NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/48B
25 January 2021
SUPERSEDING
MIL-DTL-15665/48A
14 March 2016

DETAIL SPECIFICATION SHEET

INSIGNIA, AIDE, CHAIRMAN AND VICE CHAIRMAN, JOINT CHIEFS OF STAFF, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

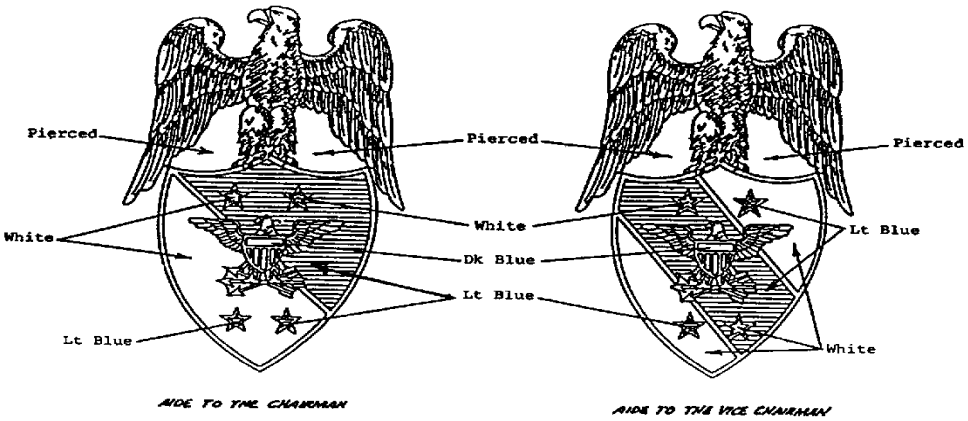

DASH NO.
-1: Aide, Chairman, JCS, Regular
-2: Aide, Vice Chairman, JCS, Regular
-3: Aide, Chairman, JCS, Subdued
-4: Aide, Vice Chairman, JCS, Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Zinc Aluminum

FINISH:
-1, -2: EAGLE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
SHIELD: Epoxy resin, 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DEVICE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

-3, -4: Dull Flat Black Enamel and shall match TIOH Metal Finish Chip Number 21.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.

DIMENSION:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (REF)
WIDTH (Overall): 13/16 inch (REF)
THICKNESS (At thickest point on shield): 0.080 ± 0.005 inch
DEVICE:
HEIGHT (Overall): 9/32 inch (REF)
WIDTH (Overall): 1/2 (REF)
THICKNESS (At thickest point): 0.045 ± 0.005 inch
ASSEMBLED THICKNESS: 0.145 ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing type clutch.

2. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch apart.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
White	#28
Light Blue	#33

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The stripes of the shield for -1 and -2 shall be enameled with alternating white and red; beginning with white and ending with white. The enamel colors shall match the TIOH Color Chip.

4. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.

5. Insignia for -1 and -2 may be manufactured using 22 karat gold plate with nickel under plating as follows for commercial sale only:

-1, -2: EAGLE: 22K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 11.

SHIELD: Epoxy resin, 22K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9.

DEVICE: 22K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 10

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-167)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.