NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/49
27 June 1996
SUPERSEDING
MIL-I-3575/50C
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, AIDE, CHAIRMAN, JOINT CHIEFS OF STAFF, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

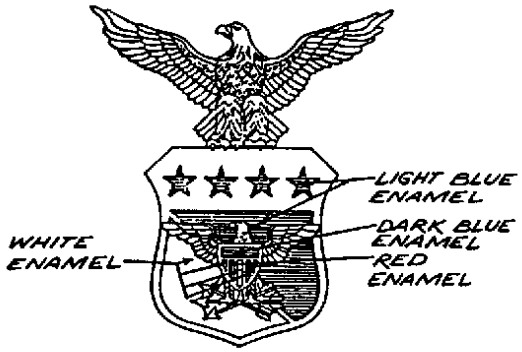

MATERIAL:
SHIELD AND EAGLE: Gilding Metal
DEVICE: Red Brass

FINISH:
SHIELD AND EAGLE: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 16.
DEVICE: Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 6.

DIMENSIONS:
SHIELD AND EAGLE:
HEIGHT (Overall): 15/16 inch (2.38 cm) (REF)
WIDTH (At Wing Tips): 7/8 inch (2.22 cm) (REF)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.

THICKNESS (At Thickest Point):
SHIELD: 0.078 inch + 0.010 inch - 0 (0.198 cm + 0.025 cm - 0)
EAGLE: 0.045 inch + 0.010 inch - 0 (0.114 cm + 0.025 cm - 0)
DEVICE:
HEIGHT (Overall): 9/32 inch (2.38) cm) (REF)
WIDTH (Overall): 7/8 inch (2.22 cm) (REF)
THICKNESS (At Thickest Point): 0.055 inch ± 0.010 inch (0.165 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Enameled colors shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	18
White	28
Light Blue	30

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The device shall be superimposed on the shield and secured by two rivets or soft solder. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as shown.

5. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:46Z
Check the source to verify that this is the current version before use.