NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/51
27 June 1996
SUPERSEDING
MIL-I-3575/7F
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, AIDE, CHIEF OF STAFF AND VICE CHIEF OF STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

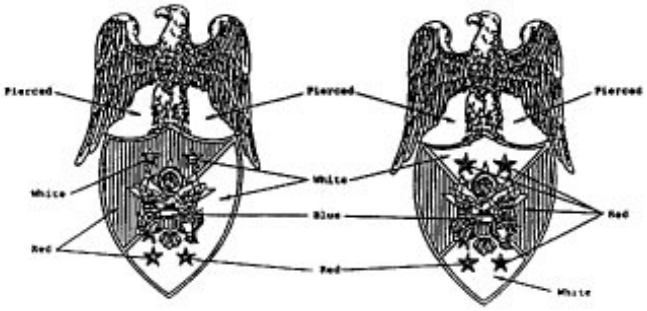

Aide, Chief of Staff Aide, Vice Chief of Staff

DASH NO.
-1: Aide, Chief of Staff, Regular
-2: Aide, Vice Chief of Staff, Regular
-3: Aide, Chief of Staff, Subdued
-4: Aide, Vice Chief of Staff, Subdued

MATERIAL:
-1, -2: Gilding Metal
-3, -4: Red Brass or Zinc Aluminum

FINISH:
-1, -2: EAGLE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Number 8.
SHIELD: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 6.
SHIELD STAR: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 16.
DEVICE: Gold Plated, Matte Finish and shall match TIOH Metal Chip Number 7.
-3, -4: Dull Flat Black Enamel

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:47Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)
WIDTH (Overall): 13/16 inch (2.06 cm) (REF)
THICKNESS (Thickest Point on Shield): 0.080 inch ± 0.005 inch (0.203 cm 0.012 cm)

DEVICE:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 11/32 inch (0.87 cm) (REF)
THICKNESS (Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Enameled colors for Dash No. -1 and -2 shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	18
White	28

4. The stripes of the shield for Dash No. -1 and -2 shall be enameled with alternating white and red; beginning with white and ending with white. The enamel color shall match the TIOH color chips listed in Note 3.

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

6. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as indicated.

7. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

8. The enamel for Dash No. -3 and -4 shall match FED-STD-595 Chip No. 37038.

9. Insignia for Dash No. -1 and -2 may be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

EAGLE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Number 11.
SHIELD: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 9.
DEVICE: Gold Plated, Matte Finish and shall match TIOH Metal Chip Number 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:47Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:47Z
Check the source to verify that this is the current version before use.