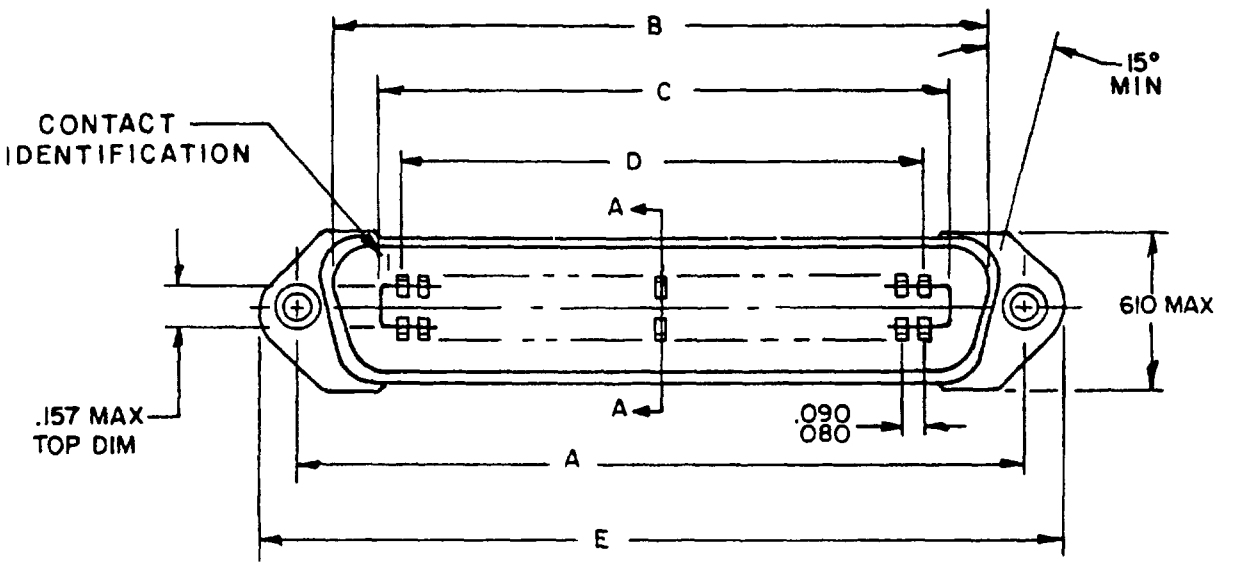
MILITARY SPECIFICATION SHEET

CONNECTOR, TELECOMMUNICATION, POLARIZED SHELL, PLUG, MALE

RACK AND PANEL, SOLDER CONTACT, SCREWLOCK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83515.




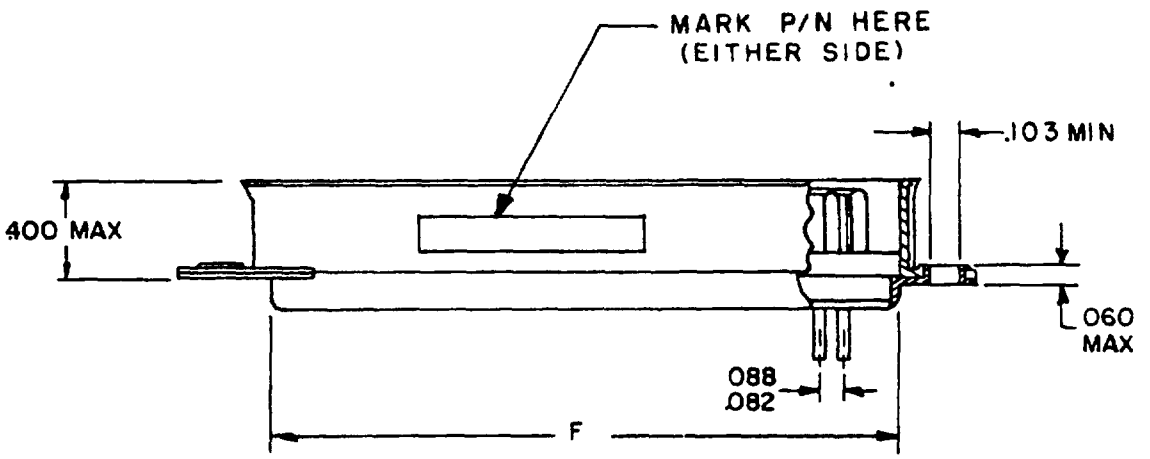



FIGURE 1. Dimensions and configurations.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

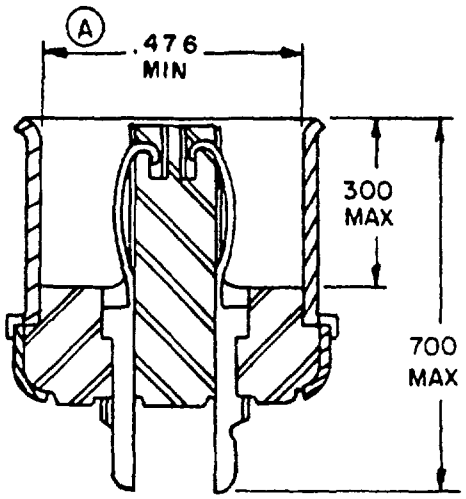

LOW BARRIER TYPE

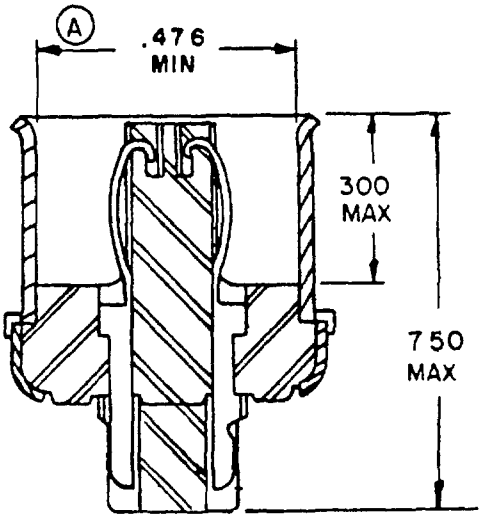

HIGH BARRIER TYPE

SECTION A-A

INCHES	MM	INCHES	MM
.060	1.52	.300	7.62
.080	2.03	.400	10.16
.085	2.16	.476	12.09
.090	2.29	.610	15.49
.103	2.62	.700	17.78
.157	3.99	.750	19.05

Size	A		B	C	D		E	F
	Min	Max	Min	Max	Min	Max	Max	Max
14	1.412 (35.86)	1.422 (36.12)	1.001 (25.43)	.683 (17.35)	.505 (12.83)	.515 (13.08)	1.750 (44.45)	.910 (23.11)
24	1.837 (46.66)	1.847 (46.91)	1.430 (36.32)	1.108 (28.14)	.930 (23.62)	.940 (23.88)	2.175 (52.24)	1.335 (33.91)
36	2.347 (59.61)	2.357 (59.87)	1.931 (49.05)	1.618 (41.10)	1.440 (36.58)	1.450 (36.83)	2.685 (68.20)	1.845 (46.86)
50	2.942 (74.73)	2.952 (74.98)	2.531 (64.29)	2.213 (56.21)	2.035 (51.69)	2.045 (51.94)	3.280 (83.31)	2.440 (61.98)

Metric equivalents are in parentheses.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Solder cups shall terminate #22, #24, and #26 AWG, solder stranded wire.
4. All dimensions are after plating.
5. All undimensioned pictorial representations are for reference purposes only.
6. (A) .010 bow permissible measured from either end.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

TABLE I. Mating connector.

Plug dash number	Mating connector	Mating connector	Mating connector
01	M83515/2-01 or M83515/2-06	M83515/4-01 or M83515/4-06	M83515/6-01 or M83515/6-06
02	M83515/2-02 or M83515/2-07	M83515/4-02 or M83515/4-07	M83515/6-02 or M83515/6-07
03	M83515/2-03 or M83515/2-08	M83515/4-03 or M83515/4-08	M83515/6-03 or M83515/6-08
04	M83515/2-04 or M83515/2-09	M83515/4-04 or M83515/4-09	M83515/6-04 or M83515/6-09
06	M83515/2-01 or M83515/2-06	M83515/4-01 or M83515/4-06	M83515/6-01 or M83515/6-06
07	M83515/2-02 or M83515/2-07	M83515/4-02 or M83515/4-07	M83515/6-02 or M83515/6-07
08	M83515/2-03 or M83515/2-08	M83515/4-03 or M83515/4-08	M83515/6-03 or M83515/6-08
09	M83515/2-04 or M83515/2-09	M83515/4-04 or M83515/4-09	M83515/6-04 or M83515/6-09

TABLE II. Dash number.

Dash number	Number of contacts	Barrier type
01	14	Low
02	24	Low
03	36	Low
04	50	Low
06	14	High
07	24	High
08	36	High
09	50	High

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See figure 1.

Specified mating connector: For testing, the specified mating connector shall be as specified in table I.

Operating temperature range: -55°C to +125°C.

Contact current rating. 5 amperes maximum per contact.

Part number: M83515/1-(dash number from table II).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities
Air Force - 99
DLA - ES

User activities:
Air Force - 11, 17, 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3530-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.