MILITARY SPECIFICATION SHEET

CONNECTOR, TELECOMMUNICATION, POLARIZED SHELL, PLUG, MALE,

PRINTED CIRCUIT BOARD, SOLDER CONTACT, SCREWLOCK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83515.

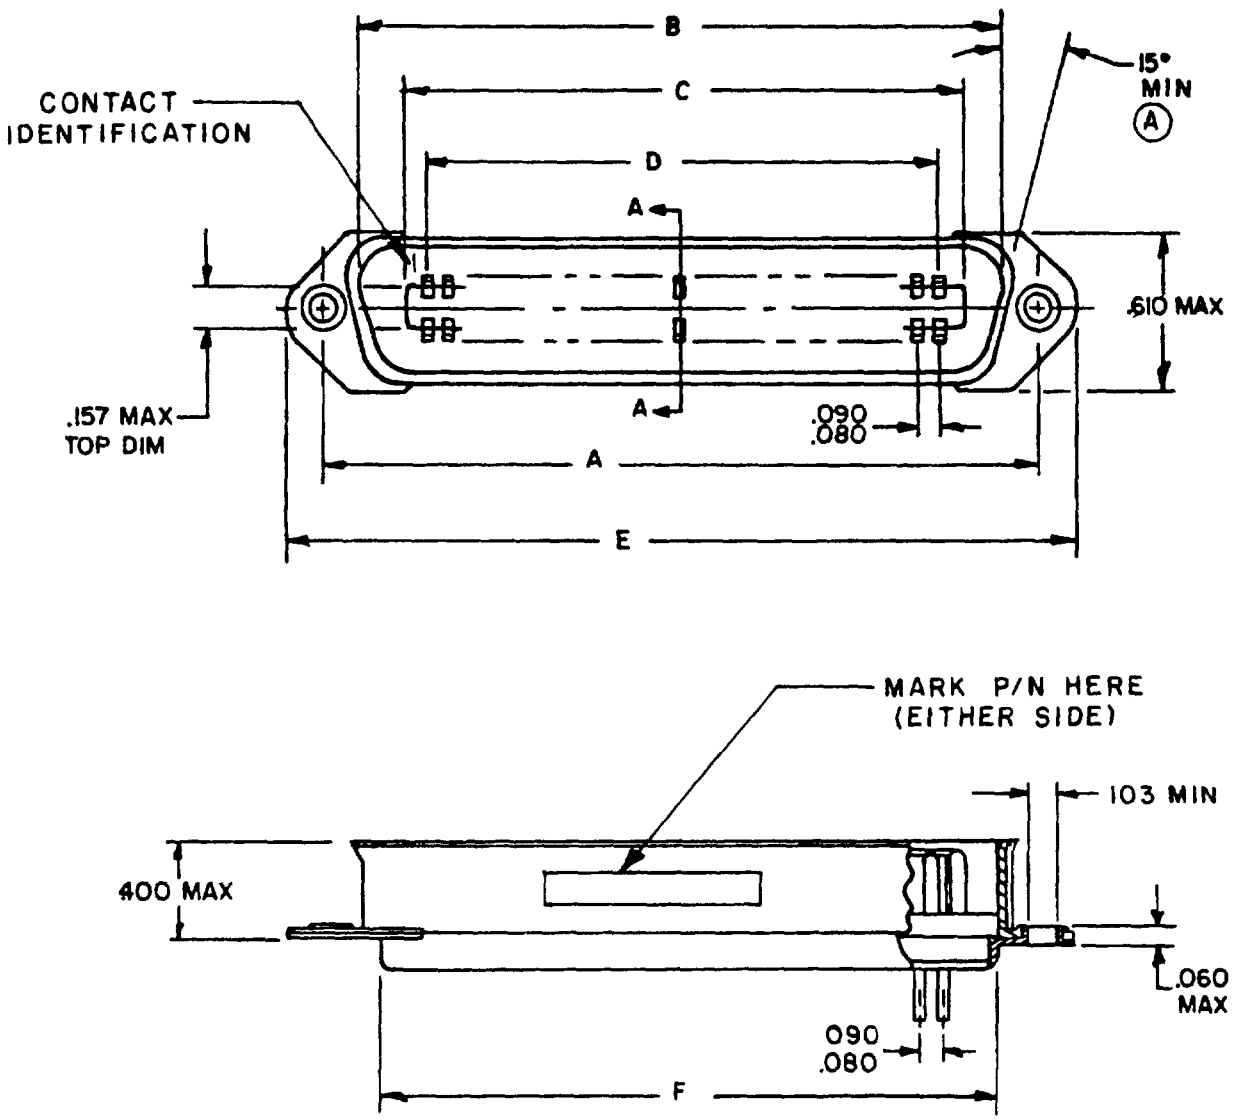



FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes


FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

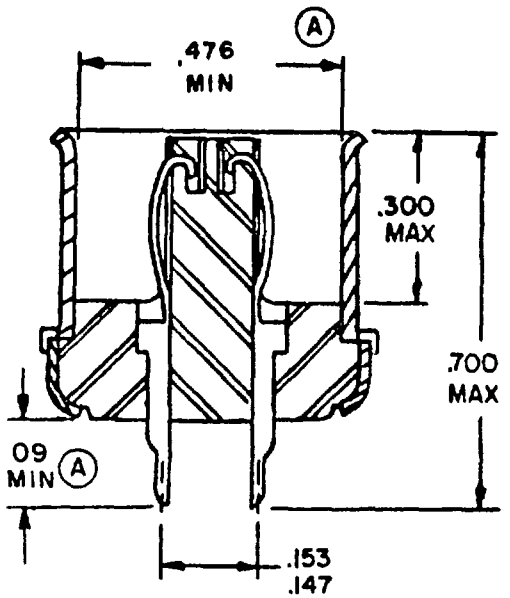

SECTION A-A

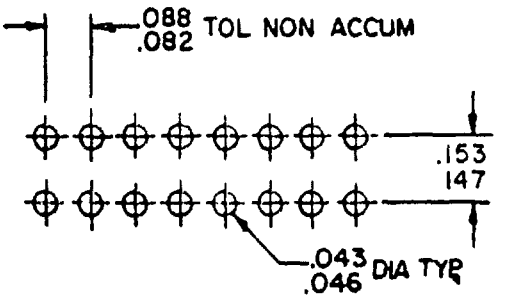

MOUNTING HOLES FOR PC BOARD

INCHES	MM	INCHES	MM	INCHES	MM
.043	1.09	.090	2.29	.300	7.62
.046	1.17	.103	2.62	.400	10.16
.060	1.52	.147	3.73	.476	12.09
.080	2.03	.153	3.89	.610	15.49
.082	2.08	.157	3.99	.700	17.78
.088	2.24				

Size	A		B	C	D		E	F
	Min	Max	Min	Max	Min	Max	Max	Max
14	1.412 (35.86)	1.422 (36.12)	1.001 (29.43)	.683 (17.35)	.505 (12.83)	.515 (13 08)	1.750 (44.45)	.910 (23.11)
24	1.837 (46.66)	1.847 (46.91)	1 430 (36.32)	1.108 (28.14)	.930 (23.62)	.940 (23.88)	2.175 (55.25)	1.335 (33.91)
36	2.347 (59.61)	2.357 (59.87)	1.931 (46.05)	1.618 (41.10)	1.440 (36.58)	1.450 (36.83)	2.685 (68.20)	1.845 (46.86)
50	2.942 (74.73)	2.952 (74.98)	2.531 (64.29)	2.213 (56.21)	2.035 (51.69)	2.045 (51.94)	3.280 (83.31)	2.440 (61.98)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All undimensioned pictorial representations are for reference purposes only.
4. All dimensions are after plating.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Specified mating connector: For testing, the specified mating connector shall be as specified in table I.

Operating temperature range: -55°C to +125°C.

Contact current rating: 5 amperes maximum per contact.

Part number: M83515/5-(dash number from table II).

TABLE I. Mating connector.

Plug dash number	Mating connector	Mating connector	Mating connector
01	M83515/2-01	M83515/4-01	M83515/6-01
02	M83515/2-02	M83515/4-02	M83515/6-02
03	M83515/2-03	M83515/4-03	M83515/6-03
04	M83515/2-04	M83515/4-04	M83515/6-04

TABLE II. Dash number.

Dash number	Number of contacts
01	14
02	24
03	36
04	50

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

User activities.
Air Force - 11, 17, 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3530-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.