MILITARY SPECIFICATION SHEET

HEADSET, ELECTRICAL, H-251A/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the headset described herein shall consist of this document and the latest issue of Military Specification MIL-H-83511.


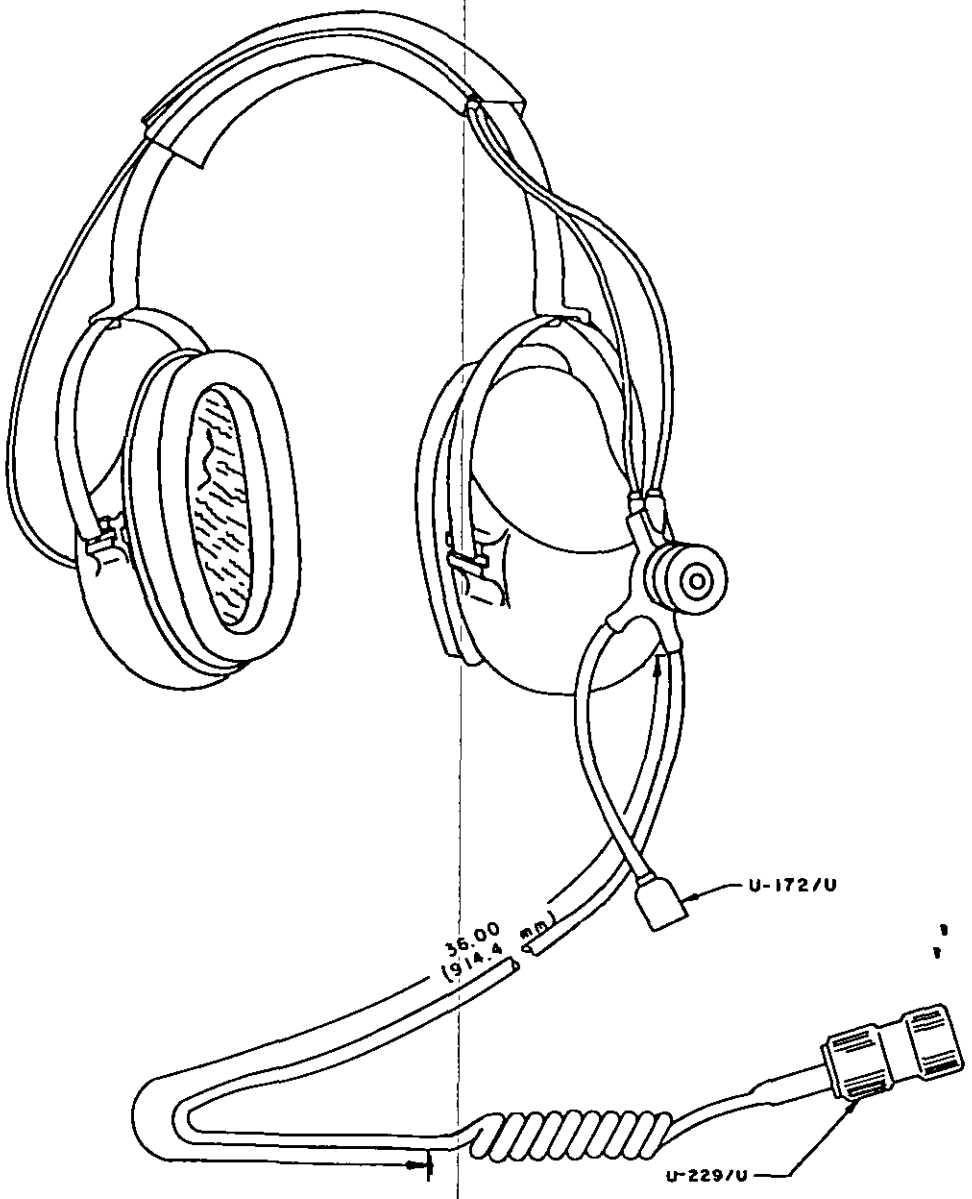


FIGURE 1. Headset-electrical, H-251A/U.

FSC 5965


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

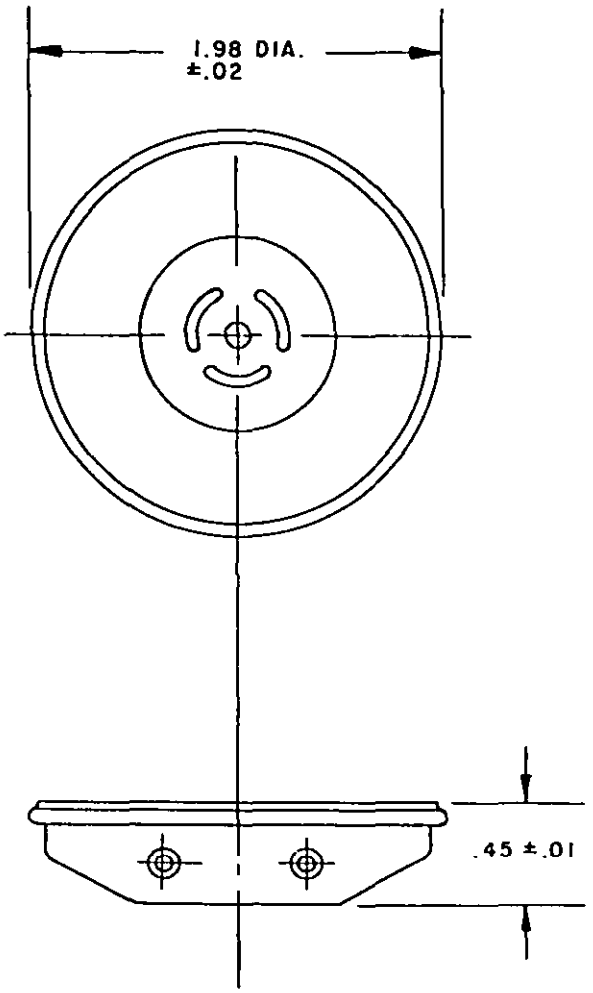

INCHES	MM
.01	.3
.02	.5
.45	11.4
1.98	50.3

FIGURE 2. Earphone

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

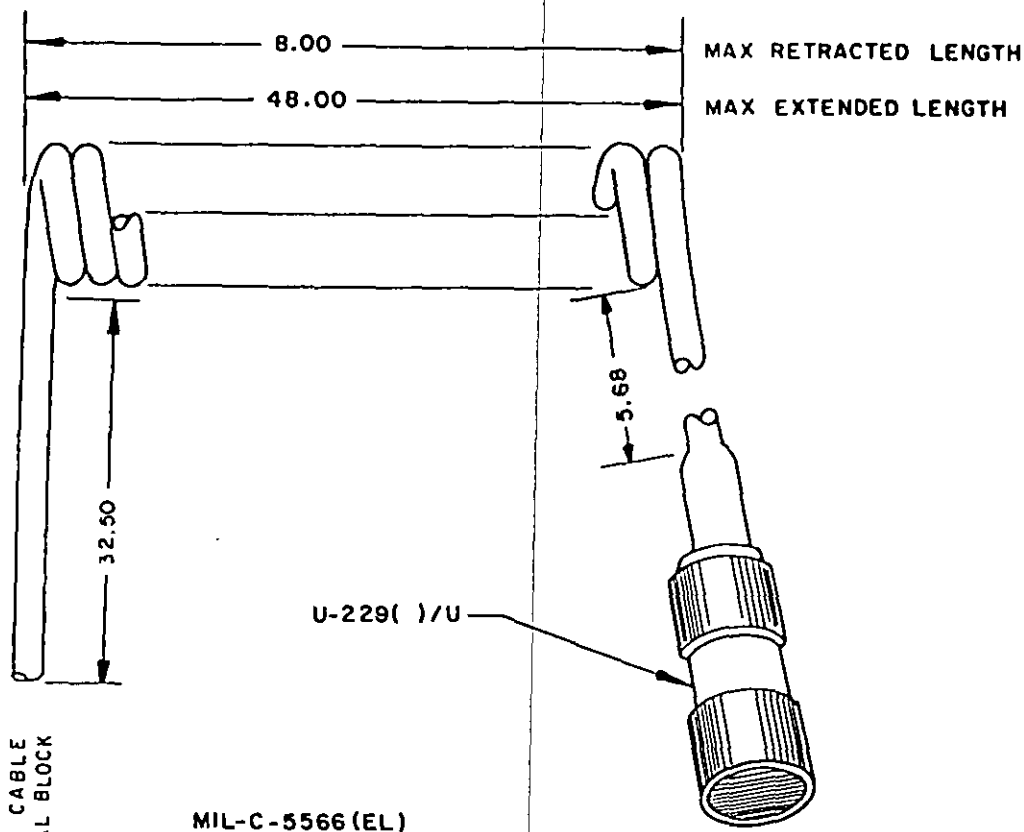

INCHES	MM
5.68	144.3
8.00	203.2
32.50	825.5
48.00	1219.2

FIGURE 3. H-251A/U cord.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

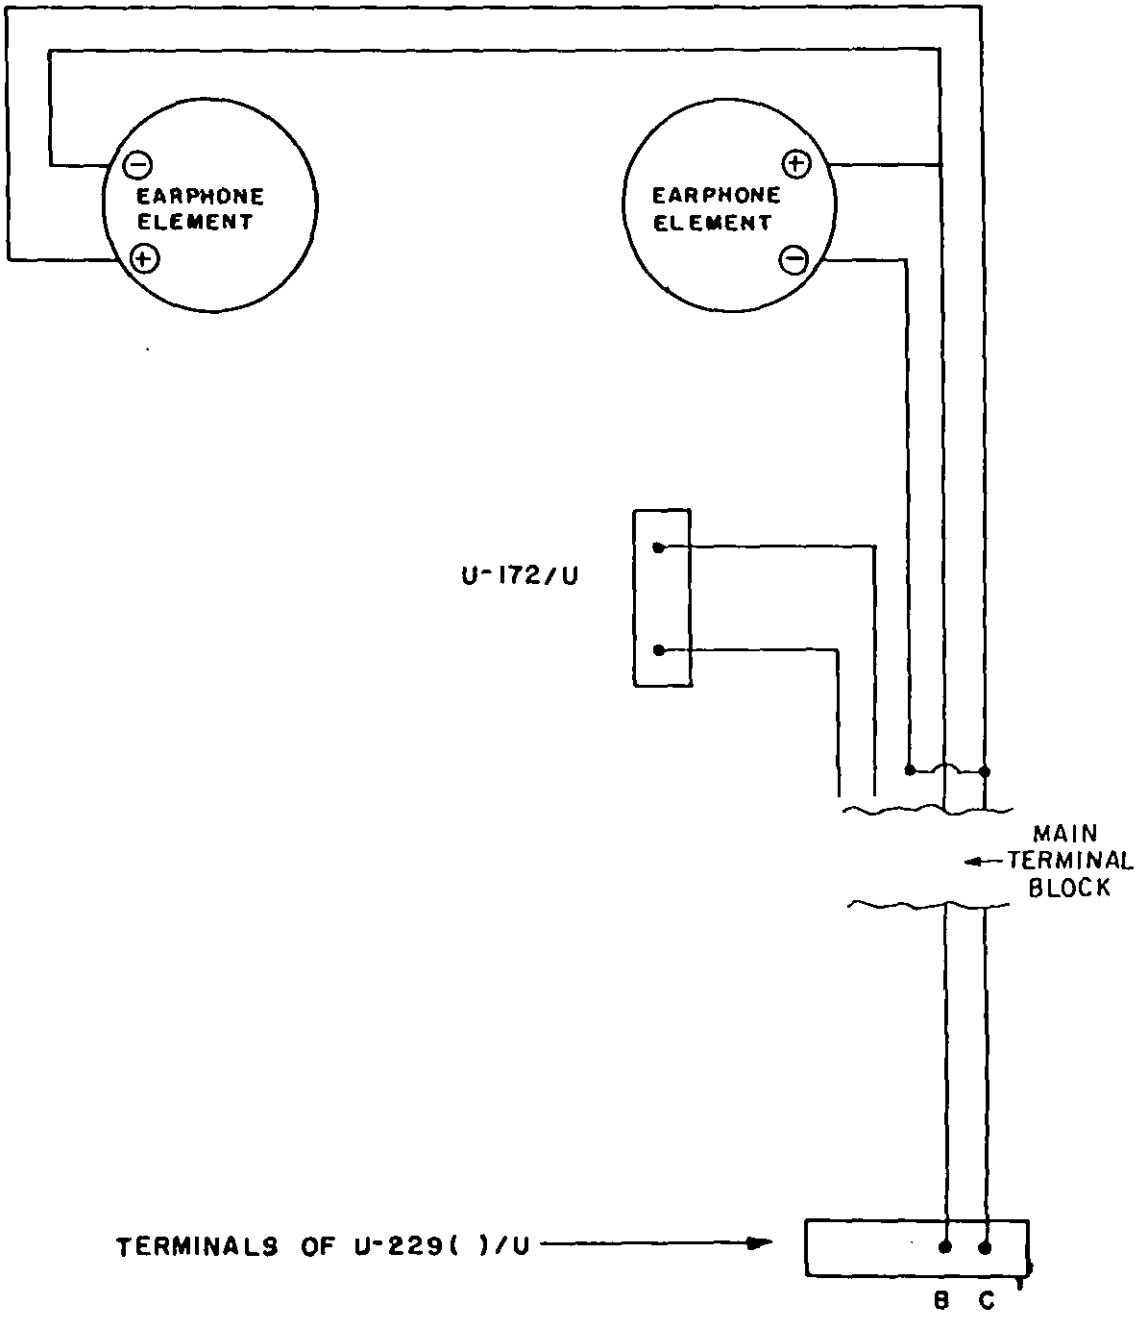


FIGURE 4. Headset-electrical, H-251A/U, wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Weight: 12 ounces maximum.

Earphone: 2 required, Electro Voice model 993 or H-269/U.
General configuration: See figure 2.
Frequency response: Output shall be 104 to 110 dB between 20 to 3,500 Hz.
Frequency response range: 20 to 3,500 Hz.
Sensitivity: 107 ±3 dB related to .0002 dynes/cm^2 at 1 kHz.
Distortion: 5 percent maximum within the frequency response range.
Impedance: 1,000 ±100 ohms at 1,000 Hz with 1.0 volt applied across the terminals.
Endurance: ±3 dB maximum deviation from initial F/R after 8 hours with 500 milliwatts input power (22.4 volts) at 1,000 Hz.

Random drop: Earphone frequency response is also required after the test.

Insulation resistance: The insulation between any insulated metallic part of the earphone and the terminals shall withstand the specified test without breakdown or decrease in insulation resistance below 1 megohm.

Blast: 30 rounds of blast at peak pressure of 9.5 lb$_f$/in^2 with ±3 dB maximum degradation in performance after subjection to sensitivity and frequency-response tests.

Blowing sand and dust: Full performance while operating under desert conditions.

Cord: Twenty-two and one-half inches straight cord including mold to accept clothing clip; 48 inches of extended length of retrax (approximately 8 inches of retracted cable) to end of coil. From this point 6 inches straight cable to entrance into connector U-229/U; a 2 inch strain relief feature shall be provided at all main cable junctions. Termination of this headset cable is a U-229/U connector.

Clothing clip: Alligator type for cord mold attachment Roanwell Corp P/N 20190 or equal.

This headset is functionally interchangeable with headset type H-251/U.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army -
Navy -
Air Force - 99
DLA - ES

User activities:
Army -
Navy - MC
Air Force -

Preparing activity:
Air Force - 85

(Project 5965-0160-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.