MILITARY SPECIFICATION SHEET

HEADSET-MICROPHONE,
M83511/7-01

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the headset-microphone described herein shall consist of this document and the latest issue of Military Specification MIL-H-83511.

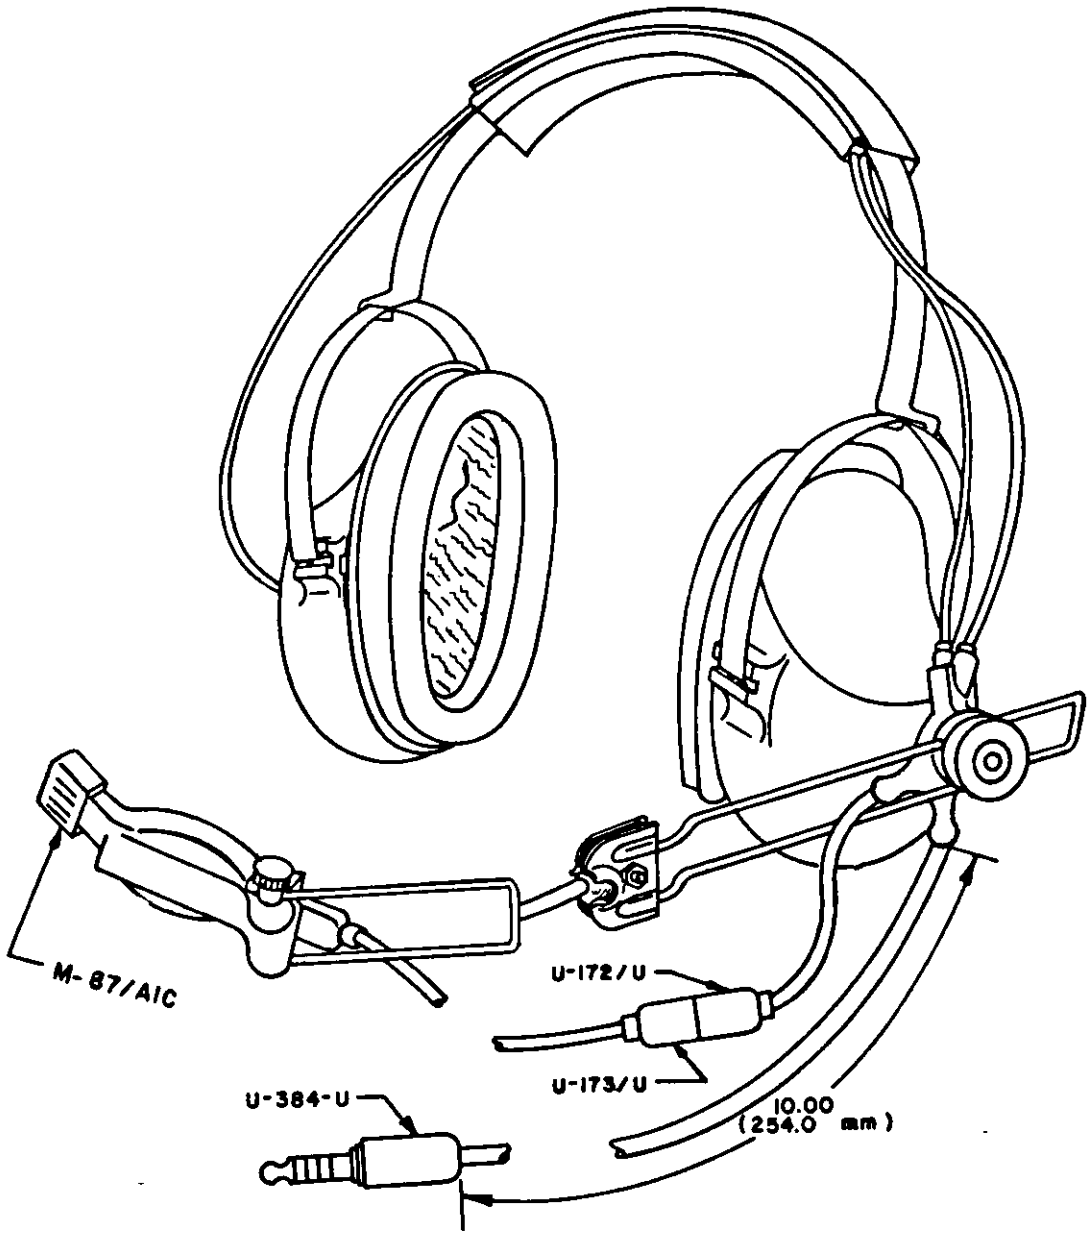


FIGURE 1. Headset-microphone M83511/7-01.

FSC 5965

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

Series network: Use terminal "5" and terminal "3" as "ground" and "signal".

Parallel network: Use terminal "5" and terminal "3" as "ground" and terminal "4" as "signal".

Stereo network: Use terminal "3" and terminal "5" as "signal" and terminal "4" as "ground".

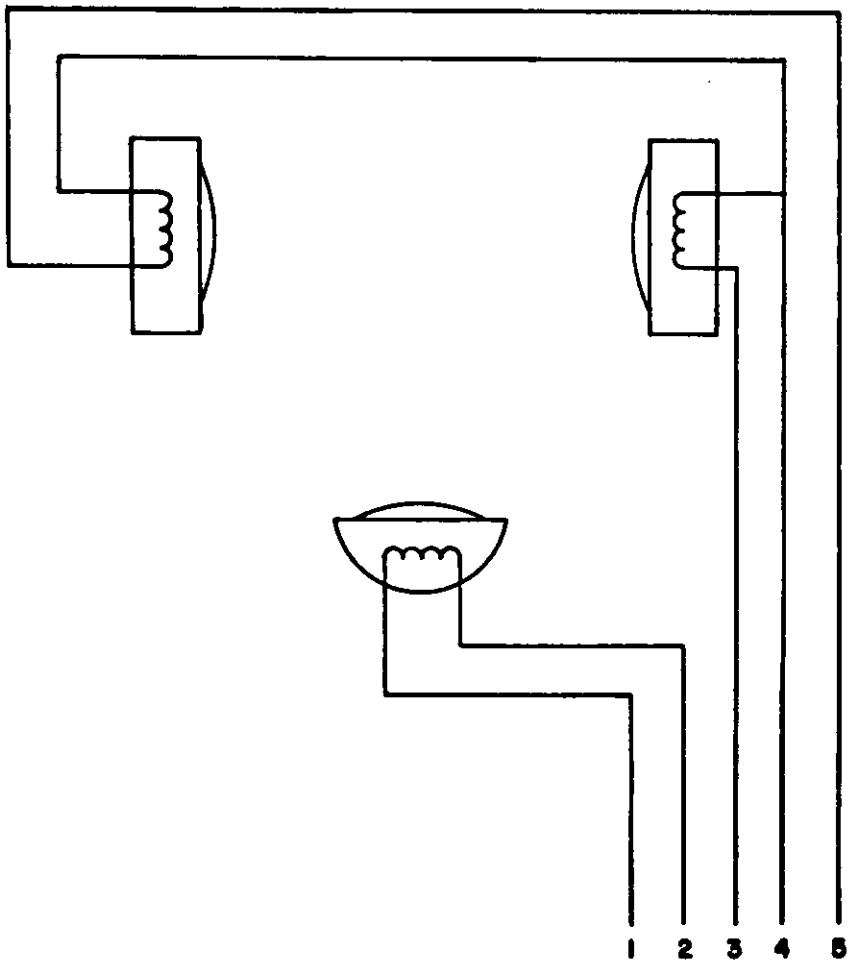


FIGURE 2. Wiring diagram for M83511/7-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1

Earphone element: Elements per MIL-E-83510 and the following:
Number required: 2.
Type: Dynamic.
Mounting provisions: Suggested polyurethane foam rubber gloves - optional.

Earphone performance: Similar to the H-87B except as follows:
Sensitivity: 103 ±2 dB at 1 kHz with 1 milliwatt applied.
Frequency response: 20 Hz to 7,000 Hz envelope - ±5 dB across the frequency response range.
Dielectric withstanding voltage: 500 volts.
Stray magnetic field: 5 maximum deflection of a compass needle at 12 inches.
Endurance: 5,000 hours before failure accelerated life test.
Impedance: 20 ±2 ohms.
Total harmonic distortion: 3 percent between 100 Hz to 2,000 Hz and 5 percent between 2,000 Hz to 7,000 Hz.
Acoustic quality: No buzzes, rattles, or other spurious sounds that would impair the quality of the reproduced audio signal in the output.
Intelligibility: Articulation index of 0.35.

Earcushion type: Polyurethane vinyl film 5/8" wide, 3/8" thick with foam filler.

Microphone: One required per MIL-M-26542/1 including the following:

Microphone performance: (Similar to the M-87 except as follows:)
Sensitivity: Same as M-87.
Frequency response: Envelope shall be flat throughout the range of 200 Hz to 6 kHz and shall be ±3 dB of the 1 kHz sensitivity.
Dielectric withstanding voltage: 500 volts.
Impedance: 4 ±1 ohms.
Noise canceling: yes.
Linearity: Same as M-87.
Total harmonic distortion: 1 percent between 200 Hz to 6,000 Hz.

Microphone configuration: See figure 1. Configuration is optional (e.g., it may be similar to the M-87).

Earcup assembly:
Earcups (domes):
Material: Optional, provided such material allows the item to meet the performance requirements.
Color: Black, per FED-STD-595.
Attachment provisions (for earcup to the headband): Flat steel band yoke.
Earcup envelope dimensions (inside) top-bottom: 2.88 inches, width (front-back) 1.70 inches.
Earcup fillers: Filler material must be absorptive but actual material is optional.

Headband: Single band, slide adjustable, locking slide.

Microphone boom: Full swivel 360° from front to back placement of ball and socket type boom.

Cordage: 6 to 10 inch cable from headset to a 5 pin quick disconnect connector with subminiature cable. Wiring to connector shall be such that with the use of an extension cord, a series, parallel, or stereo network can be attained (see figure 2).

Ⓐ Speech intelligibility: Applicable.

Intended use: Headset-microphone M83511/7-01 is desired for use with new equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army-CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy -
Air Force - 99
DLA - ES

User activities
Army -
Navy - MC
Air Force -

Preparing activity:
Air Force - 85

(Project 5965-0192)

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/23342

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.