
MILITARY SPECIFICATION SHEET

SOCKET, PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE (TO18)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the sockets described herein shall consist of this specification sheet and the latest issue of MIL-S-83502.

3 & 4 CONTACTS

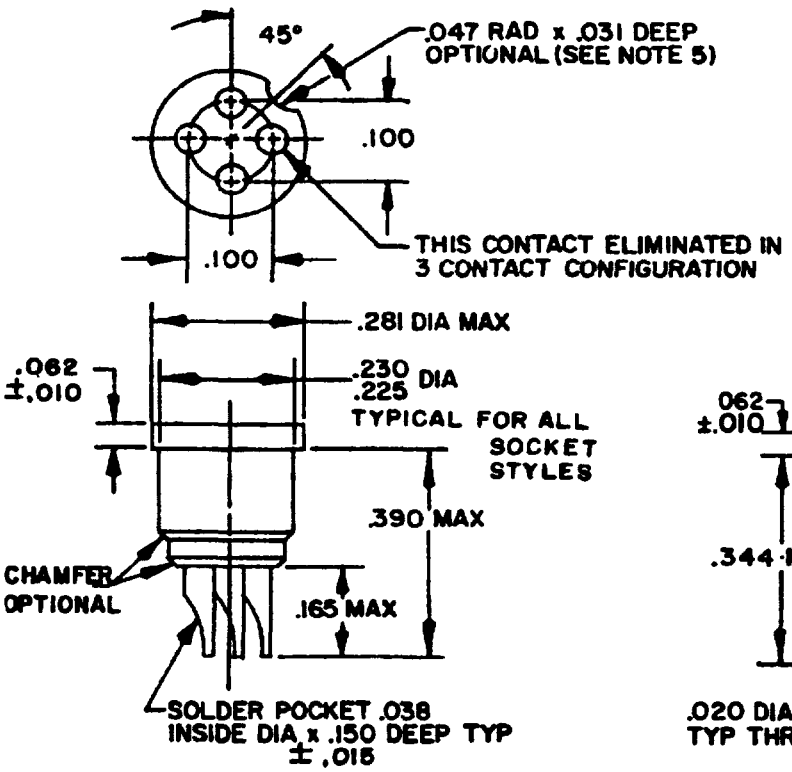

DASH NOS.
007, 015

3 & 4 CONTACTS

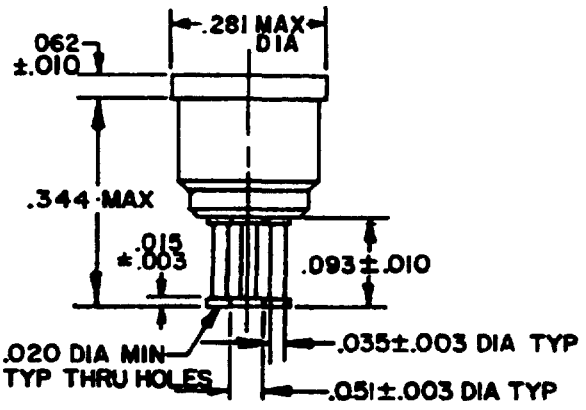


DASH NOS.
005, 013

FIGURE 1. Dimensions and configurations.

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

3 & 4 CONTACTS

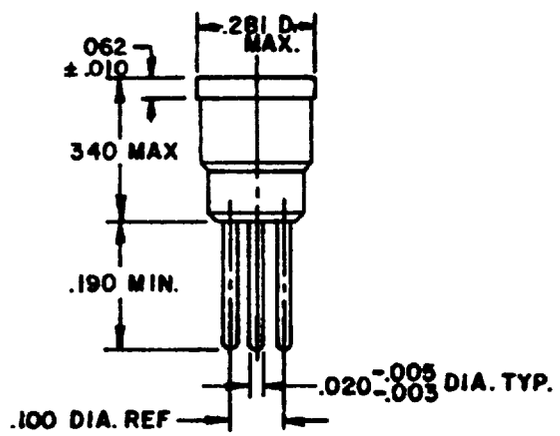


DASH NOS.
003, 011

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.045	1.14	.190	4.83
.005	.13	.047	1.19	.225	5.72
.010	.25	.051	1.30	.230	5.84
.015	.38	.062	1.57	.281	7.14
.020	.51	.093	2.36	.340	8.64
.031	.79	.100	2.54	.344	8.74
.035	.89	.150	3.81	.350	8.89
.038	.97	.165	4.19	.390	9.91

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Device to accept leads; .016 (.41 mm) to .020 (.51 mm) diameter x .190 (4.83 mm) ±.030 (.76 mm). Contact shall be made at or before reaching a depth of .100 (2.54 mm).
5. A visual polarization index to be provided in this position.
6. Marking shall be on the package.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:19Z
Check the source to verify that this is the current version before use.

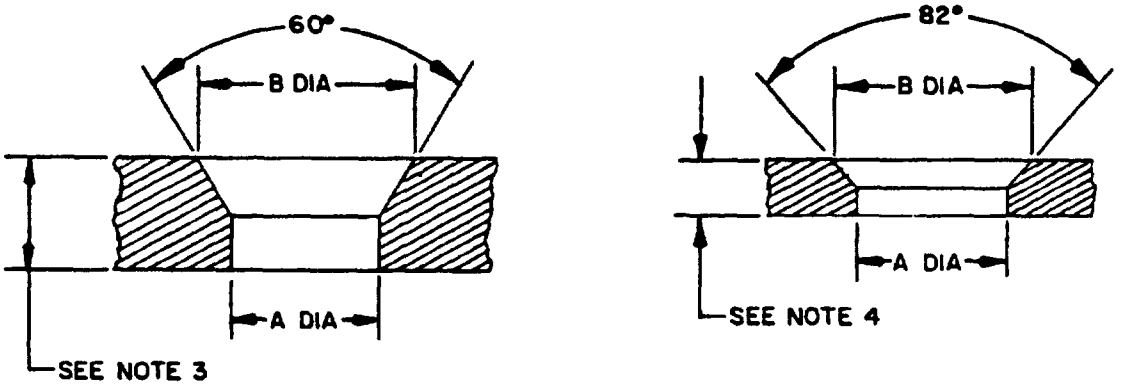

Bushing minor diameter +.002 (.05) -.003 (.08)	Recommended Hole or punch diameter "A" ±.002 (.05)	Dia. "B" + 010 (.25) -.000 (.00)
.228 (5.79)	.221 (5.61)	.234 (5.94)

NOTES:
1. For recommended installation procedure drill or punch hole in chassis for press-fit of socket.
2. For printed circuit mounting drill holes to accept terminals.
3. Use 60° countersink for chassis thickness .040 (1.02 mm) and over.
4. Use 82° countersink for chassis thickness .040 (1.02 mm) and under.
5. Dimensions are in inches.
6. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
7. Metric equivalents are in parentheses.

FIGURE 2. Mounting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Termination: See table I.

Temperature rating: +125°C.

Mounting: See figure 2.

Material:

Body: Polytetrafluoroethylene per MIL-P-19468.

Contact: Beryllium copper per QQ-C-530.

Terminal: Brass per QQ-B-626.

(B) Contact finish: See table I. In accordance with MIL-S-83502.

Part number: M83502/5-(dash number from table I).

(B) TABLE I. Dash number and characteristics.

Dash number	Number of contacts	Termination type	Contact finish	Sleeve finsh	Mating force (max-lbs)	Retention force (min-lbs
003	3	II	Gold	Gold	4.0	4.5
005	3	III	Gold	Gold	4.0	4.5
007	3	IV	Gold	Gold	4.0	4.5
011	4	II	Gold	Gold	4.0	4.5
013	4	III	Gold	Gold	4.0	4.5
015	4	IV	Gold	Gold	4.0	4.5

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3274-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.