
MIL-S-83502/9A
18 December 1978
SUPERSEDING
MIL-S-83502/9(USAF)
20 April 1976


MILITARY SPECIFICATION SHEET

SOCKETS, PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE
(TO5, WITH RETAINING RING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the sockets described herein shall consist of this document and the latest issue of Specification MIL-S-83502.

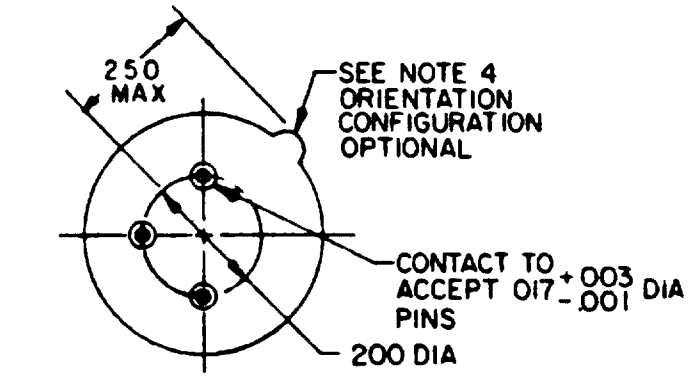




4 CONTACT

DASH NO 002

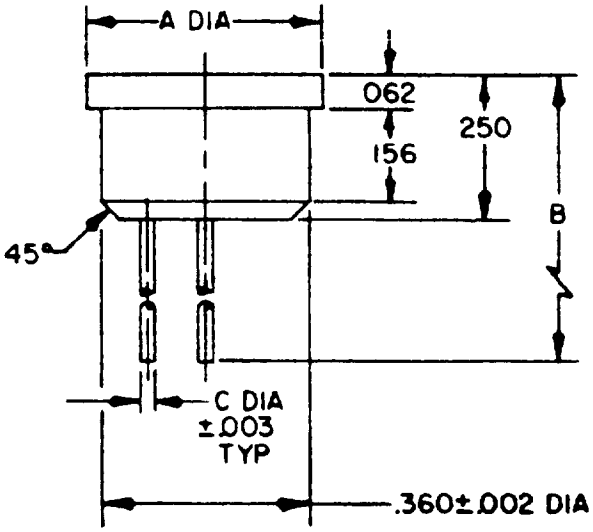

3 CONTACT

DASH NO 001

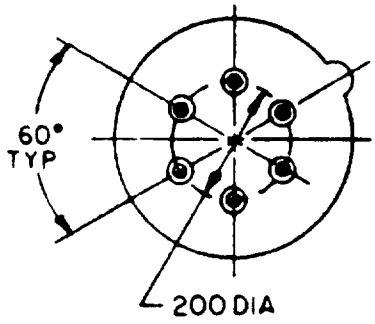


6 CONTACT

DASH NO 003

FIGURE 1. Dimensions and configurations.


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

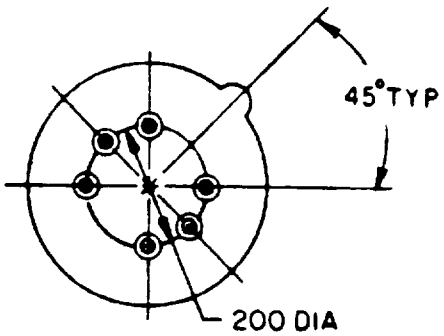


6 CONTACT

DASH NO 004

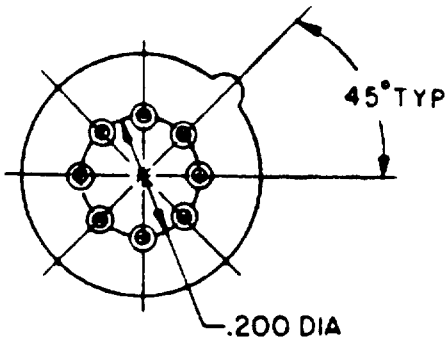


8 CONTACT

DASH NO 005

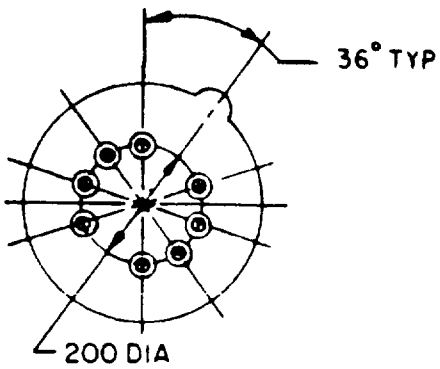


8 CONTACT

DASH NO 006

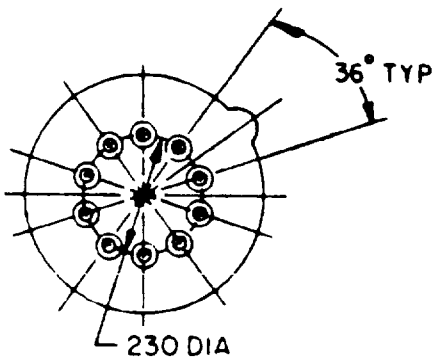

10 CONTACT

DASH NO 007

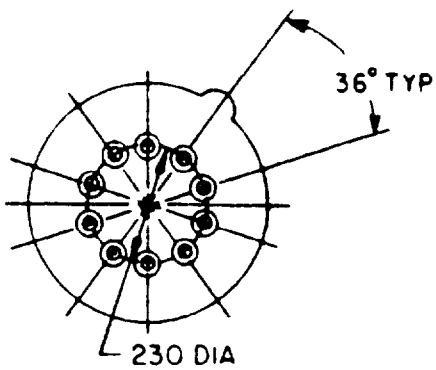

10 CONTACT

DASH NO 008

FIGURE 1 Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:20Z
Check the source to verify that this is the currentversion before use.

INCHES	MM	INCHES	MM
001	03	156	3 96
.002	05	200	5 08
003	08	230	5 84
017	.43	.250	6.35
062	1 57	360	9 14

NOTES
1. Dimensions are in inches.
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3 Unless otherwise specified, tolerance is ± 005 (13 mm)
4 Device to accept leads, 017 (43 mm) $^{+.003}_{-.001}$ $^{(.08\ mm)}_{(03\ mm)}$ diameter x 125 (3 18 mm) to 190 (4 83 mm) length. Contact shall be made at or before reaching a depth of .100 (2.54 mm)
5 A visual polarization index to be provided in the first quadrant position shown
6 Marking shall be on the package.

Dash number	Number of contacts	Dimensions (inches)		
		A	B	C
001	3	395 (10.03)	.430 (10 92)	.040 (1.02)
002	4	395 (10 03)	430 (10 92)	040 (1.02)
003	6	.405 (10.29)	.690 (17.53)	.020 (.51)
004	6	405 (10 29)	690 (17 53)	.020 (51)
005	8	405 (10.29)	690 (17 53)	020 (51)
006	8	405 (10 29)	.690 (17 53)	.020 (.51)
007	10	405 (10 29)	690 (17 53)	020 (51)
008	10	405 (10 29)	690 (17.53)	020 (.51)

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:20Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS

Design and construction
Dimensions and configuration See figure 1.
Termination. Type II (printed circuit).
Material
Body. Glass filled phenolic type GPI-100 per MIL-M-14.
Contact Beryllium copper per QQ-C-530.
Terminal Beryllium copper per QQ-C-530.
Sleeve finish. Gold over nickel plating.

Part number M83502/9 -(dash number from figure 1).

RECOMMENDED INSTALLATION PROCEDURES
1. Chassis mount with retaining ring (furnished) drill or punch

.363 (9.22 mm) $^{+.005}_{-.000}$ (.13 mm) diameter hole in chassis.

2. Printed circuit mount - Drill clearance hole for terminals.

Supersession data Supersedes US Army Drawing 10186064, Hughes Aircraft Drawings 968543 and 968541, Bendix Drawings 2068573, 2068574, 2058313, 2058163 for Air Force applications.

Revision letters are not used in this revision to identify changes due to the extensiveness of the changes.

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities
Army - ME, AT, AV
Navy - MC, AS
Air Force - 19

Preparing activity.
Air Force - 85

(Project 5935-3035-9)

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:20Z
Check the source to verify that this is the current version before use.