
MILITARY SPECIFICATION SHEET

SHIELD TERMINATION, SOLDER STYLE, INSULATED, HEAT-SHRINKABLE, ENVIRONMENT RESISTANT FOR CABLES HAVING TIN OR SILVER PLATED SHIELDS (CLASS I)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the shield termination described herein shall consist of this document and the latest issue of MIL-S-83519.

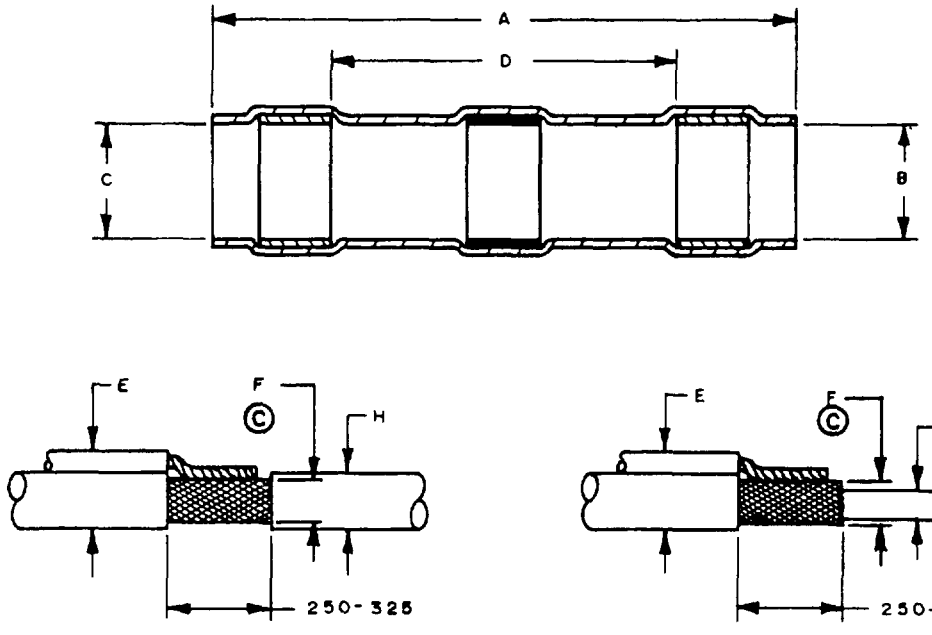

CABLE DIAMETER RANGE AND PREPARATION MEASUREMENTS

TABLE I. Construction details.

Part No.	Marking code	A ±.07	B Min	C Min	D Min	E Max	F Min	G Min	H Max	Weight Lbs/Nominal
M83519/1-1	S0101X	.650	.075	.105	.325	.105	.035	.020	.075	.00040
M83519/1-2	S0102X	.650	.105	.145	.325	.145	.055	.030	.105	.00050
M83519/1-3	S0103X	.650	.170	.200	.325	.200	.085	.050	.170	.00080
M83519/1-4	S0104X	.750	235	.255	.325	.255	.130	.070	.235	.00135
M83519/1-5	S0105X	.750	.275	.300	.325	.300	.170	.100	.275	.0015

1/ Dimensions are in inches.

© denotes changes

AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:33Z
Check the source to verify that this is the current version before use.

FSC 5940

Qualification: For qualification periodic testing cables shall be in accordance with Table II. The terminations shall be installed per the "ASSEMBLY TO CABLE" paragraph in MIL-S-83519 using the applicable convection and infrared heat sources.

Material: Insulation sleeve: Heat-shrinkable, transparent polyvinylidene fluoride. Solder preform and flux: Type Sn 63SRMAP per QQ-S-571. Thermal indicator: Color to colorless.

Temperature Rating: -55° to +150°C.

Compatible Cable Jackets: These terminations will provide environmental resistance when installed on cables conforming to:

1. MIL-C-27500 jacket types: .05, 08, 09, 10, 11, 12, 14, 15, 23 and their double jacket equivalents.
2. MIL-C-7078/1, /3, /8, /9, /10

NOTES:

1. When performing end stripped cable sealing the best results are obtained when the smallest size termination for the cable/lead wire combined is used. Sealability on cables with more than three primaries of AWG 22 and larger requires special precautions.

2. The splice is recommended for cables rated at 105°C, if special precautions are taken to isolate the heat source from the insulation.

© TABLE II. Qualification test cables.

Part no.	Minimum	Maximum
M83519/1-1	M27500305B1T23 30TG1T14 30NK1T05	M27500265B1T23 26TG1T14 26NK1T11
M83519/1-2	24SB1T23 24TG1T14 24NK1T05	18SB1T23 18TG1T14 18NK1T11
M83519/1-3	18SB1T23 18TG1T14 18NK1T05	20SB3T23 20TG3T14 20NK3T11
M83519/1-4	22SR4T23 22TG4T14 22NK4T05	16SB4T23 16TG4T14 16NK4T11
M83519/1-5	18SB4T23 18TG4T14 M27500184K4T05	16SB6T23 16TG6T14 M27500164K6T11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:33Z
Check the source to verify that this is the current version before use.

TABLE III. Supersession and cross-reference.

Military part number	Superseded numbers		
	FSCM 1/ 06090	NAS	MIL-K-81786
M83519/1-1	D-142-83 D-144-25 D-144-15	NAS1744-1 NAS1745-1 NAS1745-13 NAS1746-1	
M83519/1-2	D-100-00 D-142-50 D-144-00 D-144-12	NAS1744-2 NAS1745-2 NAS1745-14 NAS1746-2	M81786/7-1 M81786/8-1
M83519/1-3	D-101-00 D-142-51 D-144-01 D-144-13	NAS1744-3 NAS1745-3 NAS1745-15 NAS1746-3	M81786/7-2 M81786/8-2
M83519/1-4	D-107-00 D-142-56 D-144-46	NAS1745-17 NAS1745-23 NAS1746-9	
M83519/1-5	D-103-00 D-142-52 D-144-02 D-144-14	NAS1744-4 NAS1745-4 NAS1745-16 NAS1746-4	M81786/7-3 M81786/8-3

1/ FSCM is the federal supply code for manufacturers in accordance with federal supply handbooks H4-1 and H4-2.

Custodians:
Navy - AS
Army - ER
Air Force - 85

Review Activities.
Navy - SA MC
Army - MI
Air Force - 99
DSA - GS

Preparing Activity
Air Force - 85

(Project No. 5940-B028)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:33Z
Check the source to verify that this is the current version before use.