INCH-POUND

MIL-M-28787/354
23 July 1990

MILITARY SPECIFICATION

MODULES, DIGITAL, STANDARD ELECTRONIC

INTERFACE, BUS MODULE, KEY CODE AFG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the modules described herein shall consist of this specification and the latest issue of MIL-M-28787.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the acquisition of an electronic bus interface module. This module is class I as specified in MIL-STD-1389.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, Code SEA-55Z3, Department of the Navy, Washington, D.C. 20362-5101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification, standards and handbook. The following specification, standards and handbook form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

HANDBOOK

MILITARY

MIL-HDBK-217 - Reliability Prediction of Electronic Equipment.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. Modules furnished under this specification shall be products which are authorized by the qualifying activity for listing on the applicable qualified products list by the time of award of contract (see 4.5).

3.2 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.3 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

3.4 Failure rate requirements. All modules procured to this specification shall have a failure rate predicted in accordance with MIL-STD-1389. The predicted failure rate shall not exceed 0.7748 failures per million operating hours when predicted in accordance with MIL-HDBK-217.

3.5 Performance requirements. The module shall conform to the electrical requirements specified in table I and shall operate within the environment of design class I as specified in MIL-STD-1389.

3.6 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.6.1 Key code. The module key code shall be AFG.

3.6.2 Size. The module size shall be 2A Format B.

3.6.3 Weight. The module shall have a maximum weight of 100 grams.

3.6.4 Contact pins. The module shall have 100 contact pins positioned 1 through 50 in one row and 51 through 100 in the other row.

3.6.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.6.6 Depth. The module shall have no additional depth requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test cond	Parameter 5/	Ref test table	Test type 1/-3/	25 ± 5°C 4/		0 ± 5°C 4/		60 ± 5°C 4/		Units
				Min	Max	Min	Max	Min	Max	
A	Isolation, initial	II	S	10	INF	10	INF	10	INF	MOhm
	end-of-life	II	S	1	INF	1	INF	1	INF	MOhm
B1-B4	Continuity	III	X	0.0	1.0	0.0	1.0	0.0	1.0	Ohm
B5-B8	Continuity	III	Q	0.0	0.1	0.0	0.1	0.0	0.1	Ohm
C	Vcc stress	IV	S	---------- Module shall pass all remaining tests ----------						
D1-D5	Ibd	V	S	0	100	0	100	0	100	uA
D8	Ibd	V	S	0	200	0	200	0	200	uA
D7,D8	Ibd	V	S	0	100	0	100	0	100	uA
D9	Ibd	V	S	0	200	0	200	0	200	uA
D10-D14	Ibd	V	S	0	100	0	100	0	100	uA
D15-D30	Ibd	V	S	0	400	0	400	0	400	uA
D31-D94	Ibd	V	S	0	125	0	125	0	125	uA
E1-E128	Ios	VI	S	-226	-41	-226	-41	-226	-41	mA
F1-F16	Iozl	VII	X	-1.69	-0.804	-1.69	-0.804	-1.69	-0.804	mA
F17-F80	Iozl	VII	X	-1.09	-0.804	-1.09	-0.804	-1.09	-0.804	mA
G1-G16	Iozh	VIII	X	-568	-362	-568	-362	-568	-362	uA
G17-G80	Iozh	VIII	X	-508	-422	-508	-422	-508	-422	uA
H1-H94	Vio	IX	S	-1.5	-0.4	-1.5	-0.4	-1.5	-0.4	V
J1-J128	Vol	X	X	0.0	0.4	0.0	0.4	0.0	0.4	V
K1-K128	Voh	XI	X	2.4	4.5	2.4	4.5	2.4	4.5	V
L1	Iil	XII	X	-200.0	-5.0	-200.0	-5.0	-200.0	-5.0	uA
L2	Iil	XII	X	-737.0	-486.0	-737.0	-486.0	-737.0	-486.0	uA
L3-L5	Iil	XII	X	-200.0	-5.0	-200.0	-5.0	-200.0	-5.0	uA
L6	Iil	XII	X	-400.0	-10.0	-400.0	-10.0	-400.0	-10.0	uA
L7,L8	Iil	XII	X	-200.0	-5.0	-200.0	-5.0	-200.0	-5.0	uA
L9	Iil	XII	X	-400.0	-10.0	-400.0	-10.0	-400.0	-10.0	uA
L10-L13	Iil	XII	X	-200.0	-5.0	-200.0	-5.0	-200.0	-5.0	uA
L14	Iil	XII	X	-737.0	-486.0	-737.0	-486.0	-737.0	-486.0	uA

- See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

Test cond	Parameter 5/	Ref test table	Test type 1/-3/	25 ± 5°C 4/		0 ± 5°C 4/		60 ± 5°C 4/		Units
				Min	Max	Min	Max	Min	Max	
L15-L30	Iil	XII	X	-1.69	-0.804	-1.69	-0.804	-1.69	-0.804	mA
L31-L94	Iil	XII	X	-1.09	-0.804	-1.09	-0.804	-1.09	-0.804	mA
M1	Iih	XIII	X	0	20	0	20	0	20	uA
M2	Iih	XIII	X	-295	-247	-295	-247	-295	-247	uA
M3-M5	Iih	XIII	X	0	20	0	20	0	20	uA
M6	Iih	XIII	X	0	40	0	40	0	40	uA
M7,M8	Iih	XIII	X	0	20	0	20	0	20	uA
M9	Iih	XIII	X	0	40	0	40	0	40	uA
M10-M13	Iih	XIII	X	0	20	0	20	0	20	uA
M14	Iih	XIII	X	-295	-247	-295	-247	-295	-247	uA
M15-M30	Iih	XIII	X	-568	-362	-568	-362	-568	-362	uA
M31-M94	Iih	XIII	X	-500	-422	-500	-422	-500	-422	uA
N1	Icc	XIV	X	79.0	797.8	79.0	797.8	79.0	797.8	mA
N2	Icc	XIV	X	63.0	637.8	63.0	637.8	63.0	637.8	mA
N3	Icc	XIV	X	83.0	837.8	83.0	837.8	83.0	837.8	mA
P1-P128	Propagation delay time, tPLH, CL = 150 pF	XV	S	2	23	2	28	2	28	nS
P129-P256	Propagation delay time, tPLH, CL = 300 pF	XV	Q	2	32	2	37	2	37	nS
Q1-Q128	Propagation delay time, tPHL, CL = 150 pF	XVI	S	2	25	2	30	2	30	nS
Q129-Q256	Propagation delay time, tPHL, CL = 300 pF	XVI	Q	2	38	2	41	2	41	nS
R1-R128	Output disable time (tPLZ)	XVII	S	2	30	2	39	2	39	nS
S1-S128	Output enable time (tPZL)	XVIII	S	2	55	2	60	2	60	nS

- See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

Test cond	Parameter 5/	Ref test table	Test type 1/-3/	25 ± 5°C 4/		0 ± 5°C 4/		60 ± 5°C 4/		Units
				Min	Max	Min	Max	Min	Max	
T1-T128	Output disable time (tPHZ)	XIX	S	2	30	2	39	2	39	nS
V1-V128	Output enable time (tPZH)	XX	S	2	55	2	60	2	60	nS
W	Functional	XXI	X	----------		See table XXI		----------		
X1-X128	Output crosstalk (high level)	XXII	Q	0	925	0	925	0	925	mV
Y1-Y128	Output crosstalk (low level)	XXIII	Q	0	1300	0	1300	0	1300	mV
Z1-Z128	Crosstalk duration (high level)	XXIV	Q	0	35	0	35	0	35	nS
AA1-AA128	Crosstalk duration (low level)	XXV	Q	0	35	0	35	0	35	nS
BB	PSTA	XXVI	Q	0	400	0	400	0	400	mV
CC	PSFC	XXVII	S	4.125	6.875	4.125	6.875	4.125	6.875	uF
DD1-DD5	Cin	XXVIII	Q	2	40	2	40	2	40	pF
DD6	Cin	XXVIII	Q	4	45	4	45	4	45	pF
DD7,DD8	Cin	XXVIII	Q	2	40	2	40	2	40	pF
DD9	Cin	XXVIII	Q	4	45	4	45	4	45	pF
DD10-DD14	Cin	XXVIII	Q	2	40	2	40	2	40	pF
DD15-DD30	Cin	XXVIII	Q	8	160	8	160	8	160	pF
DD31-DD94	Cin	XXVIII	Q	2	60	2	60	2	60	pF

- See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

1/ "X" parameters shall be 100 percent tested during the module acceptance test.

2/ "S" parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.

3/ "Q" parameters shall be tested during qualification testing only.

4/ Unless otherwise specified in the test table, limits are for initial and end-of-life.

5/ Abbreviations used in table I are defined in 6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

3.6.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.6.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part or identifying number M28787/354-1. No marking shall interfere with heat dissipation from the fin (such as affixing a label which may act as a heat barrier).

3.7 Circuit pin configuration. The functional block diagram shall conform to figure 1. The pin assignments shall conform to figure 2.

3.8 Acceptance test. All production modules shall be tested in accordance with footnotes 1 and 2 in table I.

3.9 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits in table I (see 6.2).

3.10 Power supply voltage. Unless otherwise specified herein, the module shall be capable of conforming to the requirements in table I for a power supply voltage (Vcc) of 5.0 ± 0.5 V dc, except the output short circuit current limits apply only for a power supply voltage of 5.5 V dc ± 1 percent.

3.11 Parallel outputs. Paralleling of outputs is not permissible except to obtain extended drive capability. Each circuit whose output is paralleled with an output of another circuit must have each of its inputs paralleled with a corresponding input of the other circuit. Circuits may be paralleled only with other circuits within the same integrated circuit. The circuit groups are:

(a) Group A: Outputs D0/1A - D7/1A.

(b) Group B: Outputs D0/2A - D7/2A.

(c) Group C: Outputs D0/3A - D7/3A.

(d) Group D: Outputs D0/4A - D7/4A.

(e) Group E: Outputs D0/1B - D7/1B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

(f) Group F: Outputs D0/2B - D7/2B.

(g) Group G: Outputs D0/3B - D7/3B.

(h) Group H: Outputs D0/4B - D7/4B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

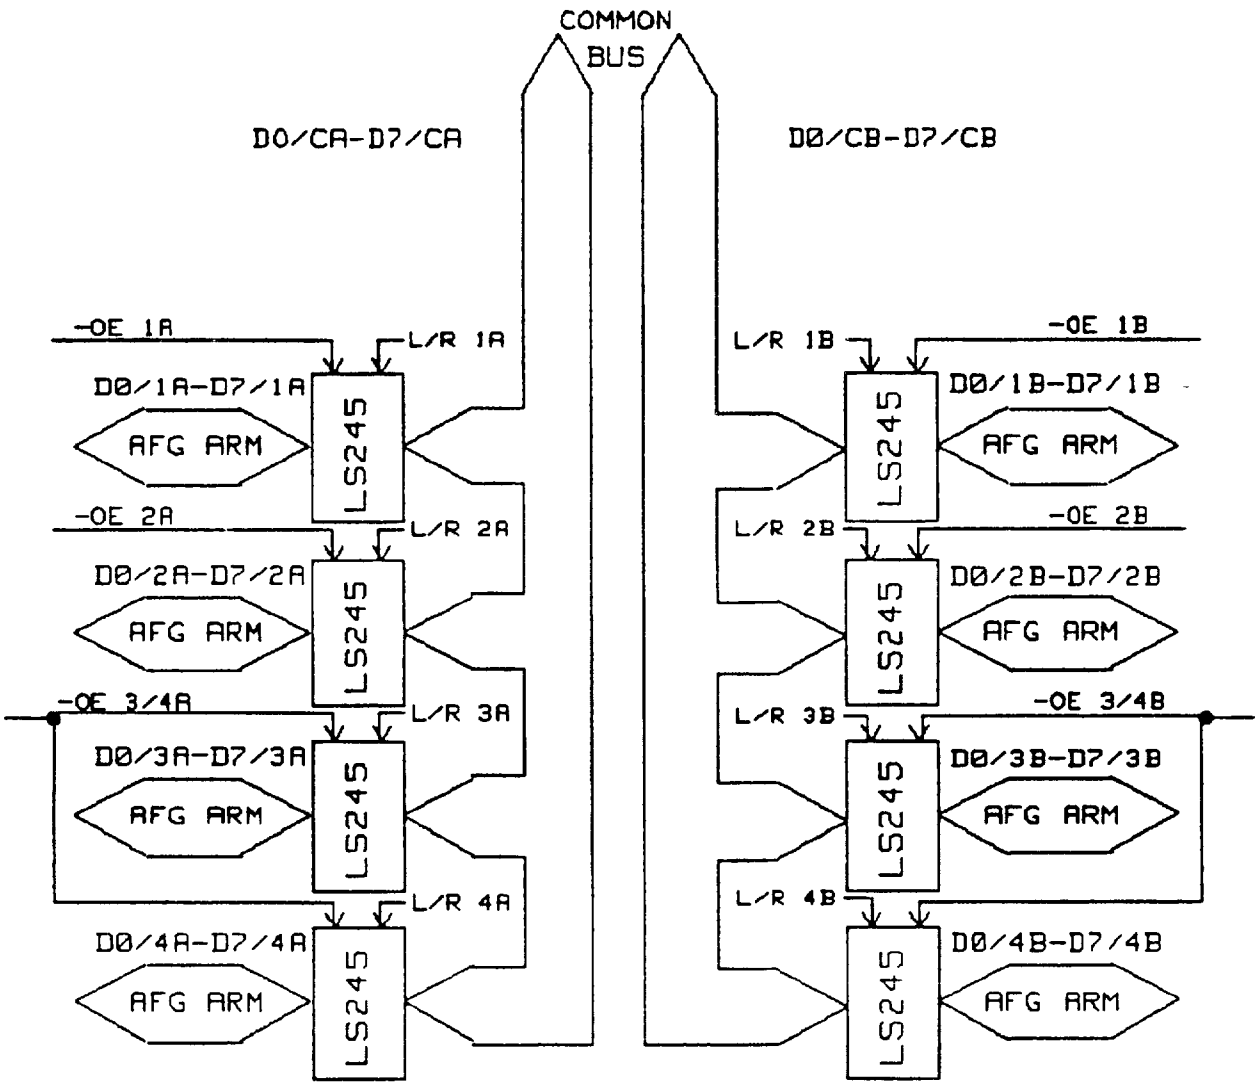


FIGURE 1. AFG functional block diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

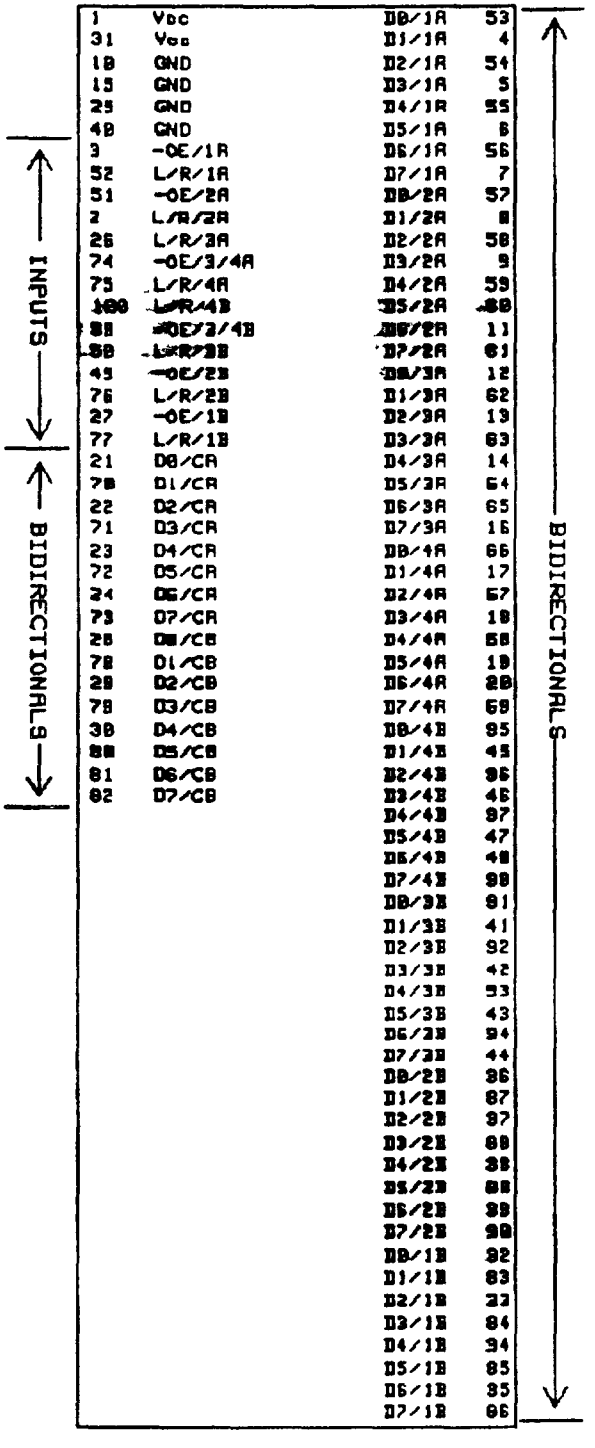


FIGURE 2. AFG pin assignment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

4.3 Test equipment. Test equipment specified on figures and in tables with a designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. Unless otherwise specified herein, all resistors shall be metal film and all capacitors shall be ceramic.

4.4 Test procedures. The module shall be tested as specified in table I.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Quality Assurance Activity (SEM-QAA) and they conform to the requirements of MIL-M-28787.

4.4.2 Order of testing. Test conditions A through DD shall be performed in any order with the following exceptions. Test conditions A, C, D, E and H are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, C, D, E or H are part of a sequence of tests, the order of testing shall be as follows: A, C, D, E and H where applicable, followed by the remaining tests in the sequence.

4.4.3 Multiple testing of pins. Singular pins listed multiple times in a test table indicate multiple devices connected to the pins. The module shall be tested so that each device connected to a pin is exercised and tested.

4.5 Qualification testing. Initial qualification tests and periodic check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through DD in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions B, F, G and J through CC shall be performed in the order specified in 4.4.2 using the initial limits for the applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 3.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 4.

4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 5. Following the vibration tests, the electrical tests in table I which are marked with an "X" in the test type column, and test condition CC, shall be performed using the initial limits at 25 ± 5°C ambient.

4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 3. Following the life test and while still at the maximum class temperature, electrical tests B, F, G and J through CC shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests B, F, G and J through CC shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I.

4.5.4 Thermal shock test. The thermal shock test shall be conducted in accordance with MIL-M-28787. The module shall be unpowered during this test. Following the thermal shock test, the electrical tests in table I which are marked with an "X" in the test type column, shall be performed using the initial limits at 25 ± 5°C ambient.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

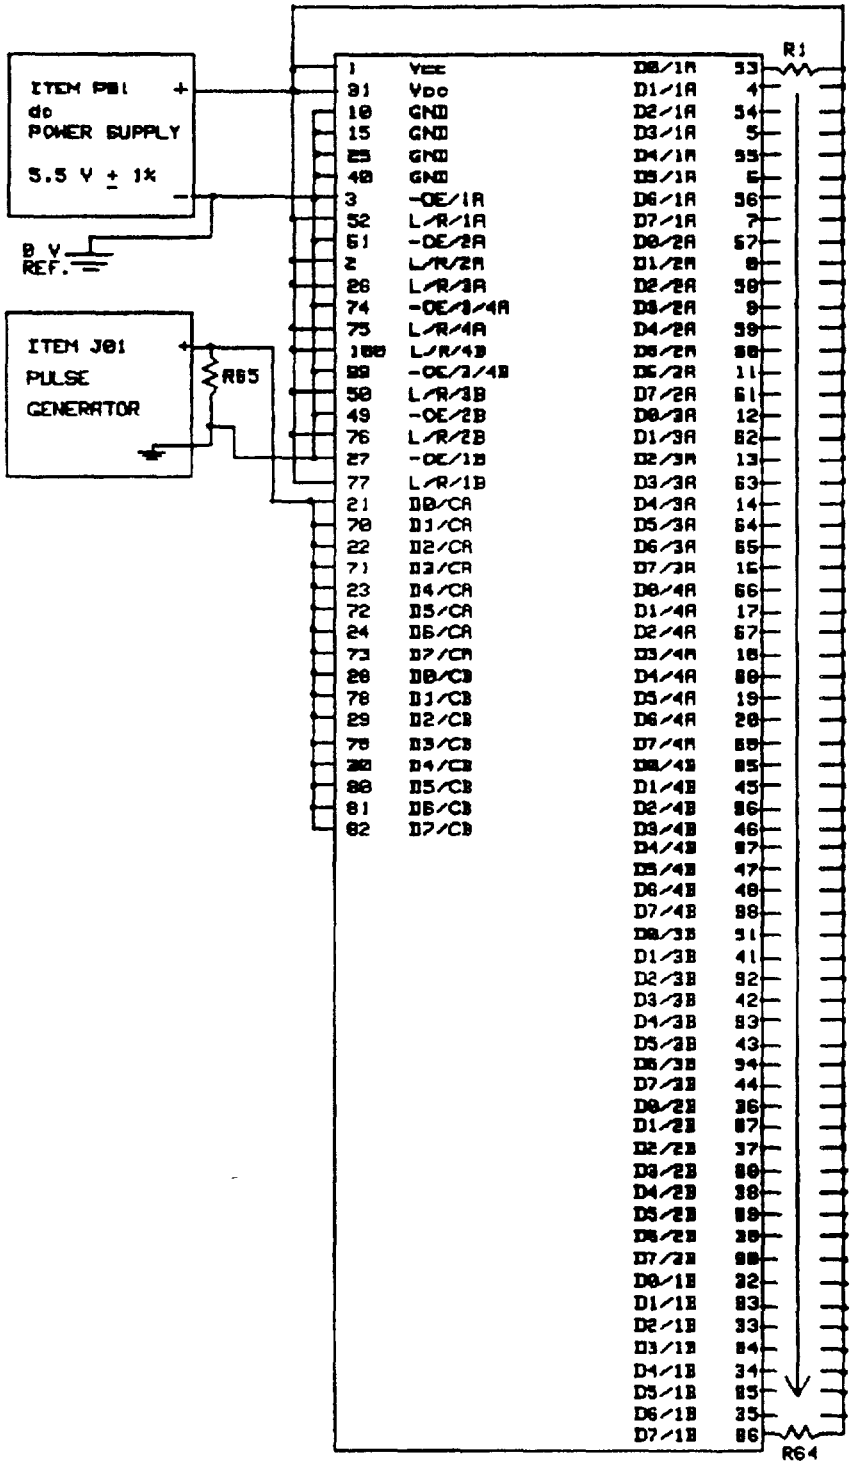


FIGURE 3. AFG operating temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:


1. Item J01 setup:

   PA = 3.0 ± 0.1 V.
   PRR = 1.0 MHz ± 20 percent.
   PW = 500 ± 100 nS.
   tTLH = tTHL < 50 nS.

2. R1-R64 = 453 ohms ± 1 percent, 1/8 W.

3. R65 = 51.1 ohms ± 1 percent, 1 W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

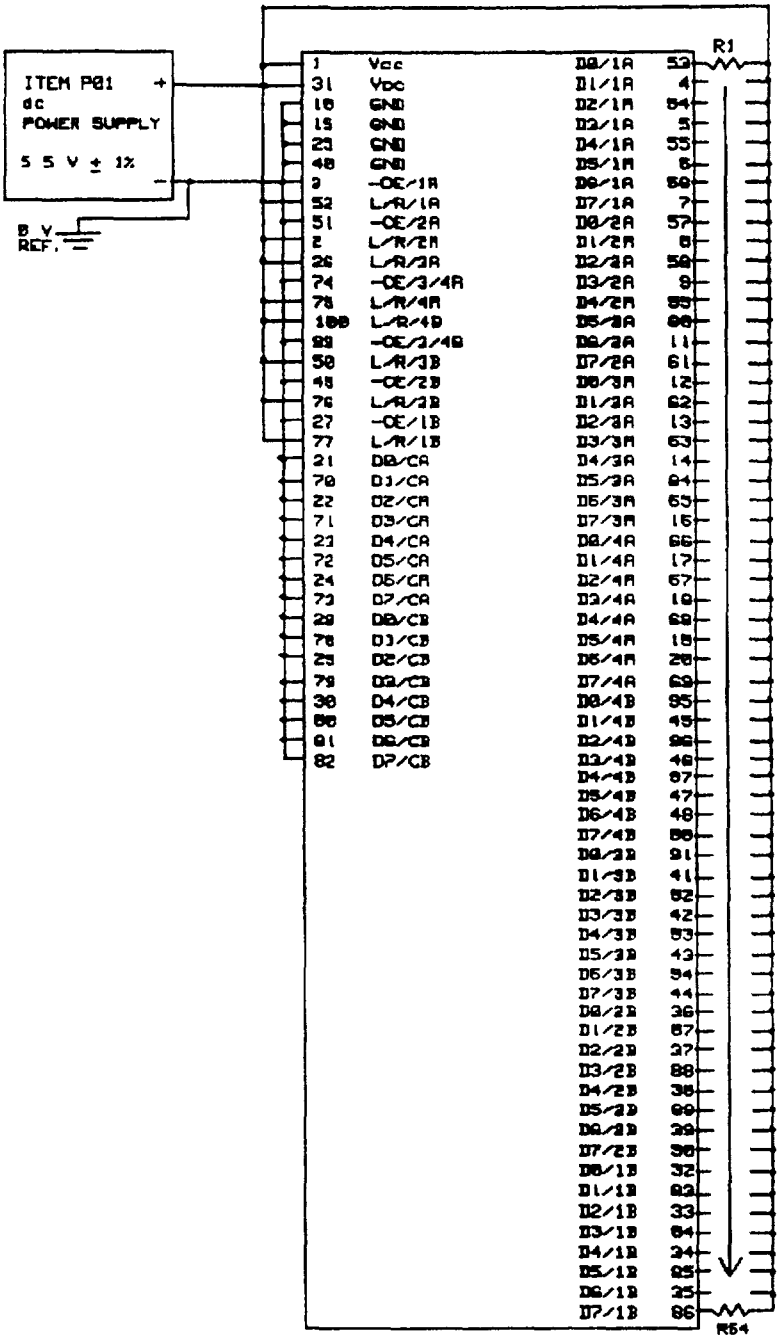

NOTE:

1. R1-R64 = 453 ohms ± 1 percent, 1/8 W.

FIGURE 4. AFG component temperature test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

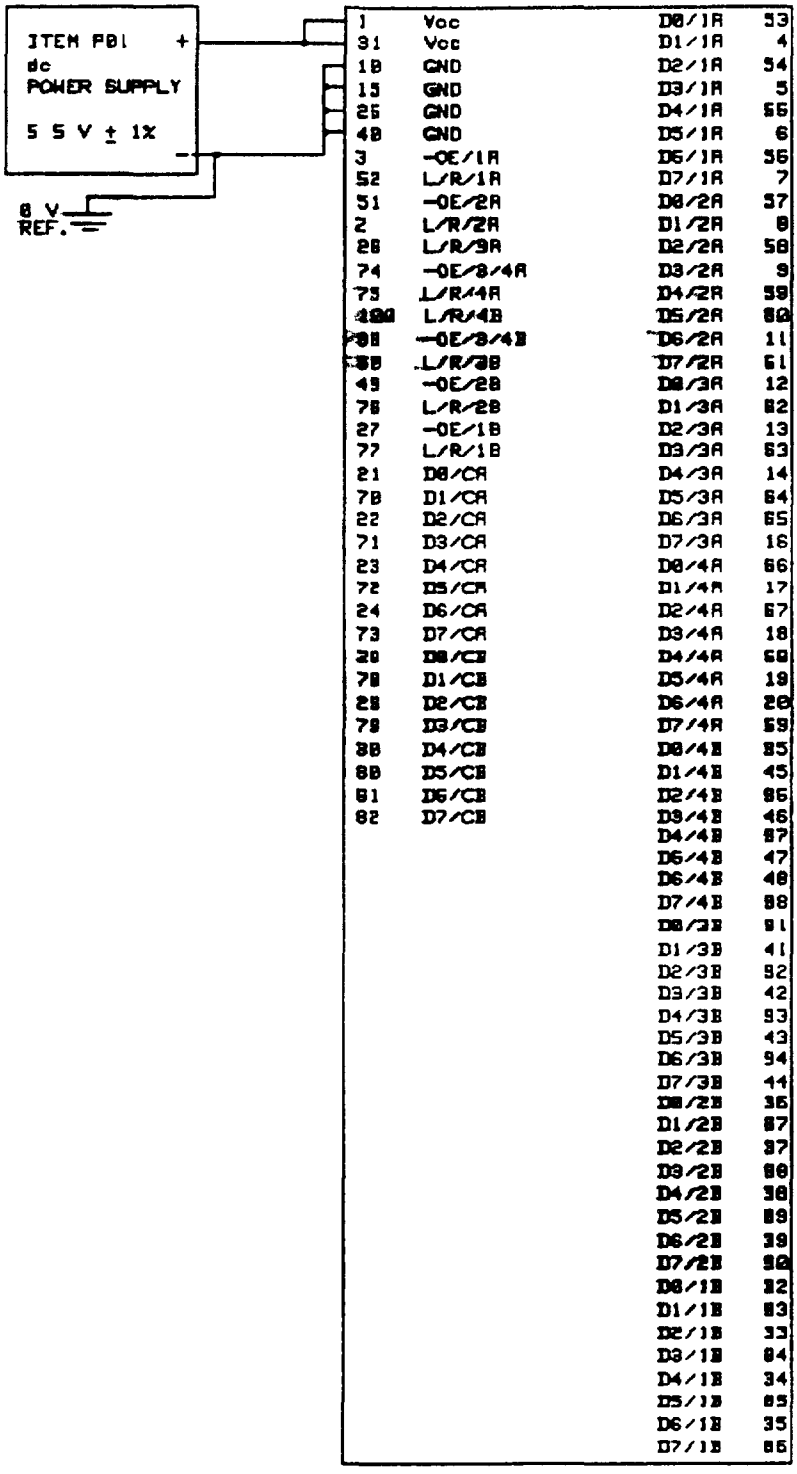


FIGURE 5. AFG vibration test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Definitions. Negative (-) current is current directed out of the module pin and positive (+) current is current directed into the module pin. Abbreviations used in this specification are defined as follows:

(a) Cin = input capacitance.
(b) Ibd = input breakdown current.
(c) Icc = power supply current.
(d) Iih = input high level current.
(e) Iil = input low level current.
(f) Ioh = output high level current.
(g) Iol = output low level current.
(h) Ios = output short circuit current.
(i) Iozh = output high level leakage current.
(j) Iozl = output low level leakage current.
(k) NA = not applicable.
(l) PSFC = power supply filter capacitance.
(m) PSTA = power supply transient amplitude.
(n) Vic = input clamp diode voltage.
(o) Vih = input high level voltage.
(p) Vil = input low level voltage.
(q) Voh = output high level voltage.
(r) Vol = output low level voltage.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements in table I, the module is considered to have completed its useful life (see 3.9).

6.3 Module description. The following electrical parameters reflect the 0°C to 60°C end-of-life parameters in table I. Operating power supply voltage range: 4.5 V dc to 5.5 V dc. Module power dissipation: 4.608 W (max).

6.4 Module function. This module consists of two 8-bit non-inverting, bidirectional buffer sections. Each bidirectional buffer operates in a bidirectional mode or high impedance output mode.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

6.5 Description of tests. The following tables and associated figures describe the tests to be performed.

(a) Isolation test - table II, figure 6.

(b) Continuity test - table III, figure 7.

(c) Vcc stress test - table IV, figure 8.

(d) Ibd test - table V, figure 9.

(e) Ios test - table VI, figure 10.

(f) Iozl test - table VII, figure 11.

(g) Iozh test - table VIII, figure 11.

(h) Vic test - table IX, figure 12.

(i) Vol test - table X, figures 13 and 14.

(j) Voh test - table XI, figures 13 and 14.

(k) Iil test - table XII, figure 15.

(l) Iih test - table XIII, figure 15.

(m) Icc test - table XIV, figure 16.

(n) Propagation delay time tests - tables XV and XVI, figures 17 and 18.

(o) Output disable and enable time tests - tables XVII, XVIII, XIX and XX, figures 17 and 19.

(p) Functional test - table XXI, figure 20.

(q) Output crosstalk tests - tables XXII and XXIII, figures 21 and 22.

(r) Output crosstalk duration tests - tables XXIV and XXV, figures 21 and 23.

(s) PSTA test - table XXVI, figures 24 and 25.

(t) PSFC test - table XXVII, figure 26.

(u) Cin test - table XXVIII, figure 26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

6.6 Functional test vectors. Functional test vectors are not printed herein because of their extreme length; and, even when presented as a hard copy, they require conversion to on-line format. When the entire sequence of vector groups is needed for driving devices as part of inspection, a test program output should be generated in a form compatible with test system architecture (magnetic tape format usually preferred). For reference purposes, the Naval Weapons Support Center (Code 607) maintains a limited quantity of dated, hard copy printouts of the functional test vectors and these may be obtained upon request.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - SH

(Project 5963-0053)

Agent: NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE II. Isolation test.

Test cond	Test description	Connect A to pin	25 ± 5°C Initial limits Min	Max	Units	Fig
A	Isolation, frame	Frame	10	INF	MOhm	6

NOTES:

1. Warning: When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "DISCHARGE" before connecting or disconnecting the test leads.

2. Penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

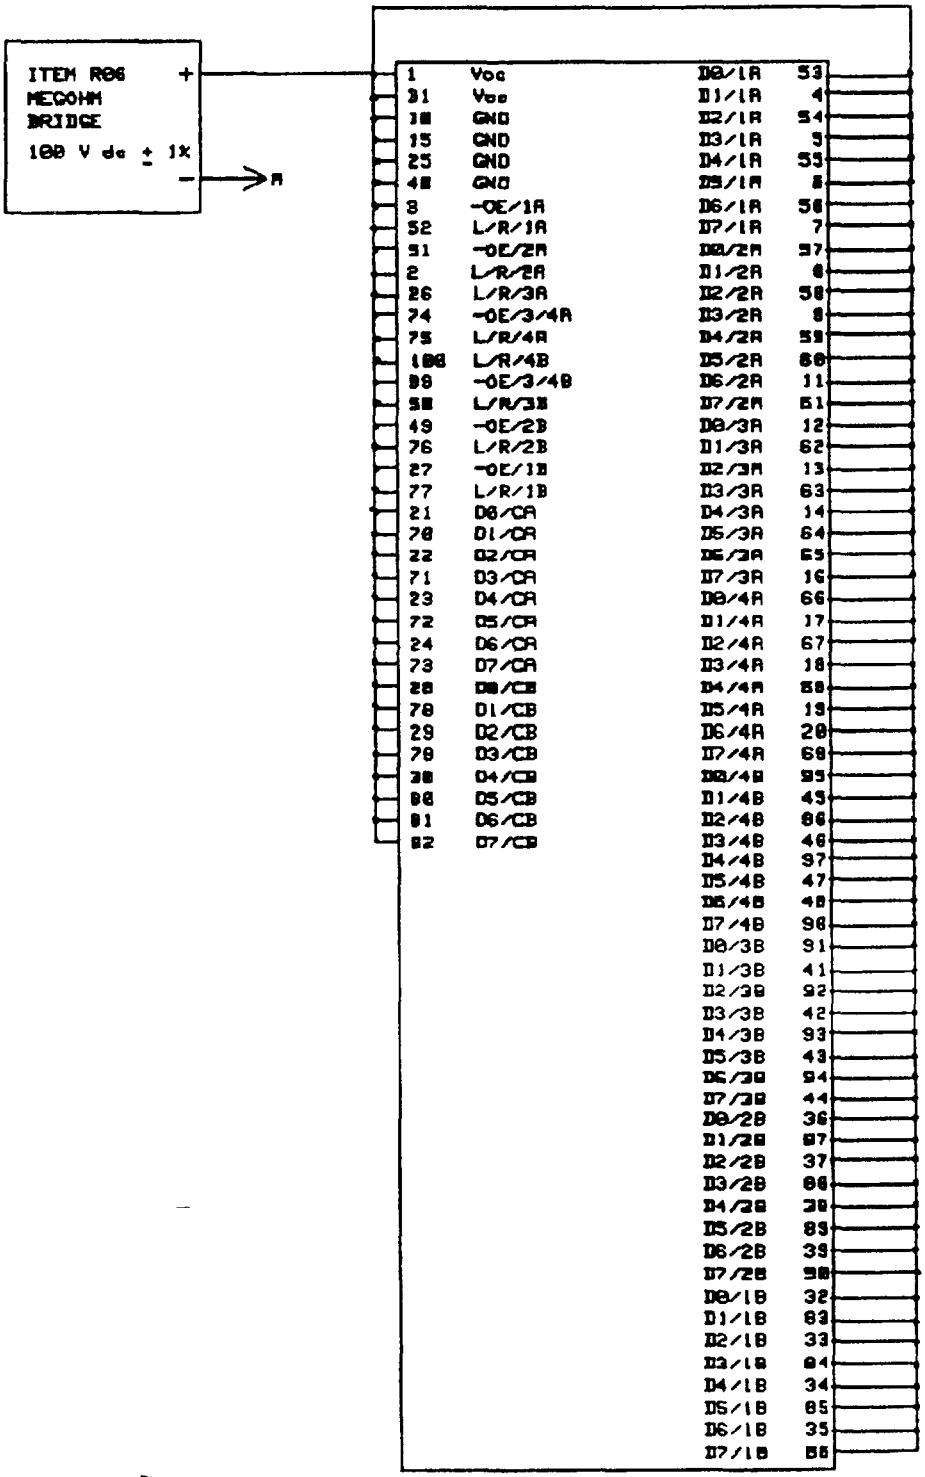



FIGURE 6. Isolation test circuit for table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE III. Continuity test.

Test cond	Test description	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
B1	Continuity	1	31	0.0	1.0	Ohm	7
B2	Continuity	10	15				
B3	Continuity	10	25				
B4	Continuity	10	40	0.0	1.0	Ohm	7
B5	Continuity	1	31	0.0	0.1	Ohm	7
B6	Continuity	10	15				
B7	Continuity	10	25				
B8	Continuity	10	40	0.0	0.1	Ohm	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.



1	Vcc	D0/1A	53
31	Vcc	D1/1A	4
10	GND	D2/1A	54
15	GND	D3/1A	5
25	GND	D4/1A	55
40	GND	D5/1A	6
3	-OE/1A	D6/1A	56
52	L/R/1A	D7/1A	7
51	-OE/2A	D0/2A	57
2	L/R/2A	D1/2A	8
26	L/R/3A	D2/2A	58
74	-OE/3/4A	D3/2A	9
75	L/R/4A	D4/2A	59
100	L/R/4B	D5/2A	60
98	-OE/3/4B	D6/2A	11
50	L/R/3B	D7/2A	61
49	-OE/2B	D0/3A	12
76	L/R/2B	D1/3A	62
27	-OE/1B	D2/3A	13
77	L/R/1B	D3/3A	63
21	D0/CA	D4/3A	14
70	D1/CA	D5/3A	64
22	D2/CA	D6/3A	65
71	D3/CA	D7/3A	16
23	D4/CA	D0/4A	66
72	D5/CA	D1/4A	17
24	D6/CA	D2/4A	67
73	D7/CA	D3/4A	18
28	D0/CB	D4/4A	68
78	D1/CB	D5/4A	19
29	D2/CB	D6/4A	20
79	D3/CB	D7/4A	69
80	D4/CB	D0/4B	85
80	D5/CB	D1/4B	45
81	D6/CB	D2/4B	86
82	D7/CB	D3/4B	46
		D4/4B	87
		D5/4B	47
		D6/4B	48
		D7/4B	88
		D0/3B	91
		D1/3B	41
		D2/3B	92
		D3/3B	42
		D4/3B	93
		D5/3B	43
		D6/3B	94
		D7/3B	44
		D0/2B	95
		D1/2B	97
		D2/2B	37
		D3/2B	98
		D4/2B	98
		D5/2B	99
		D6/2B	39
		D7/2B	90
		D0/1B	32
		D1/1B	83
		D2/1B	33
		D3/1B	84
		D4/1B	34
		D5/1B	85
		D6/1B	35
		D7/1B	86

FIGURE 7. Continuity test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE IV. Power supply stress test.

Test cond	Test description	Connect A to pin	Initial limits 25 ± 5°C	Fig
C	Vcc stress	1, 31	Module shall pass all remaining tests.	8

NOTE:

1. Vcc shall be connected for a minimum of 5 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

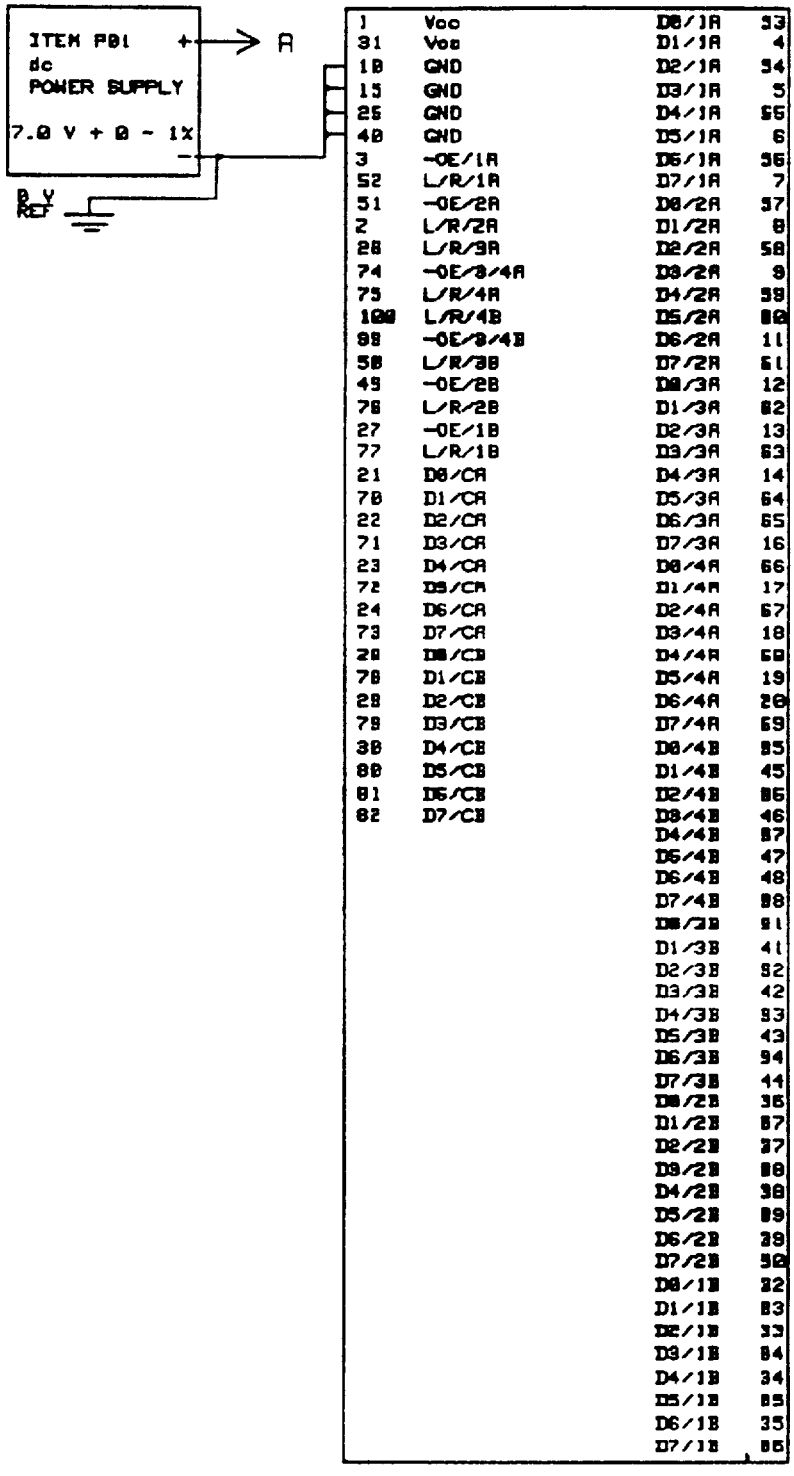


FIGURE 8. Vcc stress test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
D1	-OE/1A	3	51,74,99,49,27	Remaining module input pins	0	100	uA	9
D2	L/R/1A	52	3,51,74,99,49,27					
D3	-OE/2A	51	3,74,99,49,27					
D4	L/R/2A	2	3,51,74,99,49,27					
D5	L/R/3A	26	3,51,74,99,49,27		0	100	uA	9
D6	-OE/3/4A	74	3,51,99,49,27		0	200	uA	9
D7	L/R/4A	75	3,51,74,99,49,27		0	100	uA	9
D8	L/R/4B	100	3,51,74,99,49,27		0	100	uA	9
D9	-OE/3/4B	99	3,51,74,49,27		0	200	uA	9
D10	L/R/3B	50	3,51,74,99,49,27		0	100	uA	9
D11	-OE/2B	49	3,51,74,99,27					
D12	L/R/2B	76	3,51,74,99,49,27					
D13	-OE/1B	27	3,51,74,99,49					
D14	L/R/1B	77	3,51,74,99,49,27		0	100	uA	9
D15	D0/CA	21	3,51,74,99,49,27		0	400	uA	9
D16	D1/CA	70						
D17	D2/CA	22						
D18	D3/CA	71	3,51,74,99,49,27	Remaining module input pins	0	400	uA	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial T limits Min	25 + 5°C Initial T limits Max	Units	Fig
D19	D4/CA	23	3,51,74,99,49,27	Remaining module input pins	0	400	uA	9
D20	D5/CA	72						
D21	D6/CA	24						
D22	D7/CA	73						
D23	D0/CB	28						
D24	D1/CB	78						
D25	D2/CB	29						
D26	D3/CB	79						
D27	D4/CB	30						
D28	D5/CB	80						
D29	D6/CB	81						
D30	D7/CB	82			0	400	uA	9
D31	D0/1A	53			0	125	uA	9
D32	D1/1A	4						
D33	D2/1A	54						
D34	D3/1A	5						
D35	D4/1A	55						
D36	D5/1A	6	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
D37	D6/1A	56	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9
D38	D7/1A	7						
D39	D0/2A	57						
D40	D1/2A	8						
D41	D2/2A	58						
D42	D3/2A	9						
D43	D4/2A	59						
D44	D5/2A	60						
D45	D6/2A	11						
D46	D7/2A	61						
D47	D0/3A	12						
D48	D1/3A	62						
D49	D2/3A	13						
D50	D3/3A	63						
D51	D4/3A	14						
D52	D5/3A	64						
D53	D6/3A	65						
D54	D7/3A	16	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
D55	D0/4A	66	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9
D56	D1/4A	17						
D57	D2/4A	67						
D58	D3/4A	18						
D59	D4/4A	68						
D60	D5/4A	19						
D61	D6/4A	20						
D62	D7/4A	69						
D63	D0/4B	95						
D64	D1/4B	45						
D65	D2/4B	96						
D66	D3/4B	46						
D67	D4/4B	97						
D68	D5/4B	47						
D69	D6/4B	48						
D70	D7/4B	98						
D71	D0/3B	91						
D72	D1/3B	41	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test - Continued.


Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
D73	D2/3B	92	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9
D74	D3/3B	42						
D75	D4/3B	93						
D76	D5/3B	43						
D77	D6/3B	94						
D78	D7/3B	44						
D79	D0/2B	36						
D80	D1/2B	87						
D81	D2/2B	37						
D82	D3/2B	88						
D83	D4/2B	38						
D84	D5/2B	89						
D85	D6/2B	39						
D86	D7/2B	90						
D87	D0/1B	32						
D88	D1/1B	83						
D89	D2/1B	33						
D90	D3/1B	84	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE V. Input breakdown current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
D91	D4/1B	34	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9
D92	D5/1B	85						
D93	D6/1B	35						
D94	D7/1B	86	3,51,74,99,49,27	Remaining module input pins	0	125	uA	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

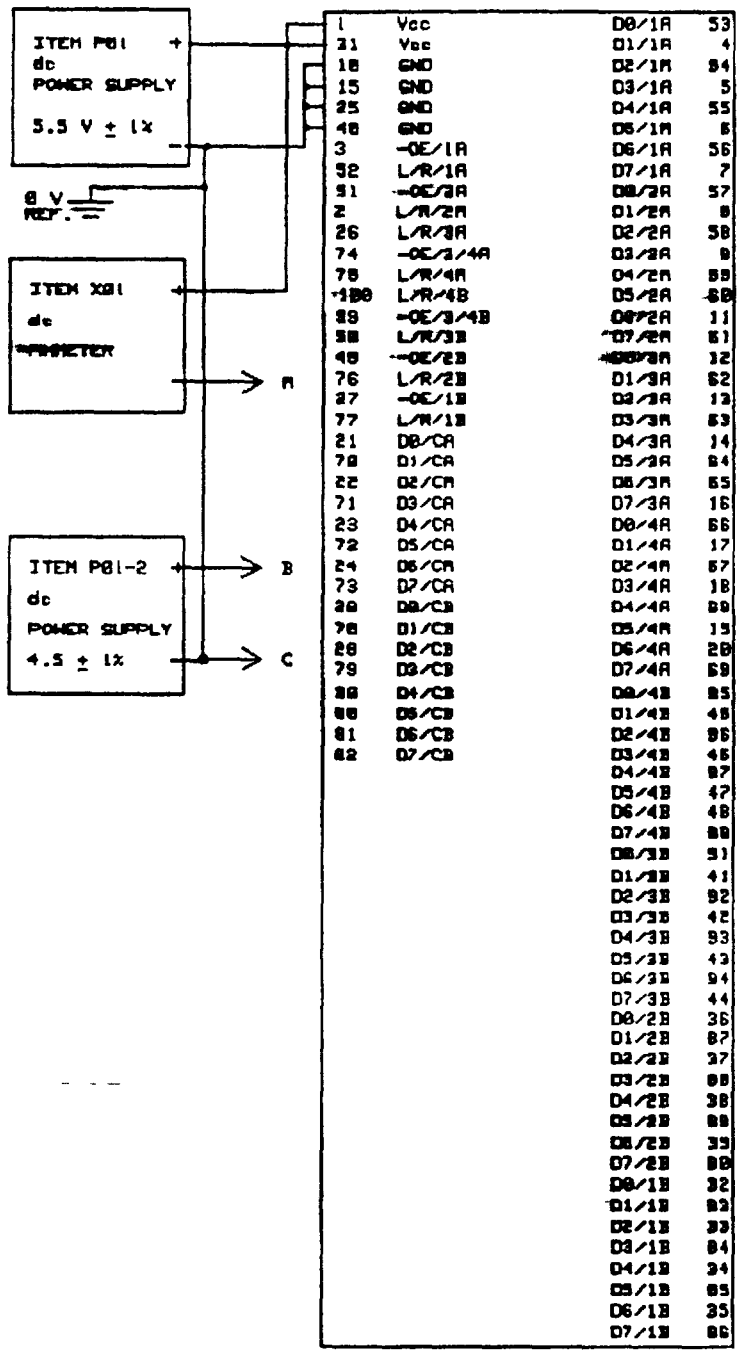

NOTE:

1. Do not isolate the chassis of ammeter X01 from earth ground.

FIGURE 9. Input breakdown current test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
E1	D0/CA	21	53,2,26,75	52,3,51,74,4,54, 5,55,6,56,7	-226	-41	mA	10
E2	D1/CA	70	4,2,26,75	52,3,51,74,53, 54,5,55,6,56,7				
E3	D2/CA	22	54,2,26,75	52,3,51,74,53,4, 5,55,6,56,7				
E4	D3/CA	71	5,2,26,75	52,3,51,74,53,4, 54,55,6,56,7				
E5	D4/CA	23	55,2,26,75	52,3,51,74,53,4, 54,5,6,56,7				
E6	D5/CA	72	6,2,26,75	52,3,51,74,53,4, 54,5,55,56,7				
E7	D6/CA	24	56,2,26,75	52,3,51,74,53,4, 54,5,55,6,7				
E8	D7/CA	73	7,2,26,75	52,3,51,74,53,4, 54,5,55,6,56				
E9	D0/CA	21	57,52,26,75	2,3,51,74,8,58, 9,59,60,11,61				
E10	D1/CA	70	8,52,26,75	2,3,51,74,57,58, 9,59,60,11,61				
E11	D2/CA	22	58,52,26,75	2,3,51,74,57,8, 9,59,60,11,61				
E12	D3/CA	71	9,52,26,75	2,3,51,74,57,8, 58,59,60,11,61				
E13	D4/CA	23	59,52,26,75	2,3,51,74,57,8, 58,9,59,11,61	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
E14	D5/CA	72	60,52,26,75	2,3,51,74,57,8, 58,9,59,11,61	-226	-41	mA	10
E15	D6/CA	24	11,52,26,75	2,3,51,74,57,8, 58,9,59,60,61				
E16	D7/CA	73	61,52,26,75	2,3,51,74,57,8, 58,9,59,60,11				
E17	D0/CA	21	12,52,2,75	26,3,51,74,62,13, 63,14,64,65,16				
E18	D1/CA	70	62,52,2,75	26,3,51,74,12,13, 63,14,64,65,16				
E19	D2/CA	22	13,52,2,75	26,3,51,74,12,62, 63,14,64,65,16				
E20	D3/CA	71	63,52,2,75	26,3,51,74,12,62, 13,14,64,65,16				
E21	D4/CA	23	14,52,2,75	26,3,51,74,12,62, 13,63,64,65,16				
E22	D5/CA	72	64,52,2,75	26,3,51,74,12,62, 13,63,14,65,16				
E23	D6/CA	24	65,52,2,75	26,3,51,74,12,62, 13,63,14,64,16				
E24	D7/CA	73	16,52,2,75	26,3,51,74,12,62, 13,63,14,64,65				
E25	D0/CA	21	66,52,2,26	75,3,51,74,17,67, 18,68,19,20,69				
E26	D1/CA	70	17,52,2,26	75,3,51,74,66,67, 18,68,19,20,69	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
E27	D2/CA	22	67,52,2,26	75,3,51,74,66,17, 18,68,19,20,69	-226	-41	mA	10
E28	D3/CA	71	18,52,2,26	75,3,51,74,66,17, 67,68,19,20,69				
E29	D4/CA	23	68,52,2,26	75,3,51,74,66,17, 67,18,19,20,69				
E30	D5/CA	72	19,52,2,26	75,3,51,74,66,17, 67,18,68,20,69				
E31	D6/CA	24	20,52,2,26	75,3,51,74,66,17, 67,18,68,19,69				
E32	D7/CA	73	69,52,2,26	75,3,51,74,66,17, 67,18,68,19,20				
E33	D0/CB	28	95,50,76,77	100,99,49,27,45, 96,46,97,47,48,98				
E34	D1/CB	78	45,50,76,77	100,99,49,27,95, 96,46,97,47,48,98				
E35	D2/CB	29	96,50,76,77	100,99,49,27,95, 45,46,97,47,48,98				
E36	D3/CB	79	46,50,76,77	100,99,49,27,95, 45,96,97,47,48,98				
E37	D4/CB	30	97,50,76,77	100,99,49,27,95, 45,96,46,47,48,98				
E38	D5/CB	80	47,50,76,77	100,99,49,27,95, 45,96,46,97,48,98				
E39	D6/CB	81	48,50,76,77	100,99,49,27,95, 45,96,46,97,47,98	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
E40	D7/CB	82	98,50,76,77	100,99,49,27,95, 45,96,46,97,47,48	-226	-41	mA	10
E41	D0/CB	28	91,100,76,77	50,99,49,27,41, 92,42,93,43,94,44				
E42	D1/CB	78	41,100,76,77	50,99,49,27,91, 92,42,93,43,94,44				
E43	D2/CB	29	92,100,76,77	50,99,49,27,91, 41,42,93,43,94,44				
E44	D3/CB	79	42,100,76,77	50,99,49,27,91, 41,92,93,43,94,44				
E45	D4/CB	30	93,100,76,77	50,99,49,27,91, 41,92,42,43,94,44				
E46	D5/CB	80	43,100,76,77	50,99,49,27,91, 41,92,42,93,94,44				
E47	D6/CB	81	94,100,76,77	50,99,49,27,91, 41,92,42,93,43,44				
E48	D7/CB	82	44,100,76,77	50,99,49,27,91, 41,92,42,93,43,94				
E49	D0/CB	28	36,50,100,77	76,99,49,27,87, 37,88,38,89,39,90				
E50	D1/CB	78	87,50,100,77	76,99,49,27,36, 37,88,38,89,39,90				
E51	D2/CB	29	37,50,100,77	76,99,49,27,36, 87,88,38,89,39,90				
E52	D3/CB	79	88,50,100,77	76,99,49,27,36, 87,37,38,89,39,90	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
E53	D4/CB	30	38,50,100,77	76,99,49,27,36, 87,37,88,89,39,90	-226	-41	mA	10
E54	D5/CB	80	89,50,100,77	76,99,49,27,36, 87,37,88,38,39,90				
E55	D6/CB	81	39,50,100,77	76,99,49,27,36, 87,37,88,38,89,90				
E56	D7/CB	82	90,50,100,77	76,99,49,27,36, 87,37,88,38,89,39				
E57	D0/CB	28	32,50,100,76	77,99,49,27,83, 33,84,34,85,35,86				
E58	D1/CB	78	83,50,100,76	77,99,49,27,32, 33,84,34,85,35,86				
E59	D2/CB	29	33,50,100,76	77,99,49,27,32, 83,84,34,85,35,86				
E60	D3/CB	79	84,50,100,76	77,99,49,27,32, 83,33,34,85,35,86				
E61	D4/CB	30	34,50,100,76	77,99,49,27,32 83,33,84,85,35,86				
E62	D5/CB	80	85,50,100,76	77,99,49,27,32, 83,33,84,34,35,86				
E63	D6/CB	81	35,50,100,76	77,99,49,27,32, 83,33,84,34,85,86				
E64	D7/CB	82	86,50,100,76	77,99,49,27,32, 83,33,84,34,85,35				
E65	D0/1A	53	21,52,2,26,75	3,51,74,70,22,71, 23,72,24,73	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
E66	D1/1A	4	70,52,2,26,75	3,51,74,21,22,71, 23,72,24,73	-226	-41	mA	10
E67	D2/1A	54	22,52,2,26,75	3,51,74,21,70,71, 23,72,24,73				
E68	D3/1A	5	71,52,2,26,75	3,51,74,21,70,22, 23,72,24,73				
E69	D4/1A	55	23,52,2,26,75	3,51,74,21,70,22, 71,72,24,73				
E70	D5/1A	6	72,52,2,26,75	3,51,74,21,70,22, 71,23,24,73				
E71	D6/1A	56	24,52,2,26,75	3,51,74,21,70,22, 71,23,72,73				
E72	D7/1A	7	73,52,2,26,75	3,51,74,21,70,22, 71,23,72,24				
E73	D0/2A	57	21,52,2,26,75	3,51,74,70,22,71, 23,72,24,73				
E74	D1/2A	8	70,52,2,26,75	3,51,74,21,22,71, 23,72,24,73				
E75	D2/2A	58	22,52,2,26,75	3,51,74,21,70,71, 23,72,24,73				
E76	D3/2A	9	71,52,2,26,75	3,51,74,21,70,22, 23,72,24,73				
E77	D4/2A	59	23,52,2,26,75	3,51,74,21,70,22, 71,72,24,73				
E78	D5/2A	60	72,52,2,26,75	3,51,74,21,70,22, 71,23,24,73	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
E79	D6/2A	11	24,52,2,26,75	3,51,74,21,70,22, 71,23,72,73	-226	-41	mA	10
E80	D7/2A	61	73,52,2,26,75	3,51,74,21,70,22, 71,23,72,24				
E81	D0/3A	12	21,52,2,26,75	3,51,74,70,22,71, 23,72,24,73				
E82	D1/3A	62	70,52,2,26,75	3,51,74,21,22,71, 23,72,24,73				
E83	D2/3A	13	22,52,2,26,75	3,51,74,21,70,71, 23,72,24,73				
E84	D3/3A	63	71,52,2,26,75	3,51,74,21,70,22, 23,72,24,73				
E85	D4/3A	14	23,52,2,26,75	3,51,74,21,70,22, 71,72,24,73				
E86	D5/3A	64	72,52,2,26,75	3,51,74,21,70,22, 71,23,24,73				
E87	D6/3A	65	24,52,2,26,75	3,51,74,21,70,22, 71,23,72,73				
E88	D7/3A	16	73,52,2,26,75	3,51,74,21,70,22, 71,23,72,24				
E89	D0/4A	66	21,52,2,26,75	3,51,74,70,22,71, 23,72,24,73				
E90	D1/4A	17	70,52,2,26,75	3,51,74,21,22,71, 23,72,24,73				
E91	D2/4A	67	22,52,2,26,75	3,51,74,21,70,71, 23,72,24,73	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
E92	D3/4A	18	71,52,2,26,75	3,51,74,21,70,22, 23,72,24,73	-226	-41	mA	10
E93	D4/4A	68	23,52,2,26,75	3,51,74,21,70,22, 71,72,24,73				
E94	D5/4A	19	72,52,2,26,75	3,51,74,21,70,22, 71,23,24,73				
E95	D6/4A	20	24,52,2,26,75	3,51,74,21,70,22, 71,23,72,73				
E96	D7/4A	69	73,52,2,26,75	3,51,74,21,70,22, 71,23,72,24				
E97	D0/4B	95	28,100,50,76,77	99,49,27,78,29, 79,30,80,81,82				
E98	D1/4B	45	78,100,50,76,77	99,49,27,28,29, 79,30,80,81,82				
E99	D2/4B	96	29,100,50,76,77	99,49,27,28,78, 79,30,80,81,82				
E100	D3/4B	46	79,100,50,76,77	99,49,27,28,78, 29,30,80,81,82				
E101	D4/4B	97	30,100,50,76,77	99,49,27,28,78, 29,79,80,81,82				
E102	D5/4B	47	80,100,50,76,77	99,49,27,28,78, 29,79,30,81,82				
E103	D6/4B	48	81,100,50,76,77	99,49,27,28,78, 29,79,30,80,82				
E104	D7/4B	98	82,100,50,76,77	99,49,27,28,78, 29,79,30,80,81	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
E105	D0/3B	91	28,100,50,76,77	99,49,27,78,29, 79,30,80,81,82	-226	-41	mA	10
E106	D1/3B	41	78,100,50,76,77	99,49,27,28,29, 79,30,80,81,82				
E107	D2/3B	92	29,100,50,76,77	99,49,27,28,78, 79,30,80,81,82				
E108	D3/3B	42	79,100,50,76,77	99,49,27,28,78, 29,30,80,81,82				
E109	D4/3B	93	30,100,50,76,77	99,49,27,28,78, 29,79,80,81,82				
E110	D5/3B	43	80,100,50,76,77	99,49,27,28,78, 29,79,30,81,82				
E111	D6/3B	94	80,100,50,76,77	99,49,27,28,78, 29,79,30,80,82				
E112	D7/3B	44	81.100.50.76.77	99.49.27.28.78. 29,79,30,80,81				
E113	D0/2B	36	82,100,50,76,77	99,49,27,78,29, 79,30,80,81,82				
E114	D1/2B	87	28,100,50,76,77	99,49,27,28,29, 79,30,80,81,82				
E115	D2/2B	37	78,100,50,76,77	99,49,27,28,78, 79,30,80,81,82				
E116	D3/2B	88	29.100.50.76.77	99.49.27.28.78. 29,30,80,81,82				
E117	D4/2B	38	79,100,50,76,77	99,49,27,28,78, 29,79,80,81,82	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output short circuit current test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
E118	D5/2B	89	30,100,50,76,77	99,49,27,28,78, 29,79,30,81,82	-226	-41	mA	10
E119	D6/2B	39	80,100,50,76,77	99,49,27,28,78, 29,79,30,80,82				
E120	D7/2B	90	81,100,50,76,77	99,49,27,28,78, 29,79,30,80,81				
E121	D0/1B	32	28,100,50,76,77	99,49,27,78,29, 79,30,80,81,82				
E122	D1/1B	83	78,100,50,76,77	99,49,27,28,29, 79,30,80,81,82				
E123	D2/1B	33	29,100,50,76,77	99,49,27,28,78, 79,30,80,81,82				
E124	D3/1B	84	79,100,50,76,77	99,49,27,28,78, 29,30,80,81,82				
E125	D4/1B	34	30,100,50,76,77	99,49,27,28,78, 29,79,80,81,82				
E126	D5/1B	85	80,100,50,76,77	99,49,27,28,78, 29,79,30,81,82				
E127	D6/1B	35	81,100,50,76,77	99,49,27,28,78, 29,79,30,80,82				
E128	D7/1B	86	82,100,50,76,77	99,49,27,28,78, 29,79,30,80,81	-226	-41	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. Only one output shall be shorted at a time and the measurement taken within 1 second.

2. Do not isolate the chassis of ammeter X01 from earth ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

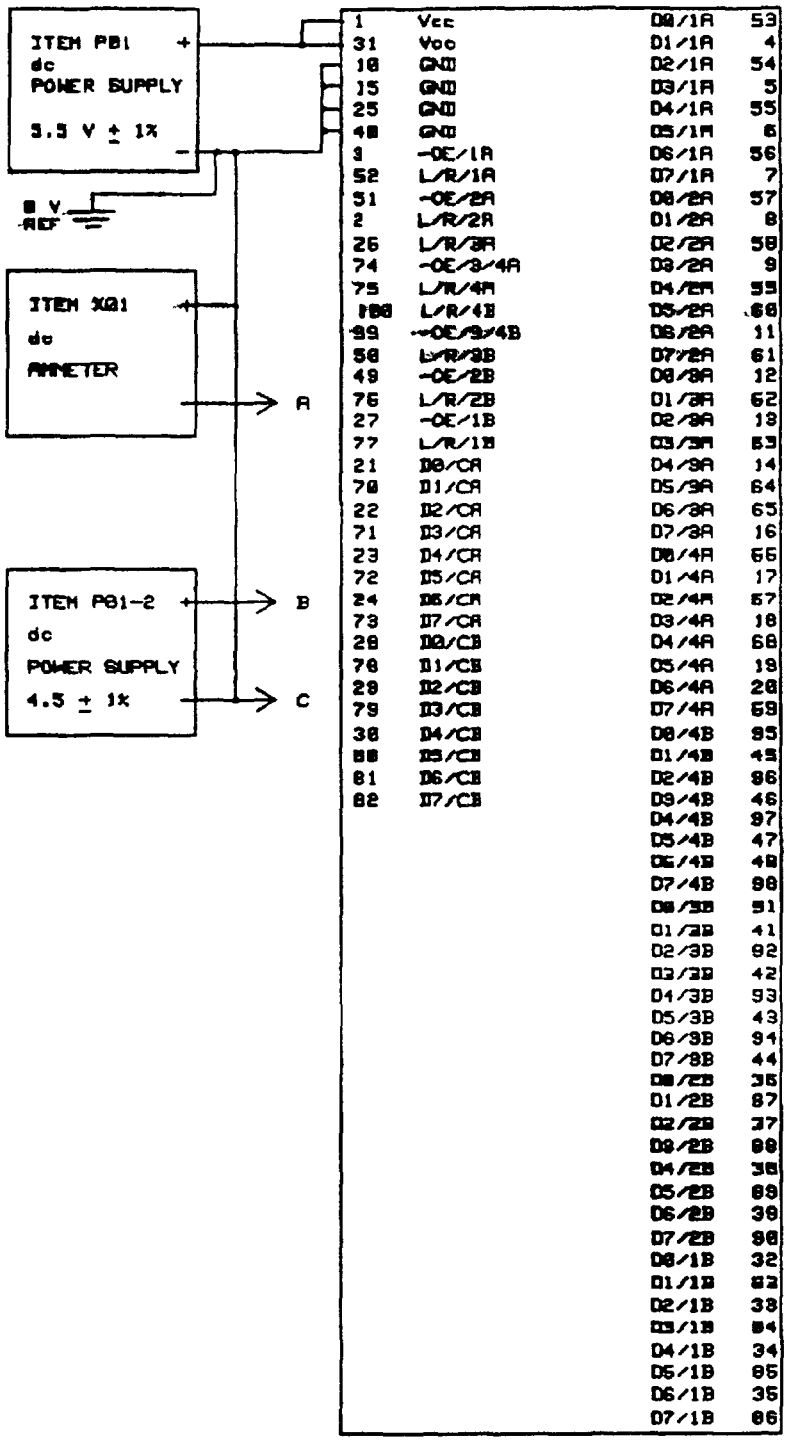


FIGURE 10. Output short circuit current test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VII. Output leakage current, low level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
F1	D0/CA	21	3,51,74,99,49,27	-1.69	-0.804	mA	11
F2	D1/CA	70					
F3	D2/CA	22					
F4	D3/CA	71					
F5	D4/CA	23					
F6	D5/CA	72					
F7	D6/CA	24					
F8	D7/CA	73					
F9	D0/CB	28					
F10	D1/CB	78					
F11	D2/CB	29					
F12	D3/CB	79					
F13	D4/CB	30					
F14	D5/CB	80					
F15	D6/CB	81					
F16	D7/CB	82	3,51,74,99,49,27	-1.69	-0.804	mA	11
F17	D0/1A	53	3,51,74,99,49,27	-1.09	-0.804	mA	11
F18	D1/1A	4					
F19	D2/1A	54					
F20	D3/1A	5	3,51,74,99,49,27	-1.09	-0.804	mA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VII. Output leakage current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
F21	D4/1A	55	3,51,74,99,49,27	-1.09	-0.804	mA	11
F22	D5/1A	6					
F23	D6/1A	56					
F24	D7/1A	7					
F25	D0/2A	57					
F26	D1/2A	8					
F27	D2/2A	58					
F28	D3/2A	9					
F29	D4/2A	59					
F30	D5/2A	60					
F31	D6/2A	11					
F32	D7/2A	61					
F33	D0/3A	12					
F34	D1/3A	62					
F35	D2/3A	13					
F36	D3/3A	63					
F37	D4/3A	14					
F38	D5/3A	64					
F39	D6/3A	65					
F40	D7/3A	16	3,51,74,99,49,27	-1.09	-0.804	mA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VII. Output leakage current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
F41	D0/4A	66	3,51,74,99,49,27	-1.09	-0.804	mA	11
F42	D1/4A	17					
F43	D2/4A	67					
F44	D3/4A	18					
F45	D4/4A	68					
F46	D5/4A	19					
F47	D6/4A	20					
F48	D7/4A	69					
F49	D0/4B	95					
F50	D1/4B	45					
F51	D2/4B	96					
F52	D3/4B	46					
F53	D4/4B	97					
F54	D5/4B	47					
F55	D6/4B	48					
F56	D7/4B	98					
F57	D0/3B	91					
F58	D1/3B	41					
F59	D2/3B	92					
F60	D3/3B	42	3,51,74,99,49,27	-1.09	-0.804	mA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VII. Output leakage current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
F61	D4/3B	93	3,51,74,99,49,27	-1.09	-0.804	mA	11
F62	D5/3B	43					
F63	D6/3B	94					
F64	D7/3B	44					
F65	D0/2B	36					
F66	D1/2B	87					
F67	D2/2B	37					
F68	D3/2B	88					
F69	D4/2B	38					
F70	D5/2B	89					
F71	D6/2B	39					
F72	D7/2B	90					
F73	D0/1B	32					
F74	D1/1B	83					
F75	D2/1B	33					
F76	D3/1B	84					
F77	D4/1B	34					
F78	D5/1B	85					
F79	D6/1B	35					
F80	D7/1B	86	3,51,74,99,49,27	-1.09	-0.804	mA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

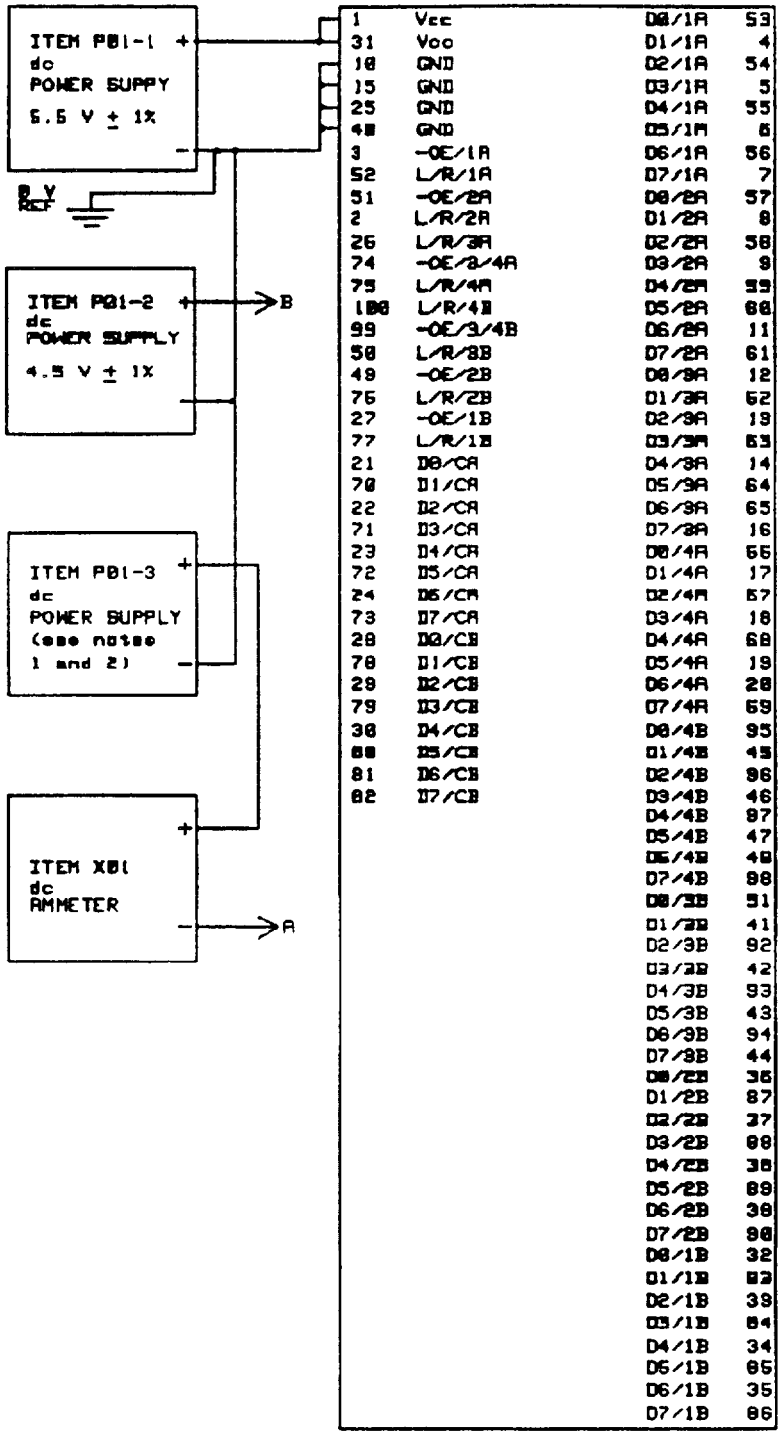


FIGURE 11. Output leakage current test circuit for tables VII and VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. For test conditions F1-F80, P01-3 = 0.4 V ± 1 percent.
2. For test conditions G1-G80, P01-3 = 2.7 V ± 1 percent.
3. Do not isolate the chassis of ammeter X01 from earth ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VIII. Output leakage current, high level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
G1	D0/CA	21	3,51,74,99,49,27	-568	-362	uA	11
G2	D1/CA	70					
G3	D2/CA	22					
G4	D3/CA	71					
G5	D4/CA	23					
G6	D5/CA	72					
G7	D6/CA	24					
G8	D7/CA	73					
G9	D0/CB	28					
G10	D1/CB	78					
G11	D2/CB	29					
G12	D3/CB	79					
G13	D4/CB	30					
G14	D5/CB	80					
G15	D6/CB	81					
G16	D7/CB	82	3,51,74,99,49,27	-568	-362	uA	11
G17	D0/1A	53	3,51,74,99,49,27	-508	-422	uA	11
G18	D1/1A	4					
G19	D2/1A	54					
G20	D3/1A	5	3,51,74,99,49,27	-508	-422	uA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VIII. Output leakage current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
G21	D4/1A	55	3,51,74,99,49,27	-508	-422	uA	11
G22	D5/1A	6					
G23	D6/1A	56					
G24	D7/1A	7					
G25	D0/2A	57					
G26	D1/2A	8					
G27	D2/2A	58					
G28	D3/2A	9					
G29	D4/2A	59					
G30	D5/2A	60					
G31	D6/2A	11					
G32	D7/2A	61					
G33	D0/3A	12					
G34	D1/3A	62					
G35	D2/3A	13					
G36	D3/3A	63					
G37	D4/3A	14					
G38	D5/3A	64					
G39	D6/3A	65					
G40	D7/3A	16	3,51,74,99,49,27	-508	-422	uA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VIII. Output leakage current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
G41	D0/4A	66	3,51,74,99,49,27	-508	-422	uA	11
G42	D1/4A	17					
G43	D2/4A	67					
G44	D3/4A	18					
G45	D4/4A	68					
G46	D5/4A	19					
G47	D6/4A	20					
G48	D7/4A	69					
G49	D0/4B	95					
G50	D1/4B	45					
G51	D2/4B	96					
G52	D3/4B	46					
G53	D4/4B	97					
G54	D5/4B	47					
G55	D6/4B	48					
G56	D7/4B	98					
G57	D0/3B	91					
G58	D1/3B	41					
G59	D2/3B	92					
G60	D3/3B	42	3,51,74,99,49,27	-508	-422	uA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE VIII. Output leakage current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
G61	D4/3B	93	3,51,74,99,49,27	-508	-422	uA	11
G62	D5/3B	43					
G63	D6/3B	94					
G64	D7/3B	44					
G65	D0/2B	36					
G66	D1/2B	87					
G67	D2/2B	37					
G68	D3/2B	88					
G69	D4/2B	38					
G70	D5/2B	89					
G71	D6/2B	39					
G72	D7/2B	90					
G73	D0/1B	32					
G74	D1/1B	83					
G75	D2/1B	33					
G76	D3/1B	84					
G77	D4/1B	34					
G78	D5/1B	85					
G79	D6/1B	35					
G80	D7/1B	86	3,51,74,99,49,27	-508	-422	uA	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE IX. Input clamp diode voltage test.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
H1	-OE/1A	3	Open	-1.5	-0.4	V	12
H2	L/R/1A	52					
H3	-OE/2A	51					
H4	L/R/2A	2					
H5	L/R/3A	26					
H6	-OE/3/4A	74					
H7	L/R/4A	75					
H8	L/R/4B	100					
H9	-OE/3/4B	99					
H10	L/R/3B	50					
H11	-OE/2B	49					
H12	L/R/2B	76					
H13	-OE/1B	27					
H14	L/R/1B	77	Open				
H15	D0/CA	21	3,51,74,27,49,99				
H16	D1/CA	70					
H17	D2/CA	22					
H18	D3/CA	71					
H19	D4/CA	23					
H20	D5/CA	72	3,51,74,27,49,99	-1.5	-0.4	V	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE IX. Input clamp diode voltage test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
H21	D6/CA	24	3,51,74,27,49,99	-1.5	-0.4	V	12
H22	D7/CA	73					
H23	D0/CB	28					
H24	D1/CB	78					
H25	D2/CB	29					
H26	D3/CB	79					
H27	D4/CB	30					
H28	D5/CB	80					
H29	D6/CB	81					
H30	D7/CB	82					
H31	D0/1A	53					
H32	D1/1A	4					
H33	D2/1A	54					
H34	D3/1A	5					
H35	D4/1A	55					
H36	D5/1A	6					
H37	D6/1A	56					
H38	D7/1A	7					
H39	D0/2A	57					
H40	D1/2A	8	3,51,74,27,49,99	-1.5	-0.4	V	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE IX. Input clamp diode voltage test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
H41	D2/2A	58	3,51,74,27,49,99	-1.5	-0.4	V	12
H42	D3/2A	9					
H43	D4/2A	59					
H44	D5/2A	60					
H45	D6/2A	11					
H46	D7/2A	61					
H47	D0/3A	12					
H48	D1/3A	62					
H49	D2/3A	13					
H50	D3/3A	63					
H51	D4/3A	14					
H52	D5/3A	64					
H53	D6/3A	65					
H54	D7/3A	16					
H55	D0/4A	66					
H56	D1/4A	17					
H57	D2/4A	67					
H58	D3/4A	18					
H59	D4/4A	68					
H60	D5/4A	19	3,51,74,27,49,99	-1.5	-0.4	V	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE IX. Input clamp diode voltage test - Continued.


Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
H61	D6/4A	20	3,51,74,27,49,99	-1.5	-0.4	V	12
H62	D7/4A	69					
H63	D0/4B	95					
H64	D1/4B	45					
H65	D2/4B	96					
H66	D3/4B	46					
H67	D4/4B	97					
H68	D5/4B	47					
H69	D6/4B	48					
H70	D7/4B	98					
H71	D0/3B	91					
H72	D1/3B	41					
H73	D2/3B	92					
H74	D3/3B	42					
H75	D4/3B	93					
H76	D5/3B	43					
H77	D6/3B	94					
H78	D7/3B	44					
H79	D0/2B	36					
H80	D1/2B	87	3,51,74,27,49,99	-1.5	-0.4	V	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE IX. Input clamp diode voltage test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
H81	D2/2B	37	3,51,74,27,49,99	-1.5	-0.4	V	12
H82	D3/2B	88					
H83	D4/2B	38					
H84	D5/2B	89					
H85	D6/2B	39					
H86	D7/2B	90					
H87	D0/1B	32					
H88	D1/1B	83					
H89	D2/1B	33					
H90	D3/1B	84					
H91	D4/1B	34					
H92	D5/1B	85					
H93	D6/1B	35					
H94	D7/1B	86	3,51,74,27,49,99	-1.5	-0.4	V	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

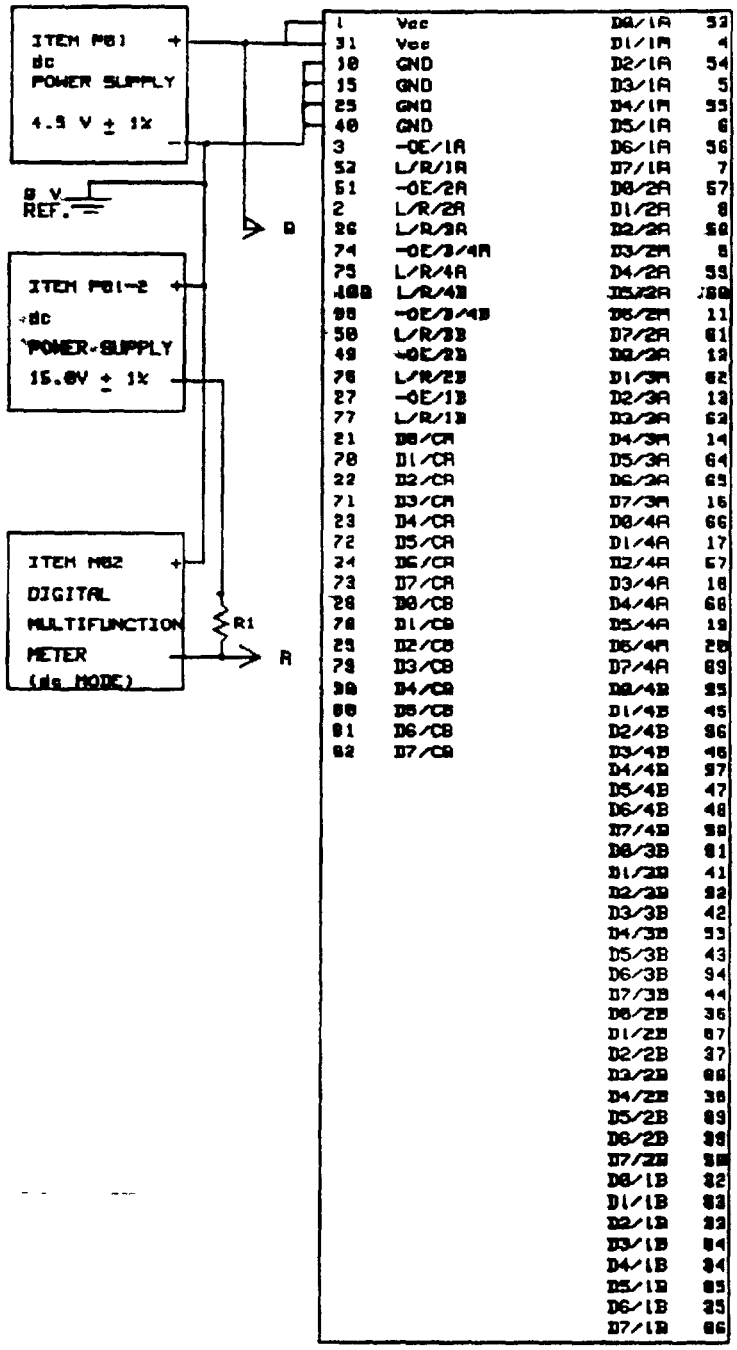

NOTE:

1. R1 = 750 Ohms ± 1 percent, 1/4 W.

FIGURE 12. Input clamp diode voltage test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial T limits Min	25 ± 5°C Initial T limits Max	Units	Figs
J1	D0/CA	21	2,26,75	52,3,51,74,53,4, 54,5,55,6,56,7	0.0	0.4	V	13,14
J2	D1/CA	70						
J3	D2/CA	22						
J4	D3/CA	71						
J5	D4/CA	23						
J6	D5/CA	72						
J7	D6/CA	24						
J8	D7/CA	73	2,26,75	52,3,51,74,53,4, 54,5,55,6,56,7				
J9	D0/CA	21	52,26,75	2,3,51,74,57,8, 58,9,59,60,11,61				
J10	D1/CA	70						
J11	D2/CA	22						
J12	D3/CA	71						
J13	D4/CA	23						
J14	D5/CA	72						
J15	D6/CA	24						
J16	D7/CA	73	52,26,75	2,3,51,74,57,8, 58,9,59,60,11,61	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
J17	D0/CA	21	52,2,75	26,3,51,74,12,62, 13,63,14,64,65,16	0.0	0.4	V	13,14
J18	D1/CA	70						
J19	D2/CA	22						
J20	D3/CA	71						
J21	D4/CA	23						
J22	D5/CA	72						
J23	D6/CA	24						
J24	D7/CA	73	52,2,75	26,3,51,74,12,62, 13,63,14,64,65,16				
J25	D0/CA	21	52,2,26	75,3,51,74,66,17, 67,18,68,19,20,69				
J26	D1/CA	70						
J27	D2/CA	22						
J28	D3/CA	71						
J29	D4/CA	23						
J30	D5/CA	72						
J31	D6/CA	24						
J32	D7/CA	73	52,2,26	75,3,51,74,66,17, 67,18,68,19,20,69	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
J33	D0/CB	28	50,76,77	100,99,49,27,95,45 96,46,97,47,48,98	0.0	0.4	V	13,14
J34	D1/CB	78						
J35	D2/CB	29						
J36	D3/CB	79						
J37	D4/CB	30						
J38	D5/CB	80						
J39	D6/CB	81						
J40	D7/CB	82	50,76,77	100,99,49,27,95,45 96,46,97,47,48,98				
J41	D0/CB	28	100,76,77	50,99,49,27,91,41, 92,42,93,43,94,44				
J42	D1/CB	78						
J43	D2/CB	29						
J44	D3/CB	79						
J45	D4/CB	30						
J46	D5/CB	80						
J47	D6/CB	81						
J48	D7/CB	82	100,76,77	50,99,49,27,91,41, 92,42,93,43,94,44	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 +5°C Initial limits Min	25 +5°C Initial limits Max	Units	Figs
J49	D0/CB	28	50,100,77	76,99,49,27,36,87, 37,88,38,89,39,90	0.0	0.4	V	13,14
J50	D1/CB	78						
J51	D2/CB	29						
J52	D3/CB	79						
J53	D4/CB	30						
J54	D5/CB	80						
J55	D6/CB	81						
J56	D7/CB	82	50,100,77	76,99,49,27,36,87, 37,88,38,89,39,90				
J57	D0/CB	28	50,100,76	77,99,49,27,32,83, 33,84,34,85,35,86				
J58	D1/CB	78						
J59	D2/CB	29						
J60	D3/CB	79						
J61	D4/CB	30						
J62	D5/CB	80						
J63	D6/CB	81						
J64	D7/CB	82	50,100,76	77,99,49,27,32,83, 33,84,34,85,35,86	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
J65	D0/1A	53	52,2,26,75	3,51,74,21,70,22, 71,23,72,24,73	0.0	0.4	V	13,14
J66	D1/1A	4						
J67	D2/1A	54						
J68	D3/1A	5						
J69	D4/1A	55						
J70	D5/1A	6						
J71	D6/1A	56						
J72	D7/1A	7						
J73	D0/2A	57						
J74	D1/2A	8						
J75	D2/2A	58						
J76	D3/2A	9						
J77	D4/2A	59						
J78	D5/2A	60						
J79	D6/2A	11						
J80	D7/2A	61						
J81	D0/3A	12	52,2,26,75	3,51,74,21,70,22, 71,23,72,24,73	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
J82	D1/3A	62	52,2,26,75	3,51,74,21,70,22, 71,23,72,24,73	0.0	0.4	V	13,14
J83	D2/3A	13						
J84	D3/3A	63						
J85	D4/3A	14						
J86	D5/3A	64						
J87	D6/3A	65						
J88	D7/3A	16						
J89	D0/4A	66						
J90	D1/4A	17						
J91	D2/4A	67						
J92	D3/4A	18						
J93	D4/4A	68						
J94	D5/4A	19						
J95	D6/4A	20						
J96	D7/4A	69	52,2,26,75	3,51,74,21,70,22, 71,23,72,24,73				
J97	D0/4B	95	100,50,76,77	99,49,27,28,78,29, 79,30,80,81,82	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
J98	D1/4B	45	100,50,76,77	99,49,27,28,78,29, 79,30,80,81,82	0.0	0.4	V	13,14
J99	D2/4B	96						
J100	D3/4B	46						
J101	D4/4B	97						
J102	D5/4B	47						
J103	D6/4B	48						
J104	D7/4B	98						
J105	D0/3B	91						
J106	D1/3B	41						
J107	D2/3B	92						
J108	D3/3B	42						
J109	D4/3B	93						
J110	D5/3B	43						
J111	D6/3B	94						
J112	D7/3B	44						
J113	D0/2B	36	100,50,76,77	99,49,27,28,78,29, 79,30,80,81,82	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE X. Output voltage, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
J114	D1/2B	87	100,50,76,77	99,49,27,28,78,29, 79,30,80,81,82	0.0	0.4	V	13,14
J115	D2/2B	37						
J116	D3/2B	88						
J117	D4/2B	38						
J118	D5/2B	89						
J119	D6/2B	39						
J120	D7/2B	90						
J121	D0/1B	32						
J122	D1/1B	83						
J123	D2/1B	33						
J124	D3/1B	84						
J125	D4/1B	34						
J126	D5/1B	85						
J127	D6/1B	35						
J128	D7/1B	86	100,50,76,77	99,49,27,28,78,29, 79,30,80,81,82	0.0	0.4	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.


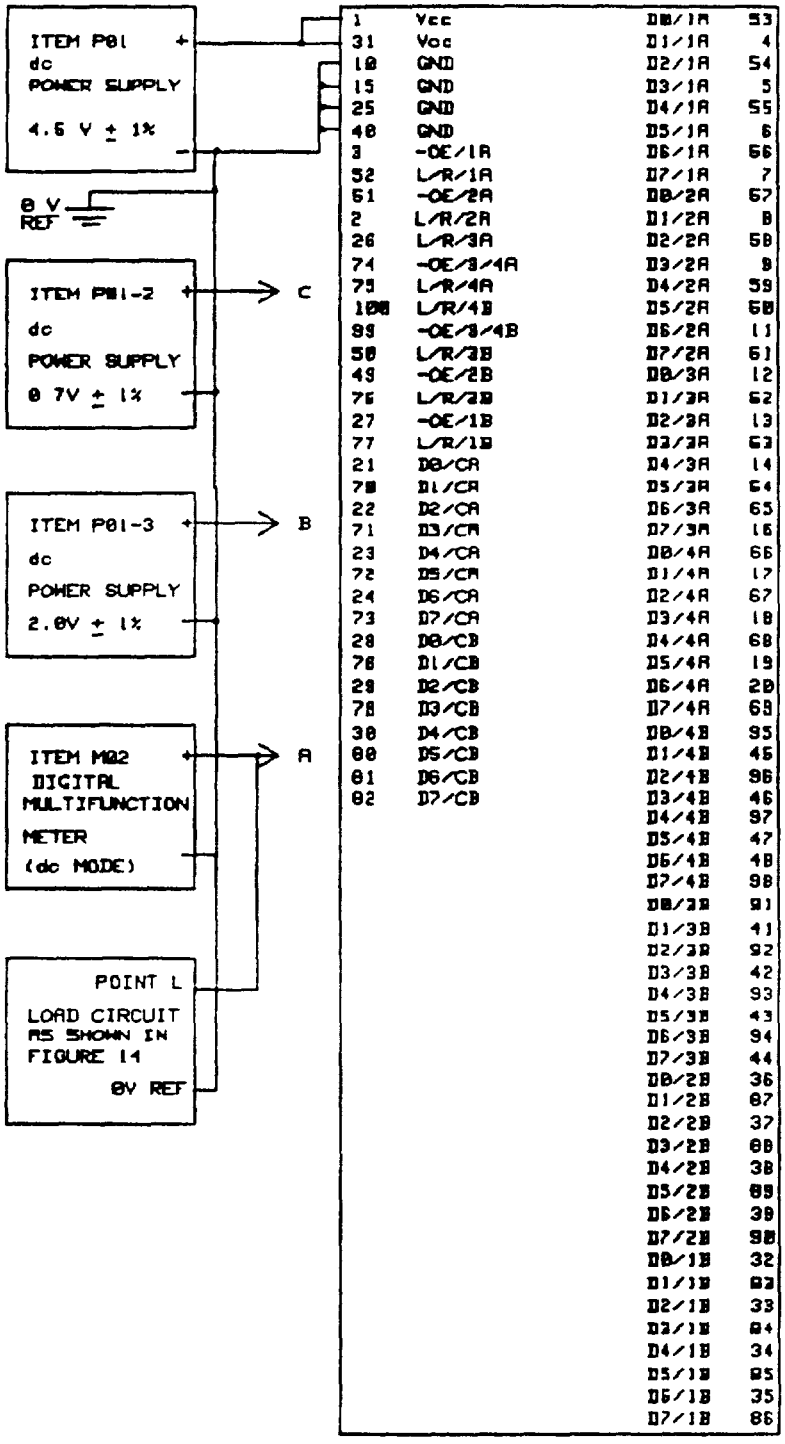


FIGURE 13. Output voltage, low and high level, test circuit for tables X and XI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

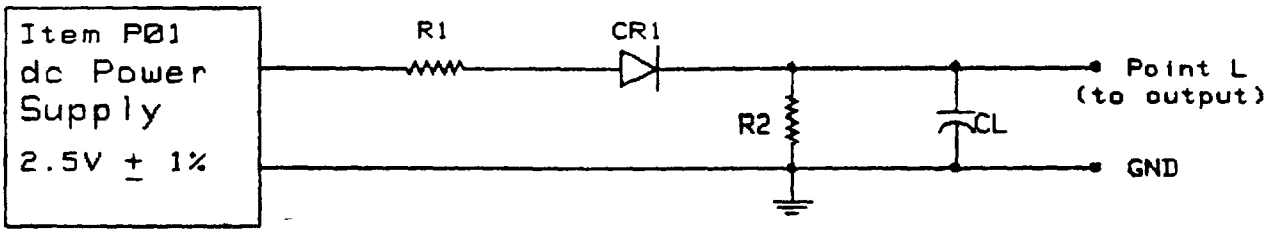

NOTES:

1. CR1 = 1N3600, 1N4150 or equivalent.

2. For output pins 4-9, 11-14, 16-20, 32-39, 41-48, 53-69 and 83-98: R1 = value for a current flow of 11.29 mA ± 5 percent with point L held at 0.4 V. R2 = 715 ohms ± 1 percent, 1/8 W.

3. For output pins 21-24, 28-30, 70-73, 78-82: R1 = value for a current flow of 10.69 mA ± 5 percent with point L held at 0.4 V. R2 = 715 ohms ± 1 percent, 1/8 W.

4. CL = 150 pf (including probe and parasitic capacitance) for sample dynamic tests.

5. CL = 300 pf (including probe and parasitic capacitance) for qualification dynamic tests.

6. CL = 50 pf (including probe and parasitic capacitance) for crosstalk tests.

7. Capacitor CL is not required for dc electrical test conditions J1-J128 and K1-K128.

8. Lead length from load circuit to module output pin under test is to be less than 1 inch (25.4 mm).

9. During output switching, the 2.5 V power supply shall have a maximum overshoot of 500 mV.

FIGURE 14. Logic load circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
K1	D0/CR	21	53,2,26,75	52,3,51,74,4,54, 5,55,6,56,7	2.4	4.5	V	13, 14
K2	D1/CR	70	4,2,26,75	52,3,51,74,53,54, 5,55,6,56,7				
K3	D2/CR	22	54,2,26,75	52,3,51,74,53,4, 5,55,6,56,7				
K4	D3/CR	71	5,2,26,75	52,3,51,74,53,4, 54,55,6,56,7				
K5	D4/CR	23	55,2,26,75	52,3,51,74,53,4, 54,5,6,56,7				
K6	D5/CR	72	6,2,26,75	52,3,51,74,53,4, 54,5,55,56,7				
K7	D6/CR	24	56,2,26,75	52,3,51,74,53,4, 54,5,55,6,7				
K8	D7/CR	73	7,2,26,75	52,3,51,74,53,4, 54,5,55,6,56				
K9	D0/CR	21	57,52,26,75	2,3,51,74,8,58, 9,59,60,11,61				
K10	D1/CR	70	8,52,26,75	2,3,51,74,57,58, 9,59,60,11,61				
K11	D2/CR	22	58,52,26,75	2,3,51,74,57,8, 9,59,60,11,61				
K12	D3/CR	71	9,52,26,75	2,3,51,74,57,8, 58,59,60,11,61	2.4	4.5	V	13, 14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K13	D4/CA	23	59,52,26,75	2,3,51,74,57,8, 58,9,60,11,61	2.4	4.5	V	13,14
K14	D5/CA	72	60,52,26,75	2,3,51,74,57,8, 58,9,59,11,61				
K15	D6/CA	24	11,52,26,75	2,3,51,74,57,8, 58,9,59,60,61				
K16	D7/CA	73	61,52,26,75	2,3,51,74,57,8, 58,9,59,60,11				
K17	D0/CA	21	12,52,2,75	26,3,51,74,62,13, 63,14,64,65,16				
K18	D1/CA	70	62,52,2,75	26,3,51,74,12,13, 63,14,64,65,16				
K19	D2/CA	22	13,52,2,75	26,3,51,74,12,62, 63,14,64,65,16				
K20	D3/CA	71	63,52,2,75	26,3,51,74,12,62, 13,14,64,65,16				
K21	D4/CA	23	14,52,2,75	26,3,51,74,12,62, 13,63,64,65,16				
K22	D5/CA	72	64,52,2,75	26,3,51,74,12,62, 13,63,14,65,16				
K23	D6/CA	24	65,52,2,75	26,3,51,74,12,62, 13,63,14,64,16				
K24	D7/CA	73	16,52,2,75	26,3,51,74,12,62, 13,63,14,64,65	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
K25	D0/CA	21	66,52,2,26	75,3,51,74,17,67, 18,68,19,20,69	2.4	4.5	V	13,14
K26	D1/CA	70	17,52,2,26	75,3,51,74,66,67, 18,68,19,20,69				
K27	D2/CA	22	67,52,2,26	75,3,51,74,66,17, 18,68,19,20,69				
K28	D3/CA	71	18,52,2,26	75,3,51,74,66,17, 67,68,19,20,69				
K29	D4/CA	23	68,52,2,26	75,3,51,74,66,17, 67,18,19,20,69				
K30	D5/CA	72	19,52,2,26	75,3,51,74,66,17, 67,18,68,20,69				
K31	D6/CA	24	20,52,2,26	75,3,51,74,66,17, 67,18,68,19,69				
K32	D7/CA	73	69,52,2,26	75,3,51,74,66,17, 67,18,68,19,20				
K33	D0/CB	28	95,50,76,77	100,99,49,27,45, 96,46,97,47,48,98				
K34	D1/CB	78	45,50,76,77	100,99,49,27,95, 96,46,97,47,48,98				
K35	D2/CB	29	96,50,76,77	100,99,49,27,95, 45,46,97,47,48,98				
K36	D3/CB	79	46,50,76,77	100,99,49,27,95, 45,96,97,47,48,98	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K37	D4/CB	30	97,50,76,77	100,99,49,27,95, 45,96,46,47,48,98	2.4	4.5	V	13,14
K38	D5/CB	80	47,50,76,77	100,99,49,27,95, 45,96,46,97,48,98				
K39	D6/CB	81	48,50,76,77	100,99,49,27,95, 45,96,46,97,47,98				
K40	D7/CB	82	98,50,76,77	100,99,49,27,95, 45,96,46,97,47,48				
K41	D0/CB	28	91,100,76,77	50,99,49,27,41, 92,42,93,43,94,44				
K42	D1/CB	78	41,100,76,77	50,99,49,27,91, 92,42,93,43,94,44				
K43	D2/CB	29	92,100,76,77	50,99,49,27,91, 41,42,93,43,94,44				
K44	D3/CB	79	42,100,76,77	50,99,49,27,91, 41,92,93,43,94,44				
K45	D4/CB	30	93,100,76,77	50,99,49,27,91, 41,92,42,43,94,44				
K46	D5/CB	80	43,100,76,77	50,99,49,27,91 41,92,42,93,94,44				
K47	D6/CB	81	94,100,76,77	50,99,49,27,91, 41,92,42,93,43,94				
K48	D7/CB	82	44,100,76,77	50,99,49,27,91, 41,92,42,93,43,94	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K49	D0/CB	28	36,50,100,77	76,99,49,27,87, 37,88,38,89,39,90	2.4	4.5	V	13,14
K50	D1/CB	78	87,50,100,77	76,99,49,27,36, 37,88,38,89,39,90				
K51	D2/CB	29	37,50,100,77	76,99,49,27,36, 87,88,38,89,39,90				
K52	D3/CB	79	88,50,100,77	76,99,49,27,36, 87,37,38,89,39,90				
K53	D4/CB	30	38,50,100,77	76,99,49,27,36, 87,37,88,89,39,90				
K54	D5/CB	80	89,50,100,77	76,99,49,27,36, 87,37,88,38,39,90				
K55	D6/CB	81	39,50,100,77	76,99,49,27,36, 87,37,88,38,89,90				
K56	D7/CB	82	90,50,100,77	76,99,49,27,36, 87,37,88,38,89,39				
K57	D0/CB	28	32,50,100,76	77,99,49,27,83, 33,84,34,85,35,86				
K58	D1/CB	78	83,50,100,76	77,99,49,27,32, 33,84,34,85,35,86				
K59	D2/CB	29	33,50,100,76	77,99,49,27,32, 83,84,34,85,35,86				
K60	D3/CB	79	84,50,100,76	77,99,49,27,32, 83,33,34,85,35,86	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K61	D4/CB	30	34,50,100, 76	77,99,49,27,32, 83,33,84,85,35,86	2.4	4.5	V	13,14
K62	D5/CB	80	85,50,100, 76	77,99,49,27,32, 83,33,84,34,35,86				
K63	D6/CB	81	35,50,100, 76	77,99,49,27,32, 83,33,84,34,85,86				
K64	D7/CB	82	86,50,100, 76	77,99,49,27,32, 83,33,84,34,85,35				
K65	D0/1A	53	21,52,2,26, 75	3,51,74,70,22,71, 23,72,24,73				
K66	D1/1A	4	70,52,2,26, 75	3,51,74,21,22,71, 23,72,24,73				
K67	D2/1A	54	22,52,2,26, 75	3,51,74,21,70,71, 23,72,24,73				
K68	D3/1A	5	71,52,2,26, 75	3,51,74,21,70,22, 23,72,24,73				
K69	D4/1A	55	23,52,2,26, 75	3,51,74,21,70,22, 71,72,24,73				
K70	D5/1A	6	72,52,2,26, 75	3,51,74,21,70,22, 71,23,24,73				
K71	D6/1A	56	24,52,2,26, 75	3,51,74,21,70,22, 71,23,72,73				
K72	D7/1A	7	73,52,2,26, 75	3,51,74,21,70,22, 71,23,72,24	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K73	D0/2A	57	21,52,2,26, 75	3,51,74,70,22,71, 23,72,24,73	2.4	4.5	V	13,14
K74	D1/2A	8	70,52,2,26, 75	3,51,74,21,22,71, 23,72,24,73				
K75	D2/2A	58	22,52,2,26 75	3,51,74,21,70,71, 23,72,24,73				
K76	D3/2A	9	71,52,2,26, 75	3,51,74,21,70,22, 23,72,24,73				
K77	D4/2A	59	23,52,2,26, 75	3,51,74,21,70,22, 71,72,24,73				
K78	D5/2A	60	72,52,2,26, 75	3,51,74,21,70,22, 71,23,24,73				
K79	D6/2A	11	24,52,2,26, 75	3,51,74,21,70,22, 71,23,72,73				
K80	D7/2A	61	73,52,2,26, 75	3,51,74,21,70,22, 71,23,72,24				
K81	D0/3A	12	21,52,2,26, 75	3,51,74,70,22,71, 23,72,24,73				
K82	D1/3A	62	70,52,2,26, 75	3,51,74,21,22,71, 23,72,24,73				
K83	D2/3A	13	22,52,2,26, 75	3,51,74,21,70,71 23,24,73				
K84	D3/3A	63	71,52,2,26, 75	3,51,74,21,70,22, 23,72,24,73	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K85	D4/3A	14	23,52,2,26, 75	3,51,74,21,70,22, 71,72,24,73	2.4	4.5	V	13,14
K86	D5/3A	64	72,52,2,26, 75	3,51,74,21,70,22, 71,23,24,73				
K87	D6/3A	65	24,52,2,26, 75	3,51,74,21,70,22, 71,23,72,73				
K88	D7/3A	16	73,52,2,26, 75	3,51,74,21,70,22, 71,23,72,24				
K89	D0/4A	66	21,52,2,26, 75	3,51,74,70,22,71, 23,72,24,73				
K90	D1/4A	17	70,52,2,26, 75	3,51,74,21,22,71, 23,72,24,73				
K91	D2/4A	67	22,52,2,26, 75	3,51,74,21,70, 71,23,72,24,73				
K92	D3/4A	18	71,52,2,26, 75	3,51,74,21,70, 22,23,72,24,73				
K93	D4/4A	68	23,52,2,26, 75	3,51,74,21,70, 22,71,72,24,73				
K94	D5/4A	19	72,52,2,26, 75	3,51,74,21,70, 22,71,23,24,73				
K95	D6/4A	20	24,52,2,26, 75	3,51,74,21,70, 22,71,23,72,73				
K96	D7/4A	69	73,52,2,26, 75	3,51,74,21,70, 22,71,23,72,24	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
K97	D0/4B	95	28,100,50, 76,77	99,49,27,78,29, 79,30,80,81,82	2.4	4.5	V	13,14
K98	D1/4B	45	78,100,50, 76,77	99,49,27,28,29, 79,30,80,81,82				
K99	D2/4B	96	29,100,50, 76,77	99,49,27,28,78, 79,30,80,81,82				
K100	D3/4B	46	79,100,50, 76,77	99,49,27,28,78, 29,30,80,81,82				
K101	D4/4B	97	30,100,50, 76,77	99,49,27,28,78, 29,79,80,81,82				
K102	D5/4B	47	80,100,50, 76,77	99,49,27,28,78, 29,79,30,81,82				
K103	D6/4B	48	81,100,50, 76,77	99,49,27,28,78, 29,79,30,80,82				
K104	D7/4B	98	82,100,50, 76,77	99,49,27,28,78, 29,79,30,80,81				
K105	D0/3B	91	28,100,50, 76,77	99,49,27,78,29, 79,30,80,81,82				
K106	D1/3B	41	78,100,50, 76,77	99,49,27,28,29, 79,30,80,81,82				
K107	D2/3B	92	29,100,50, 76,77	99,49,27,28,78, 79,30,80,81,82				
K108	D3/3B	42	79,100,50, 76,77	99,49,27,28,78, 29,30,80,81,82	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K109	D4/3B	93	30,100,50, 76,77	99,49,27,28,78, 29,79,80,81,82	2.4	4.5	V	13, 14
K110	D5/3B	43	80,100,50, 76,77	99,49,27,28,78, 29,79,30,81,82				
K111	D6/3B	94	81,100,50, 76,77	99,49,27,28,78, 29,79,30,80,82				
K112	D7/3B	44	82,100,50, 76,77	99,49,27,28,78, 29,79,30,80,81				
K113	D0/2B	36	28,100,50, 76,77	99,49,27,78,29, 79,30,80,81,82				
K114	D1/2B	87	78,100,50, 76,77	99,49,27,28,29, 79,30,80,81,82				
K115	D2/2B	37	29,100,50, 76,77	99,49,27,28,78, 79,30,80,81,82				
K116	D3/2B	88	79,100,50, 76,77	99,49,27,28,78, 29,30,80,81,82				
K117	D4/2B	38	30,100,50, 76,77	99,49,27,28,78, 29,79,80,81,82				
K118	D5/2B	89	80,100,50, 76,77	99,49,27,28,78, 29,79,30,81,82				
K119	D6/2B	39	81,100,50, 76,77	99,49,27,28,78, 29,79,30,80,82				
K120	D7/2B	90	82,100,50, 76,77	99,49,27,28,78, 29,79,30,80,81	2.4	4.5	V	13, 14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
K121	D0/1B	32	28,100,50, 76,77	99,49,27,78,29, 79,30,80,81,82	2.4	4.5	V	13,14
K122	D1/1B	83	78,100,50, 76,77	99,49,27,28,29, 79,30,80,81,82				
K123	D2/1B	33	29,100,50, 76,77	99,49,27,28,78, 79,30,80,81,82				
K124	D3/1B	84	79,100,50, 76,77	99,49,27,28,78, 29,30,80,81,82				
K125	D4/1B	34	30,100,50, 76,77	99,49,27,28,78, 29,79,80,81,82				
K126	D5/1B	85	80,100,50, 76,77	99,49,27,28,78, 29,79,30,81,82				
K127	D6/1B	35	81,100,50, 77	99,49,27,28,78, 29,79,30,81,82				
K128	D7/1B	86	82,100,50, 76,77	99,49,27,28,78, 29,79,30,80,81	2.4	4.5	V	13,14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XII. Input current, low level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
L1	-OE/1A	3	Open	Open	-200.0	-5.0	uA	15
L2	L/R/1A	52			-737.0	-486.0	uA	15
L3	-OE/2A	51			-200.0	-5.0	uA	15
L4	L/R/2A	2						
L5	L/R/3A	26			-200.0	-5.0	uA	15
L6	-OE/3/4A	74			-400.0	-10.0	uA	15
L7	L/R/4A	75			-200.0	-5.0	uA	15
L8	L/R/4B	100			-200.0	-5.0	uA	15
L9	-OE/3/4B	99			-400.0	-10.0	uA	15
L10	L/R/3B	50			-200.0	-5.0	uA	15
L11	-OE/2B	49						
L12	L/R/2B	76						
L13	-OE/1B	27			-200.0	-5.0	uA	15
L14	L/R/1B	77	Open	Open	-737.0	-486.0	uA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XII. Input current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
L15	D0/CA	21	3,51,74,99,49,27	Open	-1.69	-0.804	mA	15
L16	D1/CA	70						
L17	D2/CA	22						
L18	D3/CA	71						
L19	D4/CA	23						
L20	D5/CA	72						
L21	D6/CA	24						
L22	D7/CA	73						
L23	D0/CB	28						
L24	D1/CB	78						
L25	D2/CB	29						
L26	D3/CB	79						
L27	D4/CB	30						
L28	D5/CB	80						
L29	D6/CB	81						
L30	D7/CB	82			-1.69	-0.804	mA	15
L31	D0/1A	53	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XII. Input current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
L32	D1/1A	4	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15
L33	D2/1A	54						
L34	D3/1A	5						
L35	D4/1A	55						
L36	D5/1A	6						
L37	D6/1A	56						
L38	D7/1A	7						
L39	D0/2A	57						
L40	D1/2A	8						
L41	D2/2A	58						
L42	D3/2A	9						
L43	D4/2A	59						
L44	D5/2A	60						
L45	D6/2A	11						
L46	D7/2A	61						
L47	D0/3A	12						
L48	D1/3A	62	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XII. Input current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
L49	D2/3A	13	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15
L50	D3/3A	63						
L51	D4/3A	14						
L52	D5/3A	64						
L53	D6/3A	65						
L54	D7/3A	16						
L55	D0/4A	66						
L56	D1/4A	17						
L57	D2/4A	67						
L58	D3/4A	18						
L59	D4/4A	68						
L60	D5/4A	19						
L61	D6/4A	20						
L62	D7/4A	69						
L63	D0/4B	95						
L64	D1/4B	45						
L65	D2/4B	96	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XII. Input current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
L66	D3/4B	46	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15
L67	D4/4B	97						
L68	D5/4B	47						
L69	D6/4B	48						
L70	D7/4B	98						
L71	D0/3B	91						
L72	D1/3B	41						
L73	D2/3B	92						
L74	D3/3B	42						
L75	D4/3B	93						
L76	D5/3B	43						
L77	D6/3B	94						
L78	D7/3B	44						
L79	D0/2B	36						
L80	D1/2B	87						
L81	D2/2B	37						
L82	D3/2B	88	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XII. Input current, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
L83	D4/2B	38	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15
L84	D5/2B	89						
L85	D6/2B	39						
L86	D7/2B	90						
L87	D0/1B	32						
L88	D1/1B	83						
L89	D2/1B	33						
L90	D3/1B	84						
L91	D4/1B	34						
L92	D5/1B	85						
L93	D6/1B	35						
L94	D7/1B	86	3,51,74,99,49,27	Open	-1.09	-0.804	mA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

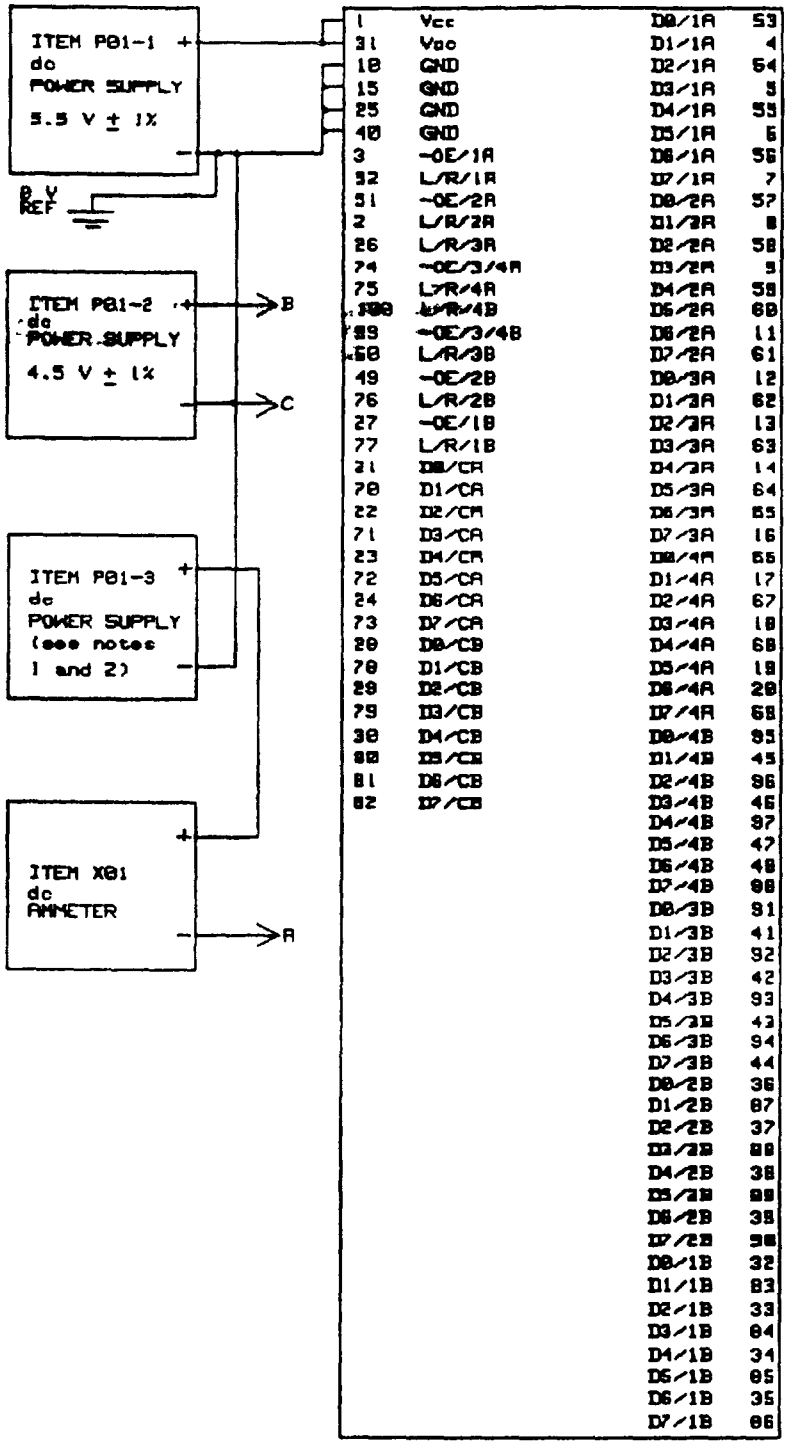


FIGURE 15. Input current, low and high level, test circuit for tables XII and XIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. For test conditions L1-L94, item P01-2 = 0.4 V ± 1 percent.
2. For test conditions M1-M94, item P01-2 = 2.7 V ± 1 percent.
3. Do not isolate the chassis of ammeter X01 from earth ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIII. Input current, high level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
M1	-OE/1A	3	Open	Remaining module input pins	0	20	uA	15
M2	L/R/1A	52			-295	-247	uA	15
M3	-OE/2A	51			0	20	uA	15
M4	L/R/2A	2						
M5	L/R/3A	26			0	20	uA	15
M6	-OE/3/4A	74			0	40	uA	15
M7	L/R/4A	75			0	20	uA	15
M8	L/R/4B	100			0	20	uA	15
M9	-OE/3/4B	99			0	40	uA	15
M10	L/R/3B	50			0	20	uA	15
M11	-OE/2B	49						
M12	L/R/2B	76						
M13	-OE/1B	27			0	20	uA	15
M14	L/R/1B	77	Open		-295	-247	uA	15
M15	D0/CA	21	3,51,74,99,49,27		-568	-362	uA	15
M16	D1/CA	70			-568	-362	uA	15
M17	D2/CA	22						
M18	D3/CA	71	3,51,74,99,49,27	Remaining module input pins	-568	-362	uA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIII. Input current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
M19	D4/CA	23	3,51,74,99,49,27	Remaining module input pins	-568	-362	uA	15
M20	D5/CA	72						
M21	D6/CA	24						
M22	D7/CA	73						
M23	D0/CB	28						
M24	D1/CB	78						
M25	D2/CB	29						
M26	D3/CB	79						
M27	D4/CB	30						
M28	D5/CB	80						
M29	D6/CB	81						
M30	D7/CB	82			-568	-362	uA	15
M31	D0/1A	53			-508	-422	uA	15
M32	D1/1A	4						
M33	D2/1A	54						
M34	D3/1A	5						
M35	D4/1A	55	3,51,74,99,49,27	Remaining module input pins	-508	-422	uA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIII. Input current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
M36	D5/1A	6	3,51,74,99,49,27	Remaining module input pins	-508	-422	uA	15
M37	D6/1A	56						
M38	D7/1A	7						
M39	D0/2A	57						
M40	D1/2A	8						
M41	D2/2A	58						
M42	D3/2A	9						
M43	D4/2A	59						
M44	D5/2A	60						
M45	D6/2A	11						
M46	D7/2A	61						
M47	D0/3A	12						
M48	D1/3A	62						
M49	D2/3A	13						
M50	D3/3A	63						
M51	D4/3A	14						
M52	D5/3A	64						
M53	D6/3A	65	3,51,74,99,49,27	Remaining module input pins	-508	-422	uA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIII. Input current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
M54	D7/3A	16	3,51,74,99,49,27	Remaining module input pins	-508	-422	uA	15
M55	D0/4A	66						
M56	D1/4A	17						
M57	D2/4A	67						
M58	D3/4A	18						
M59	D4/4A	68						
M60	D5/4A	19						
M61	D6/4A	20						
M62	D7/4A	69						
M63	D0/4B	95						
M64	D1/4B	45						
M65	D2/4B	96						
M66	D3/4B	46						
M67	D4/4B	97						
M68	D5/4B	47						
M69	D6/4B	48						
M70	D7/4B	98						
M71	D0/3B	91	3,51,74,99,49,27	Remaining module input pins	-508	-422	uA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIII. Input current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Fig
M72	D1/3B	41	3,51,74,99,49,27	Remaining module input pins	-508	-422	uA	15
M73	D2/3B	92						
M74	D3/3B	42						
M75	D4/3B	93						
M76	D5/3B	43						
M77	D6/3B	94						
M78	D7/3B	44						
M79	D0/2B	36						
M80	D1/2B	87						
M81	D2/2B	37						
M82	D3/2B	88						
M83	D4/2B	38						
M84	D5/2B	89						
M85	D6/2B	39						
M86	D7/2B	90						
M87	D0/1B	32						
M88	D1/1B	83						
M89	D2/1B	33	3,51,74,99,49,27	Remaining module input pins	-508	-422	uA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIII. Input current, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
M90	D3/1B	B4	3,51,74,99,49,27	Remaining module input pins	-500	-422	uA	15
M91	D4/1B	34						
M92	D5/1B	B5						
M93	D6/1B	35						
M94	D7/1B	B6	3,51,74,99,49,27	Remaining module input pins	-500	-422	uA	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.


TABLE XIV. Power supply current test.

Test cond	Parameter	Connect		25 ± 5°C Initial limits		Units	Fig
		A to pin	B to pin	Min	Max		
N1	Icc (low level)	3,51,74, 99,49,27, 21,70,22, 71,23,72, 24,73,28, 78,29,79, 30,80,81, 82	52,2,26, 75,100,50, 76,77	79.0	797.8	mA	16
N2	Icc (high level)	3,51,74, 99,49,27	52,2,26, 75,100,50, 76,77,70, 22,71,23, 72,24,73, 28,78,29, 79,30,80, 81,82	63.0	637.8	mA	16
N3	Icc (high impedance level)	Open	3,51,74, 99,49,27	83.0	837.8	mA	16

NOTE:

1. Abbreviations used are defined in 6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

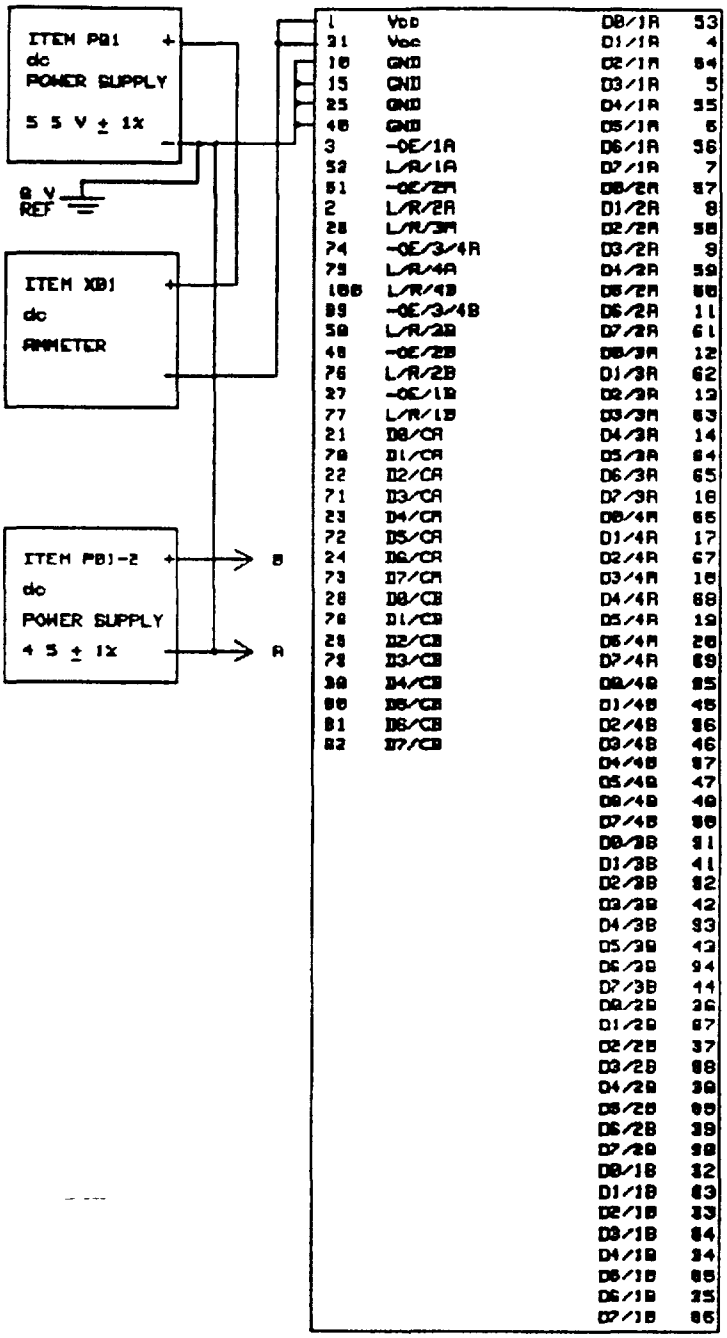

NOTE:

1. Do not isolate the chassis of ammeter X01 from earth ground.

FIGURE 16. Power supply current test circuit for table XIV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P1	D0/CA	21	53	52,3,51,74, 99,49,27	4,54,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77	2	23	nS	17,18
P2	D1/CA	78	4		53,54,3,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P3	D2/CA	22	54		53,4,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P4	D3/CA	71	5		53,4,54,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P5	D4/CA	23	55		53,4,54,5,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P6	D5/CA	72	6		53,4,54,5,55,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P7	D6/CA	24	56		53,4,54,5,55,6,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P8	D7/CA	73	7	52,3,51,74, 99,49,27	53,4,54,5,55,6,56,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P9	D0/CA	21	57	2,3,51,74, 99,49,27	0,50,9,58,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77				
P10	D1/CA	78	8	2,3,51,74, 99,49,27	57,58,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P11	D2/CR	22	58	2,3,51,74, 99,49,27	57,8,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26, 75,100,50,76,77	2	23	nS	17, 18
P12	D3/CR	71	9		57,8,58,59,60,11,61,28, 78,29,79,30,80,81,82,52, 26,75,100,50,76,77				
P13	D4/CR	23	59		57,8,58,9,60,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P14	D5/CR	72	60		57,8,58,9,59,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P15	D6/CR	24	11		57,8,58,9,59,60,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P16	D7/CR	73	61	2,3,51,74, 99,49,27	57,8,58,9,59,60,11,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P17	D0/CR	21	12	26,3,51,74, 99,49,27	62,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P18	D1/CR	70	62		12,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P19	D2/CR	22	13		12,62,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P20	D3/CR	71	63	26,3,51,74, 99,49,27	12,62,13,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77	2	23	nS	17, 18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P21	D4/CR	23	14	26,3,51,74, 99,49,27	12,62,13,63,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77	2	23	nS	17,18
P22	D5/CR	72	64		12,62,13,63,14,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P23	D6/CR	24	65		12,62,13,63,14,64,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P24	D7/CR	73	16	26,3,51,74, 99,49,27	12,62,13,63,14,64,65,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P25	D0/CR	21	66	75,3,51,74, 99,49,27	17,67,18,68,19,20,69,28, 78,29,79,30,80,81,82,52, 2,26,100,50,76,77				
P26	D1/CR	70	17		66,67,18,68,19,20,69,28, 78,29,79,30,80,81,82,52, 2,26,100,50,76,77				
P27	D2/CR	22	67		66,17,18,68,19,20,69,28, 78,29,79,30,80,81,82,52, 2,26,100,50,76,77				
P28	D3/CR	71	18		66,17,67,68,19,20,69,28, 78,29,79,30,80,81,82,52, 2,26,100,50,76,77				
P29	D4/CR	23	68		66,17,67,18,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P30	D5/CR	72	19	75,3,51,74, 99,49,27	66,17,67,18,68,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P31	D6/CA	24	20	75,3,51,74, 99,49,27	66,17,67,18,68,19,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	23	nS	17,18
P32	D7/CA	73	69	75,3,51,74, 99,49,27	66,17,67,18,68,19,20,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P33	D0/CB	28	95	100,3,51, 74,99,49,27	45,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P34	D1/CB	78	45		95,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P35	D2/CB	29	96		95,45,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P36	D3/CB	79	46		95,45,96,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P37	D4/CB	30	97		95,45,96,46,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P38	D5/CB	80	47		95,45,96,46,97,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P39	D6/CB	81	48		95,45,96,46,97,47,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P40	D7/CB	82	98	100,3,51, 74,99,49,27	95,45,96,46,97,47,48,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P41	D0/CB	28	91	50,3,51,74, 99,49,27	41,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77	2	23	nS	17,18
P42	D1/CB	78	41		91,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P43	D2/CB	29	92		91,41,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P44	D3/CB	79	42		91,41,92,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P45	D4/CB	30	93		91,41,92,42,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P46	D5/CB	80	43		91,41,92,42,93,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P47	D6/CB	81	94		91,41,92,42,93,43,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P48	D7/CB	82	44	50,3,51,74, 99,49,27	91,41,92,42,93,43,94,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P49	D0/CB	28	36	76,3,51,74, 99,49,27	87,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P50	D1/CB	78	87	76,3,51,74, 99,49,27	36,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P51	D2/CB	29	37	76,3,51,74, 99,49,27	36,87,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	23	nS	17,18
P52	D3/CB	79	88		36,87,37,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P53	D4/CB	30	38		36,87,37,88,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P54	D5/CB	80	89		36,87,37,88,38,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P55	D6/CB	81	39		36,87,37,88,38,89,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P56	D7/CB	82	90	76,3,51,74, 99,49,27	36,87,37,88,38,89,39,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P57	D0/CB	28	32	77,3,51,74, 99,49,27	83,33,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P58	D1/CB	78	83		32,33,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P59	D2/CB	29	33		32,83,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P60	D3/CB	79	84	77,3,51,74, 99,49,27	32,83,33,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P61	D4/CB	30	34	77,3,51,74, 99,49,27	32,03,33,04,05,35,06,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	23	nS	17,18
P62	D5/CB	00	05		32,03,33,04,34,35,06,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P63	D6/CB	01	35		32,03,33,04,34,05,06,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P64	D7/CB	02	06	77,3,51,74, 99,49,27	32,03,33,04,34,05,35,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P65	D0/1A	53	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P66	D1/1A	4	70		21,22,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P67	D2/1A	54	22		21,70,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P68	D3/1A	5	71		21,70,22,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P69	D4/1A	55	23		21,70,22,71,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P70	D5/1A	6	72	3,51,74,99, 49,27	21,70,22,71,23,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P71	D6/1A	56	24	3,51,74,99, 49,27	21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	23	nS	17,18
P72	D7/1A	7	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P73	D0/2A	57	21		70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P74	D1/2A	8	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P75	D2/2A	58	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P76	D3/2A	9	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P77	D4/2A	59	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P78	D5/2A	60	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P79	D6/2A	11	24	3,51,74,99, 49,27	21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
PB0	D7/2A	61	73	3,51,74,99, 49,27	21,70,22,71,23,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77,72	2	23	nS	17,18
PB1	D0/3A	12	21		70,22,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB2	D1/3A	62	70		21,22,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB3	D2/3A	13	22		21,70,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB4	D3/3A	63	71		21,70,22,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB5	D4/3A	14	23		21,70,22,71,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB6	D5/3A	64	72		21,70,22,71,23,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB7	D6/3A	65	24		21,70,22,71,23,72,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB8	D7/3A	16	73		21,70,22,71,23,72,24,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
PB9	D0/4A	66	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P90	D1/4A	17	70	3,51,74,99, 49,27	21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	23	nS	17,18
P91	D2/4A	67	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P92	D3/4A	18	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P93	D4/4A	68	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P94	D5/4A	19	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P95	D6/4A	20	24		21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P96	D7/4A	69	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,28, 75,100,50,76,77				
P97	D0/4B	95	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P98	D1/4B	45	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P99	D2/4B	96	29	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P100	D3/4B	46	79	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,30,00,01,02,52,2,26, 75,100,50,76,77	2	23	nS	17,18
P101	D4/4B	97	30		21,70,22,71,23,72,24,73,28, 78,29,79,00,01,02,52,2,26, 75,100,50,76,77				
P102	D5/4B	47	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,01,02,52,2,26, 75,100,50,76,77				
P103	D6/4B	48	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,00,02,52,2,26, 75,100,50,76,77				
P104	D7/4B	98	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,00,01,52,2,26, 75,100,50,76,77				
P105	D0/3B	91	28		21,70,22,71,23,72,24,73,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P106	D1/3B	41	78		21,70,22,71,23,72,24,73,28, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P107	D2/3B	92	29		21,70,22,71,23,72,24,73,28, 78,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P108	D3/3B	42	79		21,70,22,71,23,72,24,73,28, 78,29,30,00,01,02,52,2,26, 75,100,50,76,77				
P109	D4/3B	93	30	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,00,01,02,52,2,26, 75,100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P110	D5/3B	43	80	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77	2	23	nS	17,18
P111	D6/3B	94	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
P112	D7/3B	44	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77				
P113	D0/2B	36	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P114	D1/2B	87	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P115	D2/2B	37	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P116	D3/2B	88	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
P117	D4/2B	38	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
P118	D5/2B	89	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
P119	D6/2B	39	81	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77	2	23	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P120	D7/2B	90	82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77	2	23	nS	17,18
P121	D0/1B	32	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P122	D1/1B	83	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P123	D2/1B	33	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P124	D3/1B	84	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
P125	D4/1B	34	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
P126	D5/1B	85	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
P127	D6/1B	35	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
P128	D7/1B	86	82	3,51,74,99 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77	2	23	nS	17,18
P129	D0/CA	21	53	52,3,51,74 99,49,27	4,54,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,75,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P130	D1/CR	70	4	52,3,51,74, 99,49,27	53,54,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77	2	32	nS	17,18
P131	D2/CR	22	54		53,4,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P132	D3/CR	71	5		53,4,54,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P133	D4/CR	23	55		53,4,54,5,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P134	D5/CR	72	6		53,4,54,5,55,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P135	D6/CR	24	56		53,4,54,5,55,6,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P136	D7/CR	73	7	52,3,51,74, 99,49,27	53,4,54,5,55,6,56,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
P137	D0/CR	21	57	2,3,51,74, 99,49,27	8,58,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77				
P138	D1/CR	70	8		57,58,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77				
P139	D2/CR	22	58	2,3,51,74, 99,49,27	57,8,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P140	D3/CA	71	9	2,3,51,74, 99,49,27	57,8,58,59,60,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77	2	32	nS	17,18
P141	D4/CA	23	59		57,8,58,9,60,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P142	D5/CA	72	60		57,8,58,9,59,11,61,28 78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P143	D6/CA	24	11		57,8,58,9,59,60,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P144	D7/CA	73	61	2,3,51,74, 99,49,27	57,8,58,9,59,60,11,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
P145	D0/CA	21	12	26,3,51,74, 99,49,27	62,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P146	D1/CA	70	62		12,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P147	D2/CA	22	13		12,62,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P148	D3/CA	71	63		12,62,13,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
P149	D4/CA	23	14	26,3,51,74, 99,49,27	12,62,13,63,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P150	D5/CA	72	64	26,3,51,74, 99,49,27	12,62,13,63,14,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77	2	32	nS	17,18
P151	D6/CA	24	65		12,62,13,63,14,64,16,28,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77				
P152	D7/CA	73	16	26,3,51,74, 99,49,27	12,62,13,63,14,64,65,28,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77				
P153	D0/CA	21	66	75,3,51,74, 99,49,27	17,67,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P154	D1/CA	70	17		66,67,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P155	D2/CA	22	67		66,17,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P156	D3/CA	71	18		66,17,67,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P157	D4/CA	23	68	75,3,51,74, 99,49,27	66,17,67,18,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P158	D5/CA	72	19	75,3,51,74, 99,49,27	66,17,67,18,68,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	32	nS	17,18
P159	D6/CA	24	20		66,17,67,18,68,19,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P160	D7/CA	73	69	75,3,51,74, 99,49,27	66,17,67,18,68,19,20,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
P161	D0/CB	28	95	100,3,51, 74,99,49,27	45,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P162	D1/CB	78	45		95,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P163	D2/CB	29	96		95,45,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P164	D3/CB	79	46		95,45,96,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P165	D4/CB	30	97		95,45,96,46,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P166	D5/CB	80	47		95,45,96,46,97,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
P167	D6/CB	81	48	100,3,51, 74,99,49,27	95,45,96,46,97,47,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P168	D7/CB	82	98	100,3,51, 74,99,49,27	95,45,96,46,97,47,48,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77	2	32	nS	17,18
P169	D0/CB	26	91	50,3,51,74, 99,49,27	41,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P170	D1/CB	78	41		91,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P171	D2/CB	29	92		91,41,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P172	D3/CB	79	42		91,41,92,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P173	D4/CB	30	93		91,41,92,42,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P174	D5/CB	80	43		91,41,92,42,93,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P175	D6/CB	81	94		91,41,92,42,93,43,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P176	D7/CB	82	44	50,3,51,74, 99,49,27	91,41,92,42,93,43,94,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
P177	D0/CB	28	36	76,3,51,74, 99,49,27	87,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P178	D1/CB	78	87	76,3,51,74, 99,49,27	36,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	32	nS	17,18
P179	D2/CB	29	37		38,87,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P180	D3/CB	79	88		38,87,37,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P181	D4/CB	30	38		38,87,37,88,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P182	D5/CB	80	89		36,87,37,88,38,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P183	D6/CB	81	39		36,87,37,88,38,89,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P184	D7/CB	82	90	76,3,51,74, 99,49,27	36,87,37,88,38,89,39,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
P185	D0/CB	28	32	77,3,51,74, 99,49,27	83,33,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P186	D1/CB	78	83		32,33,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P187	D2/CB	29	33	77,3,51,74, 99,49,27	32,83,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P188	D3/CB	79	84	77,3,51,74, 99,49,27	32,83,33,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	32	nS	17,18
P189	D4/CB	30	34		32,83,33,84,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P190	D5/CB	80	85		32,83,33,84,34,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P191	D6/CB	81	35		32,83,33,84,34,85,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P192	D7/CB	82	86	77,3,51,74, 99,49,27	32,83,33,84,34,85,35,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
P193	D0/1A	53	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P194	D1/1A	4	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P195	D2/1A	54	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P196	D3/1A	5	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26 75,100,50,76,77				
P197	D4/1A	55	23	3,51,74,99, 49,27	21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P198	D5/1A	6	72	3,51,74,99, 49,27	21,70,22,71,23,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77	2	32	nS	17,18
P199	D6/1A	56	24		21,70,22,71,23,72,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P200	D7/1A	7	73		21,70,22,71,23,72,24,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P201	D0/2A	57	21		70,22,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P202	D1/2A	8	70		21,22,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P203	D2/2A	58	22		21,70,71,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P204	D3/2A	9	71		21,70,22,23,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P205	D4/2A	59	23		21,70,22,71,72,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P206	D5/2A	60	72		21,70,22,71,23,24,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P207	D6/2A	11	24	3,51,74,99, 49,27	21,70,22,71,23,72,73,28,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P208	D7/2A	61	73	3,51,74,99, 49,27	21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	32	nS	17,18
P209	D0/3A	12	21		70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P210	D1/3A	62	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P211	D2/3A	13	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,75,77				
P212	D3/3A	63	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P213	D4/3A	14	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P214	D5/3A	64	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P215	D6/3A	65	24		21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P216	D7/3A	16	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P217	D0/4A	66	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
P218	D1/4A	17	70	3,51,74,99, 49,27	21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	32	nS	17,18
P219	D2/4A	67	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P220	D3/4A	18	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
-									
P221	D4/4A	68	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P222	D5/4A	19	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P223	D6/4A	20	24		21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P224	D7/4A	69	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P225	D0/4B	95	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P226	D1/4B	45	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P227	D2/4B	96	29	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P228	D3/4B	46	79	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,30,00,01,02,52,2,26, 75,100,50,76,77	2	32	nS	17,18
P229	D4/4B	97	30		21,70,22,71,23,72,24,73,28, 78,29,79,00,01,02,52,2,26, 75,100,50,76,77				
P230	D5/4B	47	80		21,70,22,71,23,72,24,73,28, 78,29,78,30,01,02,52,2,26, 75,100,50,76,77				
P231	D6/4B	48	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,00,02,52,2,26, 75,100,50,76,77				
P232	D7/4B	98	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,00,01,52,2,26, 75,100,50,76,77				
P233	D0/3B	91	28		21,70,22,71,23,72,24,73,78, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P234	D1/3B	41	78		21,70,22,71,23,72,24,73,28, 29,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P235	D2/3B	92	29		21,70,22,71,23,72,24,73,28, 78,79,30,00,01,02,52,2,26, 75,100,50,76,77				
P236	D3/3B	42	79		21,70,22,71,23,72,24,73,28, 78,29,30,00,01,02,52,2,26, 75,100,50,76,77				
P237	D4/3B	93	30	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,00,01,02,52,2,26, 75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.


Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P238	D5/3B	43	80	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77	2	32	nS	17,18
P239	D6/3B	94	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
P240	D7/3B	44	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77				
P241	D0/2B	36	28		21,70,22,71,23,72,24,73,78, 28,78,30,80,81,82,52,2,26, 75,100,50,76,77				
P242	D1/2B	87	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P243	D2/2B	37	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P244	D3/2B	88	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
P245	D4/2B	38	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
P246	D5/2B	89	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
P247	D6/2B	39	81	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XV. Propagation delay time (tPLH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
P248	D7/2B	90	82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77	2	32	nS	17,18
P249	D0/1B	32	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P250	D1/1B	83	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P251	D2/1B	33	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
P252	D3/1B	84	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
P253	D4/1B	34	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
P254	D5/1B	85	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
P255	D6/1B	35	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
P256	D7/1B	86	82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77	2	32	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

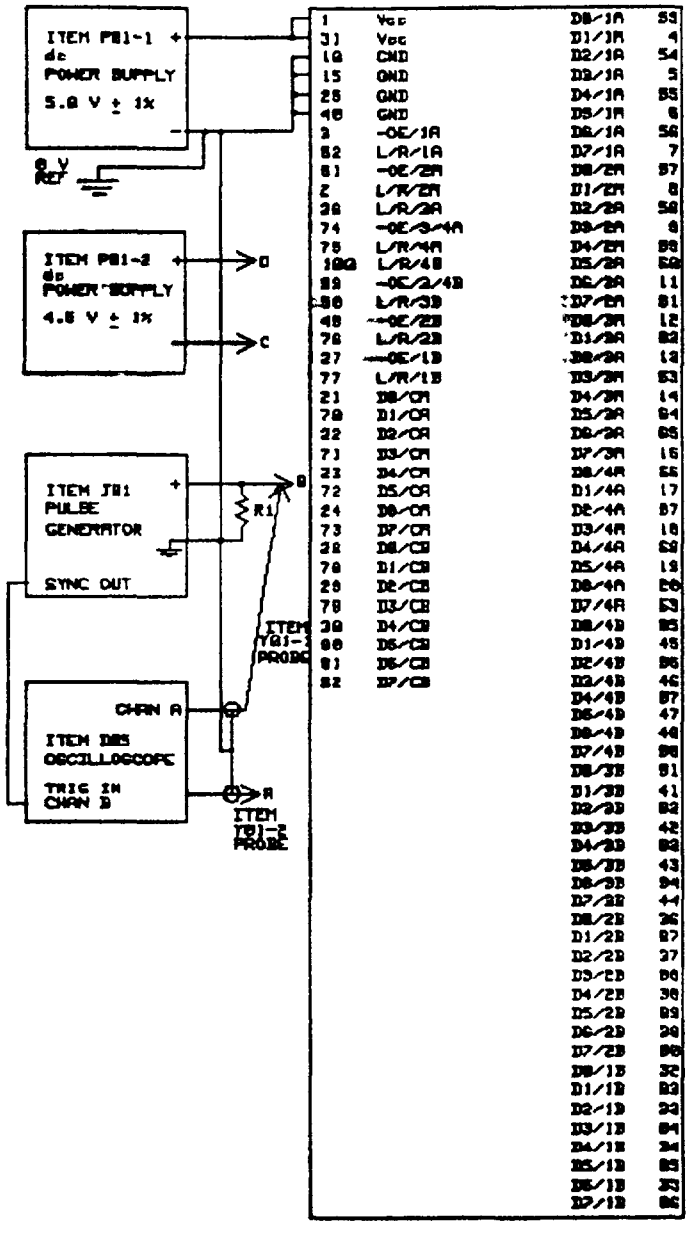

NOTE:

1. R1 = 51 Ohms ± 1 percent, 1 W.

2. Load each output as specified on figure 14.

FIGURE 17. Propagation delay time (tPLH and tPHL), disable and enable time (tPLZ, tPZL, tPHZ, and tPZH) test circuit for tables XV, XVI, XVII, XVIII, XIX and XX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

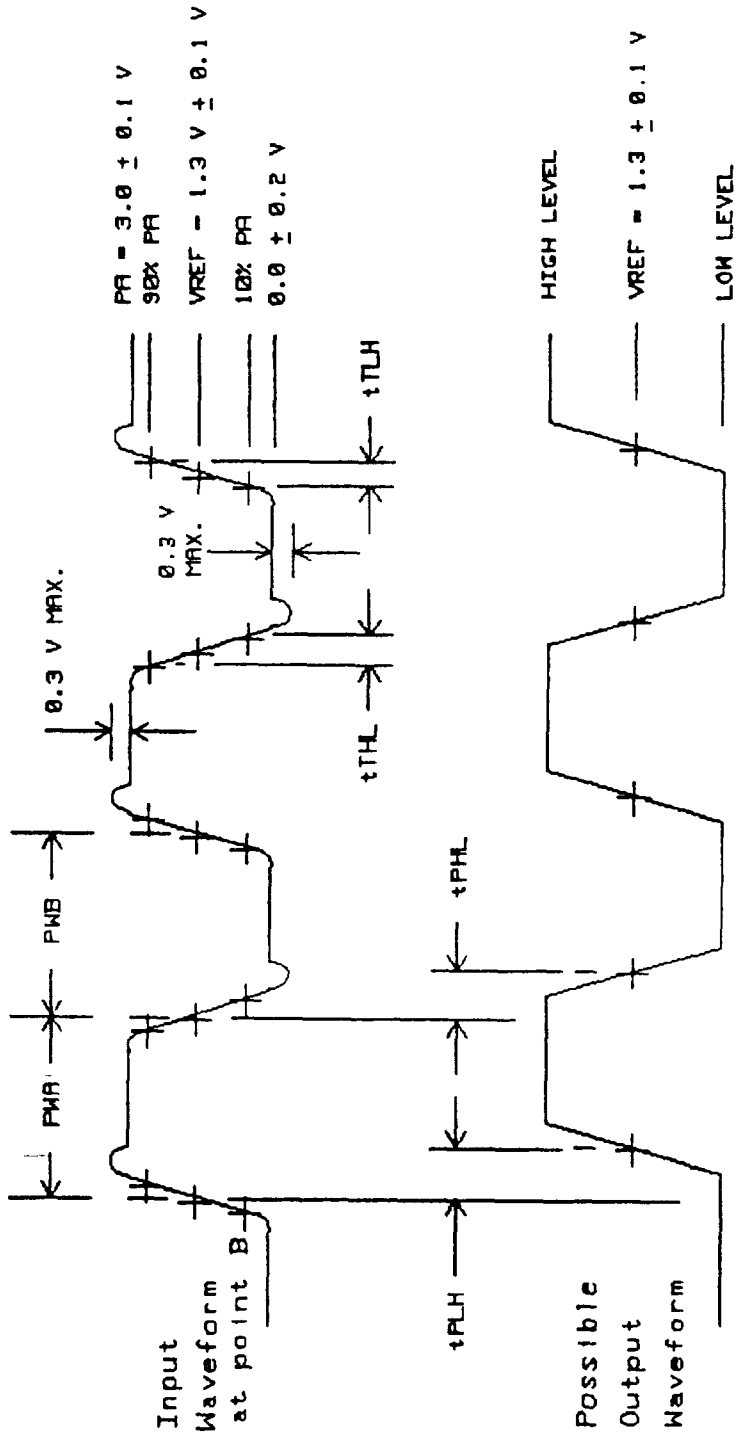


FIGURE 18. Propagation delay time (tPLH and tPHL) test circuit waveforms for table XV, XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input pulse parameters:

   PWA = PWB = 500 nS ± 10 percent.
   PRR = 1 MHz ± 10 percent.
   tTLH ≤ 15 nS, tTHL ≤ 6 nS.

2. Before making the measurements, verify that the output pulse high level is ≥ 2.4 V and the low level is ≤ 0.4 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q1	D0/CA	21	53	52,3,51,74, 99,49,27	4,54,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77	2	25	nS	17,18
Q2	D1/CA	78	4		53,54,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q3	D2/CA	22	54		53,4,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q4	D3/CA	71	5		53,4,54,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q5	D4/CA	23	55		53,4,54,5,6,56,7,28,78,28, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q6	D5/CA	72	6		53,4,54,5,55,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q7	D6/CA	24	56		53,4,54,5,55,6,7,28,78,28, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q8	D7/CA	73	7	52,3,51,74, 99,49,27	53,4,54,5,55,6,56,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q9	D0/CA	21	57	2,3,51,74, 99,49,27	8,58,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77				
Q10	D1/CA	78	8	2,3,51,74, 99,49,27	57,58,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q11	D2/CA	22	58	2,3,51,74, 99,49,27	57,8,8,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77	2	25	nS	17,18
Q12	D3/CA	71	9		57,8,58,59,60,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q13	D4/CA	22	59		57,8,58,8,60,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q14	D5/CA	72	60		57,8,58,8,59,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q15	D6/CA	24	11		57,8,58,8,59,60,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q16	D7/CA	73	61	2,3,51,74, 99,49,27	57,8,58,8,59,60,11,28,78, 29,79,30,80,81,82,52,26 75,100,50,76,77				
Q17	D0/CA	21	12	26,3,51,74, 99,49,27	62,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
Q18	D1/CA	70	62		12,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
Q19	D2/CA	22	13		12,62,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
Q20	D3/CA	71	63	26,3,51,74, 99,49,27	12,62,13,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q21	D4/CA	23	14	26,3,51,74, 99,49,27	12,62,13,63,64,65,16,20, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77	2	25	nS	17,18
Q22	D5/CA	72	64		12,62,13,63,14,65,16,20,78, 29,79,30,80,81,82,52,2,75 100,50,76,77				
Q23	D6/CA	24	65		12,62,13,63,14,64,16,20,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77				
Q24	D7/CA	73	16	26,3,51,74, 99,49,27	12,62,13,63,14,64,65,20,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77				
Q25	D0/CA	21	68	75,3,51,74, 99,49,27	17,67,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q26	D1/CA	70	17		68,67,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q27	D2/CA	22	67		68,17,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q28	D3/CA	71	18		68,17,67,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q29	D4/CA	23	68		68,17,67,18,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q30	D5/CA	72	19	75,3,51,74, 99,49,27	68,17,67,18,68,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q31	D6/CA	24	20	75,3,51,74, 99,49,27	66,17,67,18,68,19,69,20,70, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	25	nS	17,18
Q32	D7/CA	73	69	75,3,51,74, 99,49,27	66,17,67,18,68,19,20,20,70, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q33	D0/CB	28	95	100,3,51, 74,99,49,27	45,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q34	D1/CB	78	45		95,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q35	D2/CB	28	96		95,45,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q36	D3/CB	78	46		95,45,96,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q37	D4/CB	30	97		95,45,96,46,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q38	D5/CB	80	47		95,45,96,46,97,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q39	D6/CB	81	48		95,45,96,46,97,47,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q40	D7/CB	82	98	100,3,51, 74,99,49,27	95,45,96,46,97,47,48,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q41	D0/CB	28	91	50,3,51,74, 99,49,27	41,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77	2	25	nS	17,18
Q42	D1/CB	78	41		91,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q43	D2/CB	29	92		91,41,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q44	D3/CB	79	42		91,41,92,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q45	D4/CB	30	93		91,41,92,42,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q46	D5/CB	80	43		91,41,92,42,93,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q47	D6/CB	81	94		91,41,92,42,93,43,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q48	D7/CB	82	44	50,3,51,74, 99,49,27	91,41,92,42,93,43,94,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q49	D0/CB	28	36	76,3,51,74, 99,49,27	87,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q50	D1/CB	78	87	76,3,51,74, 99,49,27	36,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Q51	D2/CB	28	37	76,3,51,74, 99,49,27	36,87,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	25	nS	17,18
Q52	D3/CB	78	88		36,87,37,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q53	D4/CB	30	38		36,87,37,88,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q54	D5/CB	80	89		36,87,37,88,39,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q55	D6/CB	81	39		36,87,37,88,39,89,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q56	D7/CB	82	90	76,3,51,74, 99,49,27	36,87,37,88,39,88,39,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q57	D0/CB	28	32	77,3,51,74, 99,49,27	83,33,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q58	D1/CB	78	83		32,33,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q59	D2/CB	28	33		32,83,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q60	D3/CB	78	84	77,3,51,74, 99,49,27	32,83,33,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q61	D4/CB	38	34	77,3,51,74, 99,49,27	32,83,33,84,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	25	nS	17,18
Q62	D5/CB	88	85		32,83,33,84,34,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q63	D6/CB	81	35		32,83,33,84,34,85,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q64	D7/CB	82	86	77,3,51,74, 99,49,27	32,83,33,84,34,85,35,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q65	D0/1A	53	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q66	D1/1A	4	78		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q67	D2/1A	54	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q68	D3/1A	5	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q69	D4/1A	55	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q70	D5/1A	6	72	3,51,74,99, 49,27	21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q71	D6/1A	56	24	3,51,74,99, 49,27	21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18
Q72	D7/1A	7	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q73	D0/2A	57	21		70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q74	D1/2A	8	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q75	D2/2A	58	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q76	D3/2A	9	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q77	D4/2A	59	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q78	D5/2A	60	72	3,51,74,99, 49,27	21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Q79	D6/2A	11	24	3,51,74,99, 49,27	21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18
Q80	D7/2A	61	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q81	D0/3A	12	21		70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q82	D1/3A	62	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q83	D2/3A	13	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q84	D3/3A	63	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q85	D4/3A	14	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q86	D5/3A	64	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q87	D6/3A	65	24		21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q88	D7/3A	15	73	3,51,74,99, 49,27	21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q89	D0/4A	66	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18
Q90	D1/4A	17	78		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q91	D2/4A	67	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q92	D3/4A	18	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q93	D4/4A	68	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q94	D5/4A	19	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q95	D6/4A	20	24		21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q96	D7/4A	69	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q97	D0/4B	95	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q98	D1/4B	45	78	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Q99	D2/4B	96	29	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18
Q100	D3/4B	46	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
Q101	D4/4B	97	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
Q102	D5/4B	47	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
Q103	D6/4B	48	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
Q104	D7/4B	98	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77				
Q105	D0/3B	91	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q106	D1/3B	41	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q107	D2/3B	92	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q108	D3/3B	42	79	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q109	D4/3B	93	30	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18
Q110	D5/3B	43	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
Q111	D6/3B	94	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
Q112	D7/3B	44	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77				
Q113	D0/2B	36	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q114	D1/2B	87	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q115	D2/2B	37	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q116	D3/2B	88	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
Q117	D4/2B	38	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
Q118	D5/2B	89	80	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Q118	D6/2B	39	81	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77	2	25	nS	17,18
Q120	D7/2B	90	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77				
Q121	D0/1B	32	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q122	D1/1B	83	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,76,77				
Q123	D2/1B	33	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q124	D3/1B	84	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
Q125	D4/1B	34	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
Q126	D5/1B	85	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
Q127	D6/1B	35	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
Q128	D7/1B	86	82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77	2	25	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Q129	D0/CA	21	53	52,3,51,74, 99,49,27	4,54,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77	2	36	nS	17,18
Q130	D1/CA	70	4		53,54,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q131	D2/CA	22	54		53,4,5,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q132	D3/CA	71	5		53,4,54,55,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q133	D4/CA	23	55		53,4,54,5,6,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q134	D5/CA	72	6		53,4,54,5,55,56,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q135	D6/CA	24	56		53,4,54,5,55,6,7,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q136	D7/CA	73	7	52,3,51,74, 99,49,27	53,4,54,5,55,6,56,28,78,29, 79,30,80,81,82,2,26,75,100, 50,76,77				
Q137	D0/CA	21	57	2,3,51,74, 99,49,27	8,58,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77				
Q138	D1/CA	70	8	2,3,51,74, 99,49,27	57,58,9,59,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q139	D2/CA	22	58	2,3,51,74, 99,49,27	57,8,9,58,60,11,61,28,78, 29,79,30,80,81,82,2,26,75, 100,50,76,77	2	36	nS	17,18
Q140	D3/CA	71	9		57,8,58,59,60,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q141	D4/CA	23	59		57,8,58,9,60,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q142	D5/CA	72	60		57,8,58,9,59,11,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q143	D6/CA	24	11		57,8,58,9,59,60,61,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q144	D7/CA	73	61	2,3,51,74, 99,49,27	57,8,58,9,59,60,11,28,78, 29,79,30,80,81,82,52,26, 75,100,50,76,77				
Q145	D0/CA	21	12	26,3,51,74, 99,49,27	62,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
Q146	D1/CA	70	62		12,13,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
Q147	D2/CA	22	13		12,62,63,14,64,65,16,28, 78,29,79,30,80,81,82,52, 2,75,100,50,76,77				
Q148	D3/CA	71	63	26,3,51,74, 99,49,27	12,62,13,14,64,65,16,28,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q149	D4/CA	23	14	26,3,51,74, 99,49,27	12,62,13,63,64,65,16,28,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77	2	36	nS	17,18
Q150	D5/CA	72	64		12,62,13,63,14,65,16,28,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77				
Q151	D6/CA	24	65		12,62,13,63,14,64,16,28,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77				
Q152	D7/CA	73	16	26,3,51,74, 99,49,27	12,62,13,63,14,64,65,28,78, 29,79,30,80,81,82,52,2,75, 100,50,76,77				
Q153	D6/CA	21	66	75,3,51,74, 99,49,27	17,67,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q154	D1/CA	70	17		66,67,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q155	D2/CA	22	67		66,17,18,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q156	D3/CA	71	18		66,17,67,68,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q157	D4/CA	23	68		66,17,67,18,19,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q158	D5/CA	72	19	75,3,51,74, 99,49,27	66,17,67,18,68,20,69,28,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Q159	D6/CA	24	20	75,3,51,74, 99,49,27	68,17,67,18,68,19,69,20,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77	2	36	nS	17, 18
Q160	D7/CA	73	69	75,3,51,74, 99,49,27	66,17,67,18,68,19,20,20,78, 29,79,30,80,81,82,52,2,26, 100,50,76,77				
Q161	D0/CB	28	95	100,3,51,74, 99,49,27	45,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q162	D1/CB	78	45		95,96,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q163	D2/CB	29	96		95,45,46,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q164	D3/CB	79	46		95,45,96,97,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q165	D4/CB	30	97		95,45,96,46,47,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q166	D5/CB	80	47		95,45,96,46,97,48,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q167	D6/CB	81	48		95,45,96,46,97,47,98,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77				
Q168	D7/CB	82	98	100,3,51,74, 99,49,27	95,45,96,46,97,47,48,21,70, 22,71,23,72,24,73,52,2,26, 75,50,76,77	2	36	nS	17, 18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q169	D0/CB	20	91	50,3,51,74, 99,49,27	41,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77	2	36	nS	17, 18
Q170	D1/CB	78	41		91,92,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q171	D2/CB	29	92		91,41,42,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q172	D3/CB	79	42		91,41,92,93,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q173	D4/CB	30	93		91,41,92,42,43,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q174	D5/CB	80	43		91,41,92,42,93,94,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q175	D6/CB	81	94		91,41,92,42,93,43,44,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q176	D7/CB	82	44	50,3,51,74, 99,49,27	91,41,92,42,93,43,94,21,70, 22,71,23,72,24,73,52,2,26, 75,100,76,77				
Q177	D0/CB	20	36	76,3,51,74, 99,49,27	87,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q178	D1/CB	78	87	76,3,51,74, 99,49,27	38,37,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	36	nS	17, 18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q179	D2/CB	29	37	76,3,51,74, 99,49,27	36,87,88,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77	2	36	nS	17,18
Q180	D3/CB	79	88		36,87,37,38,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q181	D4/CB	30	38		36,87,37,88,89,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q182	D5/CB	80	89		36,87,37,88,39,39,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q183	D6/CB	81	39		36,87,37,88,38,89,90,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q184	D7/CB	82	90	76,3,51,74, 99,49,27	36,87,37,88,38,89,39,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,77				
Q185	D0/CB	28	32	77,3,51,74, 99,49,27	83,39,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q186	D1/CB	78	83		32,39,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q187	D2/CB	29	33		32,89,84,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
Q188	D3/CB	79	84	77,3,51,74, 99,49,27	32,83,33,34,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
0189	D4/CB	30	34	77,3,51,74, 99,49,27	32,83,33,84,85,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76	2	36	nS	17,18
0190	D5/CB	80	85		32,83,33,84,34,35,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
0191	D6/CB	81	35		32,83,33,84,34,85,86,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
0192	D7/CB	82	88	77,3,51,74, 99,49,27	32,83,33,84,34,85,35,21,70, 22,71,23,72,24,73,52,2,26, 75,100,50,76				
0193	D0/1A	53	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
0194	D1/1A	4	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
0195	D2/CB	54	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
0196	D3/1A	5	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
0197	D4/1A	55	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
0198	D5/1A	6	72	3,51,74,99, 49,27	21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q199	D6/1A	58	24	3,51,74,99, 49,27	21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18
Q200	D7/1A	7	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q201	D0/2A	57	21		70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q202	D1/2A	8	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q203	D2/2A	58	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q204	D3/2A	9	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q205	D4/2A	59	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q206	D5/2A	60	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q207	D6/2A	11	24		21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q208	D7/2A	61	73	3,51,74,99, 49,27	21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q209	D0/3A	12	21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18
Q210	D1/3A	62	70		21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q211	D2/3A	13	22		21,70,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q212	D3/3A	63	71		21,70,22,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q213	D4/3A	14	23		21,70,22,71,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q214	D5/3A	64	72		21,70,22,71,23,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q215	D6/3A	65	24		21,70,22,71,23,72,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q216	D7/3A	16	73		21,70,22,71,23,72,24,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q217	D0/4A	66	21		70,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q218	D1/4A	17	70	3,51,74,99, 49,27	21,22,71,23,72,24,73,28,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q219	D2/4A	67	22	3,51,74,99, 49,27	21,70,71,23,72,24,73,20,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18
Q220	D3/4A	18	71		21,70,22,23,72,24,73,20,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q221	D4/4A	69	23		21,70,22,71,72,24,73,20,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q222	D5/4A	19	72		21,70,22,71,23,24,73,20,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q223	D6/4A	20	24		21,70,22,71,23,72,73,20,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q224	D7/4A	68	73		21,70,22,71,23,72,24,20,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q225	D0/4B	95	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q226	D1/4B	45	78		21,70,22,71,23,72,24,73,20, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q227	D2/4B	96	29		21,70,22,71,23,72,24,73,20, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q228	D3/4B	46	79	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,20, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q229	D4/4B	97	30	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18
Q230	D5/4B	47	60		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
Q231	D6/4B	48	61		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
Q232	D7/4B	98	62		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77				
Q233	D0/3B	91	28		21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q234	D1/3B	41	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q235	D2/3B	92	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q236	D3/3B	42	79		21,70,22,71,23,72,24,73,28 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
Q237	D4/3B	93	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
Q238	D5/3B	43	60	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Q239	D6/3B	94	81	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18
Q240	D7/3B	44	82		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77				
Q241	D0/2B	36	20		21,70,22,71,23,72,24,73,78, 28,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q242	D1/2B	87	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q243	D2/2B	37	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q244	D3/2B	88	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
Q245	D4/2B	38	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
Q246	D5/2B	89	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
Q247	D6/2B	39	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
Q248	D7/2B	90	82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVI. Propagation delay time (tPHL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Q249	D0/1B	32	28	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,78, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77	2	36	nS	17,18
Q250	D1/1B	83	78		21,70,22,71,23,72,24,73,28, 29,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q251	D2/1B	33	29		21,70,22,71,23,72,24,73,28, 78,79,30,80,81,82,52,2,26, 75,100,50,76,77				
Q252	D3/1B	84	79		21,70,22,71,23,72,24,73,28, 78,29,30,80,81,82,52,2,26, 75,100,50,76,77				
Q253	D4/1B	34	30		21,70,22,71,23,72,24,73,28, 78,29,79,80,81,82,52,2,26, 75,100,50,76,77				
Q254	D5/1B	85	80		21,70,22,71,23,72,24,73,28, 78,29,79,30,81,82,52,2,26, 75,100,50,76,77				
Q255	D6/1B	35	81		21,70,22,71,23,72,24,73,28, 78,29,79,30,80,82,52,2,26, 75,100,50,76,77				
Q256	D7/1B	86	82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73,28, 78,29,79,30,80,81,52,2,26, 75,100,50,76,77	2	36	nS	17,18

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVII. Output disable time (tPLZ) test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
R1	D0/CA	21	3	52,53,4,54,5,55,6,56,7	2,26,75,100,50,76,77,51, 74,99,49,27	2	30	nS	17,19
R2	D1/CA	78							
R3	D2/CA	22							
R4	D3/CA	71							
R5	D4/CA	23							
R6	D5/CA	72							
R7	D6/CA	24							
R8	D7/CA	73	3	52,53,4,54,5,55,6,56,7	2,26,75,100,50,76,77,51, 74,99,49,27				
R9	D0/CA	21	51	2,57,8,58,9,59,60,11,61	52,26,75,100,50,76,77,3, 74,99,49,27				
R10	D1/CA	78							
R11	D2/CA	22							
R12	D3/CA	71							
R13	D4/CA	23							
R14	D5/CA	72							
R15	D6/CA	24							
R16	D7/CA	73	51	2,57,8,58,9,59,60,11,61	52,26,75,100,50,76,77,3, 74,99,49,27				
R17	D0/CA	21	74	26,12,62,13,63,14,64,65 16	52,2,75,100,50,76,77,3,51 99,49,27				
R18	D1/CA	78							
R19	D2/CA	22							
R20	D3/CA	71							
R21	D4/CA	23	74	26,12,62,13,63,14,64,65 16	52,2,75,100,50,76,77,3,51 99,49,27	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVII. Output disable time (tPLZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
R22	D5/CA	72	74	26,12,62,13,63,14,64, 65,16	52,2,75,100,50,76,77,3, 51,99,49,27	2	30	nS	17,19
R23	D6/CA	24							
R24	D7/CA	73	74	26,12,62,13,63,14,64, 65,16	52,2,75,100,50,76,77,3, 51,99,49,27				
R25	D0/CA	21	74	75,66,17,67,18,68,19, 20,69	52,2,26,100,50,76,77,3, 51,99,49,27				
R26	D1/CA	70							
R27	D2/CA	22							
R28	D3/CA	71							
R29	D4/CA	23							
R30	D5/CA	72							
R31	D6/CA	24							
R32	D7/CA	73	74	75,66,17,67,18,68,19, 20,69	52,2,26,100,50,76,77,3, 51,99,49,27				
R33	D0/CB	28	99	100,95,45,96,46,97,47, 48,98	52,2,26,75,50,76,77,3, 51,74,49,27				
R34	D1/CB	78							
R35	D2/CB	29							
R36	D3/CB	79							
R37	D4/CB	30							
R38	D5/CB	80							
R39	D6/CB	81							
R40	D7/CB	82	99	100,95,45,96,46,97,47, 48,98	52,2,26,75,50,76,77,3, 51,74,49,27				
R41	D0/CB	28	99	50,91,41,92,42,93,43, 94,44	52,2,26,75,100,76,77,3, 51,74,49,27	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVII. Output disable time (tPLZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
R42	D1/CB	78	99	50,91,41,92,42,93,43, 94,44	52,2,26,75,100,76,77,3, 51,74,49,27	2	30	nS	17,19
R43	D2/CB	28							
R44	D3/CB	78							
R45	D4/CB	38							
R46	D5/CB	88							
R47	D6/CB	81							
R48	D7/CB	82	99	50,91,41,92,42,93,43, 94,44	52,2,26,75,100,76,77,3, 51,74,49,27				
R49	D0/CB	28	48	76,36,87,37,88,38,89, 39,90	52,2,26,75,100,50,77,3, 74,99,27				
R50	D1/CB	78							
R51	D2/CB	29							
R52	D3/CB	78							
R53	D4/CB	38							
R54	D5/CB	88							
R55	D6/CB	81							
R56	D7/CB	82	48	76,36,87,37,88,38,89, 39,90	52,2,26,75,100,50,77,3, 74,99,27				
R57	D0/CB	28	27	77,32,83,33,84,34,85, 35,86	52,2,26,75,100,50,76,3 51,74,99,49				
R58	D1/CB	78							
R59	D2/CB	29							
R60	D3/CB	79							
R61	D4/CB	38							
R62	D5/CB	88	27	77,32,83,33,84,34,85, 35,86	52,2,26,75,100,50,76,3 51,74,99,49	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVII. Output disable time (tPLZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
R83	D6/CB	81	27	77,32,83,33,84,34,85, 35,86	52,2,26,75,100,50,76,3 51,74,99,49	2	30	nS	17,19
R84	D7/CB	82	27	77,32,83,33,84,34,85, 35,86	52,2,26,75,100,50,76,3 51,74,99,49				
R85	D0/1A	53	3	51,74,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
R86	D1/1A	4							
R87	D2/1A	54							
R88	D3/1A	5							
R89	D4/1A	55							
R70	D5/1A	8							
R71	D6/1A	58							
R72	D7/1A	7	3	51,74,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
R73	D0/2A	57	51	3,74,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
R74	D1/2A	8							
R75	D2/2A	58							
R76	D3/2A	9							
R77	D4/2A	59							
R78	D5/2A	60							
R79	D6/2A	11							
R80	D7/2A	61	51	3,74,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
R81	D0/3A	12	74	3,51,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
R82	D1/3A	62	74	3,51,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVII. Output disable time (tPLZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
R83	D2/3A	13	74	3,51,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82	2	30	nS	17,19
R84	D3/3A	83							
R85	D4/3A	14							
R86	D5/3A	64							
R87	D6/3A	85							
R88	D7/3A	18							
R89	D0/4A	66							
R90	D1/4A	17							
R91	D2/4A	87							
R92	D3/4A	18							
R93	D4/4A	88							
R94	D5/4A	18							
R95	D6/4A	20							
R96	D7/4A	89	74	3,51,99,49,27,21,70, 22,71,23,72,24,73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
R97	D0/4B	95	99	3,51,74,49,27,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73				
R98	D1/4B	45							
R99	D2/4B	96							
R100	D3/4B	48							
R101	D4/4B	97							
R102	D5/4B	47							
R103	D6/4B	48							
R104	D7/4B	98	99	3,51,74,49,27,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVII. Output disable time (tPLZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
R105	D0/3B	91	89	3,51,74,49,27,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	30	nS	17,19
R106	D1/3B	41							
R107	D2/3B	92							
R108	D3/3B	42							
R109	D4/3B	93							
R110	D5/3B	43							
R111	D6/3B	94							
R112	D7/3B	44	99	3,51,74,49,27,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73				
R113	D0/2B	36	49	3,51,74,99,27,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73				
R114	D1/2B	87							
R115	D2/2B	37							
R116	D3/2B	88							
R117	D4/2B	38							
R118	D5/2B	89							
R119	D6/2B	39							
R120	D7/2B	90	49	3,51,74,99,27,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73				
R121	D0/1B	32	27	3,51,74,99,49,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73				
R122	D1/1B	83							
R123	D2/1B	33							
R124	D3/1B	84							
R125	D4/1B	34	27	3,51,74,99,49,28,78, 29,79,30,80,81,82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVII. Output disable time (tPLZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
R126	D5/1B	85	27	3,51,74,99,49,28,78, 29,79,30,80,81,82	52,2,25,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	30	nS	17, 19
R127	D6/1B	35							
R128	D7/1B	86	27	3,51,74,99,49,28,78, 29,79,30,80,81,82	52,2,25,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	30	nS	17, 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

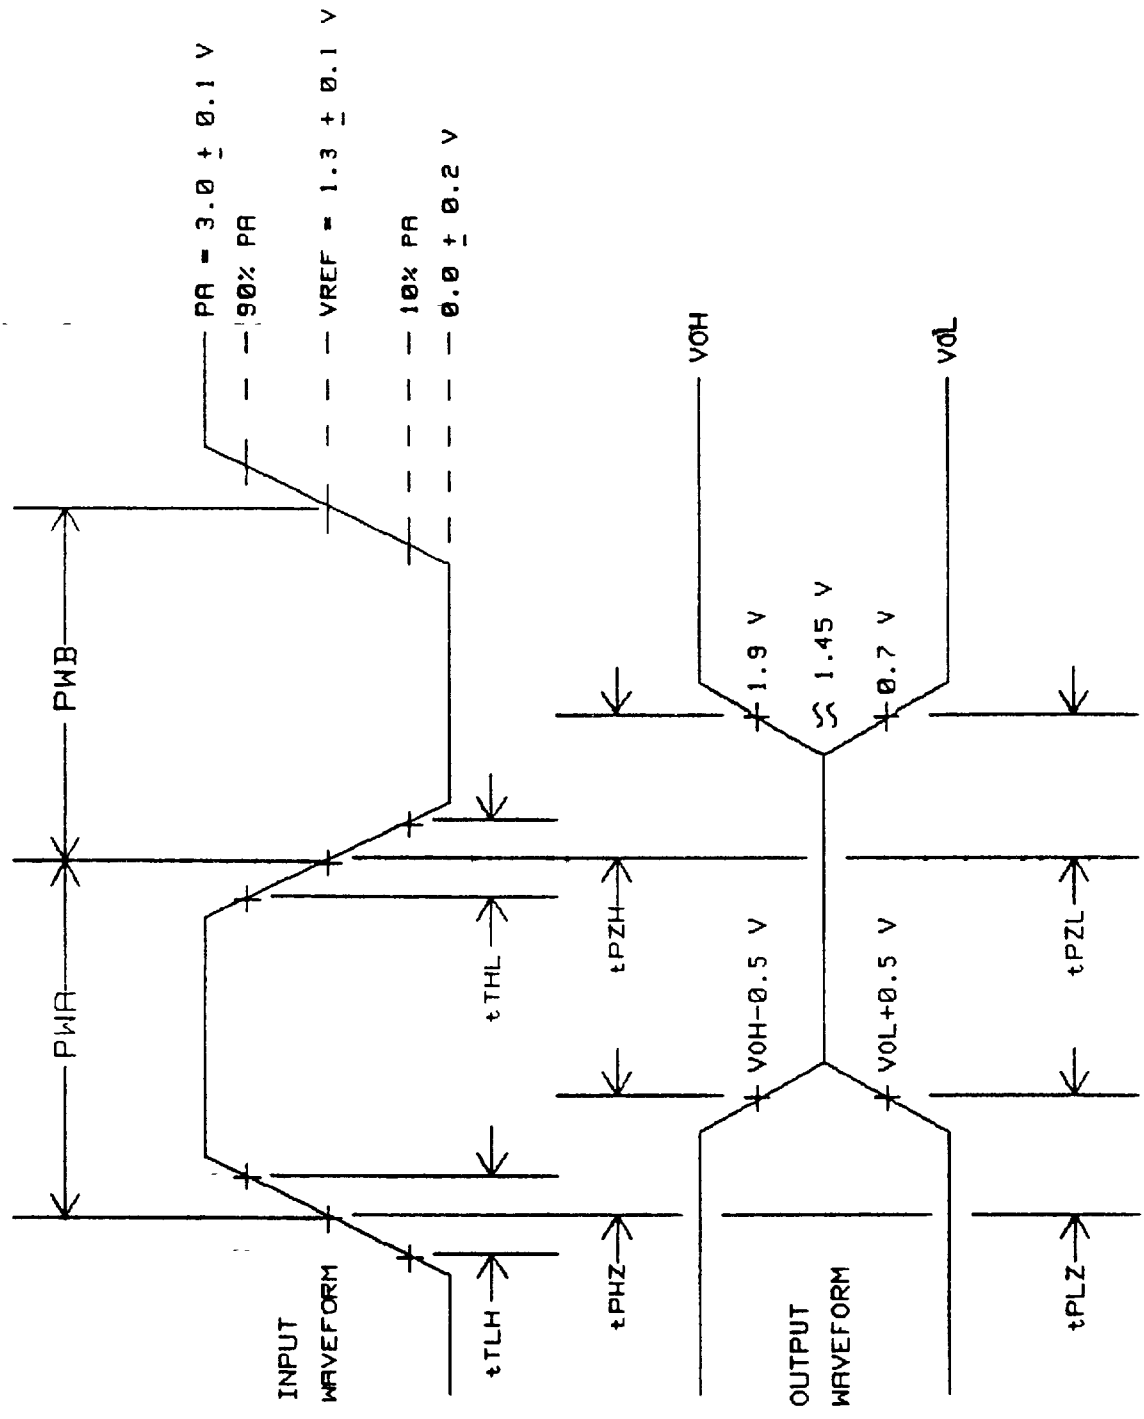


FIGURE 19. Disable and enable time (tPLZ, tPZL, tPHZ, and tPZH) test circuit waveforms for tables XVII, XVIII, XIX, and XX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input pulse parameters:

   PWA = PWB = 500 nS ± 10 percent.
   PRR = 1 MHz ± 10 percent.
   tTLH ≤ 15 nS, tTHL ≤ 6 nS.

2. Before making the measurements, verify that the output pulse high level is ≥ 2.4 V and the low level is ≤ 0.4 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S1	D0/CA	21	3	52,53,4,54, 5,55,6,56,7	2,26,75,100,50,76,77,51, 74,99,49,27	2	55	nS	17,19
S2	D1/CA	70							
S3	D2/CA	22							
S4	D3/CA	71							
S5	D4/CA	23							
S6	D5/CA	72							
S7	D6/CA	24							
S8	D7/CA	73	3	52,53,4,54, 5,55,6,56,7	2,26,75,100,50,76,77,51, 74,99,49,27				
S9	D0/CA	21	51	2,57,8,58,9, 59,60,11,61	52,26,75,100,50,76,77,3, 74,99,49,27				
S10	D1/CA	70							
S11	D2/CA	22							
S12	D3/CA	71							
S13	D4/CA	23							
S14	D5/CA	72							
S15	D6/CA	24							
S16	D7/CA	73	51	2,57,8,58,9, 59,60,11,61	52,26,75,100,50,76,77,3, 74,99,49,27	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S17	D0/CA	21	74	26,12,62,13, 63,14,64,65, 16	52,2,75,100,50,76,77,3, 51,99,49,27	2	55	nS	17,19
S18	D1/CA	70							
S19	D2/CA	22							
S20	D3/CA	71							
S21	D4/CA	23							
S22	D5/CA	72							
S23	D6/CA	24							
S24	D7/CA	73		26,12,62,13, 63,14,64,65, 16	52,2,75,100,50,76,77,3, 51,99,49,27				
S25	D0/CA	21		75,66,17,67, 18,68,19,20, 69	52,2,26,100,50,76,77,3, 51,99,49,27				
S26	D1/CA	70							
S27	D2/CA	22							
S28	D3/CA	71							
S29	D4/CA	23							
S30	D5/CA	72							
S31	D6/CA	24	74	75,66,17,67, 18,68,19,20, 69	52,2,26,100,50,76,77,3, 51,99,49,27	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S32	D7/CA	73	74	75,66,17,67, 18,68,19,20, 69	52,2,26,100,50,76,77,3, 51,99,49,27	2	55	nS	17,19
S33	D0/CB	20	99	100,95,45, 96,46,97,47, 48,98	52,2,26,75,50,76,77,3,51, 74,49,27				
S34	D1/CB	78							
S35	D2/CB	29							
S36	D3/CB	79							
S37	D4/CB	30							
S38	D5/CB	80							
S39	D6/CB	81							
S40	D7/CB	82		100,95,45, 96,46,97,47, 48,98	52,2,26,75,50,76,77,3,51, 74,49,27				
S41	D0/CB	20		50,91,41,92, 42,93,43,94, 44	52,2,26,75,100,76,77,3, 51,74,49,27				
S42	D1/CB	78							
S43	D2/CB	29							
S44	D3/CB	79	99	50,91,41,92, 42,93,43,94, 44	52,2,26,75,100,76,77,3, 51,74,49,27	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S45	D4/CB	30	99	30,91,41,92, 42,93,43,94, 44	52,2,26,75,100,76,77,3, 51,74,49,27	2	55	nS	17,19
S46	D5/CB	80							
S47	D6/CB	81							
S48	D7/CB	82	99	30,91,41,92, 42,93,43,94, 44	52,2,26,75,100,76,77,3, 51,74,49,27				
S49	D0/CB	28	49	76,36,87,37, 88,38,89,39, 90	52,2,26,75,100,50,77,3, 51,74,99,27				
S50	D1/CB	78							
S51	D2/CB	29							
S52	D3/CB	79							
S53	D4/CB	30							
S54	D5/CB	80							
S55	D6/CB	81							
S56	D7/CB	82	49	76,36,87,37, 88,38,89,39, 90	52,2,26,75,100,50,77,3, 51,74,99,27				
S57	D0/CB	28	27	77,32,83,33, 84,34,85,35, 86	52,2,26,75,100,50,76,3, 51,74,99,49				
S58	D1/CB	78	27	77,32,83,33, 84,34,85,35, 86	52,2,26,75,100,50,76,3, 51,74,99,49	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S59	D2/CB	29	27	77,32,83,33, 84,34,85,35, 86	52,2,26,75,100,50,76,3, 51,74,99,49	2	55	nS	17,19
S60	D3/CB	79							
S61	D4/CB	30							
S62	D5/CB	80							
S63	D8/CB	81							
S64	D7/CB	82	27	77,32,83,33, 84,34,85,35, 86	52,2,26,75,100,50,76,3, 51,74,99,49				
S65	D0/1A	53	3	51,74,99,49, 27,21,70,22, 71,23,72,24, 73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
S66	D1/1A	4							
S67	D2/1A	54							
S68	D3/1A	5							
S69	D4/1A	55							
S70	D5/1A	6							
S71	D6/1A	56							
S72	D7/1A	7	3	51,74,99,49, 27,21,70,22, 71,23,72,24, 73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S73	D0/2A	57	51	3,74,99,49, 27,21,70,22, 71,23,72,24, 73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82	2	55	nS	17,19
S74	D1/2A	8							
S75	D2/2A	58							
S76	D3/2A	9							
S77	D4/2A	59							
S78	D5/2A	60							
S79	D6/2A	11							
S80	D7/2A	61	51	3,74,99,49, 27,21,70,22, 71,23,72,24, 73					
S81	D0/3A	12	74	3,51,99,49, 27,21,70,22, 71,23,72,24, 73					
S82	D1/3A	62							
S83	D2/3A	13							
S84	D3/3A	63							
S85	D4/3A	14							
S86	D5/3A	64	74	3,51,99,49, 27,21,70,22, 71,23,72,24, 73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S87	D6/3A	65	74	3,51,99,49, 27,21,70,22, 71,23,72,24, 73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82	2	55	nS	17,19
S88	D7/3A	16							
S89	D0/4A	66							
S90	D1/4A	17							
S91	D2/4A	67							
S92	D3/4A	18							
S93	D4/4A	68							
S94	D5/4A	19							
S95	D6/4A	20							
S96	D7/4A	69	74	3,51,99,49, 27,21,70,22, 71,23,72,24, 73	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82				
S97	D0/4B	95	99	3,51,74,49, 27,28,78,29, 79,30,80,81, 82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73				
S98	D1/4B	45							
S99	D2/4B	96							
S100	D3/4B	46	99	3,51,74,49, 27,28,78,29, 79,30,80,81, 82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S101	D4/4B	97	99	3,51,74,49, 27,28,78,29, 79,30,80,81, 82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	55	nS	17,19
S102	D5/4B	47							
S103	D6/4B	48							
S104	D7/4B	98							
S105	D0/3B	91							
S106	D1/3B	41							
S107	D2/3B	92							
S108	D3/3B	42							
S109	D4/3B	93							
S110	D5/3B	43							
S111	D6/3B	94							
S112	D7/3B	44	99	3,51,74,49, 27,28,78,29, 79,30,80,81, 82					
S113	D0/2B	36	49	3,51,74,99, 27,28,78,29, 79,30,80,81, 82					
S114	D1/2B	87							
S115	D2/2B	37							
S116	D3/2B	88							
S117	D4/2B	38	49	3,51,74,99, 27,28,78,29, 79,30,80,81, 82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Output enable time (tPZL) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
S118	D5/2B	89	49	3,51,74,99, 27,28,78,29, 79,30,80,81, 82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	55	nS	17,19
S119	D6/2B	39							
S120	D7/2B	90	49	3,51,74,99, 27,28,78,29, 79,30,80,81, 82					
S121	D0/1B	32	27	3,51,74,99, 49,28,78,29, 79,30,80,81, 82					
S122	D1/1B	83							
S123	D2/1B	33							
S124	D3/1B	84							
S125	D4/1B	34							
S126	D5/1B	85							
S127	D6/1B	35							
S128	D7/1B	86	27	3,51,74,99, 49,28,78,29, 79,30,80,81, 82	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Unit	Figs
T1	D0/CA	21	3	52	2,26,75,100,50,76,77,51, 74,99,49,27,53,4,54,5,55, 8,56,7	2	30	ns	17,19
T2	D1/CA	70							
T3	D2/CA	22							
T4	D3/CA	71							
T5	D4/CA	23							
T6	D5/CA	72							
T7	D6/CA	24							
T8	D7/CA	73	3	52	2,26,75,100,50,76,77,51, 74,99,49,27,53,4,54,5,55, 6,56,7				
T9	D0/CA	21	51	2	52,26,75,100,50,76,77,3, 74,99,49,27,57,8,58,9,59, 60,11,61				
T10	D1/CA	70							
T11	D2/CA	22							
T12	D3/CA	71							
T13	D4/CA	23							
T14	D5/CA	72							
T15	D6/CA	24							
T16	D7/CA	73	51	2	52,26,75,100,50,76,77,3, 74,99,48,27,57,8,58,9,59, 60,11,61	2	30	ns	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
T17	D0/CA	21	74	26	52,2,75,100,50,76,77,3, 51,99,49,27,12,62,13,63, 14,64,65,16	2	30	nS	17,19
T18	D1/CA	70							
T19	D2/CA	22							
T20	D3/CA	71							
T21	D4/CA	23							
T22	D5/CA	72							
T23	D6/CA	24							
T24	D7/CA	73		26	52,2,75,100,50,76,77,3, 51,99,49,27,12,62,13,63, 14,64,65,16				
T25	D0/CA	21		75	52,2,26,100,50,76,77,3, 51,99,49,27,66,17,67,18, 68,19,20,69				
T26	D1/CA	70							
T27	D2/CA	22							
T28	D3/CA	71							
T29	D4/CA	23							
T30	D5/CA	72							
T31	D6/CA	24							
T32	D7/CA	73	74	75	52,2,26,100,50,76,77,3, 51,99,49,27,66,17,67,18, 68,19,20,69	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
T33	D0/CB	28	99	100	52,2,26,75,50,76,77,3,51, 74,48,27,85,45,96,46,97, 47,48,98	2	30	nS	17,19
T34	D1/CB	78							
T35	D2/CB	29							
T36	D3/CB	79							
T37	D4/CB	30							
T38	D5/CB	80							
T39	D6/CB	81							
T40	D7/CB	82		100	52,2,26,75,50,76,77,3,51, 74,49,27,95,45,96,46,97, 47,48,98				
T41	D0/CB	28		50	52,2,26,75,100,76,77,3, 51,74,49,27,91,41,92,42, 93,43,94,44				
T42	D1/CB	78							
T43	D2/CB	29							
T44	D3/CB	79							
T45	D4/CB	30							
T46	D5/CB	80							
T47	D6/CB	81							
T48	D7/CB	82	99	50	52,2,26,75,100,76,77,3, 51,74,49,27,91,41,92,42, 93,43,94,44	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
T49	D0/CB	28	49	76	52,2,26,75,100,50,77,3, 51,74,99,27,36,87,37,88, 38,89,39,80	2	30	nS	17,19
T50	D1/CB	78							
T51	D2/CB	29							
T52	D3/CB	79							
T53	D4/CB	30							
T54	D5/CB	80							
T55	D6/CB	81							
T56	D7/CB	82	49	76	52,2,26,75,100,50,77,3, 51,74,99,27,36,87,37,88, 38,89,39,90				
T57	D0/CB	28	27	77	52,2,26,75,100,50,76,3, 51,74,99,49,32,83,33,84, 34,85,35,86				
T58	D1/CB	78							
T59	D2/CB	29							
T60	D3/CB	79							
T61	D4/CB	30							
T62	D5/CB	80							
T63	D6/CB	81							
T64	D7/CB	82	27	77	52,2,26,75,100,50,76,3 51,74,99,49,32,83,33,84, 34,85,35,86	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
T65	D0/1A	53	3	51,74,99,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	30	nS	17,19
T66	D1/1A	4							
T67	D2/1A	54							
T68	D3/1A	5							
T69	D4/1A	55							
T70	D5/1A	6							
T71	D6/1A	56							
T72	D7/1A	7	3	51,74,99,49,27					
T73	D0/2A	57	51	3,74,99,49,27					
T74	D1/2A	8							
T75	D2/2A	58							
T76	D3/2A	9							
T77	D4/2A	59							
T78	D5/2A	60							
T79	D6/2A	11							
T80	D7/2A	61	51	3,74,99,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
TB1	D0/3A	12	74	3,51,99,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	30	nS	17,19
TB2	D1/3A	62							
TB3	D2/3A	13							
TB4	D3/3A	63							
TB5	D4/3A	14							
TB6	D5/3A	64							
TB7	D6/3A	65							
TB8	D7/3A	16							
TB9	D0/4A	66							
TB0	D1/4A	17							
TB1	D2/4A	67							
TB2	D3/4A	18							
TB3	D4/4A	68							
TB4	D5/4A	19							
TB5	D6/4A	20							
TB6	D7/4A	69	74	3,51,99,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
T97	D0/4B	95	99	3,51,74,49,27	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81,82	2	30	nS	17,19
T98	D1/4B	45							
T99	D2/4B	96							
T100	D3/4B	46							
T101	D4/4B	97							
T102	D5/4B	47							
T103	D6/4B	48							
T104	D7/4B	98							
T105	D0/3B	91							
T106	D1/3B	41							
T107	D2/3B	92							
T108	D3/3B	42							
T109	D4/3B	93							
T110	D5/3B	43							
T111	D6/3B	94							
T112	D7/3B	44	99	3,51,74,49,27	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81,82	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XIX. Output disable time (tPHZ) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
T113	D0/2B	38	49	3,51,74,99,27	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81,82	2	30	nS	17,19
T114	D1/2B	87							
T115	D2/2B	37							
T116	D3/2B	88							
T117	D4/2B	36							
T118	D5/2B	89							
T119	D6/2B	39							
T120	D7/2B	90	49	3,51,74,99,27					
T121	D0/1B	32	27	3,51,74,99,49					
T122	D1/1B	83							
T123	D2/1B	33							
T124	D3/1B	84							
T125	D4/1B	34							
T126	D5/1B	85							
T127	D6/1B	35							
T128	D7/1B	86	27	3,51,74,99,49	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81,82	2	30	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
V1	D0/CA	21	3	52	2,26,75,100,50,76,77,51, 74,99,49,27,53,4,54,5,55, 6,56,7	2	55	nS	17,19
V2	D1/CA	70							
V3	D2/CA	22							
V4	D3/CA	71							
V5	D4/CA	23							
V6	D5/CA	72							
V7	D6/CA	24							
V8	D7/CA	73	3	52	2,26,75,100,50,76,77,51, 74,99,49,27,53,4,54,5,55, 6,56,7				
V9	D0/CA	21	51	2	52,26,75,100,50,76,77,3, 74,99,49,27,57,8,58,9,59, 60,11,61				
V10	D1/CA	70							
V11	D2/CA	22							
V12	D3/CA	71							
V13	D4/CA	23							
V14	D5/CA	72							
V15	D6/CA	24							
V16	D7/CA	73	51	2	52,26,75,100,50,76,77,3, 74,99,49,27,57,8,58,9,59, 60,11,61	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
V17	D0/CA	21	74	26	52,2,75,1,100,50,76,77,3,51,99,49,27,12,62,13,63,14,64,65,16	2	55	nS	17,19
V18	D1/CA	70							
V19	D2/CA	22							
V20	D3/CA	71							
V21	D4/CA	23							
V22	D5/CA	72							
V23	D6/CA	24							
V24	D7/CA	73		26	52,2,75,1,100,50,76,77,3,51,99,49,27,12,62,13,63,14,64,65,16				
V25	D0/CA	21		25	52,2,26,1,100,50,76,77,3,51,99,49,27,66,17,67,18,68,19,20,69				
V26	D1/CA	70							
V27	D2/CA	22							
V28	D3/CA	71							
V29	D4/CA	23							
V30	D5/CA	72	74	25	52,2,26,1,100,50,76,77,3,51,99,49,27,66,17,67,18,68,19,20,69	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
V31	D6/CA	24	74	75	52,2,26,75,50,76,77,3, 51,99,49,27,66,17,67,18, 68,19,20,69	2	55	nS	17,19
V32	D7/CA	73	74	75	52,2,26,75,50,76,77,3, 51,99,49,27,66,17,67,18, 68,19,20,69				
V33	D0/CB	20	99	100	52,2,26,75,50,76,77,3,51, 74,49,27,95,45,96,46,97, 47,48,98				
V34	D1/CB	78							
V35	D2/CB	29							
V36	D3/CB	79							
V37	D4/CB	30							
V38	D5/CB	80							
V39	D6/CB	81							
V40	D7/CB	82		100	52,2,26,75,50,76,77,3,51, 74,49,27,95,45,96,46,97, 47,48,98				
V41	D0/CB	28		50	52,2,26,75,100,76,77,3, 51,74,49,27,91,41,92,42, 93,43,94,44				
V42	D1/CB	78							
V43	D2/CB	29							
V44	D3/CB	79	99	50	52,2,26,75,100,76,77,3, 51,74,49,27,91,41,92,42, 93,43,94,44	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
V45	D4/CB	30	99	50	52,2,26,75,100,76,77,3, 51,74,49,27,91,41,92,42, 93,43,94,44	2	55	nS	17,19
V46	D5/CB	80							
V47	D6/CB	81							
V48	D7/CB	82	99	50	52,2,26,75,100,76,77,3, 51,74,49,27,91,41,92,42, 93,43,94,44				
V49	D0/CB	28	49	76	52,2,26,75,100,50,77,3, 51,74,99,27,36,87,37,88, 38,89,39,90				
V50	D1/CB	78							
V51	D2/CB	29							
V52	D3/CB	79							
V53	D4/CB	30							
V54	D5/CB	80							
V55	D6/CB	81							
V56	D7/CB	82	49	76	52,2,26,75,100,50,76,3, 51,74,99,27,36,87,37,88, 38,89,39,90				
V57	D0/CB	28	27	77	52,2,26,75,100,50,76,3, 51,74,99,49,32,83,33,84, 34,85,35,86				
V58	D1/CB	78	27	77	52,2,26,75,100,50,76,3, 51,74,99,49,32,83,33,84, 34,85,35,86	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
V59	D2/CB	29	27	77	52,2,26,75,100,50,76,3, 51,74,99,49,32,83,33,84, 34,85,35,86	2	55	nS	17,19
V60	D3/CB	79							
V61	D4/CB	30							
V62	D5/CB	80							
V63	D6/CB	81							
V64	D7/CB	82	27	77	52,2,26,75,100,50,76,3, 51,74,99,49,32,83,33,84, 34,85,35,86				
V65	D0/1A	53	3	51,74,99,49 27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73				
V66	D1/1A	4							
V67	D2/1A	54							
V68	D3/1A	5							
V69	D4/1A	55							
V70	D5/1A	6							
V71	D6/1A	56							
V72	D7/1A	7	3	51,74,99,49, 27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
V73	D0/2A	57	51	3,74,99,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	55	nS	17,19
V74	D1/2A	8							
V75	D2/2A	58							
V76	D3/2A	9							
V77	D4/2A	59							
V78	D5/2A	60							
V79	D6/2A	11							
V80	D7/2A	61	51	3,74,99,49,27					
V81	D0/3A	12	74	3,51,99,49,27					
V82	D1/3A	62							
V83	D2/3A	13							
V84	D3/3A	63							
V85	D4/3A	14							
V86	D5/3A	64							
V87	D6/3A	65							
V88	D7/3A	15							
V89	D0/4A	66							
V90	D1/4A	17	74	3,51,99,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
V91	D2/4A	67	74	3,51,99,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	55	nS	17,19
V92	D3/4A	18							
V93	D4/4A	68							
V94	D5/4A	19							
V95	D6/4A	20							
V96	D7/4A	69	74	3,51,99,49,27					
V97	D0/4B	95	99	3,51,74,49,27					
V98	D1/4B	45							
V99	D2/4B	96							
V100	D3/4B	46							
V101	D4/4B	97							
V102	D5/4B	47							
V103	D6/4B	48							
V104	D7/4B	98							
V105	D0/3B	91							
V106	D1/3B	41							
V107	D2/3B	92	99	3,51,74,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
V108	D3/3B	42	99	3,51,74,49,27	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	55	nS	17,19
V109	D4/3B	93							
V110	D5/3B	43							
V111	D6/3B	94							
V112	D7/3B	44	99	3,51,74,49,27					
V113	D0/2B	36	49	3,51,74,99,27					
V114	D1/2B	87							
V115	D2/2B	37							
V116	D3/2B	88							
V117	D4/2B	38							
V118	D5/2B	89							
V119	D6/2B	39							
V120	D7/2B	90	49	3,51,74,99,27					
V121	D0/1B	32	27	3,51,74,99,49					
V122	D1/1B	83							
V123	D2/1B	33	27	3,51,74,99,49	52,2,26,75,100,50,76,77, 28,78,29,79,30,80,81,82, 21,70,22,71,23,72,24,73	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XX. Output enable time (tPZH) test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
V124	D3/1B	84	27	3,51,74,99,49	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81,82	2	55	nS	17,19
V125	D4/1B	34							
V126	D5/1B	85							
V127	D6/1B	35							
V128	D7/1B	86	27	3,51,74,99,49	52,2,26,75,100,50,76,77, 21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81,82	2	55	nS	17,19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXI. Functional test.

Test cond	Parameter	Connect	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
W	Functional test	Test vectors	Module shall pass test		NA	20

NOTE:

1. Abbreviations used are defined in 6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

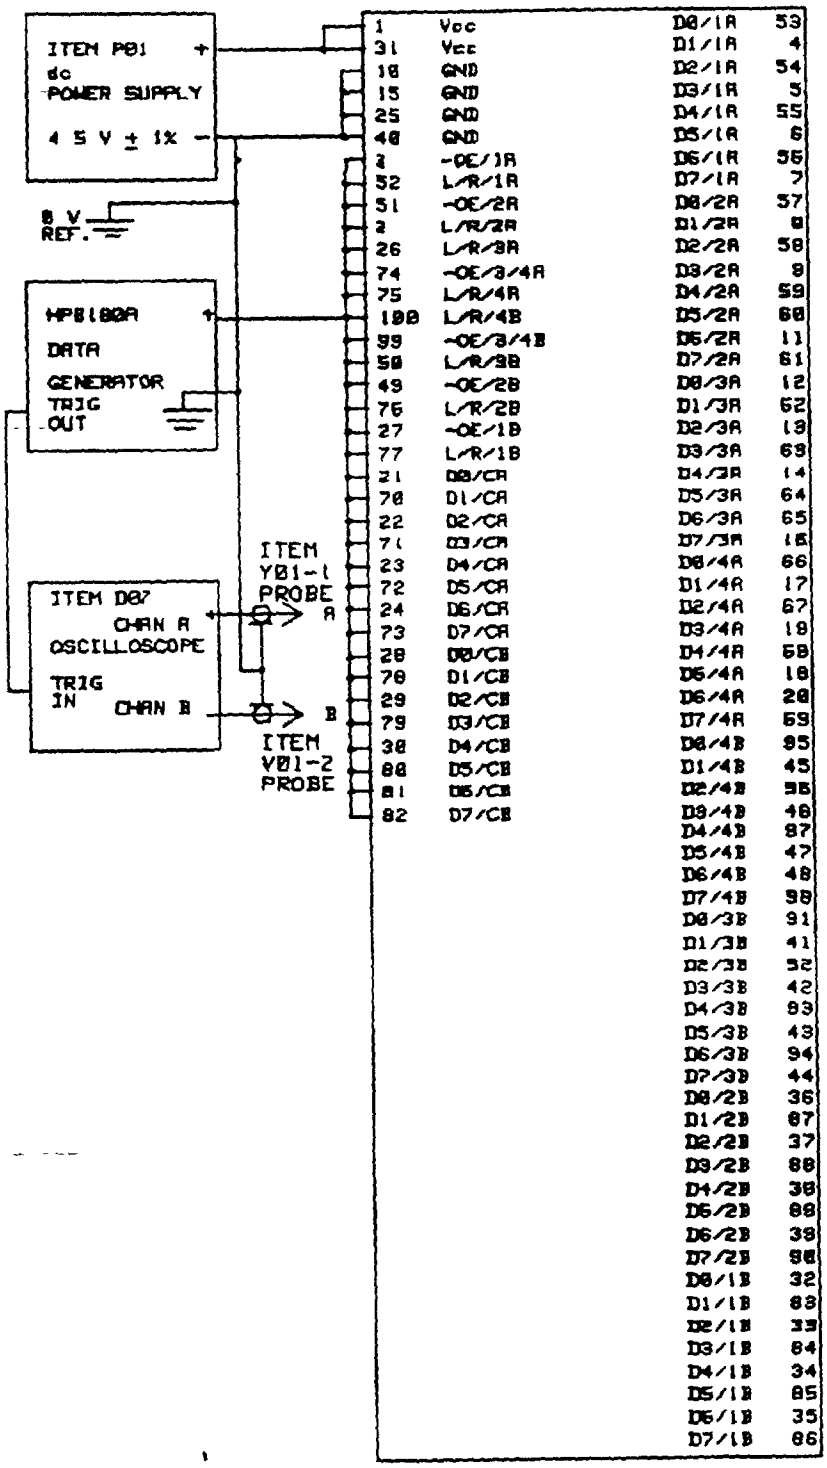


FIGURE 20. Functional test circuit for table XXI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input conditioning voltages shall be 0.7 V ± 1 percent for a logic 0 and 2.0 V ± 1 percent for a logic 1.

2. Minimum output voltage, high level, is 2.4 V.

3. Maximum output voltage, low level, is 0.4 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII Output crosstalk, high level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X1	D0/CR	21	2,26,75,100,50,76, 77,53	52,3,51,74, 99,49,27	4,54,5,55,6,56,7,28,78, 29,79,30,80,81,82	0	925	mV	21,22
X2	D1/CR	78	2,26,75,100,50,76, 77,4		53,54,5,55,6,56,7,28,78, 29,79,30,80,81,82				
X3	D2/CR	22	2,26,75,100,50,76, 77,54		53,4,5,55,6,56,7,28,78, 29,79,30,80,81,82				
X4	D3/CR	71	2,26,75,100,50,76, 77,5		53,4,54,55,6,56,7,28,78, 29,79,30,80,81,82				
X5	D4/CR	23	2,26,75,100,50,76, 77,55		53,4,54,5,6,56,7,28,78, 29,79,30,80,81,82				
X6	D5/CR	72	2,26,75,100,50,76, 77,6		53,4,54,5,55,56,7,28,78, 29,79,30,80,81,82				
X7	D6/CR	24	2,26,75,100,50,78, 77,56		53,4,54,5,55,6,7,28,78, 29,79,30,80,81,82				
X8	D7/CR	73	2,26,75,100,50,76, 77,7	52,3,51,74, 99,49,27	53,4,54,5,55,6,56,28,78, 29,79,30,80,81,82				
X9	D0/CR	21	52,26,75,100,50,76, 77,57	2,3,51,74,99, 49,27	8,58,8,59,60,11,61,28,78, 29,79,30,80,81,82				
X10	D1/CR	78	52,26,75,100,50,76, 77,8		57,58,9,59,60,11,61,28, 78,29,79,30,80,81,82				
X11	D2/CR	22	52,26,75,100,50,76, 77,58		57,8,8,59,60,11,61,28,78, 29,79,30,80,81,82				
X12	D3/CR	71	52,26,75,100,50,76, 77,9		57,8,58,59,60,11,61,28, 78,29,79,30,80,81,82				
X13	D4/CR	23	52,26,75,100,50,76, 77,59	2,3,51,74,99, 49,27	57,8,58,9,60,11,61,28,78, 29,79,30,80,81,82	0	925	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X14	D5/CR	72	52,26,75,100,50,76, 77,60	2,3,51,74,89, 49,27	57,8,58,9,59,11,81,28, 78,29,79,30,80,81,82	0	825	mV	21,22
X15	D6/CR	24	52,26,75,100,50,76, 77,11	2,3,51,74,89, 49,27	57,8,58,9,59,60,61,28,78, 29,79,30,80,81,82				
X16	D7/CR	73	52,26,75,100,50,76, 77,61	2,3,51,74,89, 49,27	57,8,58,9,59,60,11,28,78, 29,79,30,80,81,82				
X17	D0/CR	21	52,2,75,100,50,76, 77,12	26,3,51,74, 89,49,27	82,13,63,14,64,65,16,28, 78,29,79,30,80,81,82				
X18	D1/CR	70	52,2,75,100,50,76, 77,62		12,13,63,14,64,65,16,28, 78,29,79,30,80,81,82				
X19	D2/CR	22	52,2,75,100,50,76, 77,13		12,62,63,14,64,65,16,28, 78,29,79,30,80,81,82				
X20	D3/CR	71	52,2,75,100,50,76, 77,63		12,62,13,14,64,65,16,28, 78,29,79,30,80,81,82				
X21	D4/CR	23	52,2,75,100,50,76, 77,14		12,62,13,63,64,65,16,28, 78,29,79,30,80,81,82				
X22	D5/CR	72	52,2,75,100,50,76, 77,64		12,62,13,63,14,65,16,28, 78,29,79,30,80,81,82				
X23	D6/CR	24	52,2,75,100,50,76, 77,65		12,62,13,63,14,64,16,28, 78,29,79,30,80,81,82				
X24	D7/CR	73	52,2,26,100,50,76, 77,16	26,3,51,74, 89,49,27	12,62,13,63,14,64,65,28, 78,29,79,30,80,81,82				
X25	D0/CR	21	52,2,28,100,50,76, 77,66	75,3,51,74, 89,49,27	17,87,18,68,19,20,69,28, 78,29,79,30,80,81,82				
X26	D1/CR	70	52,2,28,100,50,76, 77,17	75,3,51,74, 89,49,27	88,87,18,68,19,20,69,28, 78,29,79,30,80,81,82	0	925	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X27	D2/CA	22	52,2,26,100,50,76, 77,67	75,3,51,74, 99,49,27	88,17,18,68,19,20,69,20, 70,29,79,30,80,81,82	0	825	nV	21,22
X28	D3/CA	71	52,2,26,100,50,76, 77,18		88,17,87,68,19,20,69,20, 70,29,79,30,80,81,82				
X29	D4/CA	23	52,2,26,100,50,76, 77,68		66,17,67,18,19,20,69,20, 70,29,79,30,80,81,82				
X30	D5/CA	72	52,2,26,100,50,76, 77,19		88,17,87,18,68,20,69,20, 70,29,79,30,80,81,82				
X31	D6/CA	24	52,2,26,100,50,76, 77,20		88,17,87,18,68,19,69,20, 70,29,79,30,80,81,82				
X32	D7/CA	73	52,2,26,100,50,76, 77,69	75,3,51,74, 99,49,27	66,17,67,18,68,19,20,20, 70,29,79,30,80,81,82				
X33	D0/CB	28	52,2,28,75,50,76, 77,95	100,3,51,74, 99,49,27	45,96,46,97,47,48,98,21, 70,22,71,23,72,24,73				
X34	D1/CB	78	52,2,26,75,50,76, 77,45		95,96,46,97,47,48,98,21, 70,22,71,23,72,24,73				
X35	D2/CB	29	52,2,28,75,50,76, 77,96		95,45,46,97,47,48,98,21, 70,22,71,23,72,24,73				
X36	D3/CB	75	52,2,26,75,50,76, 77,46		95,45,96,97,47,48,98,21, 70,22,71,23,72,24,73				
X37	D4/CB	30	52,2,26,75,50,76, 77,97		95,45,96,46,47,48,98,21, 70,22,71,23,72,24,73				
X38	D5/CB	80	52,2,26,75,50,76, 77,47		95,45,96,46,97,48,98,21, 70,22,71,23,72,24,73				
X39	D6/CB	81	52,2,28,75,50,76, 77,48	100,3,51,74, 99,49,27	95,45,96,46,97,47,98,21, 70,22,71,23,72,24,73	0	925	nV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
X40	D7/CB	82	52,2,26,75,50,76, 77,90	100,8,51,74, 89,48,27	85,45,86,46,87,47,48,21, 70,22,71,23,72,24,73	0	825	mV	21,22
X41	D0/CB	20	52,2,26,75,100,76, 77,91	50,3,51,74, 89,49,27	41,92,42,93,43,94,44,21, 70,22,71,23,72,24,73				
X42	D1/CB	70	52,2,26,75,100,76, 77,41		81,92,42,93,43,84,44,21, 70,22,71,23,72,24,73				
X43	D2/CB	20	52,2,26,75,100,76, 77,92		81,41,42,93,43,84,44,21, 70,22,71,23,72,24,73				
X44	D3/CB	70	52,2,26,75,100,76, 77,42		81,41,82,93,43,84,44,21, 70,22,71,23,72,24,73				
X45	D4/CB	30	52,2,26,75,100,76, 77,93		81,41,82,42,43,84,44,21, 70,22,71,23,72,24,73				
X46	D5/CB	80	52,2,26,75,100,76, 77,43		81,41,82,42,93,84,44,21, 70,22,71,23,72,24,73				
X47	D6/CB	81	52,2,26,75,100,76, 77,94		81,41,82,42,93,43,44,21, 70,22,71,23,72,24,73				
X48	D7/CB	82	52,2,26,75,100,76, 77,44	50,3,51,74, 89,49,27	81,41,82,42,93,43,84,21, 70,22,71,23,72,24,73				
X49	D0/CB	20	52,2,26,75,50,100, 77,36	76,3,51,74, 89,49,27	87,37,88,38,89,39,90,21, 70,22,71,23,72,24,73				
X50	D1/CB	70	52,2,26,75,50,100, 77,87		36,37,88,38,89,39,90,21, 70,22,71,23,72,24,73				
X51	D2/CB	20	52,2,26,75,50,100, 77,37		38,87,88,38,89,39,90,21, 70,22,71,23,72,24,73				
X52	D3/CB	70	52,2,26,75,50,100, 77,88	76,3,51,74, 89,49,27	38,87,37,38,89,39,90,21, 70,22,71,23,72,24,73	0	825	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X53	D4/CB	30	52,2,28,75,50,100, 77,38	76,3,51,74, 89,49,27	38,87,80,38,89,38,90,21, 70,22,71,23,72,24,73	0	825	mV	21,22
X54	D5/CB	80	52,2,28,75,50,100, 77,89		38,87,37,88,38,39,90,21, 70,22,71,23,72,24,73				
X55	D6/CB	81	52,2,26,75,50,100, 77,39		36,87,37,88,38,89,90,21, 70,22,71,23,72,24,73				
X56	D7/CB	82	52,2,28,75,50,100, 77,90	76,3,51,74, 89,49,27	38,87,37,88,38,88,39,21, 70,22,71,23,72,24,73				
X57	D0/CB	28	52,2,28,75,50,100, 78,32	77,3,51,74, 89,49,27	83,39,84,34,85,35,86,21, 70,22,71,23,72,24,73				
X58	D1/CB	78	52,2,26,75,50,100, 78,83		32,38,84,34,86,35,86,21, 70,22,71,23,72,24,73				
X59	D2/CB	29	52,2,28,75,50,100, 78,33		32,83,84,34,85,35,86,21, 70,22,71,23,72,24,73				
X60	D3/CB	78	52,2,26,75,50,100, 78,84		32,83,33,34,85,35,86,21, 70,22,71,23,72,24,73				
X61	D4/CB	30	52,2,28,75,50,100, 78,34		32,89,33,84,85,35,86,21, 70,22,71,23,72,24,73				
X62	D5/CB	80	52,2,28,75,50,100, 78,85		32,89,33,84,34,35,86,21, 70,22,71,23,72,24,73				
X63	D6/CB	81	52,2,26,75,50,100, 78,35		32,83,33,84,34,85,86,21, 70,22,71,23,72,24,73				
X64	D7/CB	82	52,2,28,75,50,100, 76,86	77,3,51,74, 89,49,27	32,89,33,84,34,85,35,21, 70,22,71,23,72,24,73				
X65	D0/1A	53	52,2,28,75,50,100, 78,77,21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28, 70,29,79,30,80,81,82	0	925	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X66	D1/1A	4	52,2,26,75,50,100, 76,77,70	3,51,74,99, 49,27	21,22,71,23,72,27,73,28, 78,29,79,30,80,81,82	0	925	mV	21,22
X67	D2/1A	54	52,2,26,75,50,100, 76,77,22		21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82				
X68	D3/1A	5	52,2,26,75,50,100, 76,77,71		21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
X69	D4/1A	55	52,2,26,75,50,100, 76,77,23		21,70,22,71,72,24,73,28, 78,29,79,30,80,81,82				
X70	D5/1A	6	52,2,26,75,50,100, 76,77,72		21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
X71	D6/1A	56	52,2,26,75,50,100, 76,77,24		21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82				
X72	D7/1A	7	52,2,26,75,50,100, 76,77,73		21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82				
X73	D0/2A	57	52,2,26,75,50,100, 76,77,21		70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
X74	D1/2A	8	52,2,26,75,50,100, 76,77,70		21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
X75	D2/2A	58	52,2,26,75,50,100, 76,77,22		21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82				
X76	D3/2A	9	52,2,26,75,50,100, 76,77,71		21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
X77	D4/2A	59	52,2,26,75,50,100, 76,77,23		21,70,22,71,72,24,73,28, 78,29,79,30,80,81,82				
X78	D5/2A	60	52,2,26,75,50,100, 76,77,72	3,51,74,99, 49,27	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82	0	925	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X79	D6/2R	11	52,2,28,75,50,100, 76,77,24	3,51,74,99, 49,27	21,70,22,71,23,24,73,28, 70,29,79,30,00,81,82	0	825	mV	21,22
X80	D7/2R	61	52,2,28,75,50,100, 76,77,73		21,70,22,71,23,72,24,28, 70,29,79,30,00,81,82				
X81	D0/3R	12	52,2,26,75,50,100, 76,77,21		70,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
X82	D1/3R	62	52,2,28,75,50,100, 76,77,70		21,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
X83	D2/3R	13	52,2,28,75,50,100, 76,77,22		21,70,71,23,72,24,73,28, 70,29,79,30,00,81,82				
X84	D3/3R	63	52,2,26,75,50,100, 76,77,71		21,70,22,23,72,24,73,28, 70,29,79,30,00,81,82				
X85	D4/3R	14	52,2,28,75,50,100, 76,77,23		21,70,22,71,72,24,73,28, 70,29,79,30,00,81,82				
X86	D5/3R	64	52,2,26,75,50,100, 76,77,72		21,70,22,71,23,24,73,28, 70,29,79,30,00,81,82				
X87	D6/3R	65	52,2,28,75,50,100, 76,77,24		21,70,22,71,23,72,73,28, 70,29,79,30,00,81,82				
X88	D7/3R	16	52,2,26,75,50,100, 76,77,73		21,70,22,71,23,72,24,28, 70,29,79,30,00,81,82				
X89	D0/4R	66	52,2,26,75,50,100, 76,77,21		70,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
X90	D1/4R	17	52,2,28,75,50,100, 76,77,70		21,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
X91	D2/4R	67	52,2,28,75,50,100, 76,77,22	3,51,74,99, 49,27	21,70,71,23,72,24,73,28, 70,29,79,30,00,81,82	0	825	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X92	D3/4A	18	52,2,26,75,50,100, 76,77,71	3,51,74,99, 49,27	21,70,22,23,72,24,73,28, 70,29,79,30,80,81,82	0	925	mV	21,22
X93	D4/4A	68	52,2,26,75,50,100, 76,77,23		21,70,22,71,72,24,73,28, 70,29,79,30,80,81,82				
X94	D5/4A	18	52,2,26,75,50,100, 76,77,72		21,70,22,71,23,24,73,28, 70,29,79,30,80,81,82				
X95	D6/4A	29	52,2,26,75,50,100, 76,77,24		21,70,22,71,23,72,73,28, 70,29,79,30,80,81,82				
X96	D7/4A	69	52,2,26,75,50,100, 76,77,73		21,70,22,71,23,72,24,28, 70,29,79,30,80,81,82				
X97	D0/4B	85	52,2,26,75,50,100, 76,77,28		21,70,22,71,23,72,24,73, 70,29,79,30,80,81,82				
X98	D1/4B	45	52,2,26,75,50,100, 76,77,78		21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
X99	D2/4B	85	52,2,26,75,50,100, 76,77,29		21,70,22,71,23,72,24,73, 28,70,79,30,80,81,82				
X100	D3/4B	48	52,2,26,75,50,100, 76,77,79		21,70,22,71,23,72,24,73, 28,70,29,30,80,81,82				
X101	D4/4B	97	52,2,26,75,50,100, 76,77,30		21,70,22,71,23,72,24,73, 28,70,29,79,80,81,82				
X102	D5/4B	47	52,2,26,75,50,100, 76,77,80		21,70,22,71,23,72,24,73, 28,70,29,79,30,81,82				
X103	D6/4B	48	52,2,26,75,50,100, 76,77,81		21,70,22,71,23,72,24,73, 28,70,29,79,30,80,82				
X104	D7/4B	98	52,2,26,75,50,100, 76,77,82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73, 28,70,29,79,30,80,81	0	925	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X105	D0/3B	91	52,2,26,75,50,100, 76,77,28	3,51,74,99, 49,27	21,70,22,71,23,72,24,73, 78,29,79,30,80,81,82	0	825	mV	21,22
X106	D1/3B	41	52,2,26,75,50,100, 76,77,78		21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
X107	D2/3B	92	52,2,26,75,50,100, 76,77,29		21,70,22,71,23,72,24,73, 28,78,29,30,80,81,82				
X108	D3/3B	42	52,2,26,75,50,100, 76,77,79		21,70,22,71,23,72,24,73, 28,78,29,30,80,81,82				
X109	D4/3B	93	52,2,26,75,50,100, 76,77,30		21,70,22,71,23,72,24,73, 28,78,29,30,80,81,82				
X110	D5/3B	43	52,2,26,75,50,100, 76,77,80		21,70,22,71,23,72,24,73, 28,78,29,79,30,81,82				
X111	D6/3B	94	52,2,26,75,50,100, 76,77,81		21,70,22,71,23,72,24,73, 28,78,29,79,30,80,82				
X112	D7/3B	44	52,2,26,75,50,100, 76,77,82		21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81				
X113	D0/2B	35	52,2,26,75,50,100, 76,77,28		21,70,22,71,23,72,24,73, 78,29,79,30,80,81,82				
X114	D1/2B	87	52,2,26,75,50,100, 76,77,78		21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
X115	D2/2B	37	52,2,26,75,50,100, 76,77,29		21,70,22,71,23,72,24,73, 28,78,79,30,80,81,82				
X116	D3/2B	88	52,2,26,75,50,100, 76,77,79		21,70,22,71,23,72,24,73, 28,78,29,30,80,81,82				
X117	D4/2B	38	52,2,26,75,50,100, 76,77,30	3,51,74,99, 49,27	21,70,22,71,23,72,24,73, 28,78,29,79,80,81,82	0	925	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXII. Output crosstalk, high level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
X118	D5/2B	88	52,2,26,75,50,100, 76,77,80	3,51,74,99, 49,27	21,70,22,71,23,72,24,73, 28,78,29,79,30,81,82	0	925	mV	21,22
X119	D6/2B	38	52,2,26,75,50,100, 76,77,81		21,70,22,71,23,72,24,73, 28,78,29,79,30,80,82				
X120	D7/2B	90	52,2,26,75,50,100, 76,77,82		21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81				
X121	D0/1B	32	52,2,26,75,50,100, 76,77,28		21,70,22,71,23,72,24,73, 78,29,79,30,80,81,82				
X122	D1/1B	83	52,2,26,75,50,100, 76,77,78		21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
X123	D2/1B	33	52,2,26,75,50,100, 76,77,29		21,70,22,71,23,72,24,73, 28,78,79,30,80,81,82				
X124	D3/1B	84	52,2,26,75,50,100, 76,77,79		21,70,22,71,23,72,24,73, 26,78,29,30,80,81,82				
X125	D4/1B	34	52,2,26,75,50,100, 76,77,30		21,70,22,71,23,72,24,73, 28,78,29,79,80,81,82				
X126	D5/1B	85	52,2,26,75,50,100, 76,77,80		21,70,22,71,23,72,24,73, 28,78,29,78,30,81,82				
X127	D6/1B	35	52,2,26,75,50,100, 76,77,81		21,70,22,71,23,72,24,73, 28,78,29,79,30,80,82				
X128	D7/1B	86	52,2,26,75,50,100, 76,77,82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81	0	925	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

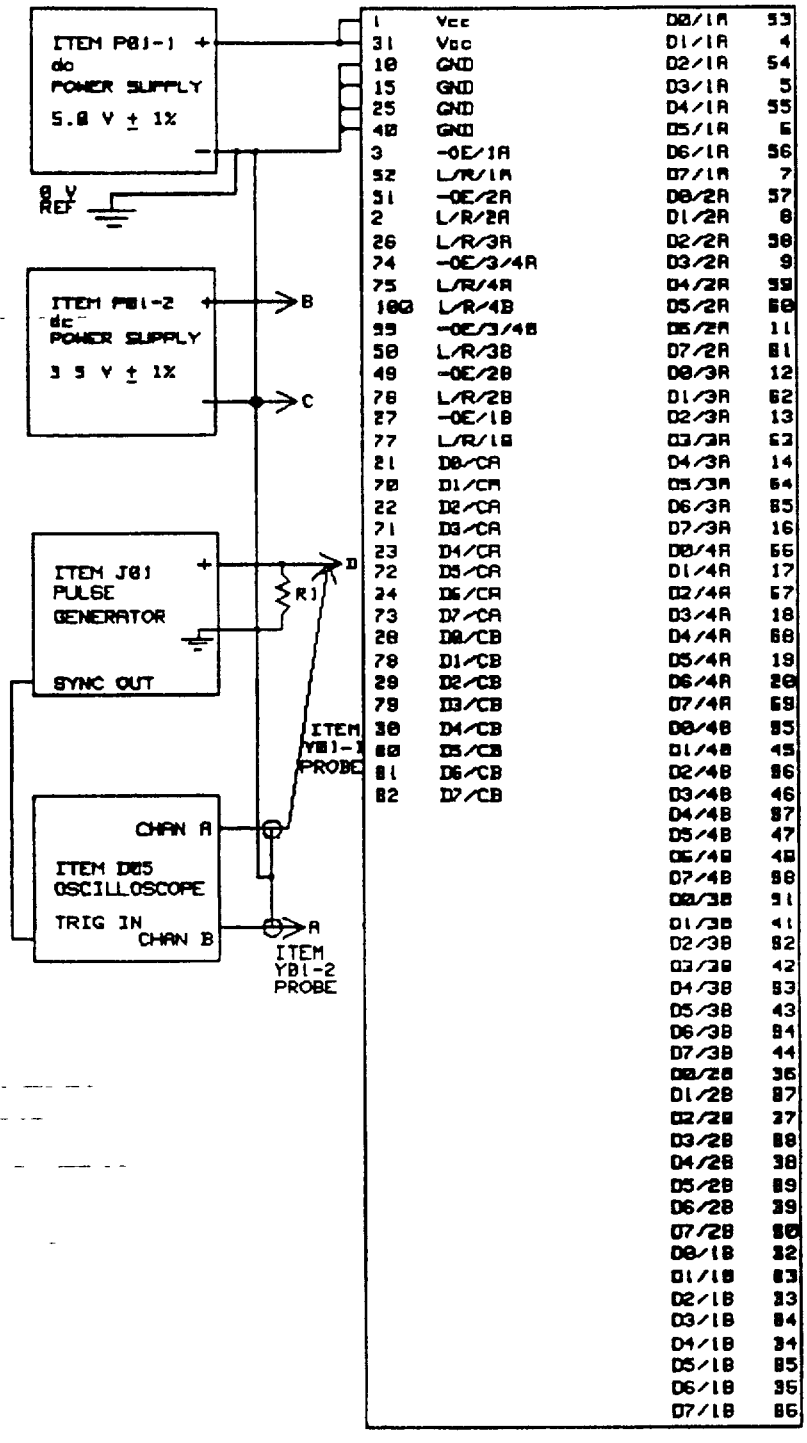


FIGURE 21. Output crosstalk, low and high level and duration, test circuit for tables XXII, XXIII, XXIV, and XXV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. R1 = 51 Ohms ± 1 percent, 1 W.
2. Load outputs as specified on figure 14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

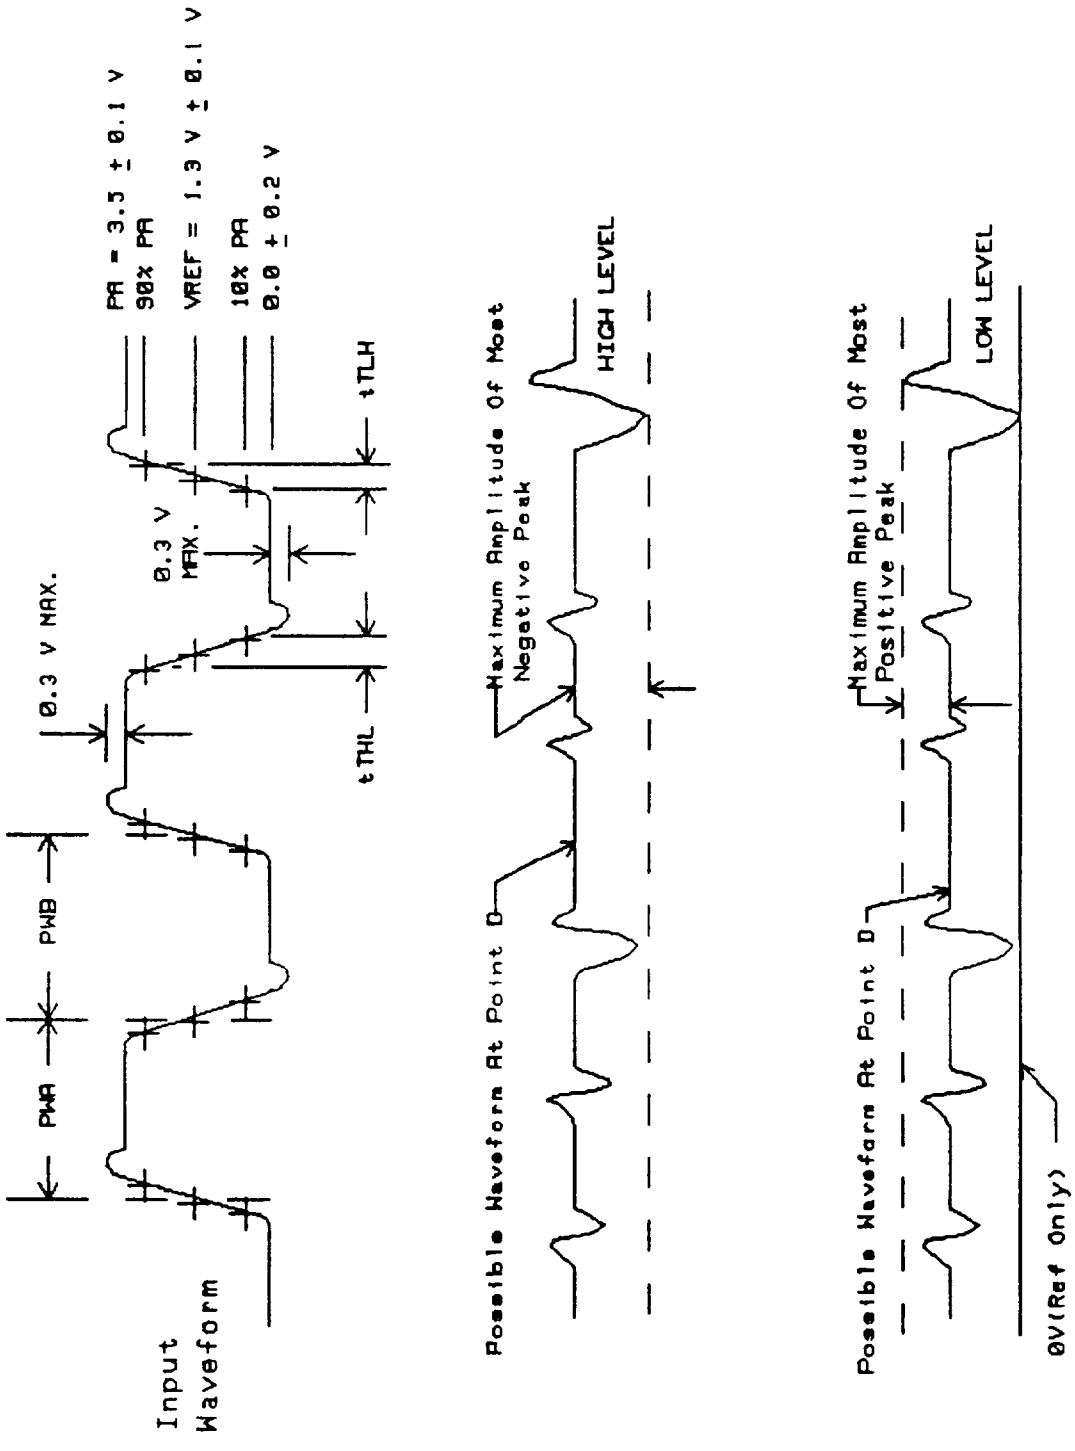


FIGURE 22. Output crosstalk, low and high level, test circuit waveforms for tables XXII and XXIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTE:

1. Input pulse parameters:

   PWA = PWB = 500 nS ± 10 percent.
   PRR = 1 MHz ± 10 percent.
   tTLH = tTHL = 3.5 ± 1.5 nS (verified at each input).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII. Output crosstalk, low level, test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y1	D0/CR	21	2,26,75,100,50,76, 77	52,3,51,74, 99,49,27,53	4,54,5,55,6,56,7,28,78, 29,79,30,80,81,82	0	1300	mV	21,22
Y2	D1/CR	78		52,3,51,74, 99,49,27,4	53,54,5,55,6,56,7,8,78, 29,79,30,80,81,82				
Y3	D2/CR	22		52,3,51,74, 99,49,27,54	53,4,5,55,6,56,7,28,78, 29,79,30,80,81,82				
Y4	D3/CR	71		52,3,52,74, 99,49,27,5	53,4,54,55,6,56,7,28,78, 29,79,30,80,81,82				
Y5	D4/CR	23		52,3,51,74, 99,49,27,55	53,4,54,5,6,56,7,28,78, 29,79,30,80,81,82				
Y6	D5/CR	72		52,3,51,74, 99,49,27,6	53,4,54,5,55,56,7,28,78, 29,79,30,80,81,82				
Y7	D6/CR	24		52,3,51,74, 99,49,27,56	53,4,54,5,56,6,7,28,78, 29,79,30,80,81,82				
Y8	D7/CR	73	2,26,75,100,50,76, 77	52,3,51,74, 99,49,27,7	53,4,54,5,56,6,56,28,78, 29,79,30,80,81,82				
Y9	D0/CR	21	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,57	8,58,8,59,60,11,61,28,78, 29,79,30,80,81,82				
Y10	D1/CR	78		2,3,51,74,99, 49,27,8	57,58,8,59,60,11,61,28, 78,29,79,30,80,81,82				
Y11	D2/CR	22		2,3,51,74,99, 49,27,58	57,8,8,59,60,11,61,28,78, 29,79,30,80,81,82				
Y12	D3/CR	71		2,3,51,74,99, 49,27,9	57,8,58,59,60,11,61,28, 78,29,79,30,80,81,82				
Y13	D4/CR	23		2,3,51,74,99, 49,27,59	57,8,58,9,60,11,61,28,78, 29,79,30,80,81,82				
Y14	D5/CR	72	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,60	57,8,58,9,59,11,61,28,78, 29,79,30,80,81,82	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y15	D6/CR	24	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,11	57,8,58,9,59,60,61,28,78, 28,79,30,80,81,82	0	1300	mV	21,22
Y16	D7/CR	73	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,61	57,8,58,9,59,60,11,28,78, 28,79,30,80,81,82				
Y17	D0/CR	21	52,2,75,100,50,76, 77	26,3,51,74, 99,49,27,12	52,13,63,14,64,65,16,28, 78,29,79,30,80,81,82				
Y18	D1/CR	78		26,3,51,74, 99,49,27,62	12,13,63,14,64,65,16,28, 78,29,79,30,80,81,82				
Y19	D2/CR	22		26,3,51,74, 99,49,27,13	12,62,63,14,64,65,16,28, 78,29,79,30,80,81,82				
Y20	D3/CR	71		26,3,51,74, 99,49,27,63	12,62,13,14,64,65,16,28, 78,29,79,30,80,81,82				
Y21	D4/CR	23		26,3,51,74, 99,49,27,14	12,62,13,63,64,65,16,28, 78,29,79,30,80,81,82				
Y22	D5/CR	72		26,3,51,74, 99,49,27,64	12,62,13,63,14,65,16,28, 78,29,79,30,80,81,82				
Y23	D6/CR	24		26,3,51,74, 99,49,27,65	12,62,13,63,14,64,16,28, 78,29,79,30,80,81,82				
Y24	D7/CR	79	52,2,75,100,50,76, 77	26,3,51,74, 99,49,27,16	12,62,13,63,14,64,65,28, 78,29,79,30,80,81,82				
Y25	D0/CR	21	52,2,26,100,50,76, 77	75,3,51,74, 99,49,27,68	17,67,18,68,19,20,69,28, 78,29,79,30,80,81,82				
Y26	D1/CR	78		75,3,51,74, 99,49,27,17	68,67,18,68,19,20,69,28, 78,29,79,30,80,81,82				
Y27	D2/CR	22	52,2,26,100,50,76, 77	75,3,51,74, 99,49,27,67	68,17,18,68,19,20,69,28, 78,29,79,30,80,81,82	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y28	D3/CA	71	52,2,28,100,50,76, 77	75,3,51,74, 99,49,27,18	88,17,87,68,19,20,69,28 78,29,79,30,80,81,82	0	1300	mV	21,22
Y29	D4/CA	23		75,3,51,74, 99,49,27,68	88,17,87,18,19,20,69,28, 78,29,79,30,80,81,82				
Y30	D5/CA	72		75,3,51,74, 99,49,27,19	66,17,67,18,68,20,69,28, 78,29,79,30,80,81,82				
Y31	D6/CA	24		75,3,51,74, 99,49,27,20	88,17,67,18,68,19,69,28, 78,29,79,30,80,81,82				
Y32	D7/CA	73	52,2,28,100,50,76, 77	75,3,51,74, 99,49,27,69	88,17,87,18,68,19,20,28, 78,29,79,30,80,81,82				
Y33	D0/CB	28	52,2,28,75,50,76,77	100,3,51,74, 99,49,27,95	43,96,46,97,47,48,98,21, 78,22,71,23,72,24,73				
Y34	D1/CB	78		100,3,51,74, 99,49,27,45	95,96,46,97,47,48,98,21, 78,22,71,23,72,24,73				
Y35	D2/CB	29		100,3,51,74, 99,49,27,96	93,45,46,97,47,48,98,21, 78,22,71,23,72,24,73				
Y36	D3/CB	79		100,3,51,74, 99,49,27,48	93,45,96,97,47,48,98,21, 78,22,71,23,72,24,73				
Y37	D4/CB	30		100,3,51,74, 99,49,27,97	95,45,96,46,47,48,98,21, 78,22,71,23,72,24,73				
Y38	D5/CB	80		100,3,51,74, 99,49,27,47	93,45,95,46,97,48,98,21, 78,22,71,23,72,24,73				
Y39	D6/CB	81		100,3,51,74, 99,49,27,48	93,45,96,46,97,47,98,21, 78,22,71,23,72,24,73				
Y40	D7/CB	82	52,2,28,75,50,76,77	100,3,51,74, 99,49,27,98	95,45,96,46,97,47,48,21, 78,22,71,23,72,24,73	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y41	D0/CB	28	52,2,26,75,100,76, 77	50,3,51,74, 99,49,27,81	41,92,42,93,43,94,44,21, 70,22,71,23,72,24,73	0	1300	mV	21,22
Y42	D1/CB	78		50,3,51,74, 99,49,27,41	91,92,42,93,43,94,44,21, 70,22,71,23,72,24,73				
Y43	D2/CB	28		50,3,51,74, 99,49,27,92	91,41,42,93,43,94,44,21, 70,22,71,23,72,24,73				
Y44	D3/CB	78		50,3,51,74, 99,49,27,42	91,41,92,93,43,94,44,21, 70,22,71,23,72,24,73				
Y45	D4/CB	88		50,3,51,74, 99,49,27,93	91,41,92,42,43,94,44,21, 70,22,71,23,72,24,73				
Y46	D5/CB	88		50,3,51,74, 99,49,27,43	91,41,92,42,93,94,44,21, 70,22,71,23,72,24,73				
Y47	D6/CB	81		50,3,51,74, 99,49,27,94	91,41,92,42,93,43,44,21, 70,22,71,23,72,24,73				
Y48	D7/CB	82	52,2,26,75,100,76, 77	50,3,51,74, 99,49,27,44	91,41,92,42,93,43,94,21, 70,22,71,23,72,24,73				
Y49	D0/CB	28	52,2,26,75,50,100, 77	76,3,51,74, 99,49,27,88	87,37,88,38,89,39,90,21, 70,22,71,23,72,24,73				
Y50	D1/CB	78		76,3,51,74, 99,49,27,87	38,87,88,38,89,39,90,21, 70,22,71,23,72,24,73				
Y51	D2/CB	28		75,3,51,74, 99,49,27,37	36,87,88,38,89,38,90,21, 70,22,71,23,72,24,73				
Y52	D3/CB	78		76,3,51,74, 99,49,27,88	38,87,37,38,89,39,90,21, 70,22,71,23,72,24,73				
Y53	D4/CB	98	52,2,26,75,50,100, 77	76,3,51,74, 99,49,27,38	38,87,37,88,89,39,90,21, 70,22,71,23,72,24,73	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y54	D5/CB	80	52,2,26,75,50,100, 77	76,3,51,74, 99,49,27,88	38,87,37,88,38,89,90,21, 70,22,71,23,72,24,73	0	1300	mV	21,22
Y55	D6/CB	81		76,3,51,74, 99,49,27,89	38,87,37,88,38,89,90,21, 70,22,71,23,72,24,73				
Y56	D7/CB	82	52,2,26,75,50,100, 77	76,3,51,74, 99,49,27,90	35,87,37,88,38,89,39,21, 70,22,71,23,72,24,73				
Y57	D0/CB	28	52,2,26,75,50,100, 76	77,3,51,74, 99,49,27,32	82,33,84,34,85,35,86,21, 70,22,71,23,72,24,73				
Y58	D1/CB	78		77,3,51,74, 99,49,27,82	32,33,84,34,85,35,86,21, 70,22,71,23,72,24,73				
Y59	D2/CB	29		77,3,51,74, 99,49,27,83	32,83,84,34,85,35,86,21, 70,22,71,23,72,24,73				
Y60	D3/CB	79		77,3,51,74, 99,49,27,84	32,83,33,34,85,35,86,21, 70,22,71,23,72,24,73				
Y61	D4/CB	30		77,3,51,74, 99,49,27,34	32,83,33,84,85,35,86,21, 70,22,71,23,72,24,73				
Y62	D5/CB	80		77,3,51,74, 99,49,27,85	32,83,33,84,34,35,86,21, 70,22,71,23,72,24,73				
Y63	D6/CB	81		77,3,51,74, 99,49,27,35	32,83,33,84,34,85,86,21, 70,22,71,23,72,24,73				
Y64	D7/CB	82	52,2,26,75,50,100, 78	77,3,51,74, 99,49,27,86	32,83,33,84,34,85,35,21, 70,22,71,23,72,24,73				
Y65	D0/1A	53	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y66	D1/1A	4	52,2,28,75,50,100, 78,77	3,51,74,99, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y67	D2/1A	54	52,2,26,75,50,100, 76,77	3,51,74,99, 49,27,22	21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82	0	1300	nV	21,22
Y68	D3/1A	5		3,51,74,99, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
Y69	D4/1A	55		3,51,74,99, 49,27,23	21,70,22,71,72,24,73,28, 78,29,79,30,80,81,82				
Y70	D5/1A	6		3,51,74,99, 49,27,72	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
Y71	D6/1A	56		3,51,74,99, 49,27,24	21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82				
Y72	D7/1A	7		3,51,74,99, 49,27,73	21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82				
Y73	D0/2A	57		3,51,74,99, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y74	D1/2A	8		3,51,74,99, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y75	D2/2A	58		3,51,74,99, 49,27,22	21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y76	D3/2A	9		3,51,74,99, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
Y77	D4/2A	59		3,51,74,99, 49,27,23	21,70,22,71,72,24,73,28, 78,29,79,30,80,81,82				
Y78	D5/2A	60		3,51,74,99, 49,27,72	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
Y79	D6/2A	11	52,2,26,75,50,100, 76,77	3,51,74,99, 49,27,24	21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82	0	1300	nV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y80	D7/2R	61	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,73	21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82	0	1300	mV	21,22
Y81	D0/3R	12		3,51,74,99, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y82	D1/3R	62		3,51,74,99, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y83	D2/3R	13		3,51,74,99, 49,27,22	21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y84	D3/3R	63		3,51,74,99, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
Y85	D4/3R	14		3,51,74,99, 49,27,23	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
Y86	D5/3R	64		3,51,74,99, 49,27,72	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
Y87	D6/3R	65		3,51,74,99, 49,27,24	21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82				
Y88	D7/3R	15		3,51,74,99, 49,27,73	21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82				
Y89	D0/4R	66		3,51,74,99, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y90	D1/4R	17		3,51,74,99, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y91	D2/4R	67		3,51,74,99, 49,27,22	21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Y92	D3/4R	18	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y93	D4/4A	68	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,23	21,78,22,71,72,24,73,28, 78,29,79,30,80,81,82	0	1300	mV	21,22
Y94	D5/4A	19		3,51,74,99, 49,27,72	21,78,22,71,23,24,73,28, 78,29,79,30,80,81,82				
Y95	D6/4A	28		3,51,74,99, 49,27,24	21,78,22,71,23,72,73,28, 78,29,79,30,80,81,82				
Y96	D7/4A	68		3,51,74,99, 49,27,73	21,78,22,71,23,72,24,28, 78,29,79,30,80,81,82				
Y97	D0/4B	95		3,51,74,99, 49,27,28	21,78,22,71,23,72,24,73, 78,29,79,30,80,81,82				
Y98	D1/4B	45		3,51,74,99, 49,27,78	21,78,22,71,23,72,24,73, 28,29,79,30,80,81,82				
Y99	D2/4B	99		3,51,74,99, 49,27,29	21,78,22,71,23,72,24,73, 28,78,79,30,80,81,82				
Y100	D3/4B	46		3,51,74,99, 49,27,79	21,78,22,71,23,72,24,73, 28,78,29,30,80,81,82				
Y101	D4/4B	97		3,51,74,99, 49,27,30	21,78,22,71,23,72,24,73, 28,78,29,79,80,81,82				
Y102	D5/4B	47		3,51,74,99, 49,27,80	21,78,22,71,23,72,24,73, 28,78,29,78,30,81,82				
Y103	D6/4B	48		3,51,74,99, 49,27,81	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,82				
Y104	D7/4B	98		3,51,74,99, 49,27,82	21,78,22,71,23,72,24,73, 28,78,29,78,30,80,81				
Y105	D0/3B	91	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,28	21,78,22,71,23,72,24,73, 78,29,79,30,80,81,82	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y106	D1/3B	41	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,78	21,78,22,71,23,72,24,73, 28,29,79,30,80,81,82	0	1300	mV	21,22
Y107	D2/3B	92		3,51,74,99, 49,27,29	21,78,22,71,23,72,24,73, 28,78,79,30,80,81,82				
Y108	D3/3B	42		3,51,74,99, 49,27,79	21,78,22,71,23,72,24,73, 28,78,29,30,80,81,82				
Y109	D4/3B	93		3,51,74,99, 49,27,30	21,78,22,71,23,72,24,73, 28,78,29,79,80,81,82				
Y110	D5/3B	43		3,51,74,99, 49,27,80	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,82				
Y111	D6/3B	84		3,51,74,99, 49,27,81	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,82				
Y112	D7/3B	44		3,51,74,99, 49,27,82	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,81				
Y113	D0/2B	35		3,51,74,99, 49,27,28	21,78,22,71,23,72,24,73, 78,29,79,30,80,81,82				
Y114	D1/2B	87		3,51,74,99, 49,27,78	21,78,22,71,23,72,24,73, 28,29,79,30,80,81,82				
Y115	D2/2B	37		3,51,74,99, 49,27,29	21,78,22,71,23,72,24,73, 28,78,79,30,80,81,82				
Y116	D3/2B	88		3,51,74,99, 49,27,79	21,78,22,71,23,72,24,73, 28,78,29,30,80,81,82				
Y117	D4/2B	38		3,51,74,99, 49,27,30	21,78,22,71,23,72,24,73, 28,78,29,79,80,81,82				
Y118	D5/2B	85	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,80	21,78,22,71,23,72,24,73, 28,78,29,79,30,81,82	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIII Output crosstalk, low level, test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Y119	D6/2B	38	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,81	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,82	0	1300	mV	21,22
Y120	D7/2B	98		3,51,74,99, 49,27,82	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,81				
Y121	D0/1B	32		3,51,74,99, 49,27,28	21,78,22,71,23,72,24,73, 78,29,79,38,80,81,82				
Y122	D1/1B	81		3,51,74,99, 49,27,78	21,78,22,71,23,72,24,73, 28,29,79,38,80,81,82				
Y123	D2/1B	33		3,51,74,99, 49,27,29	21,78,22,71,23,72,24,73, 28,78,79,38,80,81,82				
Y124	D3/1B	84		3,51,74,99, 49,27,79	21,78,22,71,23,72,24,73, 28,78,29,38,80,81,82				
Y125	D4/1B	34		3,51,74,99, 49,27,38	21,78,22,71,23,72,24,73, 28,78,29,79,80,81,82				
Y126	D5/1B	85		3,51,74,99, 49,27,80	21,78,22,71,23,72,24,73, 28,78,29,79,30,81,82				
Y127	D6/1B	35		3,51,74,99, 49,27,81	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,82				
Y128	D7/1B	88	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,82	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,81	0	1300	mV	21,22

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV Output crosstalk, high level, duration test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z1	D0/CR	21	2,26,75,100,50,76, 77,53	52,3,51,74, 99,49,27	4,54,5,55,6,56,7,28,78, 29,79,30,80,81,82	0	35	nS	21,23
Z2	D1/CR	78	2,26,75,100,50,76, 77,4		53,54,5,55,6,56,7,28,78, 29,79,30,80,81,82				
Z3	D2/CR	22	2,26,75,100,50,76, 77,54		53,4,5,55,6,56,7,28,78, 29,79,30,80,81,82				
Z4	D3/CR	71	2,26,75,100,50,76, 77,5		53,4,54,55,6,56,7,28,78, 29,79,30,80,81,82				
Z5	D4/CR	23	2,26,75,100,50,76, 77,55		53,4,54,5,6,56,7,28,78, 29,79,30,80,81,82				
Z6	D5/CR	72	2,26,75,100,50,76, 77,6		53,4,54,5,55,56,7,28,78, 29,79,30,80,81,82				
Z7	D6/CR	24	2,26,75,100,50,78, 77,56		53,4,54,5,55,6,7,28,78, 29,79,30,80,81,82				
Z8	D7/CR	73	2,26,75,100,50,76, 77,7	52,3,51,74, 99,49,27	53,4,54,5,55,6,56,28,78, 29,79,30,80,81,82				
Z9	D0/CR	21	52,26,75,100,50,76 77,57	2,3,51,74,99, 49,27	8,58,8,59,60,11,61,28,78, 29,79,30,80,81,82				
Z10	D1/CR	78	52,26,75,100,50,76, 77,8		57,58,9,59,80,11,61,28, 78,29,79,30,80,81,82				
Z11	D2/CR	22	52,26,75,100,50,76, 77,58		57,8,9,59,60,11,61,28,78, 29,79,30,80,81,82				
Z12	D3/CR	71	52,26,75,100,50,76, 77,9		57,8,58,59,60,11,61,28, 78,29,79,30,80,81,82				
Z13	D4/CR	23	52,26,75,100,50,76, 77,59	2,3,51,74,99, 49,27	57,8,58,9,60,11,61,28,78, 29,79,30,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Z14	D5/CR	72	52,26,75,100,50,76, 77,60	2,3,51,74,89, 49,27	57,8,58,9,59,11,81,28,78, 29,79,30,80,81,82	0	35	nS	21,23
Z15	D6/CR	24	52,26,75,100,50,76, 77,11		57,8,58,9,59,60,81,28,78, 29,79,30,80,81,82				
Z16	D7/CR	73	52,26,75,100,50,76, 77,61	2,3,51,74,89, 49,27	57,8,58,9,59,60,11,28,78, 29,79,30,80,81,82				
Z17	D0/CR	21	52,2,75,100,50,76, 77,12	26,3,51,74, 89,49,27	82,19,83,14,65,18,28,78, 29,79,30,80,81,82				
Z18	D1/CR	78	52,2,75,100,50,76, 77,62		12,19,63,14,64,65,16,28, 78,29,79,30,80,81,82				
Z19	D2/CR	22	52,2,75,100,50,76, 77,13		12,62,63,14,64,65,15,28, 78,29,79,30,80,81,82				
Z20	D3/CR	71	52,2,75,100,50,76, 77,63		12,62,13,14,64,65,16,28, 78,29,79,30,80,81,82				
Z21	D4/CR	23	52,2,75,100,50,76, 77,14		12,62,13,63,64,65,15,28, 78,29,79,30,80,81,82				
Z22	D5/CR	72	52,2,75,100,50,76, 77,64		12,62,13,63,14,65,16,28, 78,29,79,30,80,81,82				
Z23	D6/CR	24	52,2,75,100,50,76, 77,65		12,62,13,63,14,64,16,28, 78,29,79,30,80,81,82				
Z24	D7/CR	73	52,2,75,100,50,76, 77,16	26,3,51,74, 89,49,27	12,62,13,63,14,64,65,28, 78,29,79,30,80,81,82				
Z25	D0/CR	21	52,2,26,100,50,76, 77,66	75,3,51,74, 89,49,27	17,67,18,68,19,20,69,28, 78,29,79,30,80,81,82				
Z26	D1/CR	78	52,2,26,100,50,76, 77,17	75,3,51,74, 89,49,27	88,67,18,68,19,20,69,28, 78,29,79,30,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z27	D2/CA	22	52,2,26,100,50,76, 77,67	75,3,51,74, 99,49,27	66,17,10,60,19,20,69,20, 70,29,30,00,01,02	0	35	nS	21,23
Z28	D3/CA	71	52,2,26,100,50,76, 77,10		66,17,67,60,19,20,69,20, 70,29,79,30,00,01,02				
Z29	D4/CA	23	52,2,26,100,50,76, 77,00		66,17,67,10,19,20,69,20, 70,29,79,30,00,01,02				
Z30	D5/CA	72	52,2,26,100,50,76, 77,19		66,17,67,10,60,20,69,20, 70,29,79,30,00,01,02				
Z31	D6/CA	24	52,2,26,100,50,76, 77,20		66,17,67,10,60,19,69,20, 70,29,79,30,00,01,02				
Z32	D7/CA	73	52,2,26,100,50,76, 77,69	75,3,51,74, 99,49,27	66,17,67,10,60,19,20,20, 70,29,79,30,00,01,02				
Z33	D0/CB	20	52,2,26,75,50,76, 77,95	100,9,51,74, 99,49,27	45,96,46,97,47,40,90,21, 70,22,71,23,72,24,73				
Z34	D1/CB	70	52,2,26,75,50,76, 77,45		65,96,46,97,47,40,90,21, 70,22,71,23,72,24,73				
Z35	D2/CB	20	52,2,26,75,50,76, 77,96		65,45,46,97,47,40,90,21, 70,22,71,23,72,24,73				
Z36	D3/CB	75	52,2,26,75,50,76, 77,40		65,45,96,97,47,40,90,21, 70,22,71,23,72,24,73				
Z37	D4/CB	30	52,2,26,75,50,76, 77,97		65,45,96,46,47,40,90,21, 70,22,71,23,72,24,73				
Z38	D5/CB	00	52,2,26,75,50,76, 77,47		65,45,96,40,97,40,90,21, 70,22,71,23,72,24,73				
Z39	D6/CB	01	52,2,26,75,50,76, 77,40	100,9,51,74, 99,49,27	65,45,96,46,97,47,90,21, 70,22,70,23,72,24,73	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z40	D7/CB	82	52,2,28,75,50,76, 77,98	100,3,51,74, 99,49,27	85,45,86,46,97,47,48,21, 70,22,71,23,72,24,73	0	35	nS	21,23
Z41	D0/CB	28	52,2,26,75,100,76, 77,91	50,3,51,74, 99,49,27	41,92,42,93,43,94,44,21, 70,22,71,23,72,24,73				
Z42	D1/CB	78	52,2,26,75,100,76, 77,41		81,92,42,93,43,94,44,21, 70,22,70,23,72,24,73				
Z43	D2/CB	28	52,2,28,75,100,76, 77,92		81,41,42,93,43,94,44,21, 70,22,71,23,72,24,73				
Z44	D3/CB	78	52,2,28,75,100,76, 77,42		81,41,82,93,43,94,44,21, 70,22,71,23,72,24,73				
Z45	D4/CB	38	52,2,26,75,100,76, 77,83		81,41,82,42,43,84,44,21, 70,22,71,23,72,24,73				
Z46	D5/CB	88	52,2,28,75,100,78, 77,43		81,41,92,42,93,94,44,21, 70,22,71,23,72,24,73				
Z47	D6/CB	81	52,2,26,75,100,76, 77,94		81,41,82,42,83,43,44,21, 70,22,71,23,72,24,73				
Z48	D7/CB	82	52,2,28,75,100,76, 77,44	50,3,51,74, 89,49,27	81,41,82,42,93,43,94,21, 70,22,71,23,72,24,73				
Z49	D0/CB	28	52,2,28,75,50,100, 77,38	76,3,51,74, 89,49,27	87,37,88,38,89,39,90,21, 70,22,71,23,72,24,73				
Z50	D1/CB	78	52,2,26,75,50,100, 77,87		36,37,88,38,89,39,90,21, 70,28,71,23,72,24,73				
Z51	D2/CB	28	52,2,28,75,50,100, 77,37		38,87,88,38,89,39,90,21, 70,22,71,23,72,24,73				
Z52	D3/CB	78	52,2,28,75,50,100, 77,88	76,3,51,74, 89,49,27	38,87,37,38,89,39,90,21, 70,22,71,23,72,24,73	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z53	D4/CB	30	52,2,26,75,50,100, 77,30	76,3,51,74, 99,49,27	28,87,37,88,89,38,90,21, 70,22,71,23,72,24,73	0	35	nS	21,23
Z54	D5/CB	80	52,2,26,75,50,100, 77,89		38,87,37,88,38,39,90,21, 70,22,71,23,72,24,73				
Z55	D6/CB	81	52,2,26,75,50,100, 77,39		36,87,37,88,38,89,90,21, 70,22,71,23,72,24,73				
Z56	D7/CB	82	52,2,26,75,50,100, 77,90	76,3,51,74, 99,49,27	38,87,37,88,38,89,39,21, 70,22,71,23,72,24,73				
Z57	D0/CB	28	52,2,28,75,50,100, 78,32	77,3,51,74, 99,49,27	83,33,84,34,85,35,86,21, 70,22,71,23,72,24,73				
Z58	D1/CB	78	52,2,26,75,50,100, 78,83		32,33,84,34,85,35,86,21, 70,22,71,23,72,24,73				
Z59	D2/CB	29	52,2,28,75,50,100, 78,33		32,83,84,34,85,35,86,21, 70,22,71,23,72,24,73				
Z60	D3/CB	78	52,2,26,75,50,100, 78,84		32,83,33,34,85,35,86,21, 70,22,71,23,72,24,73				
Z61	D4/CB	30	52,2,28,75,50,100, 78,34		32,83,33,84,85,35,86,21, 70,22,71,23,72,24,73				
Z62	D5/CB	80	52,2,28,75,50,100, 78,85		32,83,33,84,34,35,86,21, 70,22,71,23,72,24,73				
Z63	D6/CB	81	52,2,26,75,50,100, 78,35		32,83,33,84,34,85,86,21, 70,22,71,23,72,24,73				
Z64	D7/CB	82	52,2,26,75,50,100, 78,86	77,3,51,74, 99,49,27	32,83,33,84,34,85,35,21, 70,22,71,23,72,24,73				
Z65	D0/1A	53	52,2,28,75,50,100, 78,77,21	3,51,74,99, 49,27	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z66	D1/1A	4	52,2,26,75,50,100, 76,77,78	3,51,74,99, 49,27	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23
Z67	D2/1A	54	52,2,26,75,50,100, 76,77,22		21,78,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Z68	D3/1A	5	52,2,26,75,50,100, 76,77,71		21,78,22,23,72,24,73,28, 78,29,79,30,80,81,82				
Z69	D4/1A	53	52,2,26,75,50,100, 76,77,23		21,78,22,71,72,24,73,28, 78,29,79,30,80,81,82				
Z70	D5/1A	6	52,2,26,75,50,100, 76,77,72		21,78,22,71,23,24,73,28, 78,29,79,30,80,81,82				
Z71	D6/1A	55	52,2,26,75,50,100, 76,77,24		21,78,22,71,23,72,73,28, 78,29,79,30,80,81,82				
Z72	D7/1A	7	52,2,26,75,50,100, 76,77,73		21,78,22,71,23,72,24,28, 78,29,79,30,80,81,82				
Z73	D0/2A	57	52,2,26,75,50,100, 76,77,21		78,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Z74	D1/2A	8	52,2,26,75,50,100, 76,77,78		21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Z75	D2/2A	58	52,2,26,75,50,100, 76,77,22		21,78,71,23,72,24,73,28, 78,29,79,30,80,81,82				
Z76	D3/2A	9	52,2,26,75,50,100, 76,77,71		21,78,22,23,72,24,73,28, 78,29,79,30,80,81,82				
Z77	D4/2A	59	52,2,26,75,50,100, 76,77,23		21,78,22,71,72,24,73,28, 78,29,79,30,80,81,82				
Z78	D5/2A	60	52,2,26,75,50,100, 76,77,72	3,51,74,99, 49,27	21,78,22,71,23,24,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z79	D6/2A	11	52,2,26,75,50,100, 76,77,24	3,51,74,99, 49,27	21,70,22,71,23,72,73,28, 70,29,79,30,00,81,82	0	35	nS	21,23
Z80	D7/2A	61	52,2,26,75,50,100, 76,77,73		21,70,22,71,23,72,24,28, 70,29,79,30,00,81,82				
Z81	D0/3A	12	52,2,26,75,50,100, 76,77,21		70,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
Z82	D1/3A	62	52,2,26,75,50,100, 76,77,70		21,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
Z83	D2/3A	13	52,2,26,75,50,100, 76,77,22		21,70,71,23,72,24,73,28, 70,29,79,30,00,81,82				
Z84	D3/3A	63	52,2,26,75,50,100, 76,77,71		21,70,22,23,72,24,73,28, 70,29,79,30,00,81,82				
Z85	D4/3A	14	52,2,26,75,50,100, 76,77,23		21,70,22,71,72,24,73,28, 70,29,79,30,00,81,82				
Z86	D5/3A	64	52,2,26,75,50,100, 76,77,72		21,70,22,71,23,24,73,28, 70,29,79,30,00,81,82				
Z87	D6/3A	65	52,2,26,75,50,100, 76,77,24		21,70,22,71,23,72,73,28, 70,29,79,30,00,81,82				
Z88	D7/3A	16	52,2,26,75,50,100, 76,77,73		21,70,22,71,23,72,24,28, 70,29,79,30,00,81,82				
Z89	D0/4A	66	52,2,26,75,50,100, 76,77,21		70,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
Z90	D1/4A	17	52,2,26,75,50,100, 76,77,70		21,22,71,23,72,24,73,28, 70,29,79,30,00,81,82				
Z91	D2/4A	67	52,2,26,75,50,100, 76,77,22	3,51,74,99, 49,27	21,70,71,23,72,24,73,28, 70,29,79,30,00,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 + 5°C Initial limits Min	25 + 5°C Initial limits Max	Units	Figs
Z92	D3/4A	18	52,2,26,75,50,100, 76,77,71	3,51,74,99, 49,27	21,70,22,23,72,24,73,28, 70,29,79,30,80,81,82	0	35	nS	21,23
Z93	D4/4A	88	52,2,26,75,50,100, 76,77,23		21,70,22,71,72,24,73,28, 70,29,79,30,80,81,82				
Z94	D5/4A	18	52,2,26,75,50,100, 76,77,72		21,70,22,71,23,24,73,28, 70,29,79,30,80,81,82				
Z95	D6/4A	28	52,2,26,75,50,100, 76,77,24		21,70,22,71,23,72,73,28, 70,29,79,30,80,81,82				
Z96	D7/4A	68	52,2,26,75,50,100, 76,77,73		21,70,22,71,23,72,24,28, 70,29,79,30,80,81,82				
Z97	D0/4B	85	52,2,26,75,50,100, 76,77,28		21,70,22,71,23,72,24,73, 70,29,79,30,80,81,82				
Z98	D1/4B	45	52,2,26,75,50,100, 76,77,70		21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
Z99	D2/4B	96	52,2,26,75,50,100, 76,77,29		21,70,22,71,23,72,24,73, 28,70,79,30,80,81,82				
Z100	D3/4B	48	52,2,26,75,50,100, 76,77,79		21,70,22,71,23,72,24,73, 28,70,29,30,80,81,82				
Z101	D4/4B	97	52,2,26,75,50,100, 76,77,30		21,70,22,71,23,72,24,73, 28,70,29,79,80,81,82				
Z102	D5/4B	47	52,2,26,75,50,100, 76,77,80		21,70,22,71,23,72,24,73, 28,70,29,79,30,81,82				
Z103	D6/4B	48	52,2,26,75,50,100, 75,77,81		21,70,22,71,23,72,24,73, 28,70,29,79,30,80,82				
Z104	D7/4B	98	52,2,26,75,50,100, 76,77,82	3,51,74,99, 49,27	21,70,22,71,23,72,24,73, 28,70,29,79,30,80,81	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z105	D0/3B	91	52,2,26,75,50,100, 76,77,28	3,51,74,99, 49,27	21,78,22,71,23,72,24,73, 78,29,79,30,80,81,82	0	35	nS	21,23
Z106	D1/3B	41	52,2,26,75,50,100, 78,77,78		21,78,22,71,23,72,24,73, 28,29,79,30,80,81,82				
Z107	D2/3B	92	52,2,26,75,50,100, 78,77,29		21,78,22,71,23,72,24,73, 28,78,79,30,80,81,82				
Z108	D3/3B	42	52,2,26,75,50,100, 76,77,79		21,78,22,71,23,72,24,73, 28,78,29,30,80,81,82				
Z109	D4/3B	93	52,2,26,75,50,100, 78,77,30		21,78,22,71,23,72,24,73, 28,78,29,78,80,81,82				
Z110	D5/3B	43	52,2,26,75,50,100, 78,77,80		21,78,22,71,23,72,24,73, 28,78,29,78,30,81,82				
Z111	D6/3B	94	52,2,26,75,50,100, 78,77,81		21,78,22,71,23,72,24,73, 28,78,29,78,30,80,82				
Z112	D7/3B	44	52,2,26,75,50,100, 78,77,82		21,78,22,71,23,72,24,73, 28,78,29,79,30,80,81				
Z113	D0/2B	38	52,2,26,75,50,100, 78,77,28		21,78,22,71,23,72,24,73, 78,29,79,30,80,81,82				
Z114	D1/2B	87	52,2,26,75,50,100, 78,77,78		21,78,22,71,23,72,24,73, 28,29,79,30,81,81,82				
Z115	D2/2B	37	52,2,26,75,50,100, 78,77,29		21,78,22,71,23,72,24,73, 28,78,79,30,80,81,82				
Z116	D3/2B	88	52,2,26,75,50,100, 76,77,79		21,78,22,71,23,72,24,73, 28,78,29,30,80,81,82				
Z117	D4/2B	98	52,2,26,75,50,100, 78,77,30	3,51,74,99, 49,27	21,78,22,71,23,72,24,73, 28,78,29,79,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Output crosstalk, high level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
Z118	D5/28	88	52,2,26,75,50,100, 76,77,80	3,51,74,99, 49,27	21,78,22,71,23,72,24,73, 28,78,29,79,30,81,82	0	35	nS	21,23
Z119	D6/28	98	52,2,28,75,50,100, 78,77,81		21,78,22,71,23,72,24,73, 28,78,29,79,30,80,82				
Z120	D7/28	99	52,2,28,75,50,100, 78,77,82		21,78,22,71,23,72,24,73, 28,78,29,79,30,80,81				
Z121	D0/18	32	52,2,26,75,50,100, 78,77,28		21,78,22,71,23,72,24,73, 78,29,79,30,80,81,82				
Z122	D1/18	83	52,2,28,75,50,100, 78,77,78		21,78,22,71,23,72,24,73, 28,29,79,30,80,81,82				
Z123	D2/18	83	52,2,28,75,50,100, 76,77,29		21,78,22,71,23,72,24,73, 28,78,79,30,80,81,82				
Z124	D3/18	84	52,2,28,75,50,100, 78,77,79		21,78,22,71,23,72,24,73, 28,78,29,30,80,81,82				
Z125	D4/18	34	52,2,26,75,50,100, 78,77,30		21,78,22,71,23,72,24,73, 28,78,29,79,80,81,82				
Z126	D5/18	85	52,2,28,75,50,100, 76,77,80		21,78,22,71,23,72,24,73, 28,78,29,79,30,81,82				
Z127	D6/18	95	52,2,28,75,50,100, 78,77,81		21,78,22,71,23,72,24,73, 28,78,29,79,30,80,82				
Z128	D7/18	88	52,2,28,75,50,100, 78,77,82	3,51,74,99, 49,27	21,78,22,71,23,72,24,73, 28,78,29,79,30,80,81	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

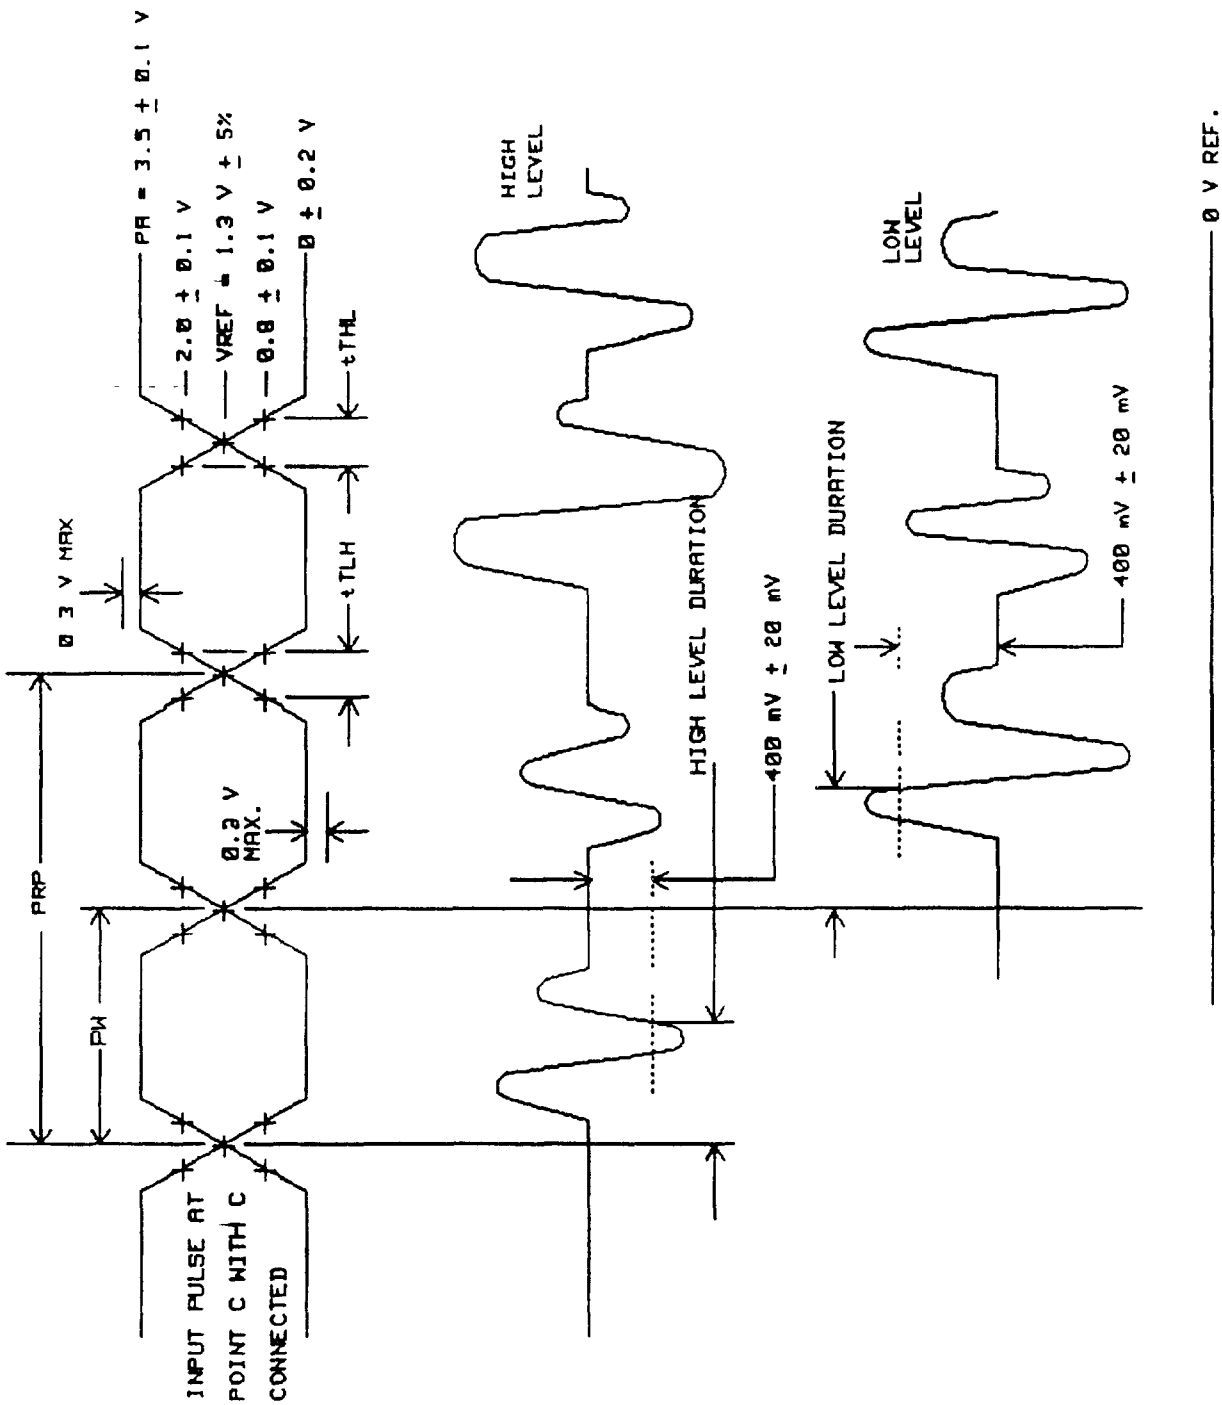


FIGURE 23. Output crosstalk duration waveforms for tables XXIV and XXV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input pulse parameters:

   PW = 500 nS ± 10 percent.
   PRP = 1 MHz ± 10 percent.
   tTLH = tTHL = 3.5 ± 1.5 nS (verified at each input).

2. The output crosstalk duration is measured from the input pulse to the point where the output crosstalk remains below the specified voltage. If the output crosstalk amplitude is less than the specified reference voltage, the output crosstalk duration shall be recorded as 0 nS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA1	D0/CA	21	2,26,75,100,50,76, 77	52,3,51,74, 99,49,27,53	4,54,5,55,6,56,7,28,78, 29,79,30,80,81,82	0	35	nS	21,23
AA2	D1/CA	70		52,3,51,74, 99,49,27,4	53,54,5,55,6,56,7,28,78, 29,79,30,80,81,82				
AA3	D2/CA	22		52,3,51,74, 99,49,27,54	53,4,5,55,6,56,7,28,78, 29,79,30,80,81,82				
AA4	D3/CA	71		52,3,51,74, 99,49,27,5	53,4,54,55,6,56,7,28,78, 29,79,30,80,81,82				
AA5	D4/CA	23		52,3,51,74, 99,49,27,55	53,4,54,5,6,56,7,28,78, 29,79,30,80,81,82				
AA6	D5/CA	72		52,3,51,74, 99,49,27,6	53,4,54,5,55,56,7,28,78, 29,79,30,80,81,82				
AA7	D6/CA	24		52,3,51,74, 99,49,27,56	53,4,54,5,55,6,7,28,78, 29,79,30,80,81,82				
AA8	D7/CA	73	2,26,75,100,50,76, 77	52,3,51,74, 99,49,27,7	53,4,54,5,55,6,56,28,78, 29,79,30,80,81,82				
AA9	D0/CA	21	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,57	0,50,8,59,60,11,61,28,78, 29,79,30,80,81,82				
AA10	D1/CA	70		2,3,51,74,99, 49,27,0	57,50,9,59,60,11,61,28, 78,29,79,30,80,81,82				
AA11	D2/CA	22		2,3,51,74,99, 49,27,50	57,0,8,59,60,11,61,28,78, 29,79,30,80,81,82				
AA12	D3/CA	71		2,3,51,74,99, 49,27,9	57,0,50,59,60,11,61,28, 78,29,79,30,80,81,82				
AA13	D4/CA	23	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,59	57,0,50,9,60,11,61,28,78, 29,79,30,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA14	D5/CA	72	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,60	57,8,58,9,59,11,61,28,78, 29,79,30,80,81,82	0	35	nS	21, 23
AA15	D6/CA	24		2,3,51,74,99, 49,27,11	57,8,58,9,59,60,61,28,78, 29,79,30,80,81,82				
AA16	D7/CA	73	52,26,75,100,50,76, 77	2,3,51,74,99, 49,27,61	57,8,58,9,59,60,11,28,78, 29,79,30,80,81,82				
AA17	D0/CA	21	52,2,75,100,50,76, 77	26,9,51,74, 99,49,27,12	62,13,63,14,64,65,16,28, 78,29,79,30,80,81,82				
AA18	D1/CA	70		26,9,51,74, 99,49,27,62	12,13,63,14,64,65,16,28, 78,29,79,30,80,81,82				
AA19	D2/CA	22		26,9,51,74, 99,49,27,13	12,62,63,14,64,65,16,28, 78,29,79,30,80,81,82				
AA20	D3/CA	71		26,9,51,74, 99,49,27,63	12,62,13,14,64,65,16,28, 78,29,79,30,80,81,82				
AA21	D4/CA	23		26,9,51,74, 99,49,27,14	12,62,13,63,64,65,16,28, 78,29,79,30,80,81,82				
AA22	D5/CA	72		26,9,51,74, 99,49,27,64	12,62,13,63,14,65,16,28, 78,29,79,30,80,81,82				
AA23	D6/CA	24		26,9,51,74, 99,49,27,65	12,62,13,63,14,64,16,28, 78,29,79,30,80,81,82				
AA24	D7/CA	73		26,9,51,74, 99,49,27,16	12,62,13,63,14,64,65,28, 78,29,79,30,80,81,82				
AA25	D0/CA	21		75,9,51,74, 99,49,27,66	17,67,18,68,18,20,69,28, 78,29,79,30,80,81,82				
AA26	D1/CA	70	52,2,75,100,50,76, 77	75,9,51,74, 99,49,27,17	68,67,18,68,18,20,69,28, 78,29,79,30,80,81,82	0	35	nS	21, 23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA27	D2/CA	22	52,2,26,100,50,76, 77	75,3,51,74, 99,49,27,67	68,17,18,88,19,20,69,20, 78,29,79,30,80,81,82	0	35	nS	21, 23
AA28	D3/CA	71		75,3,51,74, 99,49,27,18	68,17,67,88,19,20,69,20, 78,29,79,30,80,81,82				
AA29	D4/CA	23		75,3,51,74, 99,49,27,68	68,17,67,18,19,20,69,20, 78,29,79,30,80,81,82				
AA30	D5/CA	72		75,3,51,74, 99,49,27,19	68,17,67,18,68,20,69,20, 78,29,79,30,80,81,82				
AA31	D6/CA	24		75,3,51,74, 99,49,27,20	68,17,67,18,68,19,69,20, 78,29,79,30,80,81,82				
AA32	D7/CA	73	52,2,26,100,50,76, 77	75,3,51,74, 99,49,27,69	68,17,67,18,68,19,20,20, 78,29,79,30,80,81,82				
AA33	D0/CB	28	52,2,26,75,50,76,77	100,3,51,74, 99,49,27,95	45,96,46,97,47,48,98,21, 78,22,71,23,72,24,73				
AA34	D1/CB	78		100,3,51,74, 99,49,27,45	95,96,46,97,47,48,98,21, 78,22,71,23,72,24,73				
AA35	D2/CB	29		100,3,51,74, 99,49,27,96	95,45,46,97,47,48,98,21, 78,22,71,23,72,24,73				
AA36	D3/CB	79		100,3,51,74, 99,49,27,46	95,45,96,97,47,48,98,21, 78,22,71,23,72,24,73				
AA37	D4/CB	30		100,3,51,74, 99,49,27,97	95,45,96,46,47,48,98,21, 78,22,71,23,72,24,73				
AA38	D5/CB	80		100,3,51,74, 99,49,27,47	95,45,96,46,97,48,98,21, 78,22,71,23,72,24,73				
AA39	D6/CB	81	52,2,26,75,50,76,77	100,3,51,74, 99,49,27,48	95,45,96,46,97,47,98,21, 78,22,71,23,72,24,73	0	35	nS	21, 23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA40	D7/C8	82	52,2,28,75,50,76,77	100,3,51,74, 89,48,27,90	93,45,96,46,97,47,48,21, 70,22,71,23,72,24,73	0	35	nS	21, 23
AA41	D0/C8	28	52,2,28,75,100,76, 77	50,3,51,74, 89,48,27,91	41,92,42,93,43,94,44,21, 70,22,71,23,72,24,73				
AA42	D1/C8	70		50,3,51,74, 89,48,27,41	91,92,42,93,43,94,44,21, 70,22,71,23,72,24,73				
AA43	D2/C8	29		50,3,51,74, 89,48,27,92	91,41,42,93,43,94,44,21, 70,22,71,23,72,24,73				
AA44	D3/C8	79		50,3,51,74, 89,48,27,42	91,41,92,93,43,94,44,21, 70,22,71,23,72,24,73				
AA45	D4/C8	30		50,3,51,74, 89,48,27,93	91,41,92,42,43,94,44,21, 70,22,71,23,72,24,73				
AA46	D5/C8	80		50,3,51,74, 89,48,27,43	91,41,92,42,93,94,44,21, 70,22,71,23,72,24,73				
AA47	D6/C8	81		50,3,51,74, 89,48,27,94	91,41,92,42,93,43,44,21, 70,22,71,23,72,24,73				
AA48	D7/C8	82	52,2,28,75,100,76, 77	50,3,51,74, 89,48,27,44	91,41,92,42,93,43,94,21, 70,22,71,23,72,24,73				
AA49	D0/C8	28	52,2,28,75,50,100, 77	76,3,51,74, 89,48,27,36	87,37,88,38,89,39,90,21, 70,22,71,23,72,24,73				
AA50	D1/C8	70		76,3,51,74, 89,48,27,87	38,37,88,38,89,39,90,21, 70,22,71,23,72,24,73				
AA51	D2/C8	29		76,3,51,74, 89,48,27,37	38,87,88,38,89,39,90,21, 70,22,71,23,72,24,73				
AA52	D3/C8	79	52,2,28,75,50,100, 77	76,3,51,74, 89,48,27,88	38,87,37,38,89,39,90,21, 70,22,71,23,72,24,73	0	35	nS	21, 23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA53	D4/CB	30	52,2,26,75,50,100, 77	76,3,51,74, 89,49,27,38	36,87,37,88,89,39,90,21, 70,22,71,23,72,24,73	0	35	nS	21, 23
AA54	D5/CB	80		76,3,51,74, 89,49,27,89	36,87,37,88,38,39,90,21, 70,22,71,23,72,24,73				
AA55	D6/CB	81		76,3,51,74, 89,49,27,39	90,87,37,88,38,89,90,21, 70,22,71,23,72,24,73				
AA56	D7/CB	82	52,2,26,75,50,100, 77	76,3,51,74, 89,49,27,90	36,87,37,88,38,89,39,21, 70,22,71,23,72,24,73				
AA57	D0/CB	28	52,2,26,75,50,100, 76	77,3,51,74, 89,49,27,32	83,33,84,34,85,35,86,21, 70,22,71,23,72,24,73				
AA58	D1/CB	78		77,3,51,74, 89,49,27,83	32,33,84,34,85,35,86,21, 70,22,71,23,72,24,73				
AA59	D2/CB	29		77,3,51,74, 89,49,27,33	82,83,84,34,85,35,86,21, 70,22,71,23,72,24,73				
AA60	D3/CB	79		77,3,51,74, 89,49,27,84	82,83,33,34,85,35,86,21, 70,22,71,23,72,24,73				
AA61	D4/CB	30		77,3,51,74, 89,49,27,34	32,83,33,84,85,35,86,21, 70,22,71,23,72,24,73				
AA62	D5/CB	80		77,3,51,74, 89,49,27,85	82,83,33,84,34,35,86,21, 70,22,71,23,72,24,73				
AA63	D6/CB	81		77,3,51,74, 89,49,27,35	82,83,33,84,34,85,86,21, 70,22,71,23,72,24,73				
AA64	D7/CB	82	52,2,26,75,50,100, 76	77,3,51,74, 89,49,27,86	82,83,33,84,34,85,35,21, 70,22,71,23,72,24,73				
AA65	D0/1A	53	52,2,26,75,50,100, 76,77	3,51,74,89, 49,27,21	70,22,71,23,72,24,72,28, 78,29,79,30,80,81,82	0	35	nS	21, 23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA66	D1/1A	4	52,2,26,75,50,100, 76,77	3,51,74,99, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23
AA67	D2/1A	54		3,51,74,99, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA68	D3/1A	5		3,51,74,99, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
AA69	D4/1A	55		3,51,74,99, 49,27,23	21,70,22,71,71,24,73,28, 78,29,79,30,80,81,82				
AA70	D5/1A	6		3,51,74,99, 49,27,72	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
AA71	D6/1A	56		3,51,74,99, 49,27,24	21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82				
AA72	D7/1A	7		3,51,74,89, 49,27,73	21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82				
AA73	D0/2A	57		3,51,74,89, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA74	D1/2A	8		3,51,74,89, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA75	D2/2A	58		3,51,74,89, 49,27,22	21,70,71,23,72,24,72,28, 78,29,79,30,80,81,82				
AA76	D3/2A	9		3,51,74,89, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
AA77	D4/2A	59		3,51,74,89, 49,27,23	21,70,22,71,72,24,73,28, 78,29,79,30,80,81,82				
AA78	D5/2A	60	52,2,26,75,50,100, 76,77	3,51,74,89, 49,27,72	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA79	D6/2R	11	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,24	21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23
AA80	D7/2R	61		3,51,74,99, 49,27,73	21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82				
AA81	D0/3R	12		3,51,74,99, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA82	D1/3R	62		3,51,74,99, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA83	D2/3R	13		3,51,74,99, 49,27,22	21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA84	D3/3R	63		3,51,74,99, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82				
AA85	D4/3R	14		3,51,74,99, 49,27,23	21,70,22,71,72,24,73,28, 78,29,79,30,80,81,82				
AA86	D5/3R	64		3,51,74,99, 49,27,72	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
AA87	D6/3R	65		3,51,74,99, 49,27,24	21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82				
AA88	D7/3R	16		3,51,74,99, 49,27,73	21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82				
AA89	D0/4R	66		3,51,74,99, 49,27,21	70,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA90	D1/4R	17		3,51,74,99, 49,27,70	21,22,71,23,72,24,73,28, 78,29,79,30,80,81,82				
AA91	D2/4R	67	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,22	21,70,71,23,72,24,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA92	D3/4A	18	52,2,26,75,50,100, 76,77	3,51,74,99, 49,27,71	21,70,22,23,72,24,73,28, 78,29,79,30,80,81,82	0	35	nS	21,23
AA93	D4/4A	68		3,51,74,99, 49,27,29	21,70,22,71,72,24,73,28, 78,29,79,30,80,81,82				
AA94	D5/4A	19		3,51,74,99, 49,27,72	21,70,22,71,23,24,73,28, 78,29,79,30,80,81,82				
AA95	D6/4A	20		3,51,74,99, 49,27,24	21,70,22,71,23,72,73,28, 78,29,79,30,80,81,82				
AA96	D7/4A	69		3,51,74,99, 49,27,73	21,70,22,71,23,72,24,28, 78,29,79,30,80,81,82				
AA97	D0/4B	95		3,51,74,99, 49,27,28	21,70,22,71,23,72,24,73, 78,29,79,30,80,81,82				
AA98	D1/4B	45		3,51,74,89, 49,27,70	21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
AA99	D2/4B	98		3,51,74,89, 49,27,29	21,70,22,71,23,72,24,73, 28,70,79,30,80,81,82				
AA100	D3/4B	46		3,51,74,89, 49,27,79	21,70,22,71,23,72,24,73, 28,70,29,30,80,81,82				
AA101	D4/4B	97		3,51,74,89, 49,27,30	21,70,22,71,23,72,24,73, 28,70,29,79,80,81,82				
AA102	D5/4B	47		3,51,74,89, 49,27,80	21,70,22,71,23,72,24,73, 28,70,29,79,30,81,82				
AA103	D6/4B	48		3,51,74,89, 49,27,81	21,70,22,71,23,72,24,73, 28,70,29,79,30,80,82				
AA104	D7/4B	98	52,2,26,75,50,100, 76,77	3,51,74,89, 49,27,82	21,70,22,71,23,72,24,73, 28,70,29,79,30,80,81	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA105	D0/3B	91	52,2,28,75,50,100, 76,77	3,51,74,99, 49,27,28	21,70,22,71,23,72,24,73, 70,29,79,30,80,81,82	0	35	nS	21,23
AA106	D1/3B	41		3,51,74,99, 49,27,70	21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
AA107	D2/3B	92		3,51,74,99, 49,27,29	21,70,22,71,23,72,24,73, 28,70,79,30,80,81,82				
AA108	D3/3B	42		3,51,74,99, 49,27,79	21,70,22,71,23,72,24,73, 28,70,29,30,80,81,82				
AA109	D4/3B	93		3,51,74,99, 49,27,30	21,70,22,71,23,72,24,73, 28,70,29,79,80,81,82				
AA110	D5/3B	43		3,51,74,99, 49,27,80	21,70,22,71,23,72,24,73, 28,70,29,79,30,81,82				
AA111	D6/3B	94		3,51,74,89, 49,27,81	21,70,22,71,23,72,24,73, 28,70,29,79,30,80,82				
AA112	D7/3B	44		3,51,74,89, 49,27,82	21,70,22,71,23,72,24,73, 28,70,29,79,30,80,81				
AA113	D0/2B	36		3,51,74,89, 49,27,28	21,70,22,71,23,72,24,73, 70,29,79,30,80,81,82				
AA114	D1/2B	87		3,51,74,89, 49,27,70	21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
AA115	D2/2B	37		3,51,74,89, 49,27,29	21,70,22,71,23,72,24,73, 28,70,79,30,80,81,82				
AA116	D3/2B	88		3,51,74,89, 49,27,79	21,70,22,71,23,72,24,73, 28,70,29,30,80,81,82				
AA117	D4/2B	38	52,2,28,75,50,100, 76,77	3,51,74,89, 49,27,30	21,70,22,71,23,72,24,73, 28,70,29,79,80,81,82	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXV. Output crosstalk, low level, duration test - Continued.

Test cond	Signal name	Connect A to pin	Connect B to pin	Connect C to pin	Connect D to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Figs
AA118	D5/28	89	52,2,28,75,50,100, 76,77	3,51,74,89, 49,27,80	21,70,22,71,23,72,24,73, 28,78,29,79,30,81,82	0	35	nS	21,23
AA119	D6/28	39		3,51,74,89, 49,27,81	21,70,22,71,23,72,24,73, 28,78,29,79,30,80,82				
AA120	D7/28	90		3,51,74,89, 49,27,82	21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81				
AA121	D0/18	32		3,51,74,89, 49,27,28	21,70,22,71,23,72,24,73, 78,29,79,30,80,81,82				
AA122	D1/18	83		3,51,74,89, 49,27,78	21,70,22,71,23,72,24,73, 28,29,79,30,80,81,82				
AA123	D2/18	33		3,51,74,89, 49,27,29	21,70,22,71,23,72,24,73, 28,78,79,30,80,81,82				
AA124	D3/18	84		3,51,74,89, 49,27,79	21,70,22,71,23,72,24,73, 28,78,29,30,80,81,82				
AA125	D4/18	34		3,51,74,89, 49,27,30	21,70,22,71,23,72,24,73, 28,78,29,79,80,81,82				
AA126	D5/18	85		3,51,74,89, 49,27,80	21,70,22,71,23,72,24,73, 28,78,29,79,30,81,82				
AA127	D6/18	35		3,51,74,89, 49,27,81	21,70,22,71,23,72,24,73, 28,78,29,79,30,80,82				
AA128	D7/18	86	52,2,28,75,50,100, 76,77	3,51,74,89, 49,27,82	21,70,22,71,23,72,24,73, 28,78,29,79,30,80,81	0	35	nS	21,23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.


TABLE XXVI. Power supply transient amplitude test.

Test cond	Parameter	25 ± 5°C Initial limits		Units	Notes	Figs
		Min	Max			
BB	PSTA	0	400	mV	1	24,25

NOTE:

1. Abbreviations used are defined in 6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

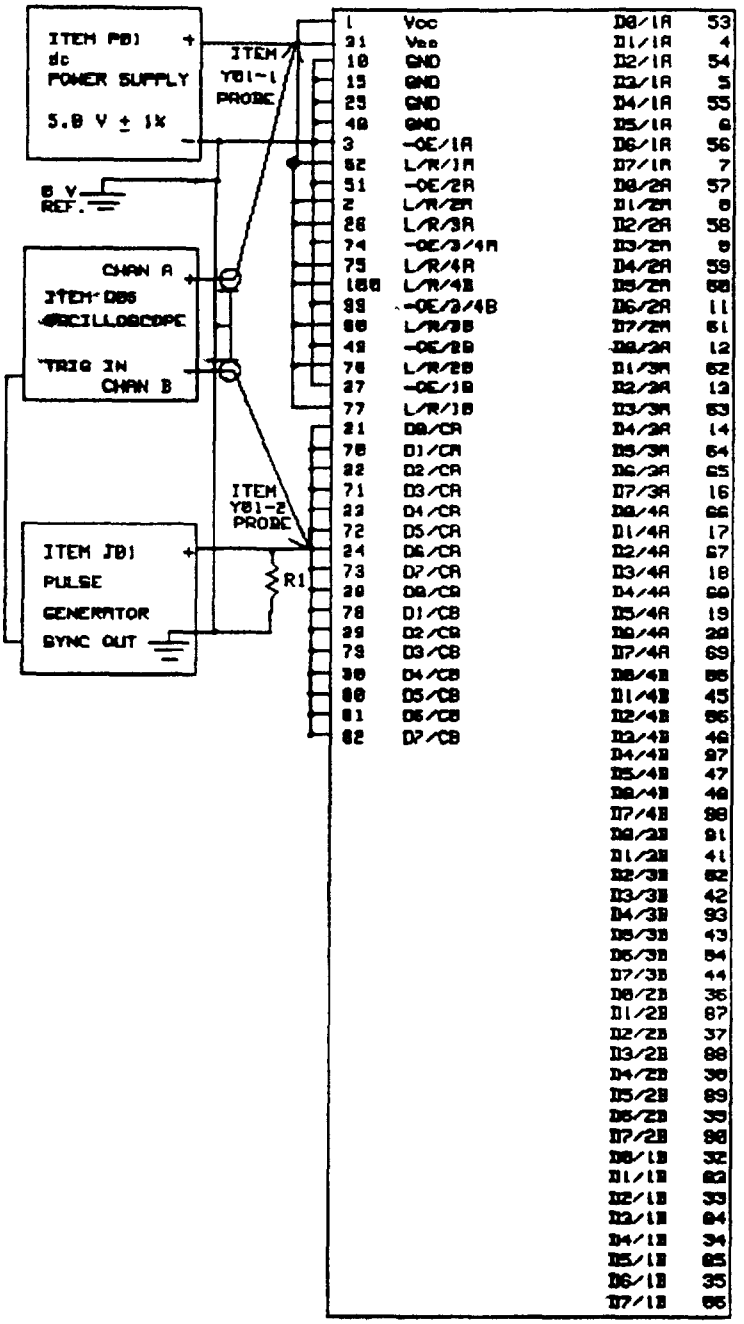

NOTE:

1. R1 = 51.1 Ohms ± 5 percent, 1 W.

FIGURE 24. Power supply transient amplitude test circuit for table XXVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

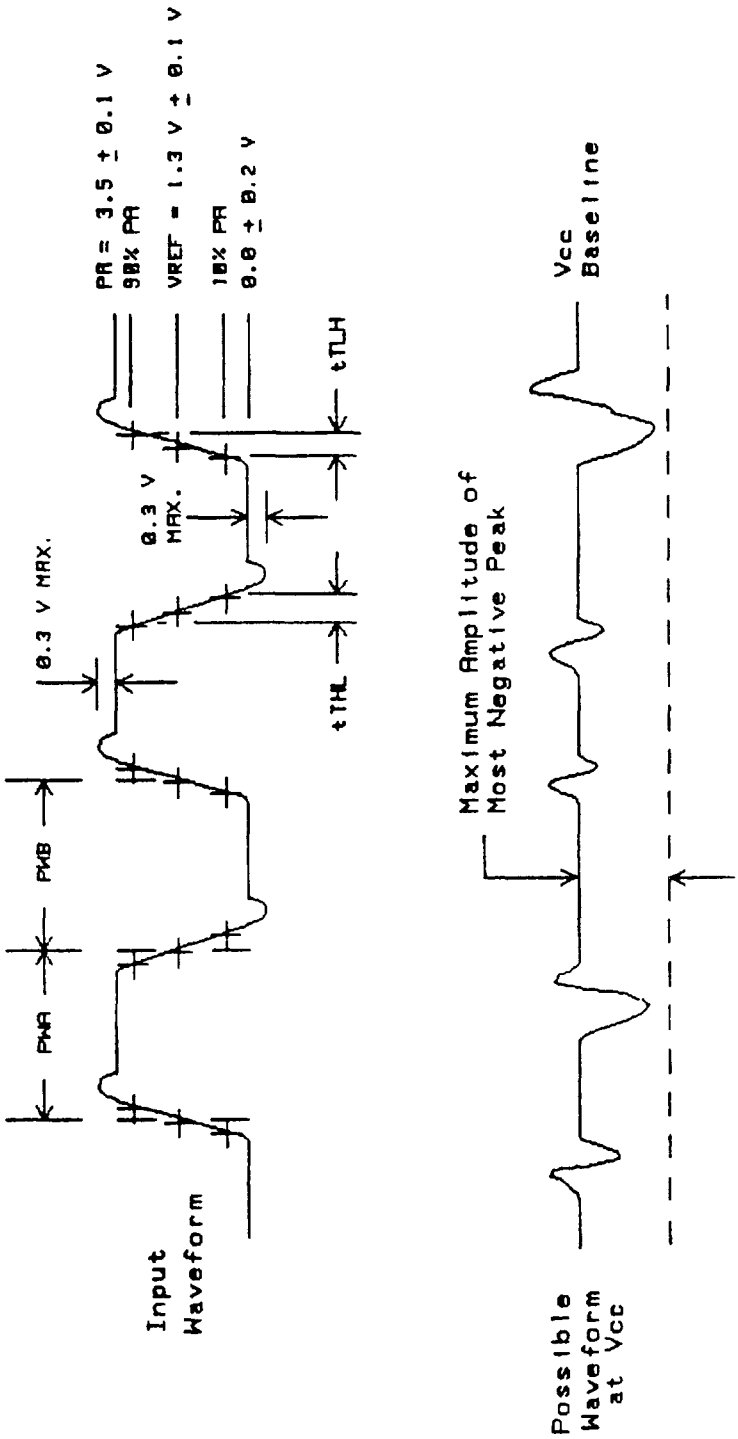


FIGURE 25. Power supply transient amplitude test circuit waveform for table XXVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. Input pulse parameters:

   PWA = PWB = 500 nS ± 10 percent.
   PRP = 1 MHz ± 10 percent.
   tTLH = tTHL = 10 ± 1 nS.

2. Connect point A as close as possible to pins 1 and 31 on the module. Observe power supply transient on item D05. Typical waveforms are shown above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXVII. Power supply filter capacitance test.

Test cond	Parameter	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
CC	PSFC	Open	1,31	4.125	6.875	uF	26

NOTE:

1. Abbreviations used are defined in 6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

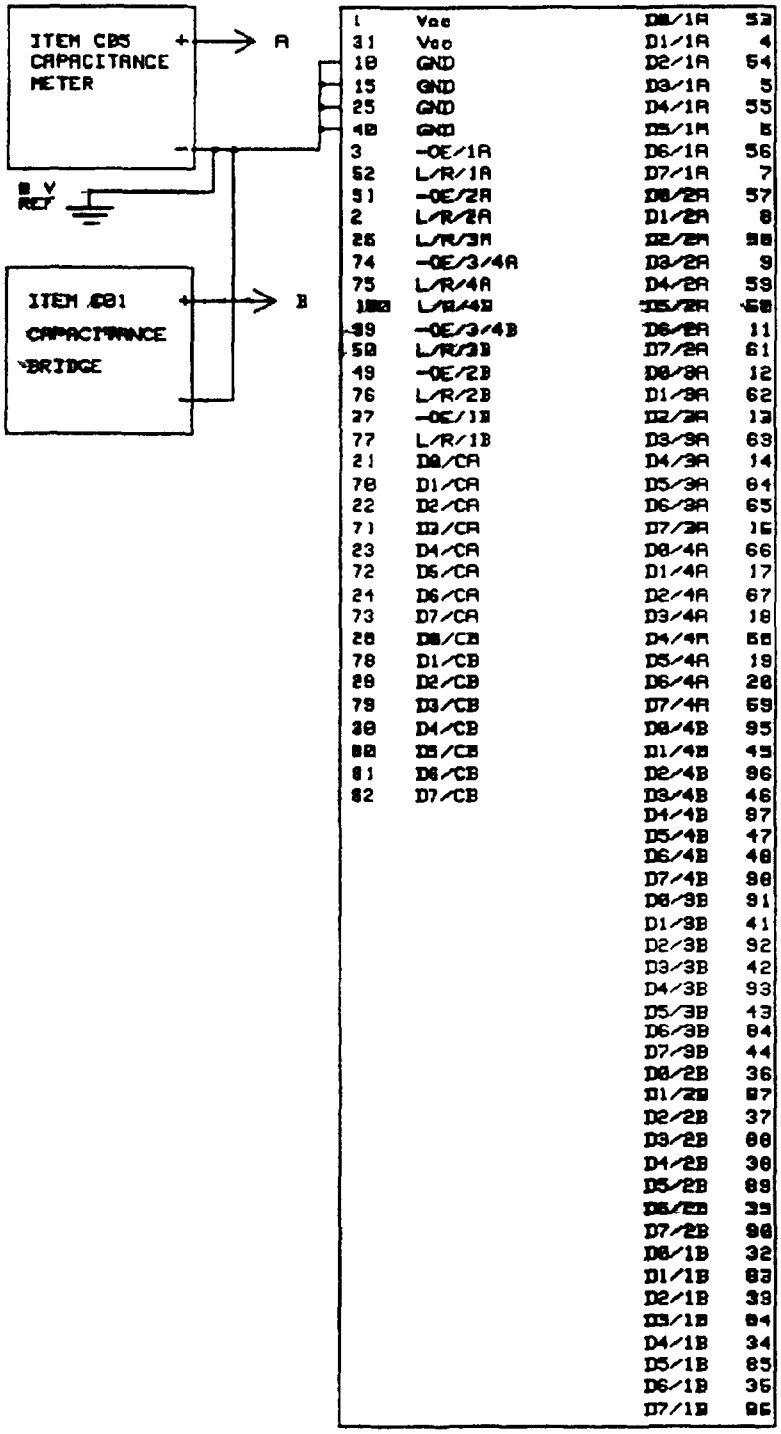


FIGURE 26. Power supply filter capacitance and input capacitance test circuit for tables XXVII and XXVIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

NOTES:

1. Null out the effect of the test leads prior to connecting to the module.

2. Do not attach test connector or wires to any of the module pins other than pins 10, 15, 25, 40 and the pin under test. Stray capacitance added to other pins may affect the readings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXVIII. Input capacitance test.

Test cond	Test description	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
DD1	-OE/1A	3	Open	2	40	pF	26
DD2	L/R/1A	52					
DD3	-OE/2A	51					
DD4	L/R/2A	2					
DD5	L/R/3A	26		2	40	pF	26
DD6	-OE/3/4A	74		4	45	pF	26
DD7	L/R/4A	75		2	40	pF	26
DD8	L/R/4B	100		2	40	pF	26
DD9	-OE/3/4B	99		4	45	pF	26
DD10	L/R/3B	50		2	40	pF	26
DD11	-OE/2B	49					
DD12	L/R/2B	76					
DD13	-OE/1B	27					
DD14	L/R/1B	77		2	40	pF	26
DD15	D0/CA	21		8	160	pF	26
DD16	D1/CA	70					
DD17	D2/CA	22					
DD18	D3/CA	71					
DD19	D4/CA	23					
DD20	D5/CA	72	Open	8	160	pF	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXVIII. Input capacitance test - Continued.

Test cond	Test description	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
DD21	D6/CA	24	Open	8	160	pF	26
DD22	D7/CA	73					
DD23	D0/CB	28					
DD24	D1/CB	78					
DD25	D2/CB	29					
DD26	D3/CB	79					
DD27	D4/CB	30					
DD28	D5/CB	80					
DD29	D6/CB	81					
DD30	D7/CB	82		8	160	pF	26
DD31	D0/1A	53		2	60	pF	26
DD32	D1/1A	4					
DD33	D2/1A	54					
DD34	D3/1A	5					
DD35	D4/1A	55					
DD36	D5/1A	6					
DD37	D6/1A	56					
DD38	D7/1A	7					
DD39	D0/2A	57					
DD40	D1/2A	8	Open	2	60	pF	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXVIII. Input capacitance test - Continued.

Test cond	Test description	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
DD41	D2/2A	58	Open	2	60	pF	26
DD42	D3/2A	9					
DD43	D4/2A	59					
DD44	D5/2A	60					
DD45	D6/2A	11					
DD46	D7/2A	61					
DD47	D0/3A	12					
DD48	D1/3A	62					
DD49	D2/3A	13					
DD50	D3/3A	63					
DD51	D4/3A	14					
DD52	D5/3A	64					
DD53	D6/3A	65					
DD54	D7/3A	16					
DD55	D0/4A	66					
DD56	D1/4A	17					
DD57	D2/4A	67					
DD58	D3/4A	18					
DD59	D4/4A	68					
DD60	D5/4A	19	Open	2	60	pF	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXVIII. Input capacitance test - Continued.

Test cond	Test description	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
DD61	D6/4A	20	Open	2	60	pF	26
DD62	D7/4A	69					
DD63	D0/4B	95					
DD64	D1/4B	45					
DD65	D2/4B	96					
DD66	D3/4B	46					
DD67	D4/4B	97					
DD68	D5/4B	47					
DD69	D6/4B	48					
DD70	D7/4B	98					
DD71	D0/3B	91					
DD72	D1/3B	41					
DD73	D2/3B	92					
DD74	D3/3B	42					
DD75	D4/3B	93					
DD76	D5/3B	43					
DD77	D6/3B	94					
DD78	D7/3B	44					
DD79	D0/2B	36					
DD80	D1/2B	87	Open	2	60	pF	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

TABLE XXVIII. Input capacitance test - Continued.

Test cond	Test description	Connect A to pin	Connect B to pin	25 ± 5°C Initial limits Min	25 ± 5°C Initial limits Max	Units	Fig
DD81	D2/2B	37	Open	2	60	pF	26
DD82	D3/2B	88					
DD83	D4/2B	38					
DD84	D5/2B	89					
DD85	D6/2B	39					
DD86	D7/2B	90					
DD87	D0/1B	32					
DD88	D1/1B	83					
DD89	D2/1B	33					
DD90	D3/1B	84					
DD91	D4/1B	34					
DD92	D5/1B	85					
DD93	D6/1B	35					
DD94	D7/1B	86	Open	2	60	pF	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-28787/354	Modules, Digital, Standard Electronic, Interface, Bus Module, Key Code AFG

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, TEAR ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:01Z
Check the source to verify that this is the current version before use.