A-A-346A
January 5, 1988
SUPERSEDING
A-A-346
December 13, 1979

COMMERCIAL ITEM DESCRIPTION

MATTOCK (CUTTER, WITHOUT HANDLE)

The General Services Administration has authorized the use of this commercial item description in lieu of Type II, Class D, Federal Specification GGG-H-506.

Scope. This description establishes requirements for mattocks used for grubbing, loosening the soil, digging up and cutting roots.


Salient characteristics:

Material. Forged carbon steel.

Design. Flat shaped blade one side with cutter blade opposite.

Hardness. The mattocks shall show a Rockwell hardness of 37-50 on the C scale. The mattocks shall exhibit the specified hardness at any point within 3/4 (± 1/32) inch from the blade.

Finish. The mattocks shall be coated with paint, oil, or any other rust-resistant material.

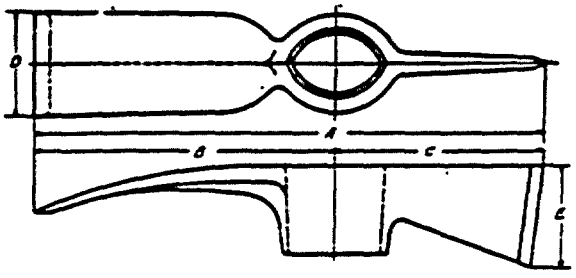

National Stock Number	Size lbs.	Actual weight lbs.		Dimensions (inches)										Eye No.
				A		B		C		D		E		
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
5120-00-702-4093	3	2-3/4	3-1/4	12-3/4	13-1/2	7-1/2	7-3/4	5-1/4	5-3/4	2-7/8	3-5/8	2-1/4	2-3/4	7
5120-00-245-1622	5	4-3/4	5-1/4	15-1/4	16-1/4	9-1/4	9-3/4	6	6-1/2	2/7/8	3-5/8	2-1/2	3-1/4	6

Identification marking. Each mattock shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol, part number and country of origin.

Workmanship. The mattocks shall be free from imperfections which may affect their appearance, serviceability, or durability. All surfaces and edges shall be free of defects which may be injurious to the user, except for the cutting edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS

Sampling for inspection and testing of the end item. Sampling shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes. The lot size shall consist of all mattocks offered for acceptance at one time. The sample unit is one mattock.

Visual inspection. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Dimensional inspection. The inspection level shall be level S-2, with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Hardness testing. The inspection level shall be level S-2, with an acceptable quality level (AQL) of 2.5 defects per hundred units. Testing shall be in accordance with ASTM E18.

Regulatory requirement. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, and marking. The preservation, packaging, packing, and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements.

Military Standards are available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

ASTM Standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians:

Army-GL
Air Force - 99

Review Activities:
Air Force - 84

PREPARING ACTIVITY

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.