

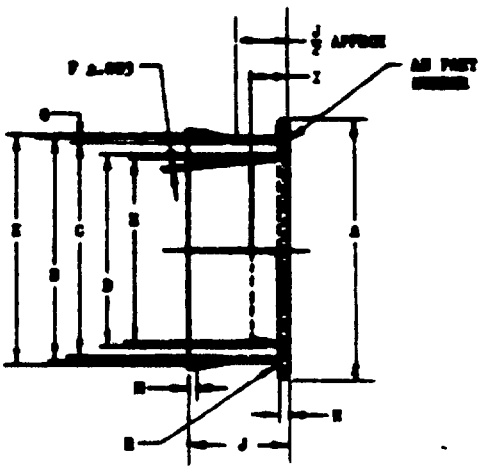


| AN PART NO. | (a) CONDUIT SIZE | A DIA | B DIA | C DIA | D DIA | E DIA | F | G | H | I | J | K +.015 -.000 DIA | R APPROX | S MAX RAD |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AN3048-16 | 1 | 1.668 | 1.267 | 1.227 | 1.000 | 15/16 | .017 | .080 | .080 | 5/16 | 5/8 | 1.270 | 1/16 | .030 |
| AN3048-20 | 1-1/4 | 1.918 | 1.522 | 1.482 | 1.250 | 1-3/16 | .017 | .080 | .080 | 5/16 | 5/8 | 1.495 | 1/16 | .030 |
| AN3048-24 | 1-1/2 | 2.160 | 1.777 | 1.737 | 1.500 | 1-7/16 | .017 | .080 | .080 | 5/16 | 3/4 | 1.870 | 1/16 | .030 |
| AN3048-28 | 1-3/4 | 2.410 | 2.029 | 1.989 | 1.750 | 1-11/16 | .017 | .080 | .080 | 5/16 | 7/8 | 2.125 | 1/16 | .030 |
| AN3048-32 | 2 | 2.910 | 2.282 | 2.242 | 2.000 | 1-15/16 | .017 | .080 | .080 | 5/16 | 1 | 2.383 | 1/16 | .030 |
| | | | | | | | | | | | | | | |

(a) USE AN3051 FERRULES FOR SYNTHETIC COVERED FLEXIBLE CONDUIT SIZES 3/16 TO 3/4 INCLUSIVE.

(4) MATERIAL ALUMINUM, SPECIFICATION QQ-A-561, TEMPER O OR SPECIFICATION QQ-A-359, TEMPER O.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005.

APPROVED 31 Dec 41 REVISED (1) 19 Dec 45 (2) 11 Aug 47 (3) 13 May 52 (4) 8 Oct 53

| PROCUREMENT SPECIFICATION | AIR FORCE-NAVY AERONAUTICAL STANDARD | AN3048 |
|---|---|---|
| NONE | FERRULE - CONDUIT, FLEXIBLE, ONE STEP, SYNTHETIC COVERED | |

GPO 810780

Source: https://assist.dla.mil -- Downloaded: 202640-26T14:18Z
Check the source to verify that this is the current version before use.