MILITARY SPECIFICATION

FOOTWEAR, COVER, RADIOACTIVE CONTAMINANTS PROTECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and size of protective footwear cover fabricated from flexible vinyl chloride plastic film (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

L-P-375	- Plastic Film, Flexible, Vinyl Chloride
PPP-B-636	- Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8430

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Color

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

MIL-STD-147 - Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material shall be plastic film, flexible, vinyl chloride and shall conform to type I, class 2 of L-P-375, 0.004 (+0.001,- 0.0004) inch thick, except that the requirements for extraction in soapy water, volatility, resistance to weathering, cold crack, lacquer lifting, crocking and dimensional stability shall not apply. The color of the film shall approximate Color No. 13655 (Yellow) of FED-STD-595.

3.4 Description. The covers shall consist of two profile sections of vinyl plastic electronically heat sealed together at the sides and bottom (see fig. 1).

3.4.1 Figure. The figure is furnished for information puposes only. To the extent of any inconsistencies between the specification and the figure, the specification shall govern.

3.5 Pattern. A standard profile pattern will be furnished by the Government to the Contractor for use in making heat sealing dies. The working pattern shall be identical to the Government pattern. Neither the Government pattern nor the working pattern shall be altered in any way.

3.5.1 Heat sealing dies. The contractor shall furnish all electric heat sealed dies required to manufacture the covers. The dies shall heat-seal and die-cut the covers to size and shape required by the standard patterns.

3.6 Construction. The covers shall be manufactured by heat sealing two profile sections and die cutting to the proper size and shape. The heat seal shall be continuous along its entire length. The width of the fused zone shall be 5/64 to 7/64 inches along the sides and bottom except at the top opening of the cover where the width of reinforcing fuse zone shall be 1/8 to 1/4 inch for a distance 3/4 to 1 inch.

*3.7 Finished dimensions. The finished dimensions of the covers shall be as listed below for A, B, C, and D which refer to Figure 1. Measurements are expressed in inches and shall be taken with the cover laid flat.

		Inches
A	Length of foot	15-3/8 to 15-5/8
B	Width of top opening	10-3/8 to 10-5/8
C	Center height	17-7/8 to 18-1/8
D	Choke width 1/	10-3/8 to 10-5/8

1/ Taken 10 inches from the bottom edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished covers shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 and 6.2 shall be visually inspected as specified in 4.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.4. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one completely fabricated cover. The lot size shall be expressed in units of covers.

* 4.4.2.1 Visual examination. The covers shall be examined for defects classified in accordance with the list below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect
Material Defects and Workmanship	Not material specified. Not color specified. Not uniform in color Not smooth finish i.e., any cover having surface finish defect of the following: crazing, cracking, blistering, pitting, bubbling and permanent wrinkling. Any hole, cut, tear, rupture, burn, or thin spots Any repair patches or mend. Excess material adjacent to fuse zone not trimmed. Any imbedded foreign matter. Any open seam. Any inadequate heat seal, i.e., seam can be easily pulled apart with moderate hand pressure. Seam excessively puckered. Any unspecified seam (fused zones). Width of fused zone (side and bottom seam) less than 5/64 inch or more than 7/64 inch. Omitted reinforcing fused zone. Width of reinforcing fused zone (top openings) less than 1/8 inch or more than 1/4 inch. Length of reinforcing fused zone (top openings) less than 3/4 inch or more than 1 inch. Height, at top opening, uneven (feathered) by more than 1/4 inch
Cleanness	Any permanent spot or stain.
Cutting	Any part not cut in accordance with pattern or specification requirements.

4.4.2.2 Dimensional examination. The covers shall be examined for dimensional defects. Any measurement deviating from the dimensions and tolerances specified in 3.7 shall be scored as a defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed as defects per 100 units, for visual and dimensional examinations shall be as follows:

	Inspection levels	AQL
For defects applicable to 4.4.2.1	II	4.0
For defects applicable to 4.4.2.2	S-3	4.0

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per one hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling, incorrect application of tape.
Content	Number of bundles per container more or less than specified. Number of covers per bundle more or less than specified. 1/

1/ For this defect only two bundles per container shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Twenty-four covers with the toes facing the same direction shall be laid out flat and neatly stacked one on top of another. The toe portion of the covers shall be folded together toward the heel to form a stack whose dimensions approximate 17 inches in length by 10 inches in width. Two hundred-forty covers (240 covers) (10 stacks) with each stack alternately reversed, shall be placed flat in a fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 125 of PPP-B-636 and shall be closed in accordance with the box specification. As a guide, the inside dimensions of each box shall approximate 18 inches in length, 10-1/2 inches in width and 3 inches in depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Covers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A. Seven hundred twenty (720) covers (3 boxes), packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class weather resistant, variety DW, style RSC, grade V15C of PPP-B-636. Level A packages shall be packed flat, three in depth within the container. As a guide, the inside dimension of each box shall approximate 18-1/2 inches in length, 11 inches in width, and 10 inches in depth. Each container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Seven hundred twenty (720) covers (3 boxes), packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety DW, style RSC, grade 200 of PPP-B-636. Level A packages shall be packed flat, three in depth within the container. As a guide, the inside dimension of each box shall approximate 18-1/2 inches in length, 11 inches in width and 10 inches in depth. Each container shall be closed in accordance with the appendix of the box specification.

5.2.3 Level C. Covers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

5.3 Palletization. When specified (see 6.2), covers, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or bonding means O. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Footwear covers covered by this specification are intended for the protection of military personnel working in the presence of low level radioactive material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

*6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. When first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
c. Level of packaging and packing required (see 5.1 and 5.2).
d. When palletization is required (see 5.3).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU
Air Force - 99

Review Activity:
Navy - SH, MS
DLA - CT
Air Force - 82

User Activities:
Navy - AS, OS, CG

Preparing Activity:
Navy - NU

Project No. 8430-0342

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

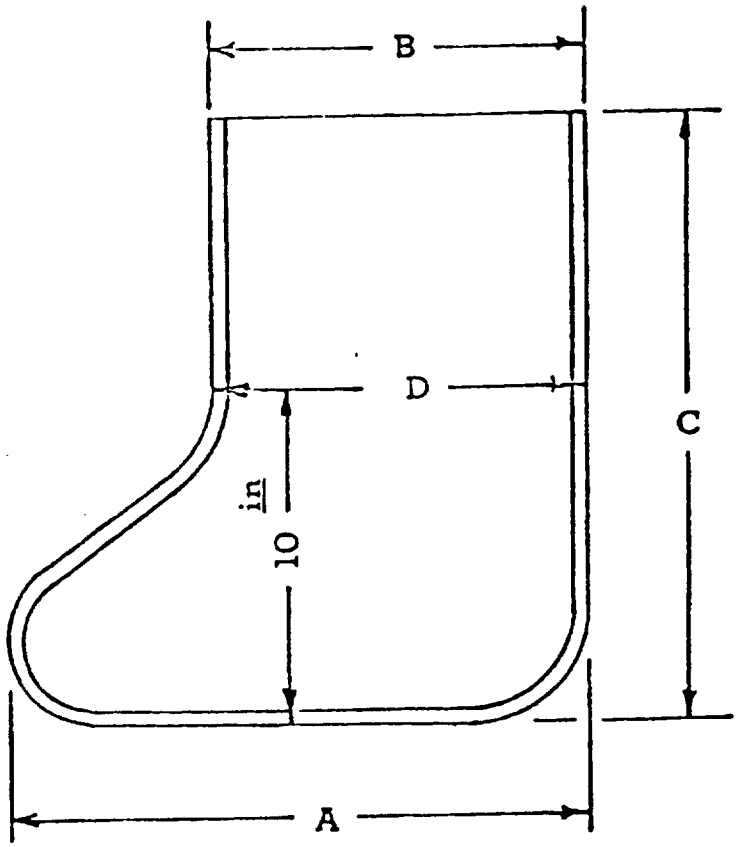


FIGURE 1

FOOTWEAR, COVER, RADIOACTIVE CONTAMINANTS, PROTECTIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
Code 50
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-82240D	FOOTWEAR, COVER, RADIOACTIVE CONTAMINANTS PROTECTIVE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://... 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.