MILITARY SPECIFICATION

SERVO ASSEMBLY: 1054544

1. SCOPE

1.1 This specification covers the general requirements for servo assembly, hereinafter referred to as "assembly", which form a part of the Sight Current Generator.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Material, General Specification - Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Material, Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-G-60662	Performance, Design and Product Configuration Requirement Generator, Sight Current

STANDARDS

Military

MIL-STD-105	Sampling, Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-454	Standards General Requirements for Electronic Equipment
MIL-STD-810	*Environmental Test Methods*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

DRAWINGS

Military

10545425	Sight Current Generator
10545431	Transformer
10545441	Servo Assembly
10545443	Potentiometer
10545461	Potentiometer
10545465	Isolator
10545566	Connector, Servo

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Item definition. The assembly manufactured to this specification shall perform its required function as a part of the Sight Current Generator for the Vulcan Air Defense System (VADS). The assembly shall consist of a range and a range rate servo. Each servo shall contain a modulator, amplifier, motor, ganged potentiometer, mechanical stops, and associated resistors, capacitor and diodes. The ganged potentiometers in the servo are driven to specific positions relative to the range and range rate voltage inputs.

3.1.1 Major component list. The components of this assembly shall be as specified on the Engineering Parts List (EPL) 10545441.

3.1.2 Government furnished property list. Not applicable.

3.2 Characteristics

3.2.1 Performance. The assembly shall be capable of performing the following functions, when assembled in accordance with Drawing Number 10545441:

a. The range servo shall drive potentiometer, R11, either clockwise or counter-clockwise to a position which represents the range input signal.

b. The range rate servo shall drive potentiometer, R12, either clockwise or counter-clockwise to a position which represents the range rate input signal.

c. The range and range rate servo mechanical stops shall prevent the respective servos from driving into the electrical dead band of the ganged potentiometers.

3.2.1.1 Input power. The input power supplied to the assembly shall be as specified in Table I.

Table I. Input Power

Pin Number	Voltage
33	+15 Vdc ± 2.0 percent
32	-15 Vdc ± 2.0 percent
30	+24 Vdc ± 2.0 percent
31 and 38	Ground
5	+20 Vdc ± 5.0 percent
22	+10 Vdc ± 2.0 percent
35	-10 Vdc ± 2.0 percent
3 and 4 (return)	115 Vac ± 5 percent 400 Hz ± 1 percent
8, 9 (Center tap) and 21 (return)	48 Vac ± 5 percent 400 Hz ± 1 percent, center tapped, in phase with 115 VAC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

3.2.1.2 Operating functions. The requirements specified in 3.2.1.2.1 through 3.2.1.2.4.2 shall be met when the conditions are as shown in Table I.

3.2.1.2.1 Mechanical stop adjustments

3.2.1.2.1.1 Range servo stop adjustment (R11). The range servo leaf spring shall engage the counter-clockwise stop pin when + 1.6 Vdc is applied between pin 2 and pin 31, and the clockwise stop pin when + 19.40 Vdc is applied between pin 2 and pin 31.

3.2.1.2.1.2 Range rate servo stops (R12). The range rate servo leaf spring shall engage the counter-clockwise stop pin when -9.7 Vdc is applied between pin 1 and pin 31, and the clockwise stop pin when +9.7 Vdc is applied between pin 1 and pin 31.

3.2.1.2.2 Servo function

3.2.1.2.2.1 Range servo function. The range servo motor shall rotate clockwise (viewed from shaft end) as the input voltage on pin 2 is varied from 1.6 Vdc to to 19.4 Vdc, and rotate counter-clockwise as the input voltage on pin 2 is varied from 19.4 Vdc to 1.6 Vdc.

3.2.1.2.2.2 Range rate servo function. The range rate servo motor shall rotate clockwise (viewed from shaft end) as the input voltage on pin 1 is varied from -9.7 Vdc to +9.7 Vdc, and rotate counter-clockwise as the input voltage on pin 1 is varied from +9.7 Vdc to -9.7 Vdc.

3.2.1.2.3 Dynamic error

3.2.1.2.3.1 Range servo dynamic error. The range servo shall have a dynamic error of less than 125 millivolts peak between pin 2 and pin 39 with an input voltage ramp of +2 volts per second or -2 volts per second applied between pin 2 and pin 31.

3.2.1.2.3.2 Range rate servo dynamic error. The range rate servo shall have a dynamic error of less than 125 millivolts peak between pin 1 and pin 20 with an input voltage ramp of +2 volts per second or -2 volts per second applied between pin 1 and pin 31.

3.2.1.2.4 Output levels

3.2.1.2.4.1 Output pin 36. The output shall be 1K ohm ± 5.0 percent between pin 36 and pin 2.

3.2.1.2.4.2 Output pin 37. The output shall be 1K ohm ± 5.0 percent between pin 37 and pin 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

3.2.1.2.5 Range Potentiometer (R11).- With the wiper loads specified in Table II and the input power specified in Table I applied, the range potentiometer shall meet all the requirements of Potentiometer 10545461.

3.2.1.2.6 Range Rate Potentiometer (R12).- With the wiper loads specified in Table III and the input power specified in Table I applied, the range rate potentiometer shall meet all the requirements of Potentiometer 10545443.

3.2.1.2.7 Shaft Angle.- With a spring deflection of 3.5° shaft angle shall not allow potentiometer cup No. 1 wiper to lose contact with the resistance element while traversing toward the dead band.

3.2.1.3 Environmental

3.2.1.3.1 Altitude.- The assembly shall be capable of continuous or intermittent operation, during atmospheric pressures from 14.7 psi (sea level) to 10 psi (10,000 feet above sea level). The assemblies shall be capable of continuous or intermittent operation after exposure to atmospheric pressures at altitudes of 40,000 feet above sea level.

3.2.1.3.2 Temperature.- The assembly shall be capable of continuous or intermittent operation in ambient temperatures from -40°F to +160°F. The assemblies shall be capable of continuous or intermittent operation after exposure to temperatures of -65°F.

3.2.1.3.3 Humidity.- The assembly shall be capable of being operated at relative humidities up to 95 percent in ambient air temperature between -40°F and +85°F.

3.2.1.3.4 Vibration.- The assembly shall be mounted on the vibration table in the normal service position with four (4) vibration isolators (part number 10545465) mounted between the holding fixture and the vibration table. The assembly shall meet the requirements of 3.2 after being subjected to the following vibration levels for three hours per plane for each of the three mutually perpendicular axis. The frequency shall be cycled between 5 to 500 to 5Hz in 15 minute cycles at levels a through e inclusive, and the rate of change shall be logarithmic.

a. 5 to 23 Hz - .076 inches double amplitude

b. 23 to 40 Hz - 2g

c. 40 to 120 Hz - 4g

d. 120 to 200 Hz - 2.5g

e. 200 to 500 Hz - 4g

3.2.1.3.5 Shock.- The assembly shall be mounted on the shock machine in the normal service position with four (4) vibration isolators (part number 10545465) mounted between the holding fixture and the shock

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

machine. The assembly shall meet the requirements of 3.2 during and after being subjected to three shocks of 10g for ten milliseconds in each direction along each of three mutually perpendicular axis for a total of 18 shock pulses.

3.2.1.4 Useful life.- The assembly shall meet the performance requirements of this specification for 2500 hours of intermittent or continuous operation, plus 3 years minimum storage under normal storage conditions.

3.2.2 Physical characteristics.- The physical characteristics shall be as specified in drawing 10545441 and the engineering parts list.

3.3 Design and construction.

3.3.1 Production drawings.- The assembly shall be fabricated in accordance with the requirements of this specification, drawing 10545441 and the engineering parts list. Any conflict between this specification and the drawing, the drawing shall be considered a superseding requirement.

3.3.2 Standard of manufacture.- The assembly shall be manufactured to meet the requirements of drawing 10545441.

3.3.3 Workmanship.- The workmanship employed in the manufacture of the assemblies shall be in accordance with Requirements 5 and 9 of MIL-STD-454.

3.4 Preproduction sample.- Preproduction samples from the first lot shall be given qualification tests prior to regular production to demonstrate the adequacy and suitability of the contractor's processes and procedures in achieving the performance that is inherent in the design. (See 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISION

4.1 General

4.1.1 Responsibility for inspection. Unless otherwise specified in the contract, the supplier is responsible for the performance of all test and inspection requirements specified herein. Except as otherwise specified in the contract the supplier will specify facilities suitable for the performance of the test and inspection, unless disapproved by the Government. The Government reserves the right to perform any of the tests and inspections set forth in the specification where such tests and inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.1.2 Special tests and examinations

4.1.2.1 First article (initial production) approval. The requirements for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall be 3 assemblies manufactured in the same manner using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production. The assemblies shall meet the requirements and tests of Table II.

4.1.2.1.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.1.2.1.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.1.2.2 Control tests. Three assemblies shall be selected at random as a control sample from each 100 produced. The control samples shall meet the requirements and tests of Table II. (See 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

Table II. Test and Requirements

Test	Requirement	Test Procedures
Performance	3.2.1	4.2.5
Altitude	3.2.1.3.1	4.3.1
Temperature	3.2.1.3.2	4.3.2
Humidity	3.2.1.3.3	4.3.3
Vibration	3.2.1.3.4	4.3.4
Shock	3.2.1.3.5	4.3.5
Design and Construction	3.3	Visual

4.1.2.3 Failure of sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved.

4.2 Quality conformance inspections

4.2.1 Submission of product. Unless otherwise specified herein, or by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" as specified in MIL-STD-105.

4.2.2 Acceptance and rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and re-submittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.2.3 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply equipment in accordance with the applicable requirements of MIL-I-45607. The Government reserves the right to use the test equipment for its own independent inspections to the extent that such use will not unduly interfere with the contractor's delivery schedule.

4.2.3.1 Contractor designed equipment. The contractor shall provide inspection equipment compatible with the "Test Methods and Procedures" specified in 4.2.3.2 and with the "Component Inspection" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerances limit, and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.2.3.2 Test equipment. Test equipment used to test assemblies for verification of Section 3 electrical requirements shall be as specified.

4.2.3.2.1 Power supply (PS1). The power supply shall be 15 ± 0.1 Vdc, 100 milliamperes or greater, ripple less than 10 millivolts (mv) rms or 100 mv peak-to-peak.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

4.2.3.2.2 Power supply (PS2).- The power supply shall be 24 ± 0.5 Vdc, 500 milliamperes or greater.

4.2.3.2.3 Power supply (PS3).- The power supply shall be 20 ± 1.0 Vdc, 10 milliamperes or greater.

4.2.3.2.4 Power supply (PS4).- The power supply shall be 10 ± 0.1 Vdc, 10 milliamperes or greater.

4.2.3.2.5 Power supply (PS5).- The power supply shall be -10 ± 0.1 Vdc, 10 milliamperes or greater.

4.2.3.2.6 Power supply (PS6).- The power supply shall be 115 ± 5 VAC, 400 ± 4 Hz, 500 milliamperes or greater.

4.2.3.2.7 Function generator (PS7).- The function generator shall supply 0 ± 20 Vdc and triangle waves as illustrated in Figures 1 and 2. Linearity and symmetry error shall be better than 1 percent over the frequency range of .05 to 1 Hz.

4.2.3.2.8 Transformer (T1).- Transformer 10545431 shall have an input of 115 Vac 400 Hz and an output of 48 Vac center-tapped 500 milliamperes maximum.

4.2.3.2.9 Resistors.- The following resistors with specified ratings and quantities are required.

a. 10 megohm ± 1%, 1/4 watt - 2
b. 50 kilohm ± 0.02%, 1/4 watt - 1
c. 1.296 megohm ± 0.02%, 1/4 watt - 1
d. 1.391 megohm ± 0.05%, 1/4 watt - 1
e. 200 kilohm ± 0.05%, 1/4 watt - 1
f. 314.6 kilohm ± 0.05%, 1/4 watt - 1
g. 1.121 megohm ± 0.05%, 1/4 watt - 1
h. 20 kilohm ± 0.5%, 1/4 watt - 1
i. 50 kilohm ± .10%, 1/4 watt - 2
j. 50 kilohm ± 0.1%, 1/4 watt - 1
k. 50 kilohm ± .20%, 1/4 watt - 1

4.2.3.2.10 Digital voltmeter.- The digital voltmeter (DVM) shall have a voltage accuracy and resolution of .01 percent or better from zero to 100 Vdc. Input impedance greater than 10 megohms on all voltage scales.

4.2.3.2.11 Digital ohmmeter.- The digital ohmmeter shall have a resistance readout to three digits from zero ohms to 10,000,000 ohms with a 1.0 percent accuracy.

4.2.3.2.12 Oscilloscope.- The oscilloscope shall measure a differential voltage with an accuracy and resolution of 5.0 percent or better at frequencies down to DC. Voltage sensitivity shall include the range of 0.05 volt/cm to 5.0 volt/cm and rise time shall be 100 nanoseconds or better.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

4.2.4 Examinations.- Unless otherwise specified, components and subassemblies shall be inspected in accordance with the "Inspection provisions for components and subassemblies" and the Sampling Plan Tables contained in MIL-F-13926. Examinations to verify requirements of 3.3 shall be performed. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein.

4.2.5 Functional tests.- Detail functional requirements specified below shall be inspected on a 100 percent basis. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50°F to +90°F
b.	Relative humidity	90 percent RU max.
c.	Pressure	28 to 32 inches of Hg

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

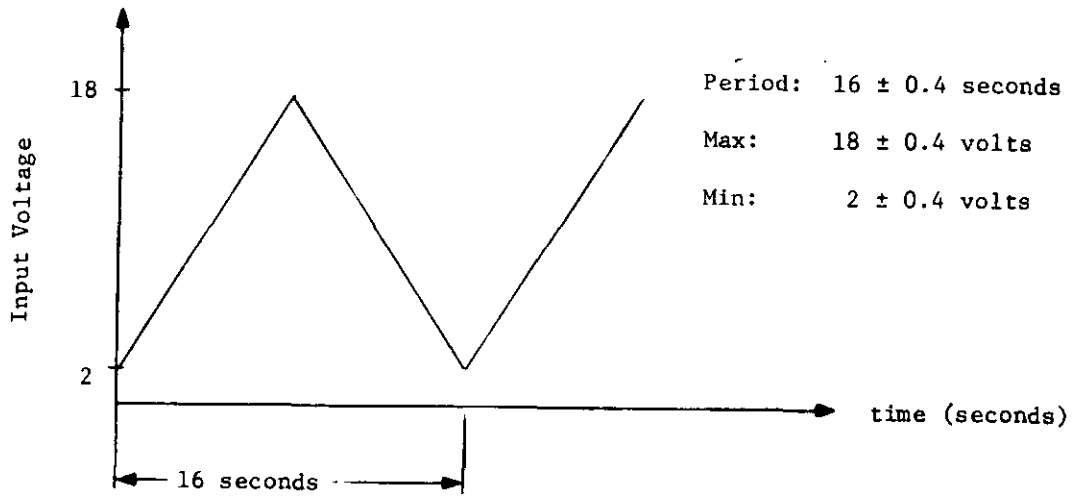


FIGURE 1. Range Servo Input

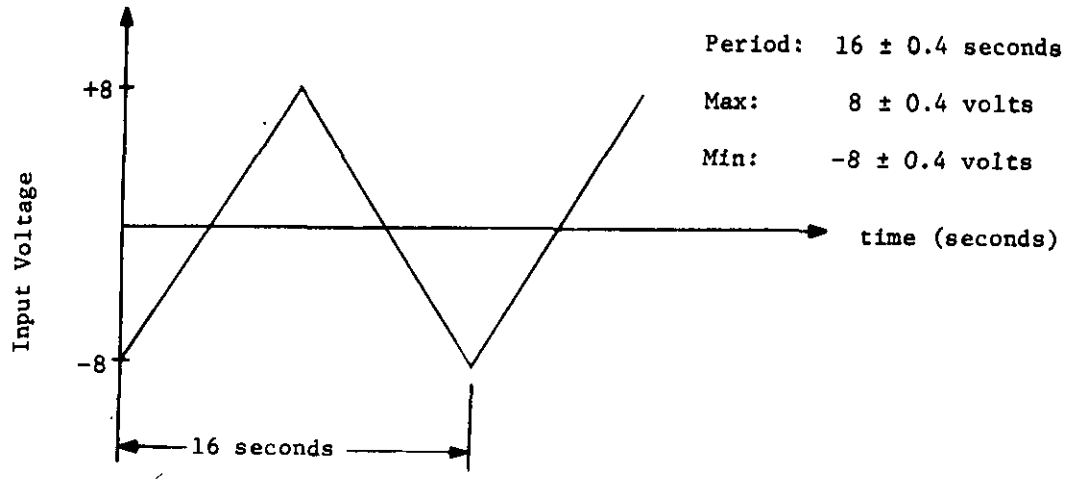


FIGURE 2. Range Rate Servo Input

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

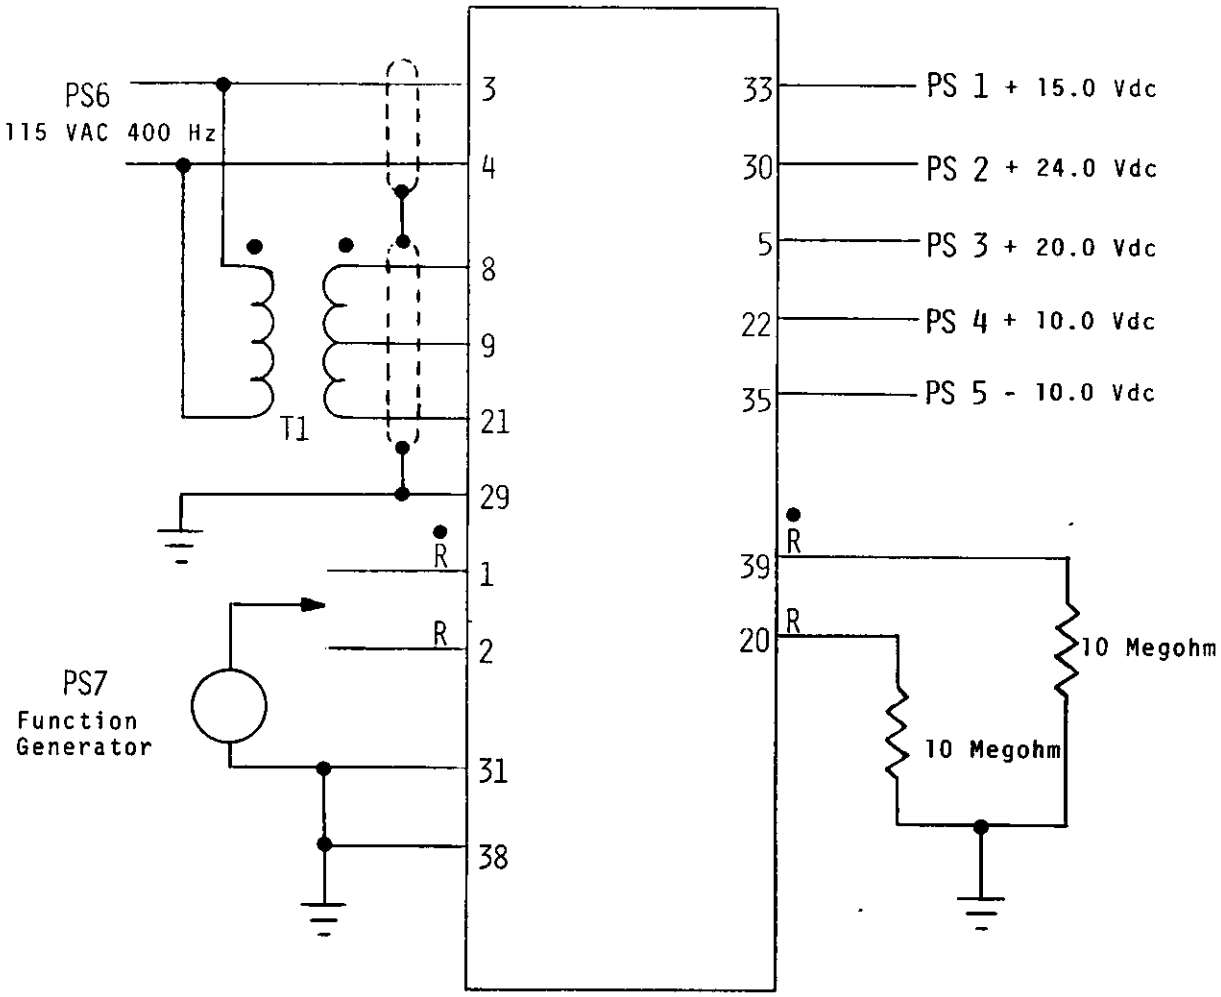


FIGURE 3. Test Connections

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

TABLE III

POTENTIOMETER RANGE R11

CUP WIPER	LOAD
Reference	None
First Term	50 kilohm ± 0.02%, 1/4 watt
Second Term	1.296 megohm ± 0.02%, 1/4 watt
Third Term	1.391 megohm ± .05%, 1/4 watt
Lambda	200 kilohm ± .05%, 1/4 watt
Density Term	314.6 kilohm ± .05%, 1/4 watt
Super Elev.	1.121 megohm ± .05%, 1/4 watt

TABLE IV

POTENTIOMETER RANGE RATE R12

CUP WIPER	LOAD
Reference	10.00 megohm ± 1%, 1/4 watt
Density	20 kilohm ± .5%, 1/4 watt
Second Term	50 kilohm ± .10%, 1/4 watt
Third Term	50 kilohm ± .10%, 1/4 watt
Lambda	50 kilohm ± 0.1%, 1/4 watt
Super Elev.	50 kilohm ± .20%, 1/4 watt

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

TABLE V

RANGE POTENTIOMETER R11

Shaft Angle (deg.)	Reference Cup No. 1	Cup 2	Cup 3	Cup 4	Cup 5	Cup 6	Cup 7
0	.0667	1.000	.2138	1.000	.5179	.3347	.2300
30	.1467	.6605	.3524	.6653	.6596	.5035	.2538
60	.2267	.5145	.4830	.5170	.7689	.6339	.2820
90	.3067	.4254	.6163	.4254	.8569	.7396	.3162
120	.3867	.3624	.7556	.3587	.9236	.8272	.3581
150	.4667	.3139	.8987	.3064	.9663	.8977	.4106
180	.5467	.2762	.9903	.2621	.9942	.9541	.4831
210	.6267	.2476	.9900	.2276	.9721	.9942	.5745
240	.7067	.2252	.9427	.1999	.8804	.9948	.6717
270	.7867	.2070	.8915	.1900	.7858	.9569	.7671
300	.8667	.1919	.8548	.1903	.7072	.8928	.8582
330	.9467	.1790	.8279	.1929	.6464	.8175	.9447
350	1.000	.1714	.8147	.1947	.6140	.7688	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

TABLE VI

RANGE RATE POTENTIOMETER R12

Shaft Angle (deg.)	Reference Cup No. 1	Cup 2	Cup 3	Cup 4	Cup 5	Cup 6
0	-1.000	.1383	1.000	1.000	.0595	.0514
30	-0.8286	.1467	.8868	.8223	.0596	.0832
60	-0.6571	.1560	.7578	.6476	.0609	.1184
90	-0.4857	.1668	.6086	.4740	.0629	.1576
120	-0.3143	.1794	.4326	.3038	.0661	.2018
150	-0.1429	.1943	.2193	.1370	.0710	.2520
180	.0286	.2127	.0150	-.0277	.0786	.3094
210	.2000	.2357	.1135	-.1878	.0890	.3767
240	.3714	.2661	.2299	-.3438	.1053	.4565
270	.5429	.3099	.3711	-.4929	.1336	.5541
300	.7143	.3816	.5486	-.6324	.1885	.6781
330	.8857	.5412	.7852	-.7548	.3464	.8455
350	1.000	1.000	1.000	-.8202	1.000	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

4.2.5.1 Test connections.- The power supplies, resistors, and transformer shall be connected to the assembly under test in accordance with Figure 3 using connector 10545566-1.

4.2.5.1.1 Test procedure.- Compliance with the requirements of 3.2.1.2.1 through 3.2.1.2.4 shall be verified as follows:

a. Adjust the input voltage of pin 2 to 1.6 + 0/-0.2 Vdc. Verify the leaf spring on the range servo motor (B1) has engaged the counter-clockwise stop pin.

b. Increase the input voltage at pin 2 to 19.40 + 0.2/-0 Vdc. Verify the range servo motor rotates clockwise to engage the clockwise stop pin.

c. Adjust the input voltage at pin 2 to the waveform shown in Figure 1. Verify that the servo motor rotation is as specified in 3.2.1.2.2.1. Using the oscilloscope verify the voltage difference between pin 20 and pin 2 does not exceed 0 ± 125 millivolts peak.

d. Adjust the input voltage at pin 1 to -9.7 + 0/-0.2 Vdc. Verify the leaf spring on the range rate servo motor (B2) has engaged the counter-clockwise stop pin.

e. Increase the input voltage at pin 1 to +9.7 + 0.2/-0 Vdc. Verify the range servo motor rotates clockwise to engage the clockwise stop pin.

f. Adjust the input voltage at pin 1 to the waveform shown in Figure 2. Verify that the servo motor rotation is as specified in 3.2.1.2.2.2. Using the oscilloscope verify the voltage difference between pin 39 and pin 1 does not exceed 0 ± 125 millivolts peak.

g. With no voltage applied to the assembly, verify output levels per 3.2.1.2.4 with the digital ohmmeter.

4.2.5.2 Test procedure.- Compliance with the requirements of 3.2.1.2.5 shall be verified as follows:

a. Using the wiper loads specified in Table III and the input power of Table I, the output gain for range potentiometer R11 shall be as specified in Table V. A minimum of three points on each cup will be verified.

4.2.5.3 Test procedure.- Compliance with the requirements of 3.2.1.2.6 shall be verified as follows:

a. Using the wiper loads specified in Table IV and the input power of Table I, the output gain for range rate potentiometer R12 shall be as specified in Table VI. A minimum of three points on each cup will be verified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

4.3 Environmental test methods and procedures.

4.3.1 Altitude.- Test in accordance with Procedure I of Method 500 of MIL-STD-810 except the non-operating altitude shall be 40,000 feet above sea level.

4.3.2 Temperature.

a. High temperature, test in accordance with Procedure I, Method 501 of MIL-STD-810 with the following exceptions:

(1) Step 3: change 48 hours to 12 hours
(2) Step 4: omit

b. Low temperature test in accordance with Procedure I, Method 502 of MIL-STD-810 with the following additions:

(1) Step 2: Maintain a non-operating low temperature of -65°F for a period of 12 hours.
(2) Step 4: Maintain a temperature of -40°F for a period of 24 hours then apply power to the unit under test for 5 minutes before proceeding to step 5.

4.3.3 Humidity.- The unit under test shall be exposed to an atmosphere of approximately 95 percent humidity at -40°F for a period of 48 hours, after which the temperature shall be raised to +85°F and maintained for 48 hours at 95 ± 5 percent relative humidity. After this exposure the unit shall be examined, operated and tested.

4.3.4 Vibration.- The assembly under test shall be mounted in accordance with 3.2.1.3.4. The assembly shall be vibrated in three mutually perpendicular axis over the range of frequencies specified in a through e inclusive. The vibration frequencies shall be cycled between 5 and 500 Hertz each complete cycle time being 15 minutes. The rate of change in frequency shall be logarithmic, and the test time shall be three hours in each plane for a total of nine hours. The assembly shall then be examined, operated, and tested.

a. 5 to 23 Hz - 0.076 inches double amplitude
b. 23 to 40 Hz - 2g
c. 40 to 120 Hz - 4g
d. 120 to 200 Hz - 2.5g
e. 200 to 500 Hz - 4g

4.3.5 Shock.- The assembly under test shall be mounted in accordance with 3.2.1.3.5. The assembly shall be subjected to a shock of 10g for a period of 10 milliseconds along each direction of its three mutually perpendicular axis, three times for each axis for a total of 18 shocks, after which it shall be examined, operated, and tested. Half sine shock pulses shall be used for this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging and marking shall be in accordance with the level A requirements of Packaging Data Sheet (PDS), AMC form 1029, 10545441.

6. NOTES

6.1 Intended use. The assembly covered by this specification is intended for use in the Sight Current Generator, 10545425. By positioning the range and range rate potentiometers in the assembly the fire control problems are resolved.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Instructions for arranging of examination, test, and approval of first article (see 4.2).

6.3 Instruction for models and samples

6.3.1 Instruction for preproduction sample. Preproduction samples shall be as specified in the contract.

6.3.2 Tests. Any change to control tests specified in 4.1.2.2 is to be so specified in the contract.

Custodian

Army - MU

Preparing Activity

Army - MU
Project No. 1285-A360

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-50795(MU) Servo Assembly: 10545441

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.