INCH-POUND
MIL-S-87056A
INTERIM AMENDMENT 1
08 December 1997

MILITARY SPECIFICATION

SHIRT, WOMAN'S DRESS BLUE (LONG SLEEVE)

This interim amendment is approved for use within the Department of Defense, with MIL-S-87056A dated 27 November 1985.

PAGE 2

Para. 2.1.1, under column for "SPECIFICATIONS, FEDERAL", add :

"A-A-50199 - Thread Polyester Core, Cotton-or Polyester-Covered
A-A-50135 - Cloth, Interlining, Polyester
V-B-871 - Buttonhole, Sewing Hole, and Button, Staple (Plastic)"

under "SPECIFICATIONS, MILITARY", delete:

"MIL-T-43548 - Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-C-43594 - Cloth, Interlining, Polyester
MIL-P-55010 - Plastic, Sheet, Polyethylene Terephthalate".

PAGE 4

Para. 3.3.2.1, line 3, delete "MIL-T-43548" and substitute "A-A-50199, Type I". Line 4 and 5, delete "or three".

Para. 3.3.2.2, lines 3 and 5, delete "MIL-T-43548" and substitute "A-A-50199".

Para. 3.3.3, at the end of paragraph, add "The polyester button to be under the finished collar shall be size 14 line, style 15, Black, Cable No. 62001 conforming to V-B-871, Type 2, Class D."

Para. 3.3.4.1, line 10, after "NAME OF CONTRACTOR:" add new line "NAME OF MANUFACTURER

NOTE: WHEN OTHER THAN THE CONTRACTOR".

AMSC N/A **FSC 8410**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

After Para. 3.3.4.2, add new paragraph:

"3.3.4.3 Barcode label/tag. Each item shall be individually bar coded with a Type VIII, Class 17, label/tag of DDD-L-20. The label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and shall cause no damage to the item."

Para. 3.3.5, delete in its entirety and substitute:

"3.3.5 Underlying fabrics

3.3.5.1 Sew-in-interlining. The material used for interlining the collar shall be a polyester interlining conforming to A-A-50135, except the color shall be black.

3.3.5.2 Fusible interlining. The material used for interlining the top pockets flaps, top collarstand, and top cuffs shall be a dark Charcoal Gray or Black, nonwoven, polyester/nylon web with a minimum of 50 percent polyester which has been thermally bonded with a resin applied to the substrate. The weight of the fusible cloth including the adhesive shall be a 1.7 to 2.4 oz. sq./yd. cloth when tested in accordance with ASTM D3776, Option C. The breaking strength shall be a minimum 3.0 pounds in the warp direction and 2.0 pounds in the filling direction when tested in accordance with ASTM D5034.

3.3.5.3 Fused component conformance. A fused sample consisting of the fusible and the basic material shall be tested against the requirements specified in Table IA.

TABLE IA. In-process testing requirements

CHARACTERISTICS	REQUIREMENTS	TEST METHOD
Stiffness		
Initial	Warp, 13.0 to 38.0 lbs. Filling, 6.0 to 22 lbs.	ASTM D1388, Option A
After 25 launderings	Warp, 10.4 to 30.4 lbs. Filling, 4.8 to 17.6 lbs.	AATCC-124-1984 and ASTM D1388, Option A 1/
Peel Strength 2/		
Initial	20 to 24 ozs.	ASTM D2724 3/
After 25 launderings	16 ozs. (min.)	ASTM D2724 3/
Appearance 2/		
Initial	No bubbling, delamination, change, bleed through, or detrimental affect in the shade of the basic material	Visual
After 25 laundering	4.0 rating	AATCC-124-1984 and Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

1/ One 15 X 15 inch fused sample per 1000 fused pieces shall be laundered. Wash temperature shall be 140 (+/-5) degrees F, 60 (+/-3) degrees C. Drying shall be performed only after the 25th washing. The evaluation portion of the AATCC test method is not applicable. Pressing of the sample prior to evaluation is prohibited.

2/ A fused sample will be tested for peel strength and appearance at the beginning of a contract, anytime the press is down, after 1000 cut pieces have been fused, and at the end of the contract. The fused sample shall be a 15 x 15 inch swatch.

3/ The fused sample shall be accepted if the fusible either splits from itself rather than separate from the outershell material or if it begins to separate from the outershell material higher than the minimum peel strength. and then splits from itself.".

Para. 3.3.6, delete in its entirety and substitute:
"3.3.6 Collar stay. The plain collar stay shall be made from polyethylene terephthalate plastic sheet. The thickness shall be 0.009 (+/- 0.0015) inch and the color shall be natural (clear or opaque). The stay shall measure not less than 1/4 inch or more than 3/8 inch wide and 2-1/4 to 2-1/2 inches in length when tested as specified in 4.4.1. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded.".

After Para. 3.3.6, add:
"3.3.7 Elastic. The elastic cord to be used under the collar shall be black polyester fiber, flat, 1/8 to 3/16 inch wide, with a minimum stretch.".

Para. 3.4, delete in its entirety and substitute:
"3.4 Design. The long sleeve shirt shall be of a two-piece princess style front and a one piece back, five (5) button front closure, breast patch pockets with buttoned down flaps, convertible collar with 1/2 collarstand and collar stays. The collar shall close with an elastic cord loop under right side of collar and loop around a button under the left side of the collar. The sleeves shall have a placket at cuff opening, with two (2) buttons on each cuff for adjustment (see Figures 1 and 2). The top collarstand, top pocket flaps and top cuffs shall be fused.".

Para. 3.5, lines 5 and 6, after "seams" delete "except for the front seam which shall be 3/8 inch".

Para. 3.5.1, delete pattern parts list in its entirety and substitute:

MATERIAL	PIECE NAME	SPECIFICATION NAME	CUT PIECES	SIZES
Basic material	FRONT_N12	CENTER FRONT	2	ALL
	S-FRON_N12	SIDE FRONT	2	ALL
	BACK_12	BACK	1	ALL
	COLLAR-N12	COLLAR	2	ALL

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

CLRSTD-N12	COLLARSTAND	2	ALL
FRONT_N13	CENTER FRONT	2	ALL
S-FRON_N13	SIDE FRONT	2	ALL
BACK_N13	BACK	1	ALL
COLLAR-N13	COLLAR	2	ALL
CLRSTD-N13	COLLARSTAND	2	ALL
FRONT_N14	CENTER FRONT	2	ALL
S-FRON_N14	SIDE FRONT	2	ALL
BACK_N14	BACK	1	ALL
COLLAR-N14	COLLAR	2	ALL
CLRSTD-N14	COLLARSTAND	2	ALL
FRONT_N15	CENTER FRONT	2	ALL
S-FRON_N15	SIDE FRONT	2	ALL
BACK_N15	BACK	1	ALL
COLLAR-N15	COLLAR	2	ALL
CLRSTD-N15	COLLARSTAND	2	ALL
FRONT_N16	CENTER FRONT	2	ALL
S-FRON_N16	SIDE FRONT	2	ALL
BACK_N16	BACK	1	ALL
COLLAR-N16	COLLAR	2	ALL
CLRSTD-N16	COLLARSTAND	2	ALL
SLV_A_L29	SLEEVE	2	32 to 38 Only
SLV_A_L30	SLEEVE	2	32 to 38 Only
SLV_A_L32	SLEEVE	2	32 to 38 Only
SLV_A_L34	SLEEVE	2	32 to 38
SLV_B_L29	SLEEVE	2	Only 40 to 42nly
SLV_B_L30	SLEEVE	2	40 to 42 Only
SLV_B_L32	SLEEVE	2	40 to 42 Only
SLV_B_L34	SLEEVE	2	32 to 38 Only
POCKET-X	POCKET	2	32 to 36 Only
POCKET-Y	POCKET	2	38 to 42 Only

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

	PKT_FLAP-X	POCKET FLAP	4	32 to 36 Only
	PKT_FLAP-Y	POCKET-FLAP	4	38 to 42 Only
	CUFF-Q	CUFF	2	32 to 38 Only
	CUFF-R	CUFF	2	40 to 42 Only
	WIDEPLAKET	WIDE PLACKET	2	ALL
	NAR_PLAKET	NARROW PLACKET	2	ALL
	WDPLKT-ALT	WIDE PLACKET (ALT)	2	ALL
	NRPLKT-ALT	NARROW PLACKET (ALT)	2	ALL
Sew-in-Interlining	CLR-IN-N12	COLLAR INTERLINING	1	ALL
	CLR-IN-N13	COLLAR INTERLINING	1	ALL
	CLR-IN-N14	COLLAR INTERLINING	1	ALL
	CLR-IN-N15	COLLAR INTERLINING	1	ALL
	CLR-IN-N16	COLLAR INTERLINING	1	ALL
Fusible Interlining	P-FLP-IN-X	POCKET FLAP INTERLINING	2	32 to 36 Only
	P-FLP-IN-Y	POCKET FLAP INTERLINING	2	38 to 38 Only
	CST-IN-N12	COLLARSTAND INTERLINING	1	ALL
	CST-IN-N13	COLLARSTAND INTERLINING	1	ALL
	CST-IN-N14	COLLARSTAND INTERLINING	1	ALL
	CST-IN-N15	COLLARSTAND INTERLINING	1	ALL
	CST-IN-N16	COLLARSTAND INTERLINING	1	ALL
	CUFF_INT-Q	CUFF INTERLINING	2	32 to 38 Only
	CUFF_INT-R	CUFF INTERLINING	2	40 to 42 Only

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

Templates	FIN_PKT-X	FINISHED POCKET	-	32 to 36 Only
	FIN_PKT-Y	FINISHED POCKET	-	38 to 42 Only
	FN-P-FLP-X	T FINISHED POCKET FLAP	-	32 to 36 Only
	FN-P-FLP-Y	T FINISHED POCKET FLAP	-	38 to 42 Only
	BTNHOL-MKR	BUTTONHOLE MARKER	-	ALL

Para. 3.6.1, line 10, delete “The width of the safety stitch shall be 3/8 inch” and substitute “The width of the safety stitch seam shall be 1/4 inch, the bite shall be 3/16 inch,”.

PAGE 9

Operation 4.d., delete in its entirety.

PAGE 10

Operation 6.d., delete in its entirety and substitute:
“6.d. The finished pocket X, sizes 32-36, shall measure 4-1/4 (+/-1/16) inches wide, 4-3/4 (+/-1/16) inches deep and for finished pocket Y, sizes 38-42, shall measure 4-3/4 (+/-1/16) inches wide and 5-1/2 (+/-1/16) inches deep.

NOTE: The finished pocket shall be checked for size and uniformity against the pocket template. The depth measurement shall be taken at center front.”.

Operation 7.c., line 1, delete “1/16” and substitute “1/4”.

Operation 8.a., line 1, after “shirt” add “centered”.

Operation 8.b., line 1 delete “5/16” and substitute “1/4”.

Operation 8.c., delete in its entirety and substitute:

“ 8.c. The finished pocket flap shall measure 2 (± 1/16) inches in vertical length at center point, and 1-1/2 (± 1/16) inches at sides for all sizes. The finished pocket flap X (sizes 32-36) shall measure 4-3/8 (± 1/16) inches in width. The finished pocket flap Y (sizes 38-42) shall measure 4-7/8 (± 1/16) inches in width”.

PAGE 11

Operation 10.a., line 1, before “Bind”, add new sentence, “Clip a V-notch at the end of placket opening.”. Line 4, after “bindings” add “(narrow placket)”. Line 7 after “binding” add “(narrow placket)”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

Operation 10 continued:

Operation 10.c., line 1 after “binding” add “narrow placket”.

Operation 10, add 10.d.:

“Operation 10.d. With end of binding (narrow placket) on outside of sleeve, fold “V” notch towards of sleeve and stitch through notch and binding (narrow placket) 1/32 inch from folded edge. 301 or 401 LSd-1 10-12”.

PAGE 13

Operation 14.a., delete in its entirety and substitute “Center fusible on fold of top ply of cuff and press.”. Lines 1 and 3 delete “interlining” and substitute “fusing”.

PAGE 14

Operation 14.c., line 3, delete “5/16 to 3/8” and substitute “1/4”, line 6, after “cuff” delete “3/16 to”. “Seam Type” delete “Sse-2” and substitute “Ssae-2”. “NOTE” line 2, delete “interlined” and substitute “fused”.

Operation 14.d**.**, line 2, delete “3/16 to”.

Operation 14.e**.,** line 1, delete “stitch” and substitute “topstitch”.

Operation 14.f., after “inches” delete (.) and insert the following, “for all sizes. The finished cuff Q length shall measure 9-1/8 (+/-1/8) inches. The finished cuff R length will measure 10-1/8 (+/-1/8) inches.”.

PAGES 15 & 16

Operation 15., delete in its entirety and substitute:

“15. Collar assembly
a. Place stay on collar interlining, according to marks on pattern, and tack through stay and interlining. 301 or 304, SSv-1, 10-12

b. Center fusible interlining to one ply of collarstand. Press fusible interlining to back of collarstand in accordance with the directions of the fusible manufacturer.

c. Join collar pieces together stitching 1/4 inch from raw edge, on top and sides. Trim corners and turn to finished position . 301 or 401, SSae-2(a), 10-12
Topstitch around the top and side edges of collar, 1/4 inch from finished folded edge. 301, SSbe-2(b), 10-12

NOTE: Be sure collar stay is on underside of finished collar.

d. Staystitch collarstand seam of collar 1/8 inch from raw edges, joining interlining and shell pieces together, in preparation for the attachment of the collarstand. 301, SSa-1, 10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

NOTE: This is an optional operation.

e. Insert collar assembly between collarstands, and stitch according to notches, 1/4 inch from raw edge, easing the collarstand to the collar. 301 or 401, SSe-2(a), 10-12

NOTE: Fused collarstand piece shall be closest to wearer.

f. Turn to finished position and edgestitch 1/16 inch from folded edge. 301, SSe-2(b), 10-12"

PAGES 16 & 17

Operation 16., delete in its entirety and substitute.

"16. Collar attachment
a. Stay stitch outer collar assembly (unfused) to neckline, only 1/2 inch past shoulder, matching center back notches. 301, SSa-1, 10-12

b. Cut a 4-1/2 (+1/8, -0) inches long piece of button elastic. Place 1-1/4 inch back from collar placement notch on left side of shirt. Form a closed loop finishing 2 (+/-1/8) inches, with elastic ends side by side when stitched. This loop shall be included when attaching collar to neckline of shirt. Place folded loop so fold shall be stitched in such a way that it will lay towards the center back neckline. Elastic shall be securely stitched or tacked so it shall not pull out of seam.

c. Starting at one side of neckline, turn facing back onto collar, matching unfused collar assembly ends at notches, and stitch through all plies from center front, 1/4 inch from raw edge stopping 1/2 inch before shoulder seam, notch through all plies. At notch, flip or move the inner collarstand out of the way, and continue single needle stitching across and past center back, approximately 1 inch. 301, SSa-1, 10-12

d. Turn shirt over to opposite center front and stitch in the same way as stated above, stopping at center back, overlapping approximately 1/2 inch. 301, SSa-1, 10-12

e. Turn inner collarstand under 1/4 inch and edgestitch 1/16 inch from turned edge, across from notch to notch. 301, BSq-2(b), 10-12

f. Distance from edgestitched seam of collarstand to outer edge of topcollar along neckline should measure 1-1/2 (+/-1/8) inches.

g. Collar Finished Measurements:
1. Collar points are 3-1/4 (+/-1/8) inches long. Measure from base of collar at neckline to point of collar. Points will be equal in length.
2. Collarstand height at center back measures 1-1/4 (+/-1/8) inches.
3. Collar at center back from collarstand seam measures 2(+/-1/8) inches to finished edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

h. Stamp the size label inscription as specified in 3.3.6.1 inside back of collarstand. There shall be no evidence of the printing visible on outside of finished collar as worn.

or

Simultaneously center and catch the size label in the top collarstand stitching with operation 16.e.

NOTE: There shall be no evidence of the collar stay or reinforcement piece protruding into the fold of the finished topcollar.".

Operation 18.a., line 1, after "Make" delete "six (6)" and substitute "five (5)". Line 2, after "front," delete "3/4" and substitute "5/8".

PAGE 18

Operation 18.c., delete in its entirety.

Operation 19.b., line 1, delete "six (6)" and substitute "five (5), line 3, delete "3/4" and substitute "5/8".

Operation 19.c., line 4, after "buttonhole" insert the following "and match first button on center front".

PAGE 19

Operation 19.e., delete in its entirety. Add the following sentence to end of "**NOTE:**" paragraph, "All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.".

Operation 20.a. Line 5, delete "top" and substitute "side". Line 6, delete "side" and substitute "bottom".

Operation 20.b. Line 1, delete "bottom" and substitute "side". Line 4, delete "and top".

PAGE 20

Operation 22.a., line 4, after "garment." add the following: "Shirt collar points shall be pressed flat. Center back collar shall be hard pressed at center back with collar folded in finished position.".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

Table II - Sizes and finished measurements, delete in its entirety and substitute:

"TABLE II - Finished measurements

TICKET SIZE BUST	NECK	(A) COLLAR	(B) BUST	(C) CENTER BACK LENGTH
32	12	12-1/4	38	26-1/4
	13	13-1/4	38	26-1/4
	14	14-1/4	38	26-1/4
	15	15-1/4	38	26-1/4
	16	16-1/4	38	26-1/4
34	12	12-1/4	40	26-3/8
	13	13-1/4	40	26-3/8
	14	14-1/4	40	26-3/8
	15	15-1/4	40	26-3/8
	16	16-1/4	40	26-3/8
36	12	12-1/4	42	26-1/2
	13	13-1/4	42	26-1/2
	14	14-1/4	42	26-1/2
	15	15-1/4	42	26-1/2
	16	16-1/4	42	26-1/2
38	12	12-1/4	44	26-5/8
	13	13-1/4	44	26-5/8
	14	14-1/4	44	26-5/8
	15	15-1/4	44	26-5/8
	16	16-1/4	44	26-5/8
40	12	12-1/4	46	26-3/4
	13	13-1/4	46	26-3/4
	14	14-1/4	46	26-3/4
	15	15-1/4	46	26-3/4
	16	16-1/4	46	26-3/4
42	12	12-1/4	48	26-7/8
	13	13-1/4	48	26-7/8
	14	14-1/4	48	26-7/8
	15	15-1/4	48	26-7/8
	16	16-1/4	48	26-7/8
44	12	12-1/4	50	27
	13	13-1/4	50	27
	14	14-1/4	50	27
	15	15-1/4	50	27
	16	16-1/4	50	27
Tolerance	--	+/-1/4	+/-1/2	-0, +1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

ALL SIZES = (D) SLEEVE LENGTH - 29,30,32,34 - Tolerance: +1, -1/2

NOTE: A, B, C and D shall refer to Figure 1 and 2. B, C and D measurements shall be taken with the shirt buttoned, laid flat and smooth.

A. COLLAR - Measurement shall be taken straight across collar from one end at junction of collar to opposite end of collar with the collar in a flat position.

B. BUST - Twice the measurement taken across the front at the base of the armhole from folded edge to folded edge.

C. CENTER BACK LENGTH - Center back length shall be taken along the center of the back from undercollar seam to bottom edge of shirt.

D. LONG SLEEVE - Measurement shall be taken from center back at collarstand seam, diagonally across back along top fold of sleeve to bottom edge of cuff.".

PAGE 25

Defect VIIc., "NOTE:" paragraph, line 1, after "considered" add "open".

PAGE 27

Defect IX., after defect "d." add the following defects:
"e. Bottom of anchor not pointed down (Minor A)

f. Button stitching (other than the cross-over stitch) not in grooves (Minor A)

PAGE 28

Defect XIIh., delete in its entirety and substitute:
"h. Measurements, collar, collarstand
1. Width of collar at center back: 1-7/8 to 2-1/8 inches (Minor A)
2. Height of collarstand at center back: 1-1/4 to 1-3/8 inches (Minor A)
3. Length of collar points: 3-1/8 to 3-3/8 inches (Minor A)
4. Distance of edgestitched seam of collarstand to topcollar front edge: 1-7/8 to 2-1/8 inches (Minor A)"

After Defect XIIi., add the following new defect:

"j. Collar points measure less than 3-1/8 or more than 3-3/8 (Minor A)"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

PAGE 29

Defect XIII**.,** add new paragraph: "e. Center of pocket and point of flap vertically out of alignment with the front seam by more than 1/8 inch. (Major)".

Defect XIVc., delete in its entirety and substitute the following: "Width of pocket X less than 4-3/16 inches or more than 4-5/16 inches. Width of pocket Y less than 4-11/16 inches or more than 4-13/16 inches (Minor A)".

Defect XIVd**.**, delete in its entirety and substitute the following: "Depth of pocket X less than 4-5/8 inches or more than 4-7/8 inches. Depth of pocket Y less than 5-3/8 inches or more than 5-5/8 inches (Minor A)".

Defect XVa**.,** delete in its entirety and substitute the following: "Width of pocket flap X less than 4-5/16 inches or more than 4-7/16 inches. Width of pocket flap Y less than 4-13/16 inches or more than 4-15/16 inches (Minor A)".

PAGE 30

Defects XVb**.,** delete in its entirety and substitute the following: "Vertical length of pocket flap at center less than 1-15/16 inches or more than 2-1/8 inches (Minor A)".

Defect XVe**.,** delete in its entirety and substitute: "Vertical length of pocket flap at sides less than 1-3/8 inches or more than 1-5/8 inches (Minor A)".

Defect XVIIIa**.,** add the following:
"4. Length of cuff Q less than 9 inches or more than 9-1/4 inches (Minor A)
5. Length of cuff R less than 10 inches or more than 10-1/4 inches (Minor A)".

Add defect paragraphs:

"**XX <u>FUSIBLE MATERIAL</u>**
a. Omitted or misplaced on top pocket flaps, top collarstand, or top cuffs (Major)
b. Delamination of fused components
   1. Partial or complete delamination on any fused component (Major)
   2. Bubbling or any fused component (Major)
   3. Any strikethrough or bleedthrough (Major)

XXI <u>BAR CODE LABEL/TAG</u>
a. Bar code omitted or not readable by scanner (Minor A)
b. Human readable interpretation (HRI) omitted or illegible (Minor A)
c. Not visible on folded, package item (Minor A)
d. Causes damage to the item (Major)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

XXII ELASTIC

a. Not placed or sewn as specified (Minor A)
b. Ends not stitched and caught in seam correctly and securely (Major)
c. Length less than 4-1/2 or more than 4-5/8 (Minor B)"

PAGE 34

Paragraph 6.4, delete in its entirety.

PAGES 36 & 37

Delete Figures 1 and 2 and substitute the following new Figures 1 and 2.

Custodians
Navy - NU

Preparing activity
DLA - CT

Project 8410-0899

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

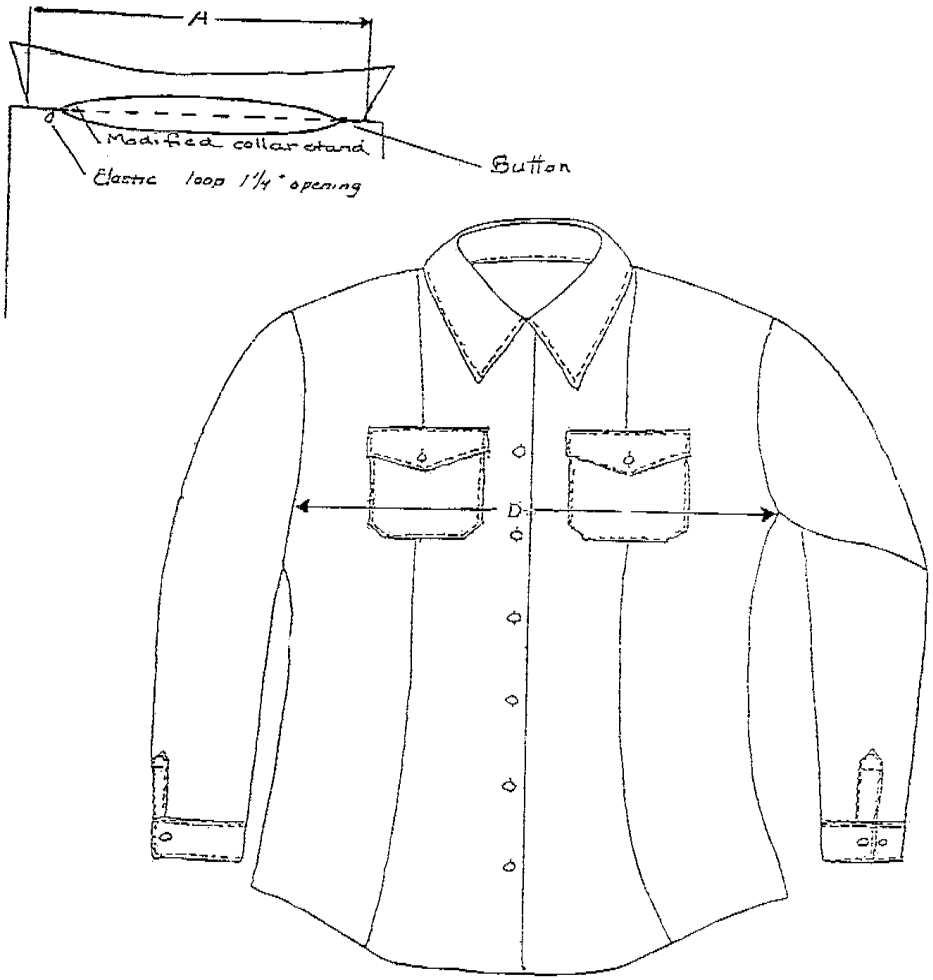


FIGURE 1 - SHIRT, WOMAN'S, DRESS, BLUE (LONG SLEEVE)

FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.

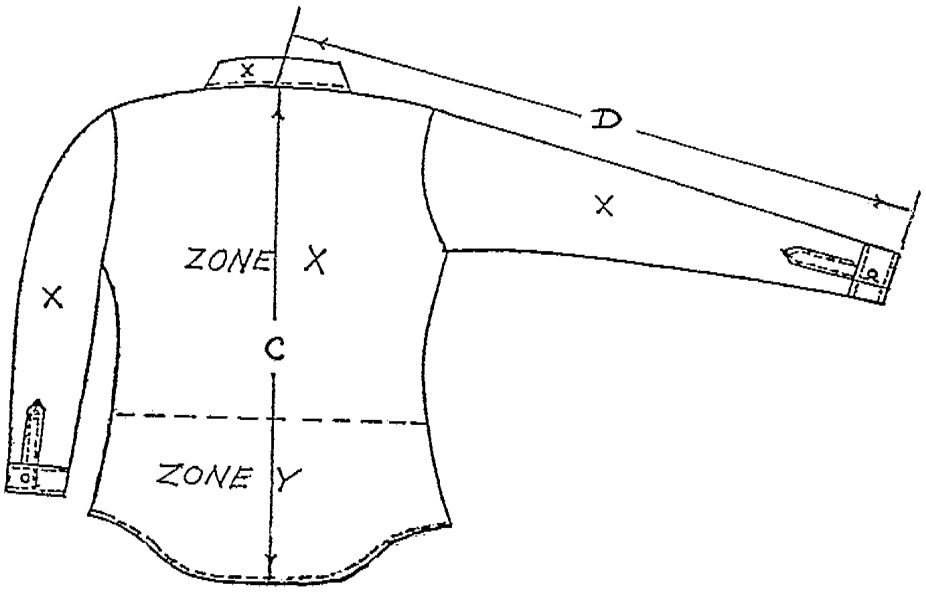


FIGURE 2 - SHIRT, WOMAN'S, DRESS, BLUE (LONG SLEEVE)

BACK VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:39Z
Check the source to verify that this is the current version before use.