MILITARY SPECIFICATION

WARHEAD, 2.75 INCH ROCKET, HE DUAL PURPOSE M247 WITH OR WITHOUT FUZE, LOADING

This specification is approved for use by the US Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification contains requirements and provides quality assurance provisions for the loading of one type of shaped charge warhead for the 2.75 Inch Rocket.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-R-11470	-	Radiographic Inspection, Qualifications of Equipment, Operators and Procedures
MIL-P-12815	-	Power Source, Piezoid (Lucky)
MIL-A-48078		Ammunition Standard Quality Assurance Provisions, General Specifications for

FSC: 1340

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-453	-	Radiographic Inspection
MIL-STD-1167	-	Ammunition Data Cards

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein.

CODE OF FEDERAL REGULATIONS

Title 49 - Transportation, parts 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402)

TECHNICAL SOCIETIES AND TECHNICAL ASSOCIATIONS

ASTM-A-36		Structural Steel
ASTM-A-370	-	Mechanical Testing
AISI-C-1018	-	Carbon Steel

(Technical Societies and Technical Associations specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

DRAWINGS

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)

8838107	-	Detonator, Electric, M84
9258181	-	Cap
9258192	-	Warhead, 2.75 Inch Rocket, Heat,Dual Purpose, M247 Loaded Assembly
9259239	-	Sleeve, Fuze
9259254	-	Booster Assembly

(Copies of specifications, standards, drawings and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Material. Material shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on drawing (dwg) 9258192 and associated drawings and with all requirements specified in applicable specifications and standards.

3.3 Cavitation and explosive leakage.

3.3.1 General. Cavities having a maximum (max) projected dimension of 1.32 inch or less shall be disregarded provided that they are separated by 1/2 inch of solid explosive.

3.3.2 Maximum projected area and dimensions of cavities. The maximum projected areas dimensions of cavities in each of the segments (see figure 1) shall be in accordance with Table I.

TABLE 1. Maximum cavity areas and dimensions.

SEGMENT A		SEGMENT B		SEGMENT C
Sum of Areas of all cavities (square inches)	Maximum dimension of any cavity (inch)	Sum of areas of all cavities (square inches)	Maximum dimension of any cavity (inch)	Sum of areas of all cavities (square inches)
1/16	3/16	3/8	5/8	1/16

3.3.3 Cavities extending into two segments. The projected area of cavities extending into two segments shall meet the requirement of both segments.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:46Z
Check the source to verify that this is the current version before use.

3.3.4 Piping cavities. Two or less piping cavities on the longitudinal axis of the projectile between two inches aft of the apex of the cone and the bottom surface of the fuze cavity shall be permitted provided that no projected length exceeds 2 inches and no width exceeds 1/4 inch. The projected area of such a cavity shall not be included when determining cavity area in the charge. A single piping cavity extending to the apex of the cone shall be permitted provided that its projected length does not exceed 1/2 inch and its width does not exceed 1/8 inch. The projected area of such a cavity shall not be included when determining cavity area in the charge.

3.3.5 Surface cavitation. Cavities formed due to explosive chipped or broken from the sidewalls of the fuze well shall not extend in aggregate around more than 1/4 of the circumference. The maximum dimensions of any visible cavity, after machining, on any surface of the fuze well shall not exceed 1/8 inch. The total area of all cavities visible on the bottom surface of the fuze well shall not exceed 1/4 square inch. (Cavities having a maximum dimension of 1/32 inch or less shall be disregarded in this computation) .

3.3.6 Cracks and annular rings. Cracks in the explosive shall be permitted in Segment A if they are no wider than 3/64 inch and provided not more than four occur in that segment (see figure 1). Cracks in the explosive shall be permitted in Segment B if they are no wider than 3/64 inch and provided not more than three occur in that segment (see figure 1). The presence of one annular ring, a maximum of 1/16 inch wide, and extending from the shell wall 1/4 inch into the charge, shall not be cause for rejection, except when it occurs in Segment C in the presence of a crack. Segment C is permitted either one crack not wider than 1/16 inch or one annular ring within the limitations stated above. The cavity area represented by a crack or annular ring shall not be included when determining cavity area in the charge.

3.4 Leakage of explosive. There shall be no evidence of explosive leakage through the cone-body joint or through the liner cable seal.

3.5 Insulation integrity. The loaded warhead less the forward cap assembly, compression pad, fuze and cap must measure ten (10) megohms minimum resistance when measured with one hundred (100) volts DC between the two leads of the wiring harness and between the two leads and the warhead body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

3.6 Penetration. The loaded warhead shall function satisfactorily as evidenced by complete detonation and penetration of mild steel when tested as specified in 4.5.5.

Stand-Off Distance (Measured from tip of nose cap to target	Minimum Penetration Requirement
0.0 inches	10.50 inches minimum

3.7 First article inspection. This specification makes provision for First Article Inspection. Requirements for the submission of First Article samples by the contractor shall be as specified in the contract.

3.8 Workmanship. Unless otherwise specified on the drawing, all parts and assemblies shall be free from burrs, chips, sharp edges, cracks, unblended radi, surface defects, dirt, grease, rust, porosity, warpage, burn marks, checks, blisters, excess flash, corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agents. Surface coating shall be continuous except for a few slight scratches not exposing base material. The loading and assembly operations shall be performed in a thorough, workmanlike manner consistent with the best practices of the industry. All required markings shall be neat and sharply defined. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspections Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the Contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are made a part of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. Unless otherwise specified herein, or in the contract, the following types of inspection shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a First Article sample as designated by the contracting officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated.

Part Description	Drawing	Quantity
Nose Cap Assembly	10048528	10
Warhead, 2.75 Inch Rocket, He: Dual Purpose M247, Metal Parts Assembly	9258191	4
Warhead, 2.75 Inch Rocket, HE: Dual Purpose, M247 Loaded Assembly (Loaded and drilled, prior to assembly of Nose Cap, Fuze and Cap)	9258192	4
Warhead, 2.75 Inch Rocket, HE: Dual Purpose, M247 Loaded Assembly (Less Fuze and Compression Pad, suitable for static penetration testing)	9258192	24
Warhead, 2.75 Inch Rocket, HE: Dual Purpose, M247 Loaded Assembly (Complete)	9258192	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

TABLE II. First Article Inspection.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-50986A(AR)

PARAGRAPH	TITLE: Warhead, 2.75 Inch Rocket, HE, Dual Purpose M247		SHEET 1 OF 2		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Nose Cap Assembly (Dwg. 10048528)				
	Examination for defects	10		3.2	4.4.2.1
	Warhead, 2.75 Inch Rocket, HE, Dual Purpose M247, Metal Parts Assembly (Dwg. 9258191)				
	Examination for defects	4		3.2	4.4.2.2
	Warhead 2.75 Inch Rocket, HE, Dual Purpose M247 Loaded Assembly (Loaded and Drilled Prior to Assembly of Nose Cap, Fuze and Cap) (Dwg. 9258192)				
	Examination for defects	4		3.2/3.4	4.4.2.3

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T20:46Z
Check the source to verify that this is the current version before use.

TABLE II. First Article Inspection.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-50986A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
	Warhead, 2.75 Inch Rocket, HE, Dual Purpose M247 (Continued)				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Warhead, 2.75 Inch Rocket, HE, Dual Purpose M247 Loaded Assembly (Less Fuze and Compression Pad) (Dwg. 9258192)				
	Examination for defects	24		3.2	4.4.2.4
	Penetration	24		3.6	4.5.5
	Warhead, 2.75 Inch Rocket, HE, Dual Purpose M247 Loaded Assembly (Complete) (Dwg. 9258192)				
	Examination for defects	4		3.2	4.4.2.5

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provision of MIL-A-48078. In addition, inspection lots of warheads shall not contain fuzes from more than three fuze lots. Homogeneity restrictions shall restrict those to one manufacturer and the same interfix number.

4.4.2 Examination. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level 11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	Nose Cap Assembly				10048528
					NEXT HIGHER ASSEMBLY 9258192
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Resistance between two terminals		0.40%	3.2	Ohmmeter
102	Cement on flat lucky assembly, other than on silvered surface		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-50986A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Warhead, 2.75 Inch Rocket, HE: Dual Purpose M247, Metal Parts Assembly				9258191
					NEXT HIGHER ASSEMBLY 9258192
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Evidence of foreign material		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-50986A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Warhead, Loaded and Drilled Prior to Assembly of Nose Cap Assembly, Fuze and Cap				9258192
					NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Comp B-4 caked on outside of assembly		100%	3.2	Visual
Major					
101	Depth of fuze cavity		0.40%	3.2	Gage
102	Diameter of fuze cavity		0.40%	3.2	Gage
103	Concentricity of fuze cavity		0.40%	3.2	Gage
104	Depth to explosive		0.40%	3.2	Gage
105	Cable cut or damaged		0.40%	3.2	Visual
106	Ogive loose or improperly installed		0.40%	3.2	Visual/Manual
107	Radiographic examination		0.40%	3.3/3.4	4.5.1
108	Insulation integrity		0.40%	3.5	4.5.3
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Warhead, Loaded Less Fuze and Compression Pad				9258192
					NEXT HIGHER ASSEMBLY ---
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Resistance Test (Piezoelectric circuit)		100%	3.2	4.5.4
102	Penetration	8(a)		3.6	4.5.5
Minor	None defined				

NOTES:
(a) Warheads with defective flexible cables may be used for the penetration test provided they are randomly selected from each lot's flexible cable, rejected loaded and drilled warheads.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Warhead Fully Assembled				9258192
					NEXT HIGHER ASSEMBLY ---
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Assembly dented, distorted or otherwise damaged		100%	3.2	Visual
102	Nose cap assembly loose or improperly aligned		100%	3.2	Visual/Manual
103	Cap too far above flush		0.40%	3.2	Gage
104	Protective finish inadequate or damaged		0.40%	3.2	Visual
105	Marking incorrect or illegible		0.40%	3.2	Visual
106	Radiographic inspection		0.40%	3.3	4.5.2
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described bed in the Quality Conformance Inspection tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "paragraph Reference/Inspection Method" column in the tables starting with 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein. The contractor shall submit all inspection equipment designs to the government for evaluation and approval prior to fabrication of such equipment.

4.5 Test methods and procedures.

PRECAUATION: This specification covers sampling and testing of chemical, toxic or explosive materials which are potentially hazardous to personnel. Accordingly, it is emphasized that all applicable safety rules, regulations and procedures must be followed in handling and processing these materials.

4.5.1 Radiographic examination of warhead, loaded and drilled prior to assembly of nose cap assembly, fuze and cap. The warheads shall be radiographically examined, in accordance with the procedures of MIL-STD-453, by directing the beam normal to the longitudinal axis of the warhead. The penetrameter used in the application specified in MIL-STD-453 shall be designed and constructed to insure a two (2) percent sensitivity. In addition, the sensitivity of x-ray technique shall be 2.0 percent, and the photographic density of the film shall be no less than 1.25. Any warhead that does not meet the cavitation standards of 3.3 shall be considered defective. In addition, the warhead shall be examined for explosive leakage into the forward section of the warhead. If leakage is evidenced by the x-ray, the forward electrical connector shall then be disassembled from the warhead and visual determination be made as to whether the material is explosive or adhesive sealant. Any warhead that shows evidence of explosive leakage shall be considered defective. Any warhead that shows evidence of excessive adhesive sealant or other substance shall be noted in the test report. Radiographic equipment, operations and procedures shall be qualified in accordance with Specification MIL-R-11470.

NOTE: Radiographic examination is required at two stages of assembly for two different criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

4.5.2 Radiographic examination of loaded warhead. The loaded warhead shall be radiographically examined, in accordance with the procedures of MIL-STD-453. by directing the beam normal to the longitudinal axis of the warhead. This radiograph shall be taken normal to the Radiograph in 4.5.1 and normal to the warhead longitudinal axis. The penetrameter used in the application specified in MIL-STD-453 shall be designed and constructed to insure a two (2) percent sensitivity. In addition, the sensitivity of x-ray technique shall be 2.0 percent, and the photographic density of the film used shall be no less than 1.00. Any warhead that has a component missing, or in which the forward cap assembly terminal and the forward end of the electrical harness assembly are improperly connected, or in which the cable and fuze are improperly placed, or in which the cable is improperly connected to the fuze, or the compression pad is improperly placed shall be considered defective. Radiographic equipment, operations and procedures shall be qualified in accordance with Specification MIL-R-11470.

4.5.3 Insulation integrity test. Each warhead in the sample shall have a one hundred (100) volt DC potential applied to measure the resistance between the leads of the wiring harness and between the live lead and the warhead. No more than 0.10 milliampere shall be applied to the circuit. Any assembly that does not meet the requirement of 3.5 shall be classed defective.

4.5.4 Resistance test (piezoelectric circuit). Each warhead shall be checked for the resistance of the piezoelectric circuit by contacting the cable assembly where the fuze connects, applying no more than 0.10 milliampere to the circuit and measuring the resistance. Any assembly that does not meet the requirements on the drawing shall be rejected and withdrawn from the lot.

4.5.5 Penetration. The warhead less fuze and compression pad shall be mounted symmetrically and aligned perpendicular to the target stack. Standoff of 0.0 inches may be achieved by resting the warhead on the tip of the nose cap. The target stack shall be of sufficient height to contain the warhead jet. The maximum depth of penetration shall be measured to the nearest tenth (1/10) inch by a probe of the last plate or rod penetrated. The warhead shall be initiated by an M84 Electric Detonator in conjunction with a booster assembly, dwg. 9259254. The booster assembly shall be held in normal position by filler material which shall center the initiator against the booster inside a Fuze Sleeve, dwg. 9259239. The Cap, dwg. 9258181, shall be drilled with a five sixteenth (5/16) inch, maximum, hole to facilitate electrical cable. The test procedure shall provide for preparation of the

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:46Z
Check the source to verify that this is the current version before use.

sample to the configuration illustrated in Figure 2. A simple arithmetic mean (average) of the eight penetration values shall be computed. A mean of less than 10.50 inches shall require that the lot be rejected. Each warhead shall be x-rayed in accordance with the procedures of MIL-STD-453 by directing the beam normal to the longitudinal axis of the warhead. The warhead charge shall be radiographed twice, the second picture to be displaced 90 degrees from the first. Both views shall be normal to the warhead longitudinal axis. The penetrameter used in the application specified in MIL-STD-453 shall be designed and constructed to insure a two percent (2%) sensitivity. In addition, the sensitivity of x-ray technique shall be 2.0 percent, and the photographic density of the film used shall be no less than 1.25.

NOTE : All local safety regulations shall be observed and precautions taken consistent with the handling of loaded items.

4.5.5.1 Target stack. Mild steel is defined as Carbon Steel Plate or Rod. For the purpose of obtaining penetration values, Carbon Steel Plate or Rod of Structural Quality shall be used. The target material shall meet the following requirements:

a. The hardness of the target material shall be from 116 to 156 Brinell,

b. The requirements of ASTM-A-36 or AISI-C-1018 with the revision that the tensile strength shall be within a minimum of 58,000 psi and a maximum of 80,000 psi.

c. The plates shall have a nominal thickness of two inches or 4 inches as applicable.

d. The cylinders shall have a diameter of five inches and shall be five inches long.

e. Samples for testing. Each plate or rod as-rolled shall meet the requirements stated above. “As-rolled” is defined as the original total product rolled from a slab or directly from an ingot. The test specimens used shall be taken from the mill product in accordance with the AISI Steel Products Manual.

The hardness determination shall be made on each plate or rod-as-rolled and on a representative sample of the plates or rods-as-cut for target stacking. The representative sample of the plates or rods-as-cut shall be selected randomly in accordance with special inspection level S-3 of MIL-STD-105, using the Single

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

Sampling Plan for Normal Inspection, Table IIA. The hardness measurement shall be taken at the center of both faces of the target material. Failure of one or more pieces of target material to meet the hardness requirement shall be cause for rejection of all the target material obtained from the original mill product. All mechanical testing shall be performed on each mill product in accordance with ASTM-A-370.

4.5 6 Data requirements. The contractor shall submit a quality inspection test demonstration and evaluation report in accordance with Data Item Descriptions DI-R-1721 and DI-R-1724 giving the detailed test results.

5. PACKAGING

5.1 Packaging and packing. This specification covers the loading only for 2.75 Inch Rocket, HEDP M247 Warheads. The warhead is to be delivered as part of a complete round in accordance with MIL-R-50263, unless otherwise specified in the contract.

5.2 Ammunition data cards. Data card information shall be as specified in MIL-STD-1167.

6.0 NOTES

6.1 Intended use. The components covered by this specification are intended for use on the 2.75 Inch Folding Fin Aerial Rocket.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. See 6.2 of MIL-A-48078. Sumnit designs as required to Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAF-I, Dover, NJ 07801.

6.4 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph No.	Data Requirement	Title	Applicable DID No.
4.5.6	Quality Inspection Test Demonstration Evaluation Report		DI-R-1724
4.5.6	Quality Inspection Defect Report		DI-R-1721

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L. , Vol. II, amsdl. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval publications and Forms Center or as directed by the contracting office.)

6.5 First article. When a first article is required for inspection and approval, see 3.7 and 4.3.

6.6 Source control and specification control drawings. Cetificates of conformance from the supplier certifying that the item complies with the drawing requirements shall be provided to the government representative.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.


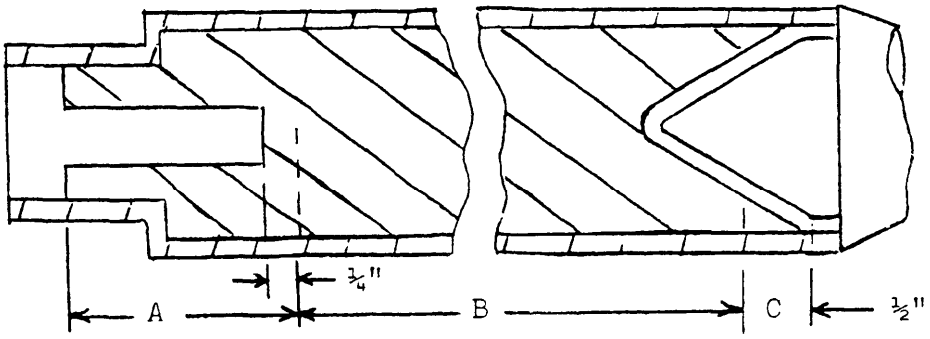


Figure 1. Cavity segments

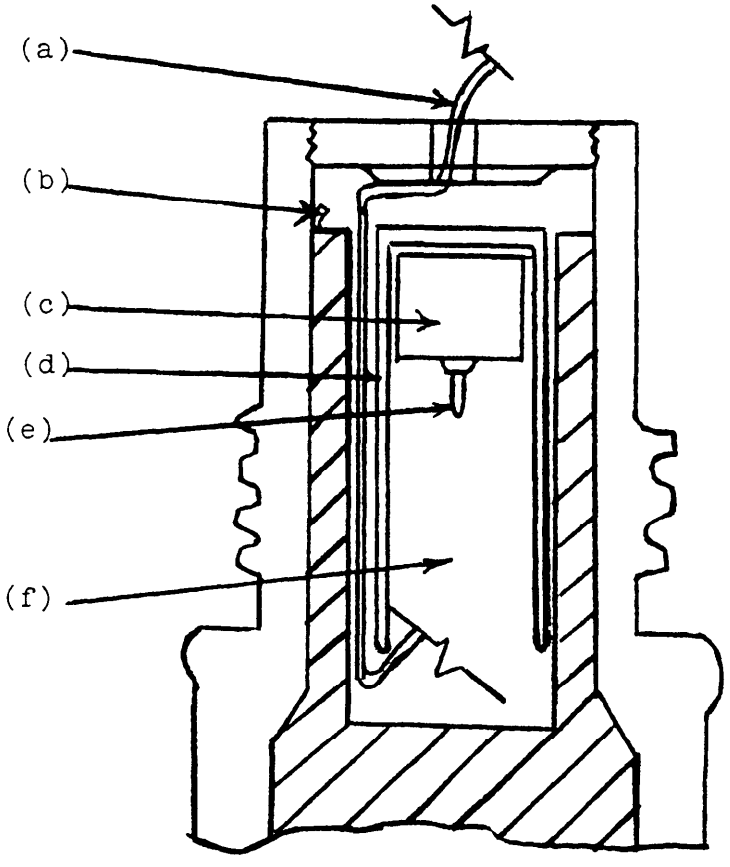

NOTES:
(a) Flexible Cable Assembly (9259235) modified for electrical connections at one or both
(b) Cut and dispose of exposed end of cable.
(c) Booster Assembly (9259254)
(d) Fuze Sleeve (9259239) or approved modification of
(e) Fuze Detonator for M438 Fuze
(f) Filler may be M438 Fuze components.

Figure 2. Penetration test sample configuration

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:46Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AR

Preparating activity:
Army - AR
(Project 1340-A632)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-W-50986A WARHEAD, 2.75 INCH ROCKET, HE DUAL PURPOSE M247 WITH OR WITHOUT FUZE LOADING

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:46Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN: DRDAR-QAF
DOVER, NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:46Z
Check the source to verify that this is the current version before use.