MILITARY SPECIFICATION SHEET

VALVE, SELECTOR, THREE-WAY, PILOT OPERATED

This specification is approved for use within Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve described herein shall consist of this specification and the latest issue of MIL-V-47322(MI).

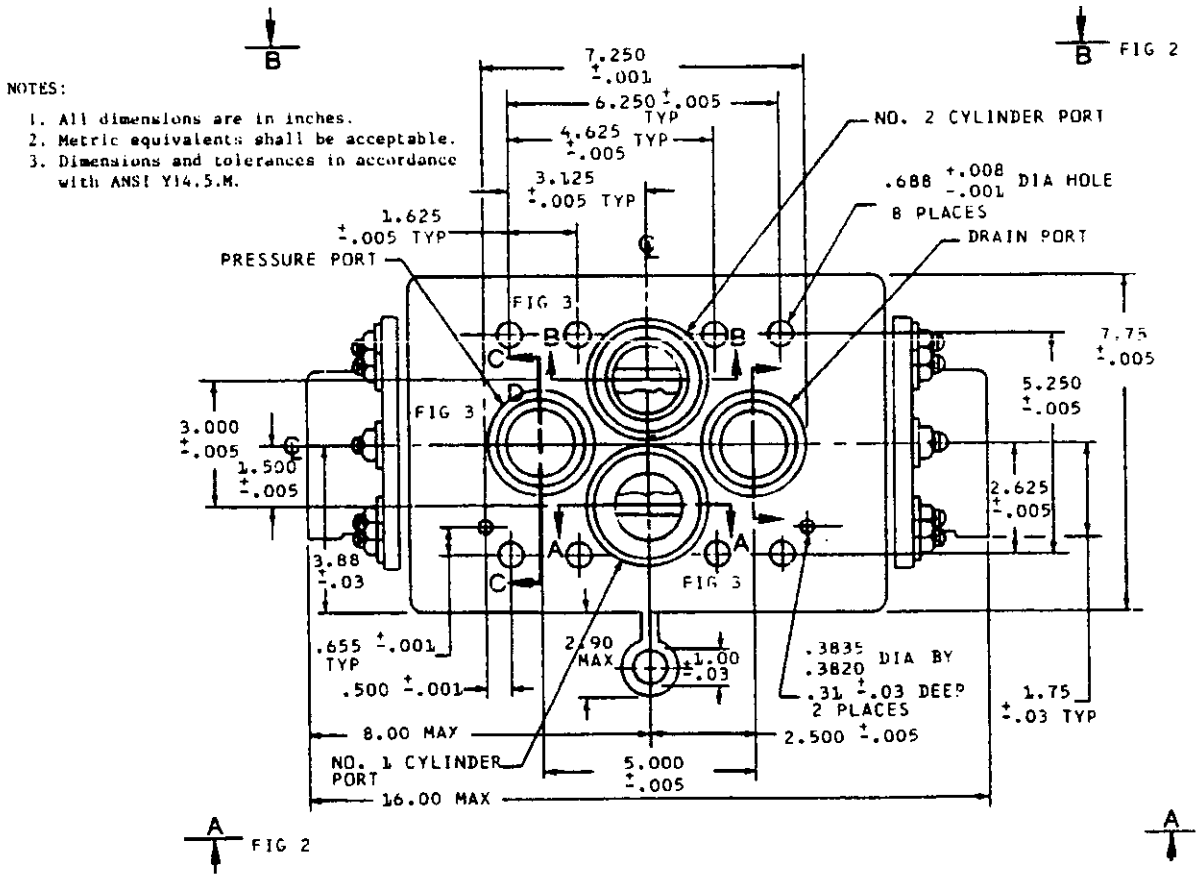
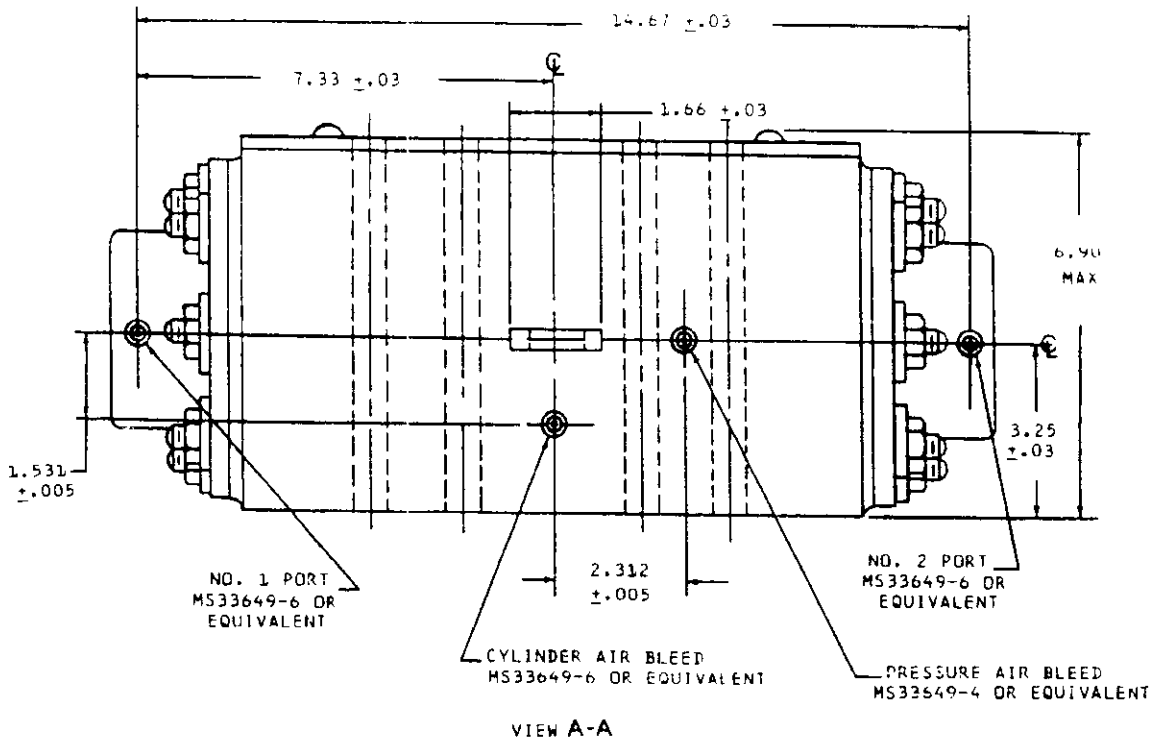


FIGURE 1. Valve selector, pilot operated.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.




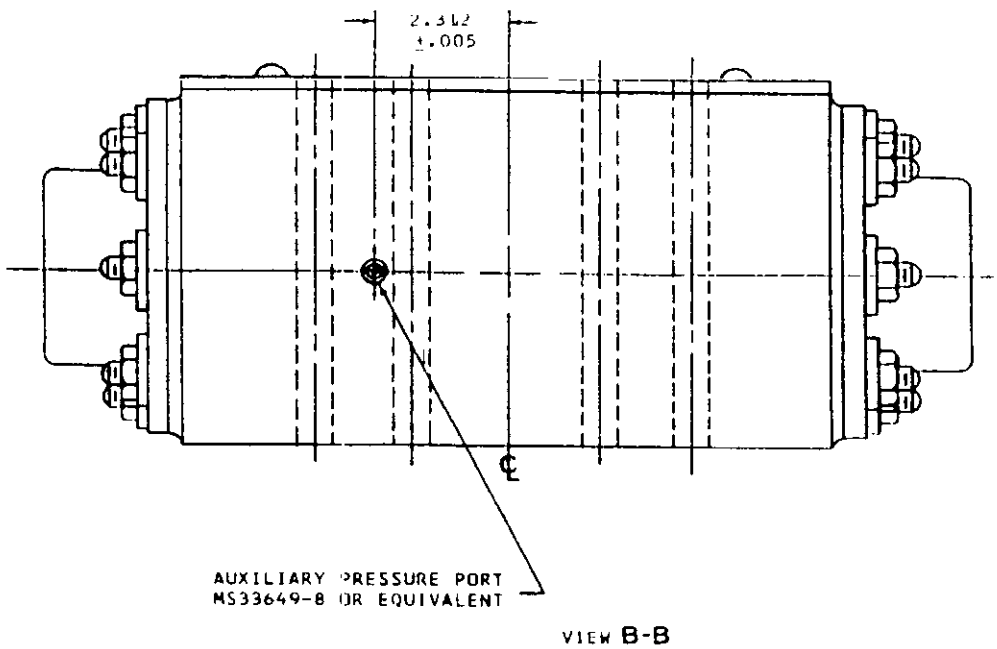



FIGURE 2. Views A-A and B-B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

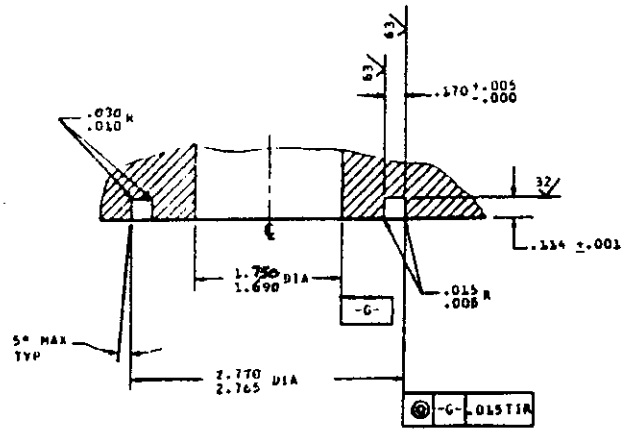


NO. 1 CYLINDER PORT

SECTION A-A

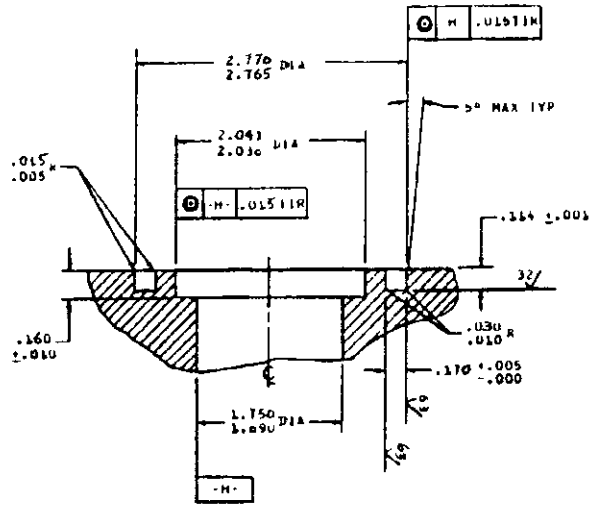


NO. 2 CYLINDER PORT

SECTION B-B

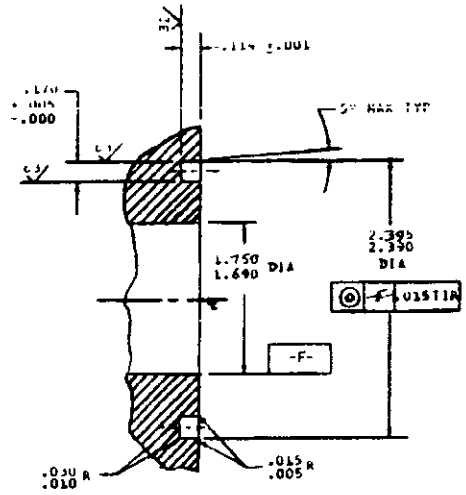

DRAIN AND PRESSURE PORTS
DRAIN PORT SHOWN

SECTION C-C
2 PLACES

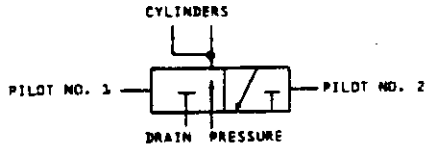

VALVE SCHEMATIC

FIGURE 3. Details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Housing: Bronze in accordance with ASTM B61.

Metals: Metals other than those in contact with the fluid media shall be corrosion resisting or protected to resist corrosion.

Finish: First coat in accordance with DOD-P-15328 with top coat in accordance with MIL-P-23377 type 1, plus MIL-C-46168 type optional.

Seals: In accordance with MS28775.

Design and construction: The cylinder ports shall be internally connected within the valve. The air bleed ports shall bleed all air from the pressure and cylinder port. An auxiliary port shall be internally connected to the pressure port.

Unit weight: 175 pounds (lb) maximum.

Mechanical requirements:

Pressure drop: 50 pounds per square inch (psi) maximum at a flow rate of 150 gallons per minute (gpm) minimum when tested in accordance with MIL-H-8775.

Actuation time: 1 second minimum, 3 seconds maximum at pressures of 1000 and 3000 psi.

Internal leakage: Drop tight.

Marking: Apply part number in accordance with MIL-STD-130.

Electrical requirements: N/A

Part number: M47322/2.

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4810-A072)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.