
MILITARY SPECIFICATION SHEET

VALVE, SELECTOR, SOLENOID OPERATED

This specification is approved for use within the Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve described herein shall consist of this specification and the latest issue of MIL-V-47322(MI).

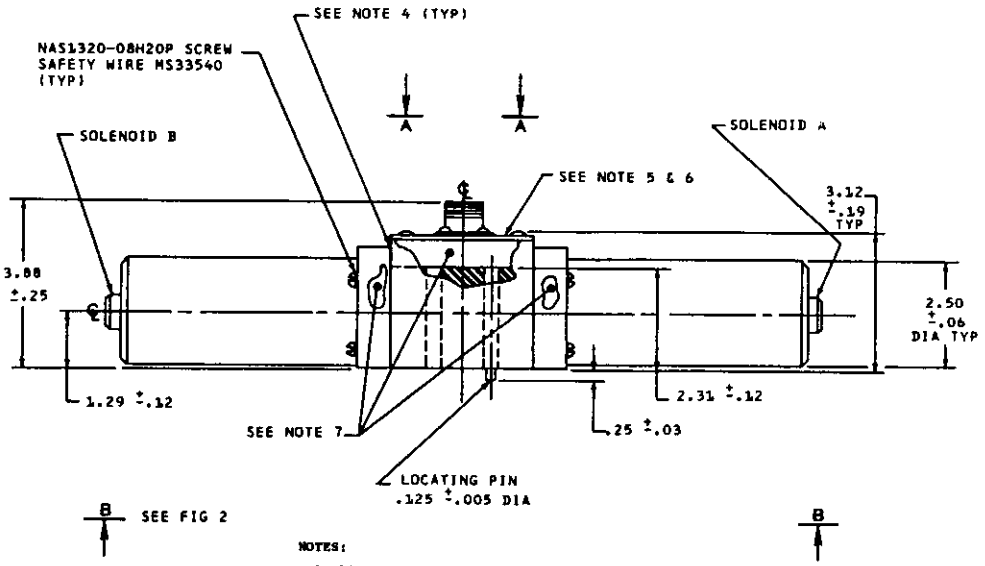

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are acceptable.
3. Dimensions are after plating unless otherwise specified.
4. Gasket cement per MIL-S-8802, class optional.
5. Remove name plate to mount part.
6. MIL-G-46898 RFJ type gaskets.
7. Fill cavities with compound per MIL-S-8660.
8. Seal with tape per MIL-T-27730.

FIGURE 1. Valve, selector.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.



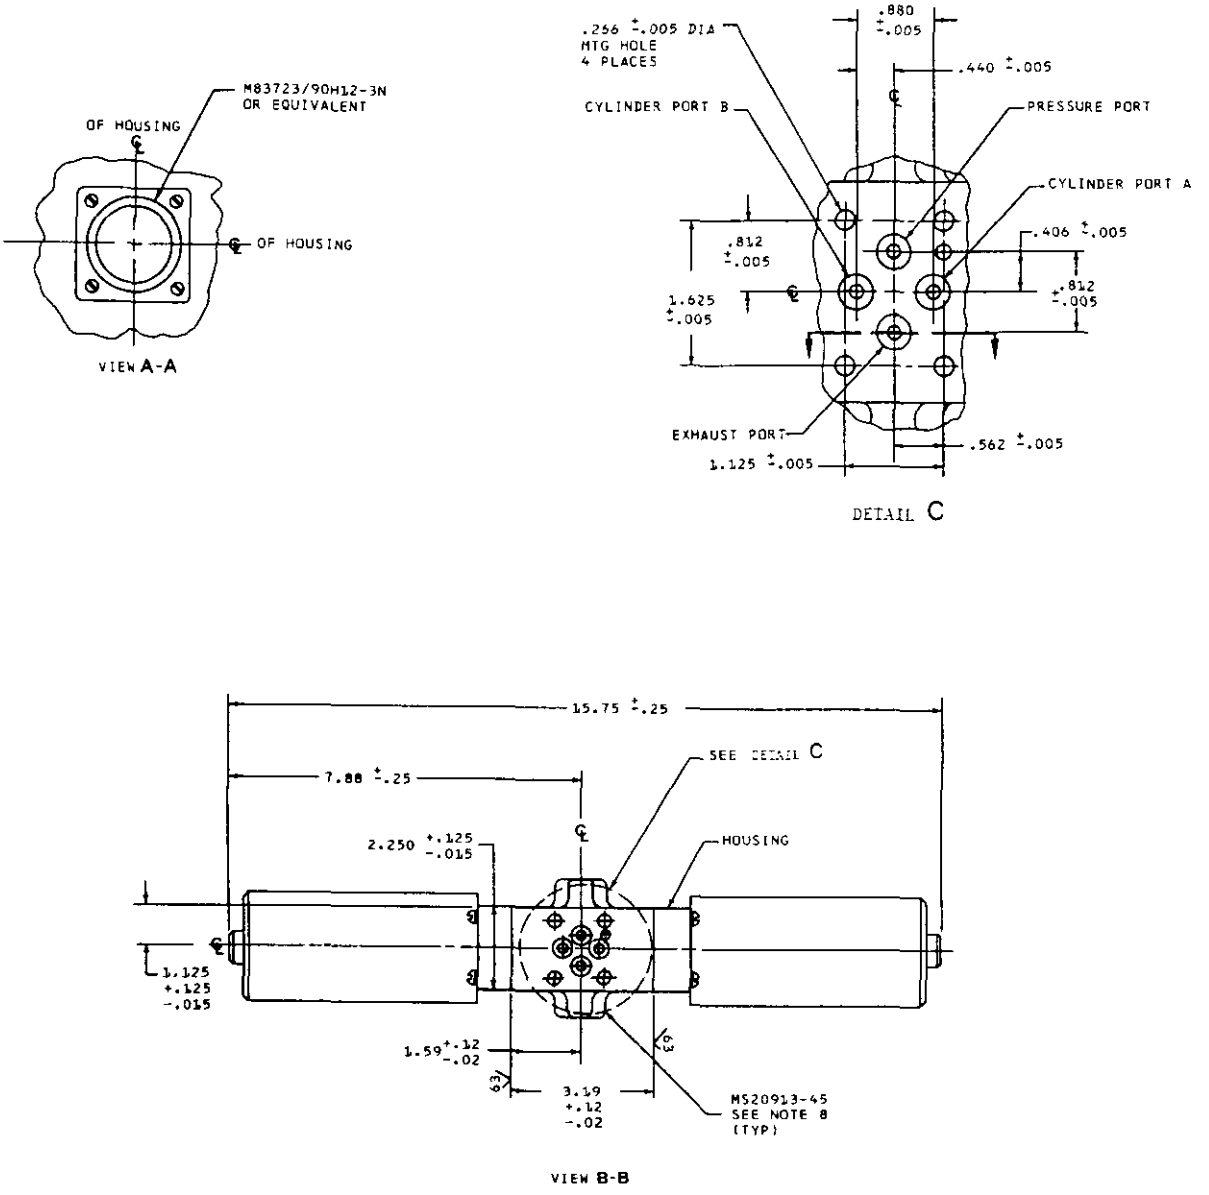


FIGURE 2. Details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

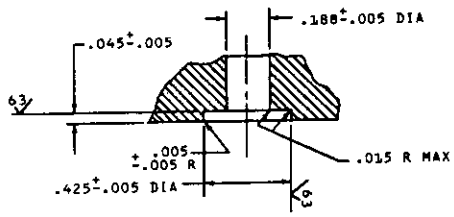

SECTION D-D
TYP 4 PLACES

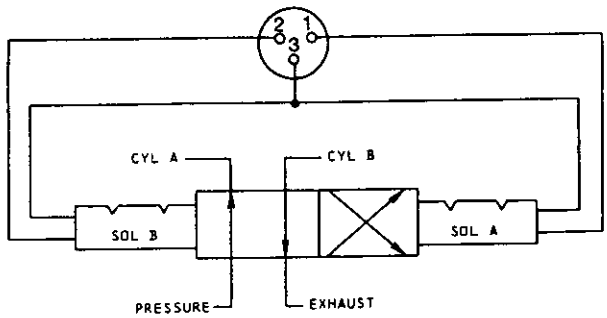

VALVE SCHEMATIC SOLENOID A ACTUATED

FIGURE 3. Details(cont'd).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Materials:

Housing: Steel, commercial.

Internal surfaces: Compatible with the operating media.

Slide: Corrosion resistant steel, commercial.

Seals: Elastomers in accordance with MIL-P-25732.

Surface roughness: In accordance with ANSI B46.1.

Finish:

External: Enamel, commercial, except ports.

Design and construction: The valve shall have detents to retain the valve in the last energized position with no electrical power applied. When the opposite coil is energized the valve will change position. Valve shall withstand electrical power applied continuously and shall operate in any attitude. Valve shall have a manual override.

Unit weight: 16 pounds (lb) maximum.

Mechanical requirements:

Internal leakage: One drop per minute maximum per port.

Flow rate: 0.28 gallons per minute (gpm).

Pressure drop: 10.0 pounds per square inch (psi) maximum at rated flow.

Actuation time: 0.25 seconds maximum.

Service life: 50,000 cycles. One cycle defined as port A to port B to port A.

Electrical requirements:

Duty cycle: Continuous.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

Actuation voltage: 21 to 28 volts dc (Vdc).

Coil current at 24 Vdc:

In rush: 1.67 amperes (A) ref.

Holding: 1.67 amperes (A) ref.

Coil resistance at 70°C:

In rush: 14.4 ± 1.5 ohm.

Holding: 14.4 ± 1.5 ohm.

Dielectric strength: 500 volts root mean square (Vrms) at 60 Hz for 60 seconds, current leakage 10 milliamperes (mA) maximum.

Insulation resistance: 50 megohm minimum at 500 Vdc

Part number: M47322/7

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4810-A074)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.