
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN158001 THRU AN158300

FSC 5307

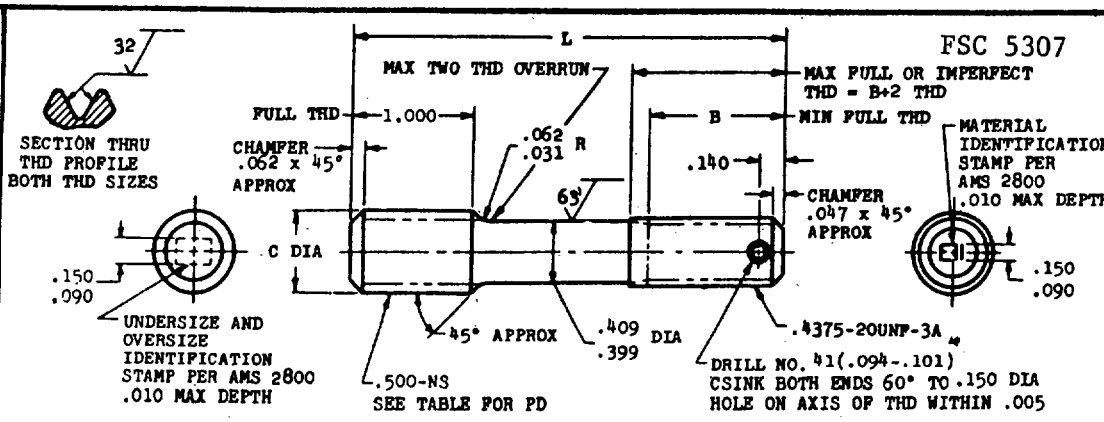

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.495-.500	.495-.500	.495-.500	.495-.500	.504-.509	.504-.509
PD BEFORE PLATING		.4518-.4528	.4548-.4558	.4578-.4588	.4608-.4618	.4638-.4648	.4668-.4678
PD AFTER PLATING		.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.4688
PD LEAD THREAD		.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.4620
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.750 1.812	.625 .688	AN158019 AN158025	AN158020 AN158026	AN158021 AN158027	AN158022 AN158028	AN158023 AN158029	AN158024 AN158030
1.875 1.938	.750 .750	AN158031 AN158037	AN158032 AN158038	AN158033 AN158039	AN158034 AN158040	AN158035 AN158041	AN158036 AN158042

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(4) CANCELED AS OF 9 OCT 87

(2) DO NOT USE ASSIGNED PART NUMBERS.
(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN158001 THRU AN158300
NONE	STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, .500-13 x .4375-20	

E-25-121

Project 5307-0390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.