
FED. SUP CLASS
9540

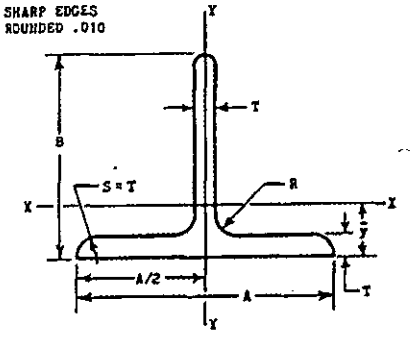

NOTES ON SYMBOLS

"y" = LOCATING DIMENSIONS FOR AXIS XX.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10136-1801", "10136" INDICATES "TEE", 18 INDICATES 1-4/8" FOR DIMENSION "A" (1.500 IN COL. "A"). 01 IN 1801 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

(3) REINSTATE - 3 Mar 82

AND 10136 DASH NO'S	NOMINAL DIMENSIONS				AREA
	A	B	T	R	
	Inches				Square Inches
-1201	1.250	.625	.050	.094	.0937
-1202		.750	.063	.125	.127
-1301	1.3750	.750	.050	.094	.106
-1302		1.000	.063	.125	.150
-1303			.078		.183
-1304			.094		.216
-1305		1.250	.094		.240
-1401	1.500	.750	.063	.125	.141
-1402			.094		.204
-1403		1.000	.078		.193
-1404			.094		.228
-1405		1.250	.078		.212
-1406			.094		.252
-1407			.125		.326
-1501	1.6250	.875	.078	.125	.192
-1502			.125		.295
-1503		1.125	.078		.212
-1504			.125		.326
-1505		1.375	.094		.275
-1506			.125		.358
-1507			.156		.437
-1601	1.750	.875	.094	.125	.240
-1602			.125		.311
-1603		1.125	.094		.263
-1604			.156		.418
-1605		1.375	.094		.287
-1606			.156		.457
-1607		1.625	.094		.313
-1608			.125		.405
-1609			.156		.497

SECTION ELEMENTS				
$\bar{y}$	Ixx	Iyy	ρ xx	ρ yy
Inch	Inches^4		Inch	
.121	.0028	.0077	.173	.287
.160	.0055	.0098	.209	.276
.148	.0046	.0103	.209	.312
.228	.0131	.0129	.256	.293
.235	.0156	.0158	.292	.294
.242	.0182	.0183	.290	.295
.327	.0345	.0189	.379	.280
.121	.0052	.0169	.192	.346
.159	.0080	.0224	.198	.346
.225	.0160	.0200	.288	.327
.232	.0186	.0245	.286	.328
.307	.0301	.0206	.377	.312
.314	.0354	.0245	.375	.312
.327	.0449	.0319	.371	.313
.180	.0110	.0263	.240	.370
.198	.0161	.0407	.294	.372
.254	.0228	.0263	.328	.352
.274	.0339	.0403	.322	.364
.345	.0475	.0314	.415	.338
.358	.0605	.0408	.411	.338
.370	.0725	.0499	.407	.338
.279	.0131	.0393	.234	.405
.191	.0162	.0512	.230	.406
.252	.0273	.0343	.322	.336
.276	.0412	.0648	.314	.387
.333	.0584	.0393	.411	.370
.358	.0741	.0627	.403	.371
.420	.0777	.0394	.500	.356
.434	.0995	.0513	.496	.356
.446	.1200	.0629	.492	.356

APPROVED 2 Apr 43 REVISED (1) 20 Mar 45 (2) 1 Sep 81 (3) 3 Mar 82

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.


F. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE TEE - EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND10136
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		

DD FORM 1 MAY 72 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 9540-0077

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9540

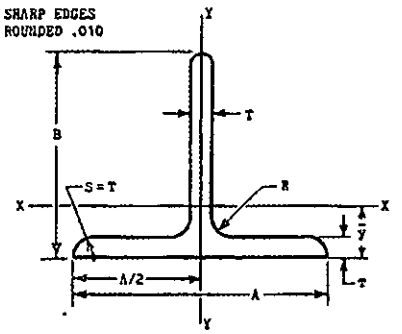

NOTES ON SYMBOLS

"$\bar{y}$" = LOCATING DIMENSIONS FOR AXIS XX-YY.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10136-2401", "10136" INDICATES "TEE", 24 INDICATES 2-4/8" FOR DIMENSION "A" (2.500 IN COL. "A"). 01 IN 2401 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10136 DASH NO'S	NOMINAL DIMENSIONS				AREA
	A	B	T	R	
	Inches				Square Inches
-1201	1.875	1.000	.078	.125	.222
-1202			.094		.263
-1203			.125		.342
-1204		1.250	.125		.373
-1205			.156		.457
-1206		1.500	.094		.310
-1207			.125		.405
-1208			.156		.496
-1209		1.750	.156		.535
-2001	2.000	1.000	.078	.125	.231
-2002			.094		.275
-2003			.125		.358
-2004		1.250	.078		.251
-2005			.094		.299
-2006			.125		.389
-2007		1.750	.094		.346
-2008			.125		.451
-2401	2.500	1.250	.094	.125	.346
-2402			.125		.452
-2403			.156		.554
-2404		1.625	.094		.381
-2405			.125		.498
-2406			.156		.613
-2407		2.000	.125		.545
-2408			.156		.671
-2409			.188	.188	.807
-3001	3.000	1.500	.125	.125	.545
-3002			.156		.671
-3003		2.000	.156		.749
-3004			.188	.188	.901
-3005		2.500	.125	.125	.670
-3006			.188	.188	.995

SECTION ELEMENTS				
$\bar{y}$	Ixx	Iyy	ρxx	ρyy
Inch	Inches^4		Inch	
.200	.0169	.0408	.275	.429
.207	.0197	.0486	.274	.429
.219	.0249	.0635	.270	.430
.294	.0479	.0634	.358	.412
.306	.0572	.0776	.354	.412
.363	.0631	.0485	.452	.396
.376	.0809	.0635	.447	.396
.388	.0973	.0776	.443	.396
.477	.1513	.0777	.532	.381
.194	.0171	.0496	.272	.463
.200	.0200	.0592	.270	.464
.212	.0253	.0770	.266	.464
.265	.0325	.0495	.360	.444
.272	.0383	.0592	.358	.445
.285	.0488	.0770	.354	.445
.438	.0995	.0592	.537	.414
.451	.1278	.0772	.532	.414
.241	.0403	.1168	.342	.581
.254	.0513	.1530	.338	.582
.265	.0616	.1881	.333	.583
.351	.0858	.1168	.475	.554
.364	.1101	.1530	.470	.554
.376	.1329	.1882	.466	.554
.487	.1991	.1531	.604	.530
.500	.2412	.1884	.599	.530
.509	.2831	.2240	.592	.527
.295	.0914	.2670	.409	.700
.307	.1103	.3291	.405	.700
.456	.2539	.3292	.582	.663
.465	.2984	.3919	.576	.659
.611	.3929	.2669	.766	.631
.632	.5649	.3925	.754	.628

APPROVED 2 Apr 43 REVISED ① 20 Mar 45 ② 1 Sep 81 ③ 3 Mar 82

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

P. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE TEE - EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND10136
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 72 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.