NOT MEASUREMENT SENSITIVE

MIL-DTL-1563/13A
30 April 1997
SUPERSEDING
MIL-B-1563/13
31 December 1990

DETAIL SPECIFICATION SHEET

INSIGNIA, U.S.M.A., BUCKLE, BREASTPLATE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-1563 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

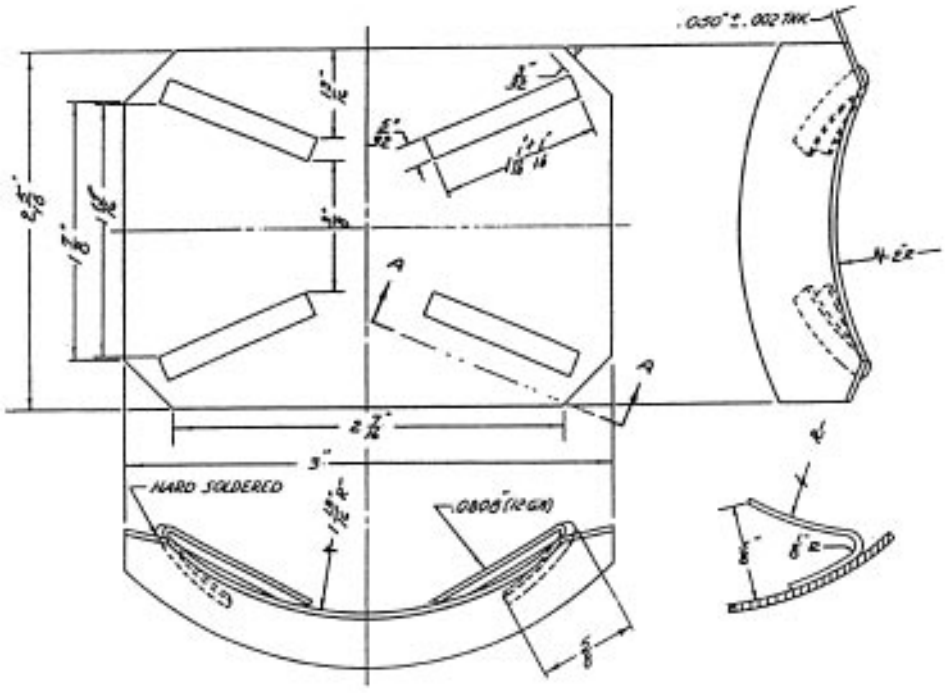

MATERIAL: Yellow Brass

FINISH: Mirror-like Polished Fronts, Matte Finish Back and Edges

MARKING FOR IDENTIFICATION: Back of Buckle.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:29Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT: 2-5/16 inches ± 1/64 inch (5.87 cm ± 0.04 cm))
WIDTH: 2-7/16 inches + 1/64 inch (6.19 cm + 0.04 cm
THICKNESS: 0.050 inch ± .002 inch (0.127 cm ± 0.005 cm)

SUGGESTED PACKAGING: Standard Commercial

UNIT PACKAGING: Each Wrapped.

INTERMEDIATE PACKAGING: 50 breastplates per box.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Breastplate shall conform to the design and dimensions shown.

3. Breastplate shall be dapped as shown.

4. The following shall be used for metric conversion:

INCH	CENTIMETER
3	7.62
2-7/16	6.09
2-5/16	5.87
2	5.08
1-7/8	4.76
1-13/16	4.60
1-1/16	2.70
13/16	2.06
5/8	1.59
3/8	0.95
5/32	0.40
1/8	0.32
3/32	0.24
1/16	0.16
0.050	0.127
0.002	0.005

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0880)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:29Z
Check the source to verify that this is the current version before use.