NOT MEASUREMENT SENSITIVE

MIL-DTL-1563/3A
30 April 1997
SUPERSEDING
MIL-B-1563/3
31 December 1990

DETAIL SPECIFICATION SHEET

INSIGNIA, U.S.M.A., COLLAR, BLACK, GRAY OR GOLD SHIELD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-1563 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

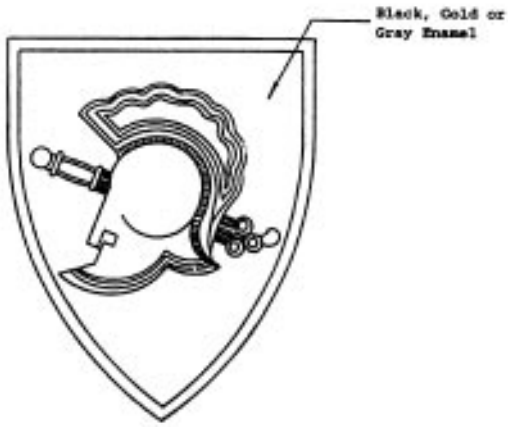

MATERIAL:

-1, -3, -5:
BASE: Gilding Metal
DEVICE: Red Brass or Gilding Metal

-2, -4, -6:
BASE: Red Brass or Gilding Metal
DEVICE: Red Brass or Gilding Metal

DASH NO.

-1. Regular
-2: Subdued
-3: Regular
-4: Subdued
-5: Regular
-6: Subdued

DIMENSIONS:
HEIGHT: 1-3/32 inch (2.78 cm) (REF)
WIDTH: 7/8 inch (2.22 cm) (REF)
THICKNESS (On Helmet): 0.080 inch $\pm$ 0.005 inch (0.203 cm $\pm$ 0.012 cm))

MARKING FOR IDENTIFICATION: Back of Insignia.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:26Z
Check the source to verify that this is the current version before use.

FINISH:

-1: BASE: Black Epoxy Resin (Stoning Epoxy), Gold Plated, Polished Finish.
DEVICE: Gold Plated, Polished Finish.

-2: BASE: Black Baked Enamel.
DEVICE: Brown Baked Enamel.

-3: BASE: Gray Epoxy Resin (Stoning Epoxy), Gold Plated, Polished Finish.
DEVICE: Gold Plated, Polished Finish.

-4: BASE: Olive Drab Baked Enamel.
DEVICE: Brown Baked Enamel.

-5: BASE: Gold Epoxy Resin (Stoning Epoxy), Gold Plated, Polished Finish.
DEVICE: Gold Plated, Polished Finish.

-6: BASE: Brown Baked Enamel.
DEVICE: Brown Baked Enamel.

SUGGESTED PACKAGING: Standard Commercial

UNIT PACKAGING: One branch insignia shall be mounted on a 1-1/4 x 1-1/2 inch card.

INTERMEDIATE PACKAGING: 100 mounted cards per box.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Two prongs shall be located on the vertical centerline, equidistant from each end and 3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm) apart. When epoxy resin is used, rivets shall be used to attach the device to the shield.

3. Epoxy resin (stoning epoxy) areas for Dash No. -1, -3 and -5 shall be as indicated and the color as specified in the acquisition documents. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
Gold	31
Gray	27

4. Baked enamel for Dash No. -2, -4, and -6 shall match the color chip number of FED--STD-595 as follows:

COLOR	CHIP NUMBER
Black	37038
Brown	20095
Green (Olive Drab)	34096

5. Hard enamel may be used in lieu of epoxy resin (stoning epoxy) at the option of manufacturer.

6. The device (helmet and sword) may be attached to the base by either soft solder or two rivets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:26Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0880)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:26Z
Check the source to verify that this is the current version before use.