INCH-POUND

MIL-DTL-1563/3C
20 May 2019
SUPERSEDING
MIL-DTL-1563/3B
6 January 2014

DETAIL SPECIFICATION SHEET

INSIGNIA, U.S.M.A., COLLAR, BLACK, GRAY OR GOLD SHIELD

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-B-1563.

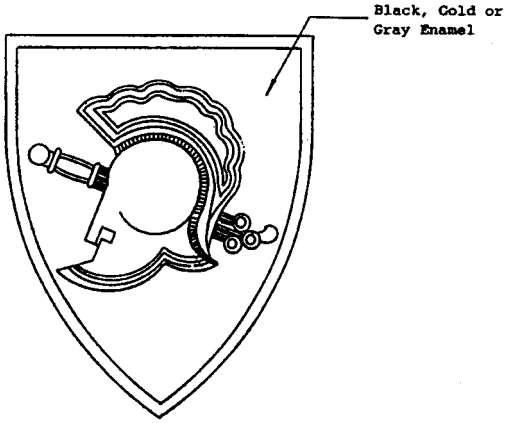

DASH NO.
-1: Regular
-2: Subdued
-3: Regular
-4: Subdued
-5: Regular
-6: Subdued

MATERIAL:
-1, -3, -5:
BASE: Gilding Metal 95/5 (UNS Alloy No. C-210)
DEVICE: Red Brass 85/15 (UNS Alloy No. C-230)
-2, -4, -6:
BASE: Red Brass 85/15 (UNS Alloy No. C-230) or Gilding Metal 95/5 (UNS Alloy No. C-210)
DEVICE: Red Brass 85/15 (UNS Alloy No. C-230) or Gilding Metal 95/5 (UNS Alloy No. C-210)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:26Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT: 1-3/32 inch (REF)
WIDTH: 7/8 inch (REF)
THICKNESS (On helmet): 0.080 inch ± 0.005 inch

MARKING FOR IDENTIFICATION: Back of Insignia

FINISH:
-1: BASE: Black Epoxy Resin (Stoning Epoxy), Gold Plated, Polished Finish.
DEVICE: Gold Plated, Polished Finish.

-2: BASE: Black Baked Enamel.
DEVICE: Black Baked Enamel.

-3: BASE: Gray Epoxy Resin (Stoning Epoxy), Gold Plated, Polished Finish.
DEVICE: Gold Plated, Polished Finish.

-4: BASE: Olive Drab Baked Enamel.
DEVICE: Brown Baked Enamel.

-5: BASE: Gold Epoxy Resin (Stoning Epoxy), Gold Plated, Polished Finish.
DEVICE: Gold Plated, Polished Finish.

-6: BASE: Brown Baked Enamel.
DEVICE: Brown Baked Enamel.

ATTACHING DEVICE:
1. Attaching device shall be prong and clutch type.

2. Two prongs shall be located on the vertical centerline, equidistant from each end and 3/4 inch $\pm$ 1/64 inch (1.91 cm $\pm$ 0.04 cm) apart. When epoxy resin is used, rivets shall be used to attach the device to the shield.

EPOXY: Epoxy resin shall be applied to the Lapel Button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26
Gold	#31
Gray	#27

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:26Z
Check the source to verify that this is the current version before use.

Baked Enamel for -2, -4, and -6 shall match the color chip number of SAE-STD-AMS-595 as follows.

COLOR	CHIP NUMBER
BLACK	37038
BROWN	20095
GREEN (Olive)	34096

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Hard enamel may be used in lieu of epoxy resin (stoning epoxy) at the option of manufacturer.

3. The device (helmet and sword) may be attached to the base by either soft solder or two rivets.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2019-226)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:26Z
Check the source to verify that this is the current version before use.