MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS P

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1986 ©

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.


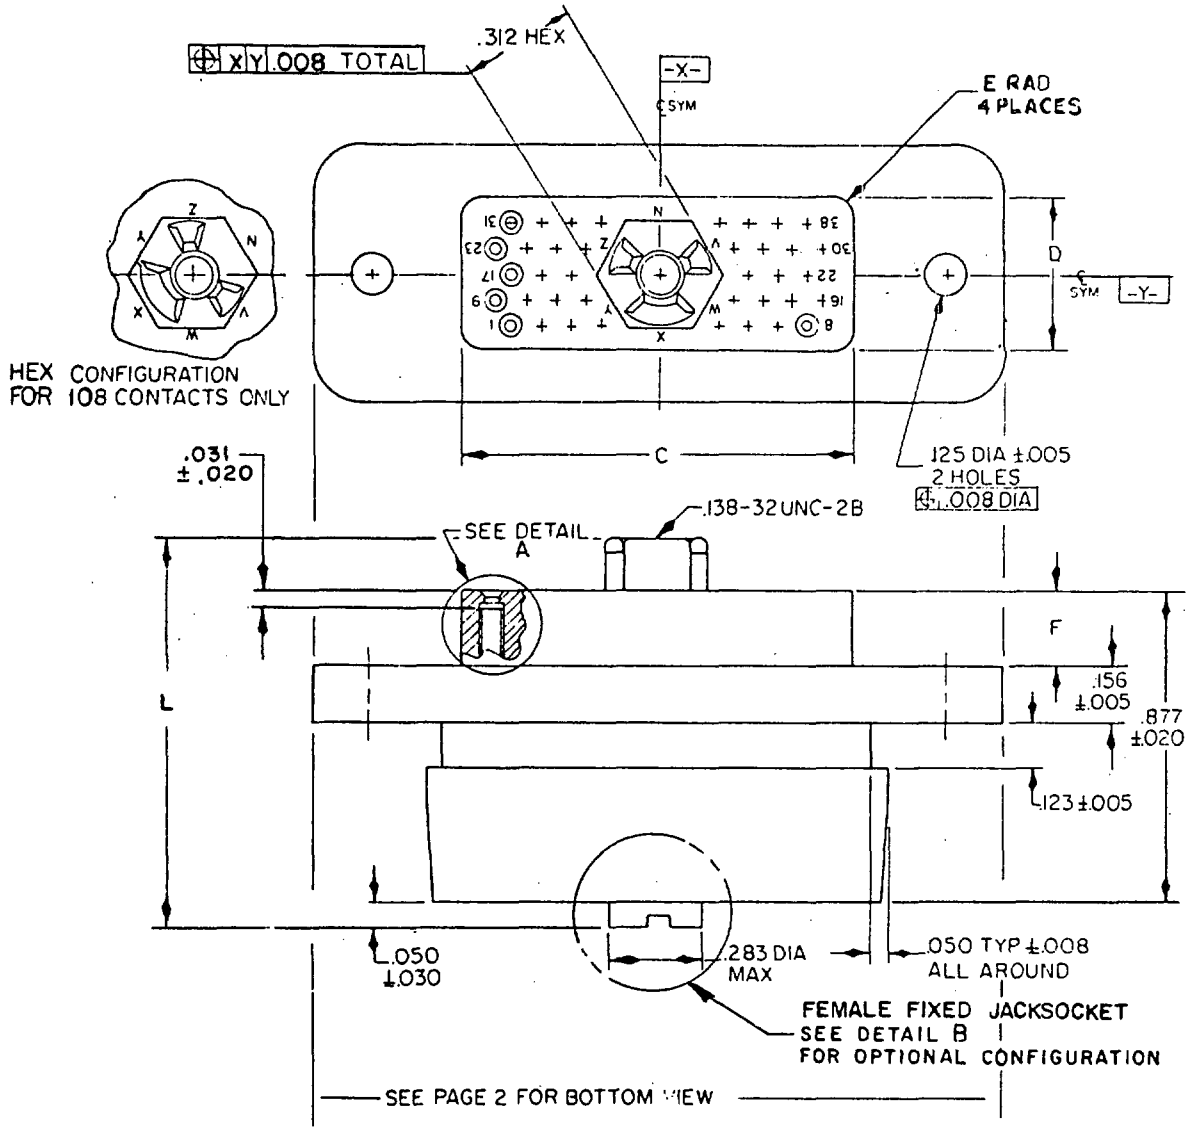


FIGURE 1. Connector, crimp removable socket contacts, class P.

© Denotes change


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.

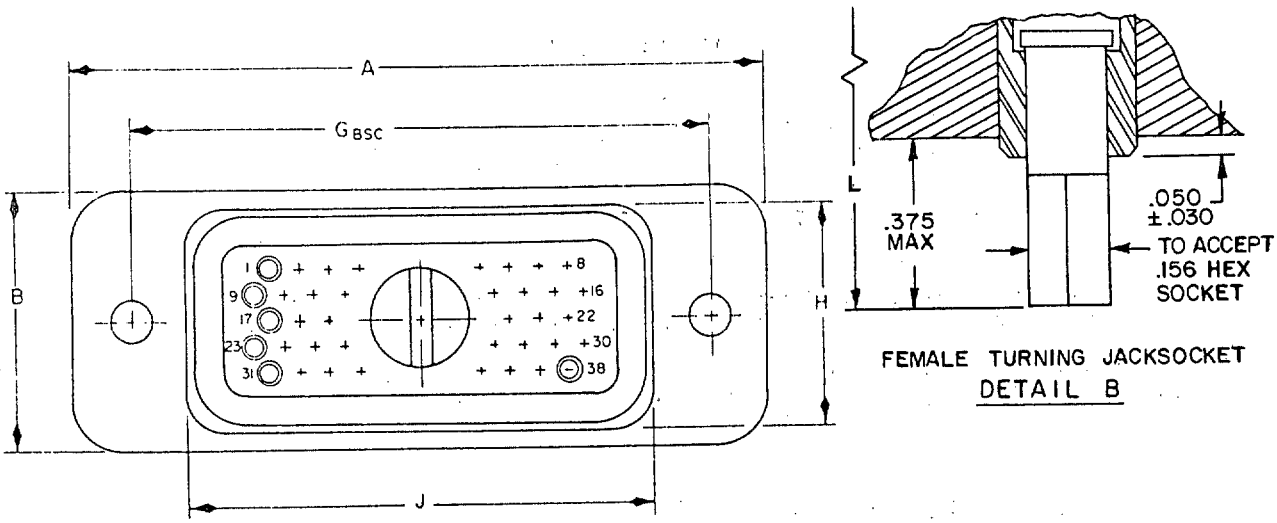

BOTTOM VIEW

FEMALE TURNING JACKSOCKET
DETAIL B

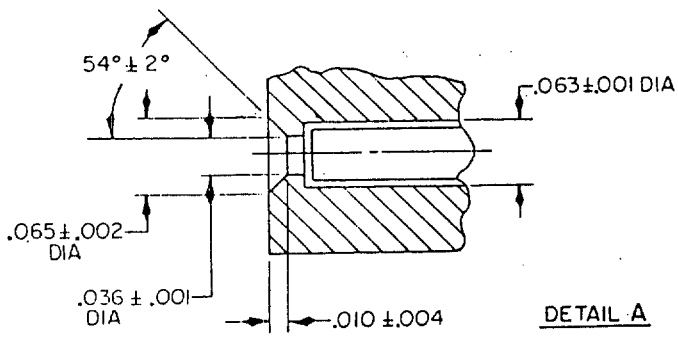

DETAIL A

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.156	3.96	1.308	33.22
.002	0.05	.216	5.49	1.318	33.48
.004	0.10	.283	7.19	1.355	34.42
.005	0.13	.312	7.92	1.520	38.61
.008	0.20	.423	10.74	1.532	38.91
.010	0.25	.607	15.42	1.625	41.28
.020	0.52	.615	15.62	1.718	43.64
.025	0.64	.625	15.88	1.935	49.15
.031	0.79	.674	17.12	1.943	49.35
.036	0.91	.725	18.42	1.945	49.40
.050	1.27	.772	19.61	1.990	50.55
.056	1.42	.802	20.37	2.148	54.56
.063	1.60	.877	22.28	2.156	54.76
.064	1.63	.888	22.56	2.460	62.48
.065	1.65	.902	22.91	2.470	62.74
.106	2.69	.977	24.82	2.780	70.61
.110	2.79	1.075	27.31	2.790	70.87
.123	3.12	1.077	27.36	3.289	83.54
.125	3.18	1.095	27.81	3.494	88.75
.138	3.51	1.200	30.48	3.808	96.72
				4.128	104.85

FIGURE 1. Connector, crimp removable socket contacts, class P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.

Dash no. 1/ 2/	Shell size	No. of contacts	Insert arrangement no. 3/	A ±.015	B ±0.15	C ±.005	D ±.005	E ±.005	F ±.015	G BSC	H ±.008	J ±.008	L ±.025	Weight (max) (w/contacts)
1	8	14	Section 10 No. 1	1.520	.725	.674	.423	.056	.216	1.200	.625	.888	1.075	18 grams
2	10	38	Section 20 No. 1	1.945	.725	1.095	.423	.056	.216	1.625	.625	1,308	"	25 "
3	12	88	Section 30 No. 1	2.780	.725	1.935	.423	.056	.216	2.460	.625	2.148	"	32 "
4	14	108	Section 40 No. 1	1.990	1.077	1.318	.772	.064	.216	1.718	.977	1.532	"	37 "
5	16	132	Section 50 No. 1	2.790	.902	1.943	.607	.106	.216	2.470	.802	2.156	"	47 "
6	18	244	Section 60 No. 1	4.128	.902	3.289	.615	.110	.216	3.808	.802	3.494	1.075	52.5 "
7	8	14	Section 10 No. 1	1.520	.725	.674	.423	.056	.216	1.200	.625	.888	1.355	20.5 "
8	10	38	Section 20 No. 1	1.945	.725	1.095	.423	.056	.216	1.625	.625	1.308	"	27.5 "
9	12	88	Section 30 No. 1	2.780	.725	2.935	.423	.056	.216	2.460	.625	2.148	"	34.5 "
10	14	108	Section 40 No. 1	1.990	1.077	1.318	.772	.064	.216	1.718	.977	1.532	"	39.5 "
11	16	132	Section 50 No. 1	2.790	.902	1.943	.607	.106	.216	2.470	.625	2.148	"	49.5 "
12	18	244	Section 60 No. 1	4.128	.902	3.289	.615	.110	.216	3.808	.802	3.494	1.355	55.0 grams

1/ Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
2/ Dash numbers 1 thru 6 are supplied with female turning jacksockets; dash numbers 7 through 12 are supplied with female fixed jacksockets.
3/ For insert arrangements, see MIL-STD-1632.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Connectors, crimp removable pin contacts, class P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: Shall be in accordance with MIL-C-28804/10.

Mating connectors: M28804/5-1 thru -6 mates with M28804/2-1 thru -6, M28804/4-1 thru -6, M28804/6-1 thru -6, M28804/8-1 thru -6 and M28804/11-1 thru -6. M28804/5-7 thru -12 mates with M28804/2-7 thru -12, M28804/4-7 thru -12, M28804/6-7 thru -12, M28804/8-7 thru -12, and M28804/11-7 thru -12.

Part number: M28804/5- (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.