MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS P

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1986 ©

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.


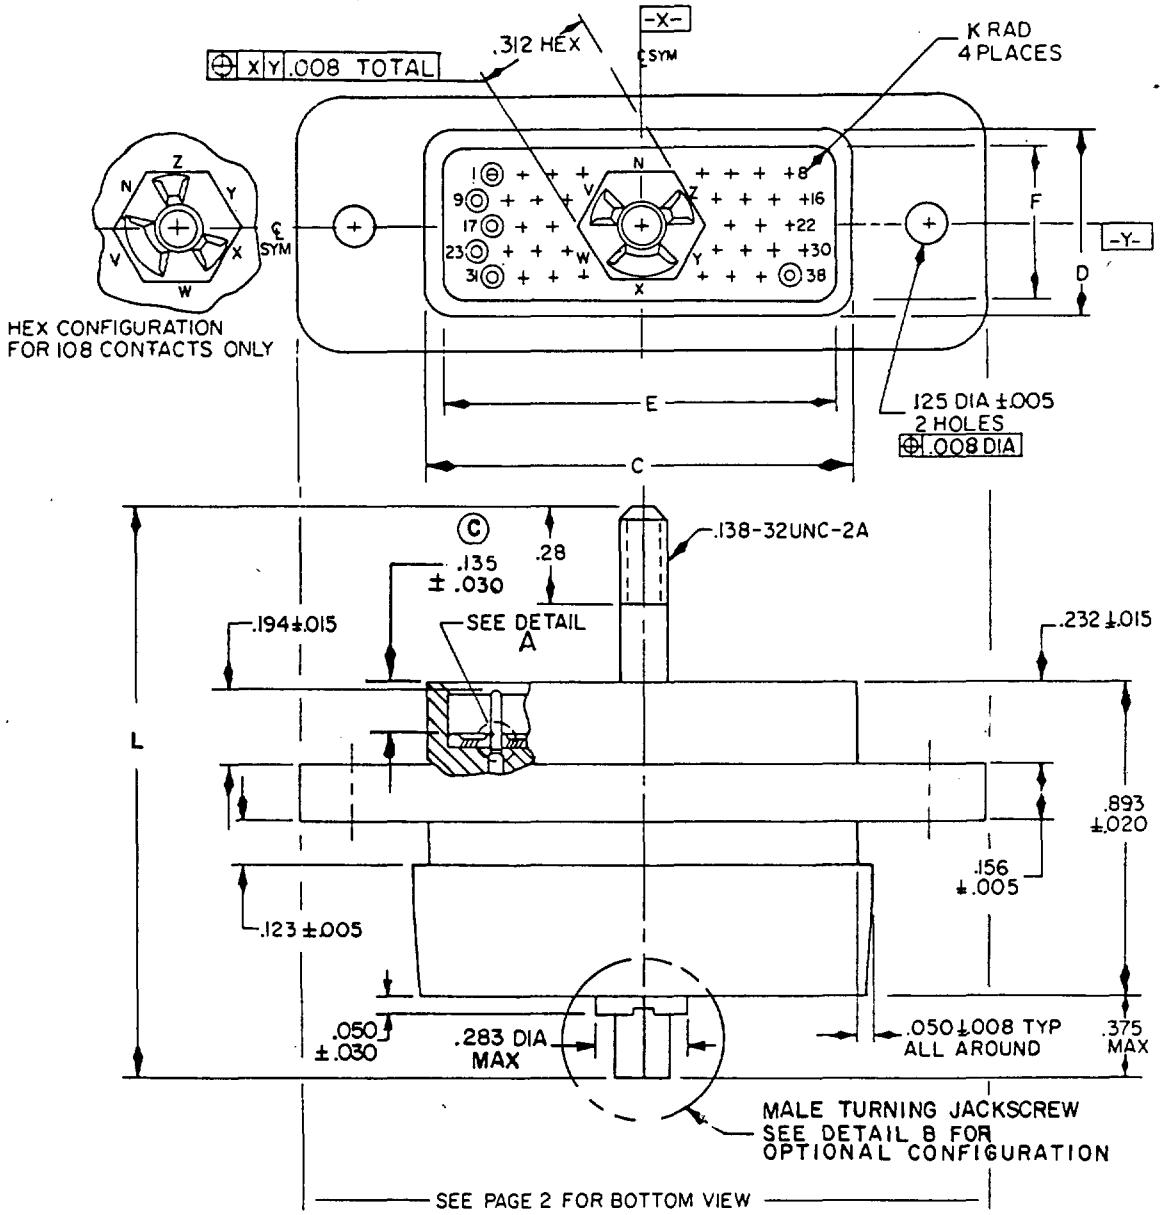



FIGURE 1. Connector, crimp removable pin contacts, class P.


© Denotes change




DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.

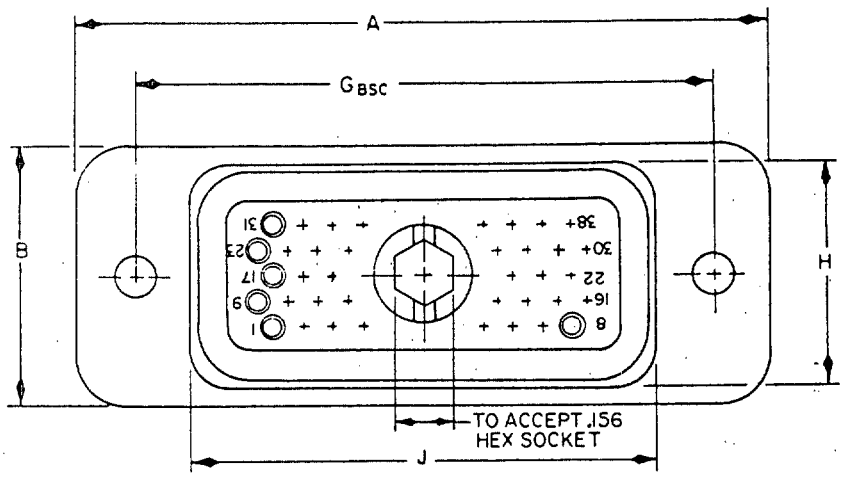


BOTTOM VIEW

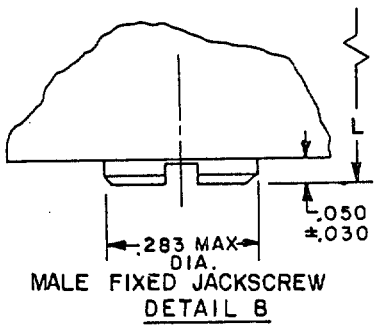


MALE FIXED JACKSCREW
DETAIL B

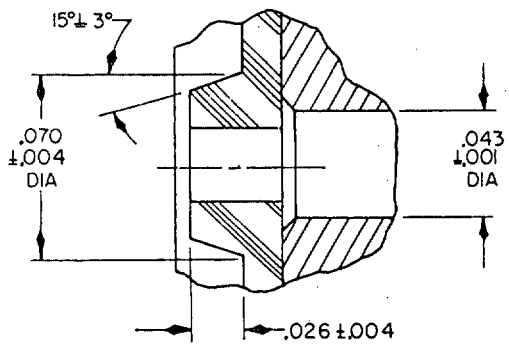


DETAIL A

| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .001 | 0.03 | .436 | 11.07 | 1.520 | 38.61 |
| .004 | 0.10 | .548 | 13.92 | 1.532 | 38.91 |
| .005 | 0.13 | .620 | 15.75 | 1.625 | 41.28 |
| .008 | 0.20 | .625 | 15.88 | 1.716 | 43.59 |
| .010 | 0.25 | .688 | 17.48 | 1.718 | 43.64 |
| .015 | 0.38 | .725 | 18.42 | 1.945 | 49.40 |
| .020 | 0.51 | .732 | 18.59 | 1.948 | 49.48 |
| .026 | 0.66 | .785 | 19.94 | 1.956 | 49.68 |
| .043 | 1.09 | .800 | 20.32 | 1.990 | 50.55 |
| .050 | 1.27 | .802 | 20.37 | 2.060 | 52.32 |
| .058 | 1.47 | .888 | 22.56 | 2.068 | 52.53 |
| .070 | 1.78 | .893 | 22.68 | 2.148 | 54.56 |
| .100 | 2.54 | .897 | 22.78 | 2.156 | 54.76 |
| .123 | 3.12 | .902 | 22.91 | 2.460 | 62.48 |
| .125 | 3.18 | .977 | 24.82 | 2.470 | 62.74 |
| .137 | 3.48 | 1.077 | 27.36 | 2.780 | 70.61 |
| .138 | 3.51 | 1.108 | 28.14 | 2.790 | 70.87 |
| .156 | 3.96 | 1.200 | 30.48 | 3.294 | 83.67 |
| .194 | 4.93 | 1.216 | 30.89 | 3.406 | 86.51 |
| .195 | 4.95 | 1.220 | 30.99 | 3.494 | 88.75 |
| .232 | 5.89 | 1.308 | 33.22 | 3.808 | 96.72 |
| .28 | 7.1 | 1.332 | 33.83 | 4.128 | 104.85 |
| .312 | 7.92 | 1.444 | 36.68 | | |
| .375 | 9.52 | | | | |

FIGURE 1. Connector, crimp removable socket contacts, class P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.

| Dash no. 1/ 2/ | Shell size | No. of contacts | Insert arrangement no. 3/ | A ±.015 | B ±0.15 | C ±.005 | D ±.005 | E ±.005 | F ±.005 | G BSC | H ±.008 | J ±.008 | K ±.005 | L ±.025 | Weight (max) (w/contacts) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 8 | 14 | Section 10 No. 1 | 1.520 | .725 | .800 | .548 | .688 | .436 | 1.200 | .625 | .888 | .050 | 1.716 | 18.0 grams |
| 2 | 10 | 38 | Section 20 No. 1 | 1.945 | .725 | 1.200 | .548 | 1,108 | .436 | 1.625 | .625 | 1,308 | .050 | | 25.0 |
| 3 | 12 | 88 | Section 30 No. 1 | 2.780 | .725 | 2.060 | .548 | 1.948 | .436 | 2.460 | .625 | 2.148 | .050 | | 32.0 |
| 4 | 14 | 108 | Section 40 No. 1 | 1.990 | 1.077 | 1.444 | .897 | 1.332 | .785 | 1.718 | .977 | 1.532 | .058 | | 37.0 |
| 5 | 16 | 132 | Section 50 No. 1 | 2.790 | .902 | .068 | .732 | 1.956 | .620 | 2.470 | .802 | 2.156 | .100 | | 47.0 |
| 6 | 18 | 244 | Section 60 No. 1 | 4.128 | .902 | 3.406 | .732 | 3.294 | .620 | 3.808 | .802 | 3.494 | .100 | 1.716 | 52.5 |
| 7 | 8 | 14 | Section 10 No. 1 | 1.520 | .725 | .800 | .548 | 6.88 | .436 | 1.200 | .625 | .888 | .050 | 1.216 | 18.0 |
| 8 | 10 | 38 | Section 20 No. 1 | 1.945 | .725 | 1.220 | .548 | 1.108 | .436 | 1.625 | .625 | 1.308 | .050 | | 25.0 |
| 9 | 12 | 88 | Section 30 No. 1 | 2.780 | .725 | 2.060 | .548 | 1.948 | .436 | 2.460 | .625 | 2.148 | .050 | | 32.0 |
| 10 | 14 | 108 | Section 40 No. 1 | 1.990 | 1.077 | 1.444 | .897 | 1.332 | .785 | 1.718 | .977 | 1.532 | .058 | | 37.0 |
| 11 | 16 | 132 | Section 50 No. 1 | 2.790 | .902 | 2.068 | .732 | 1.956 | .620 | 2.470 | .625 | 2.148 | .050 | | 47.0 |
| 12 | 18 | 244 | Section 60 No. 1 | 4.128 | .902 | 3.406 | .732 | 3.294 | .620 | 3.808 | .802 | 3.494 | .100 | 1.216 | 52.5 grams |

1/ Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
2/ Dash numbers 1 thru 6 are supplied with male turning jackscrews; dash numbers 7 thru 12 are supplied with male fixed jackscrews.
3/ For insert arrangements, see MIL-STD-1632.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Connectors, crimp removable pin contacts, class P - Continued.





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: Shall be in accordance with MIL-C-28804/9.

Mating connectors: M28804/6-1 thru -6 mates with M28804/1-1 thru -6, M28804/3-1 thru -6, M28804/5-1 thru -6, M28804/7-1 thru -6. M28804/6-7 thru -12 mates with M28804/1-7 thru -12, M28804/3-7 thru -12, M28804/5-7 thru -12, and M28804/7-7 thru -12.

Part number: M28804/6- (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-6)

☆U.S. GOVERNMENT PRINTING OFFICE: 1986 — 704-038/45853



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:04Z
Check the source to verify that this is the current version before use.