MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS G

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1985 ©

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.

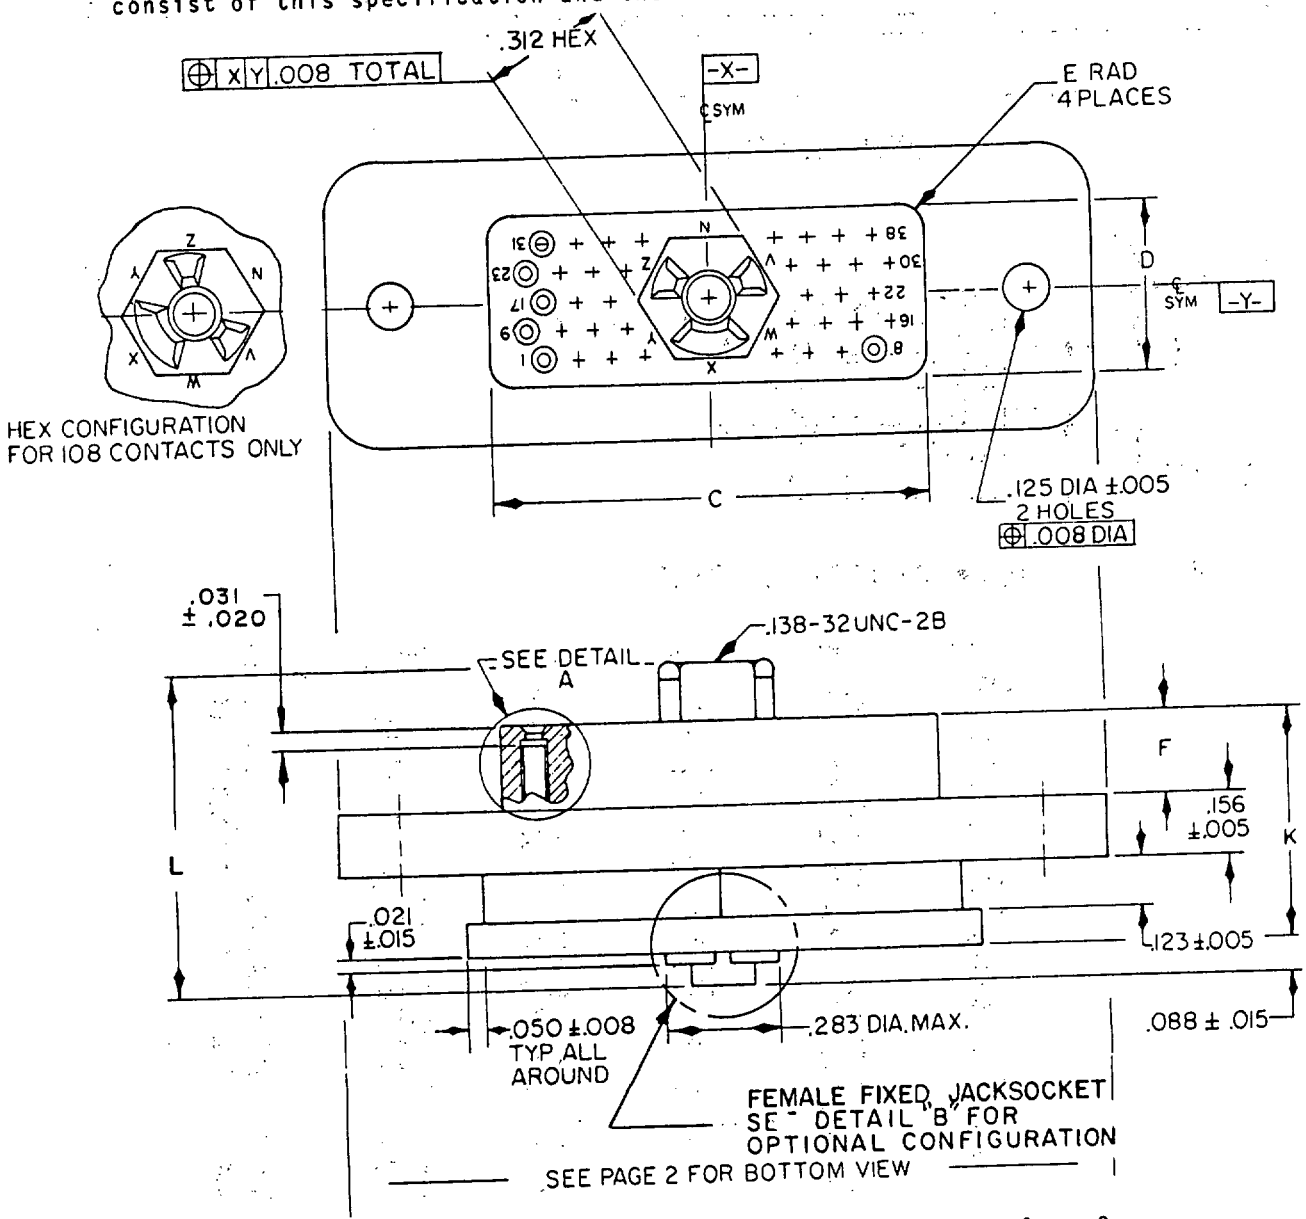



FIGURE 1. Connector, crimp removable socket contacts, class G.

FSC 5935


AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.

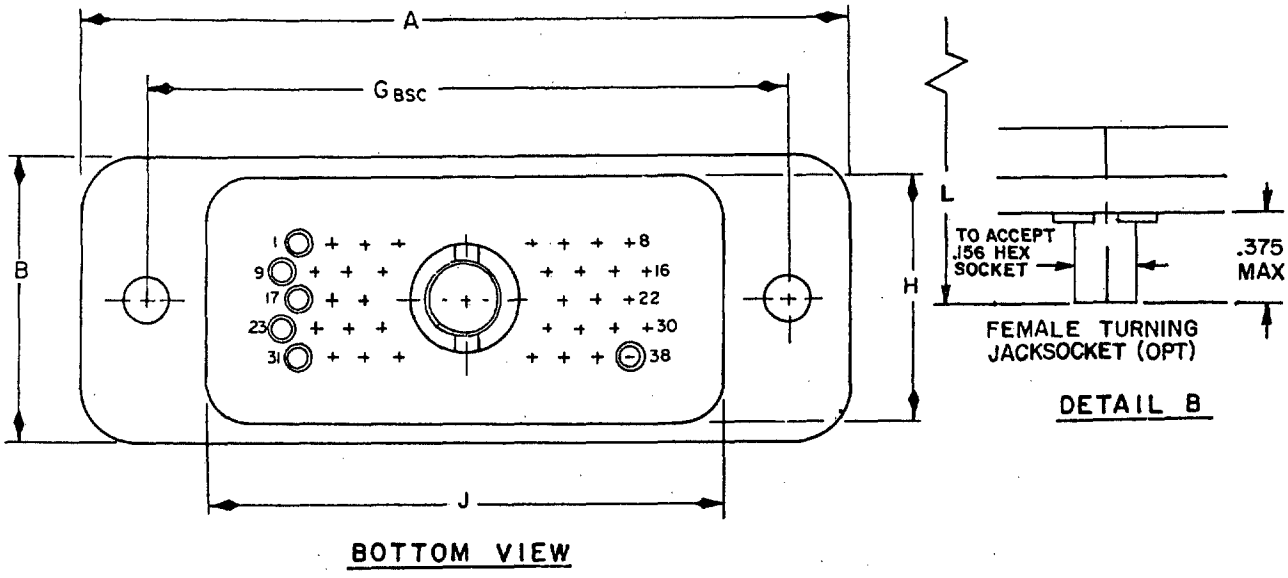

BOTTOM VIEW

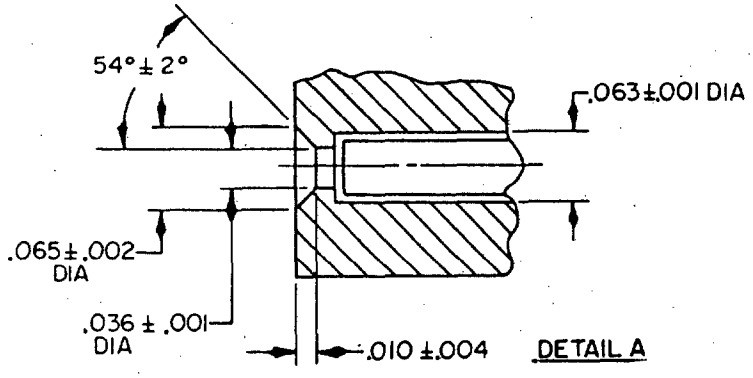

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.138	3.51	1.220	30.48
.002	0.05	.156	3.96	1.308	33.22
.004	0.10	.185	4.70	1.318	33.48
.005	0.13	.216	5.49	1.520	38.61
.008	0.20	.283	7.19	1.532	38.91
.010	0.25	.312	7.92	1.625	41.28
.015	0.38	.423	10.74	1.718	43.64
.020	0.51	.582	14.78	1.935	49.15
.021	0.53	.607	15.41	1.943	49.35
.031	0.79	.615	15.62	1.945	49.40
.036	0.91	.625	15.88	1.990	50.55
.050	1.27	.674	17.12	2.148	54.56
.056	1.42	.725	18.42	2.156	54.76
.063	1.60	.772	19.61	2.460	62.48
.064	1.63	.802	20.37	2.470	62.74
.065	1.65	.810	20.57	2.780	70.61
.088	2.24	.888	22.56	2.790	70.87
.106	2.69	.902	22.91	3.289	83.54
.110	2.79	.977	24.82	3.494	88.75
.123	3.12	1.077	27.36	3.808	96.72
.125	3.18	1.095	27.81	4.128	104.85

FIGURE 1. Connector, crimp removable socket contacts, class G - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.

Dash no. 1/ 2/	Shell size	No. of contacts	Insert arrangement no. 3/	A ±.015	B ±0.15	C ±.005	D ±.005	E ±.005	F ±.015	G BSC	H ±.008	J ±.008	K ±.015	L ±.025	Weight (max) (w/contacts)
1	8	14	Section 10 No. 1	1.520	.725	.674	.423	.056	.216	1.200	.625	.888	.582	.810	16.5 grams
2	10	38	Section 20 No. 1	1.945	.725	1.095	.423	.056	.216	1.625	.625	1,308	.582	"	23.0 "
3	12	88	Section 30 No. 1	2.780	.725	2.060	.423	.056	.216	2.460	.625	2.148	.582	"	28.5 "
4	14	108	Section 40 No. 1	1.990	1.077	1.318	.772	.064	.216	1.718	.977	1.532	.582	"	34.5 "
5	16	132	Section 50 No. 1	2.790	.902	.068	.607	.106	.216	2.470	.802	2.156	.582	"	40.5 "
6	18	244	Section 60 No. 1	4.128	.902	3.289	.615	.110	.216	3.808	.802	3.494	.582	.810	46.0 "
7	8	14	Section 10 No. 1	1.520	.725	.674	.423	.056	.216	1.200	.625	.888	.582	1.007	19.0 "
8	10	38	Section 20 No. 1	1.945	.725	1.095	.423	.056	.216	1.625	.625	1.308	.582	"	25.5 "
9	12	88	Section 30 No. 1	2.780	.725	1.935	.423	.056	.216	2.460	.625	2.148	.582	"	31.0
10	14	108	Section 40 No. 1	1.990	1.077	1.318	.772	.064	.216	1.718	.977	1.532	.582	"	37.0 "
11	16	132	Section 50 No. 1	2.790	.902	1.943	.607	.106	.216	2.460	.625	2.148	.582	"	43.0 "
12	18	244	Section 60 No. 1	4.128	.902	3.289	.615	.110	.216	3.808	.802	3.494	.582	1.007	48.5 grams

1/ Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
2/ Dash numbers 1 thru 6 are supplied with female turning jacksockets; dash numbers 7 through 12 are supplied with female fixed jacksockets.
3/ For insert arrangements, see MIL-STD-1632.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Connector, crimp removable socket contacts, class G - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: Shall be in accordance with MIL-C-28804/10.

Mating connectors: M28804/1-1 thru -6 mates with M28804/2-1 thru -6, M28804/4-1 thru -6, M28804/6-1 thru -6, M28804/8-1 thru -6, and M28804/11-1 thru -6. M28804/1-7 thru -12 mates and M28804/2-7 thru -12, M28804/4-7 thru -12, M28804/6-7 thru -12, M28804/8-7 thru -12, and M28804/11-7 thru -12.

Part number: M28804/1- (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.