INCH-POUND
MIL-DTL-28804/1E
w/AMENDMENT 2
23 August 2021
SUPERSEDING
MIL-DTL-28804/1E
w/AMENDMENT 1
24 February 2020

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, CRIMP REMOVABLE SOCKET CONTACTS, CLASS G

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28804.


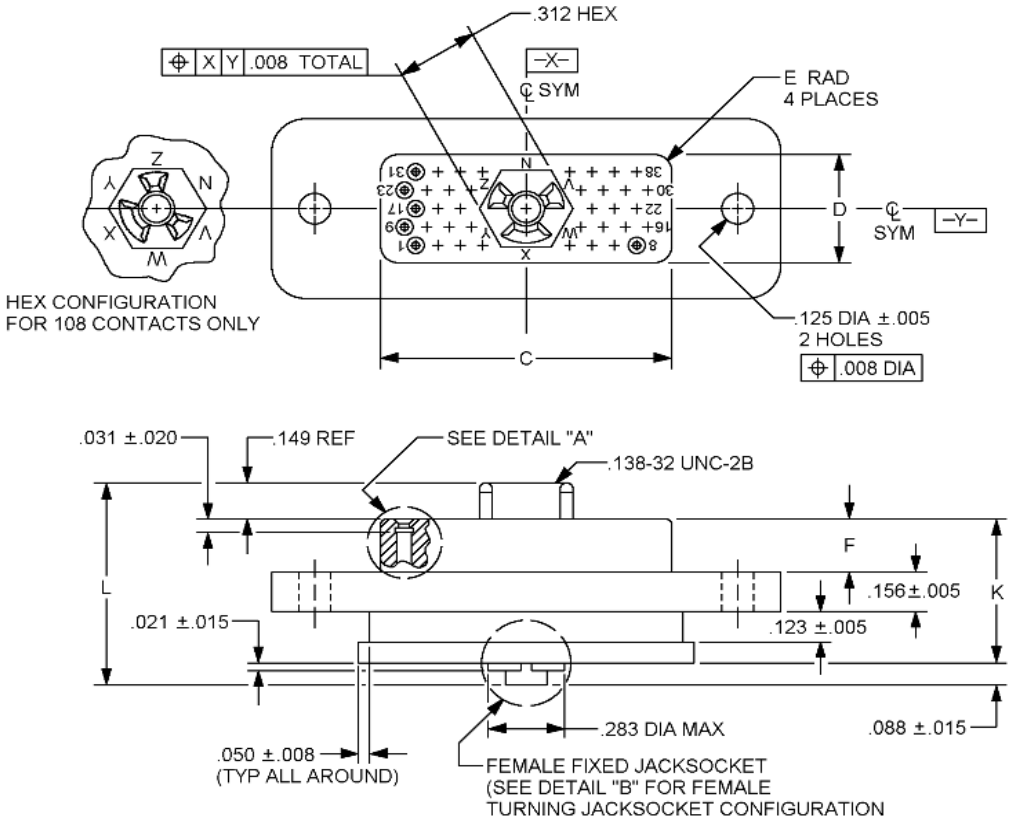


FIGURE 1. Connector, crimp removable socket contacts, class G.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.

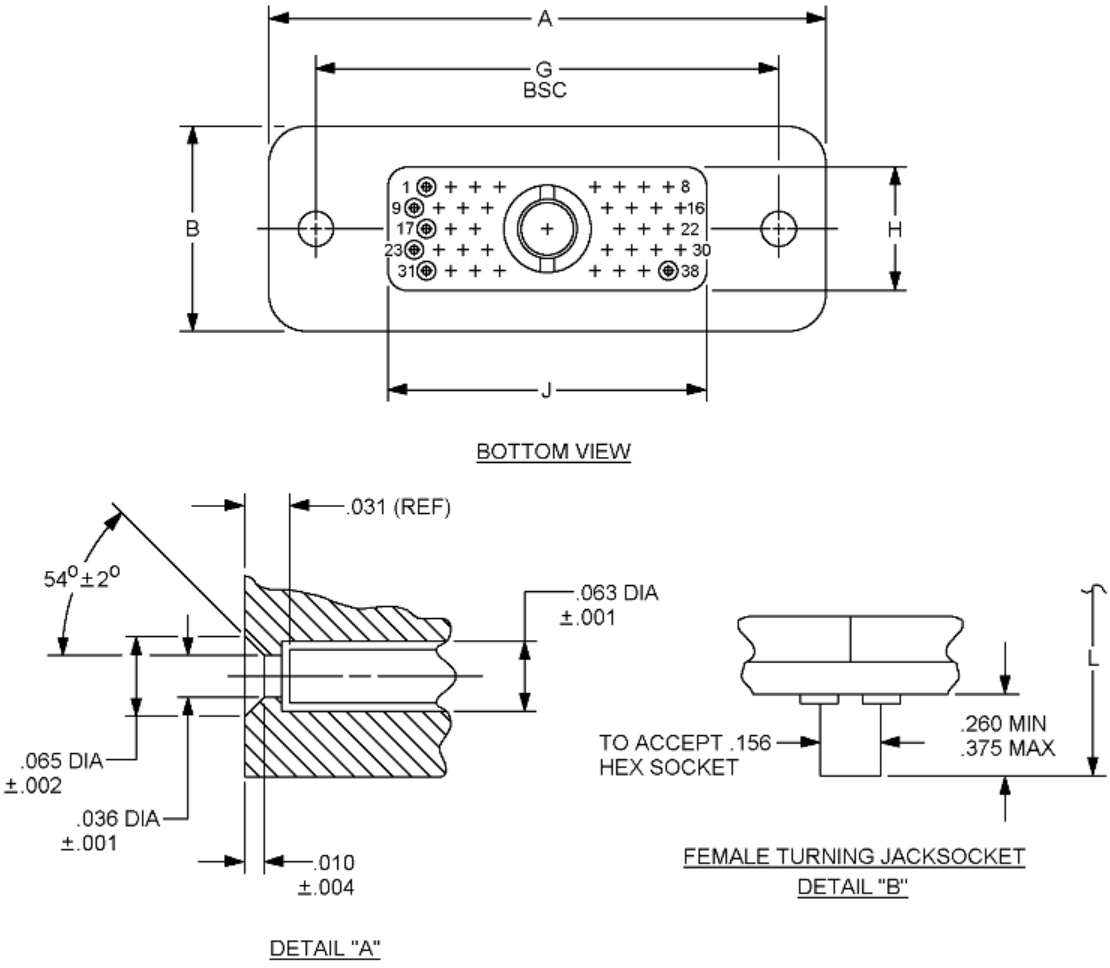

Inches	mm	Inches	mm
.001	0.03	.063	1.60
.002	0.05	.065	1.65
.004	0.10	.088	2.24
.005	0.13	.123	3.12
.008	0.20	.125	3.18
.010	0.25	.138	3.51
.015	0.38	.149	3.78
.020	0.51	.156	3.96
.021	0.53	.260	6.60
.031	0.79	.283	7.19
.036	0.91	.312	7.92
.050	1.27	.375	9.53

FIGURE 1. Connector, crimp removable socket contacts, class G - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.

Dash number (see notes 4 and 5)	Shell size	Number of contacts	Insert arrangement number section (see note 6)	A ±.015 (0.38)	B ±.015 (0.38)	C ±.005 (0.13)	D ±.005 (0.13)	E ±.005 (0.13)	F ±.015 (0.38)	G BSC	H ±.008 (0.20)	J ±.008 (0.20)	K ±.015 (0.38)	L ±.025 (0.64)	Weight (max) (with contacts) grams
1	8	14	10 No. 1	1.520 (38.61)	.725 (18.42)	.674 (17.12)	.423 (10.74)	.056 (1.42)	.216 (5.49)	1.200 (30.48)	.625 (15.88)	.888 (22.56)	.582 (14.78)	.810 (20.57)	16.5
2	10	38	20 No. 1	1.945 (49.40)	.725 (18.42)	1.095 (27.81)	.423 (10.74)	.056 (1.42)	.216 (5.49)	1.625 (41.27)	.625 (15.88)	1.308 (33.22)	.582 (14.78)	.810 (20.57)	23.0
3	12	88	30 No. 1	2.780 (70.61)	.725 (18.42)	1.935 (49.15)	.423 (10.74)	.056 (1.42)	.216 (5.49)	2.460 (62.48)	.625 (15.88)	2.148 (54.56)	.582 (14.78)	.810 (20.57)	28.5
4	14	108	40 No. 1	1.990 (50.55)	1.077 (27.36)	1.318 (33.48)	.772 (19.61)	.064 (1.63)	.216 (5.49)	1.718 (43.64)	.977 (24.82)	1.532 (38.91)	.582 (14.78)	.810 (20.57)	34.5
5	16	132	50 No. 1	2.790 (70.87)	.902 (22.91)	1.943 (49.35)	.607 (15.42)	.106 (2.69)	.216 (5.49)	2.470 (62.73)	.802 (20.37)	2.156 (54.76)	.582 (14.78)	.810 (20.57)	40.5
6	18	244	60 No. 1	4.128 (104.85)	.902 (22.91)	3.284 (83.41)	.610 (15.49)	.106 (2.69)	.216 (5.49)	3.808 (96.72)	.802 (20.37)	3.494 (88.75)	.582 (14.78)	.810 (20.57)	57.0
7	8	14	10 No. 1	1.520 (38.61)	.725 (18.42)	.674 (17.12)	.423 (10.74)	.056 (1.42)	.216 (5.49)	1.200 (30.48)	.625 (15.88)	.888 (22.56)	.582 (14.78)	1.007 (25.58)	19.0
8	10	38	20 No. 1	1.945 (49.40)	.725 (18.42)	1.095 (27.81)	.423 (10.74)	.056 (1.42)	.216 (5.49)	1.625 (41.27)	.625 (15.88)	1.308 (33.22)	.582 (14.78)	1.007 (25.58)	25.5
9	12	88	30 No. 1	2.780 (70.61)	.725 (18.42)	1.935 (49.15)	.423 (10.74)	.056 (1.42)	.216 (5.49)	2.460 (62.48)	.625 (15.88)	2.148 (54.56)	.582 (14.78)	1.007 (25.58)	31.0
10	14	108	40 No. 1	1.990 (50.55)	1.077 (27.36)	1.318 (33.48)	.772 (19.61)	.064 (1.63)	.216 (5.49)	1.718 (43.64)	.977 (24.82)	1.532 (38.91)	.582 (14.78)	1.007 (25.58)	37.0
11	16	132	50 No. 1	2.790 (70.87)	.902 (22.91)	1.943 (49.35)	.607 (15.42)	.106 (2.69)	.216 (5.49)	2.470 (62.73)	.802 (20.37)	2.156 (54.76)	.582 (14.78)	1.007 (25.58)	43.0
12	18	244	60 No. 1	4.128 (104.85)	.902 (22.91)	3.284 (83.41)	.610 (15.49)	.106 (2.69)	.216 (5.49)	3.808 (96.72)	.802 (20.37)	3.494 (88.75)	.582 (14.78)	1.007 (25.58)	61.0

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Millimeters are in parentheses.
4. Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
5. Dash numbers 1 through 6 are supplied with female fixed jack sockets; dash numbers 7 through 12 are supplied with female turning jack sockets.
6. For insert arrangements, see MIL-STD-1632.

FIGURE 1. Connector, crimp removable socket contacts, class G - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: Shall be in accordance with MIL-DTL-28804/10.

Mating connectors: M28804/1-1 through -6 mates with M28804/2-1 through -6, M28804/4-1 through -6, M28804/6-1 through -6, M28804/8-1 through -6, and M28804/11-1 through -6. M28804/1-7 through -12 mates with M28804/2 – 7 through 12, M28804/4 – 7 through 12, M28804/6 -7 through 12, M28804/8-7 through -12, and M28804/11-7 through -12.

Part or Identifying Number (PIN): M28804/1-(dash number from figure 1 and a suffix letter code to define polarization. See figure 1, note 4 herein, and MIL-DTL-28804.)

Referenced documents. In addition to MIL-DTL-28804, this document references the following:

MIL-DTL-28804/10
MIL-STD-1632

Amendment notations. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA – CC

(Project 5935-2021-085)

Review activities:
Army – AR, AT, CR4, MI
Navy – AS, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:01Z
Check the source to verify that this is the current version before use.