MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS G

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1986 ©

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.


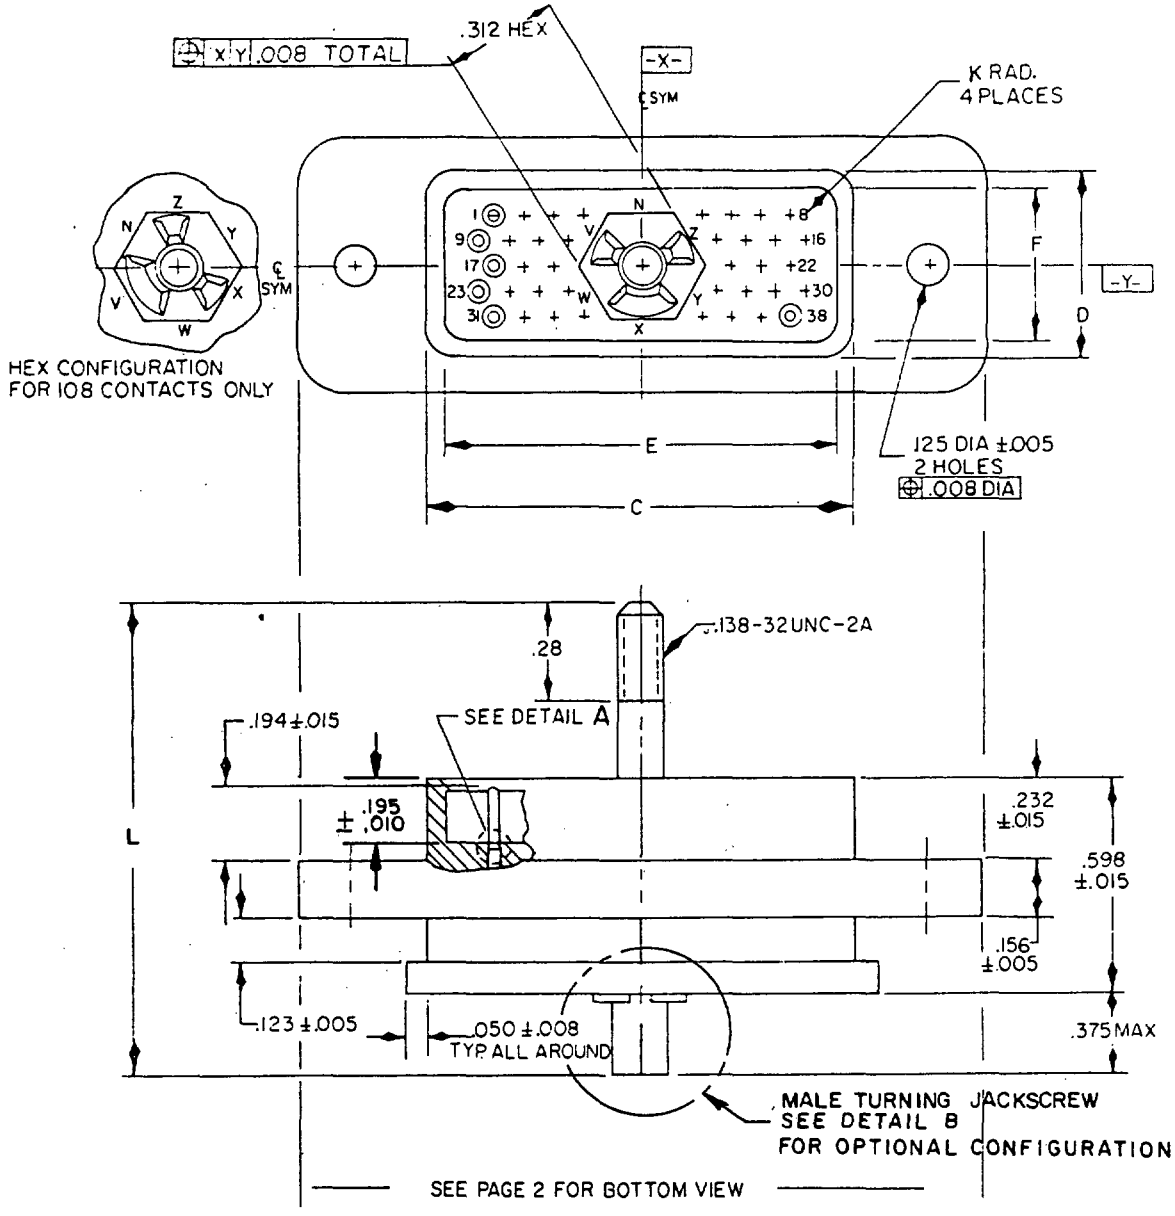


FIGURE 1. Connector, crimp removable pin contacts, class G.

© Denotes change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:02Z
Check the source to verify that this is the current version before use.

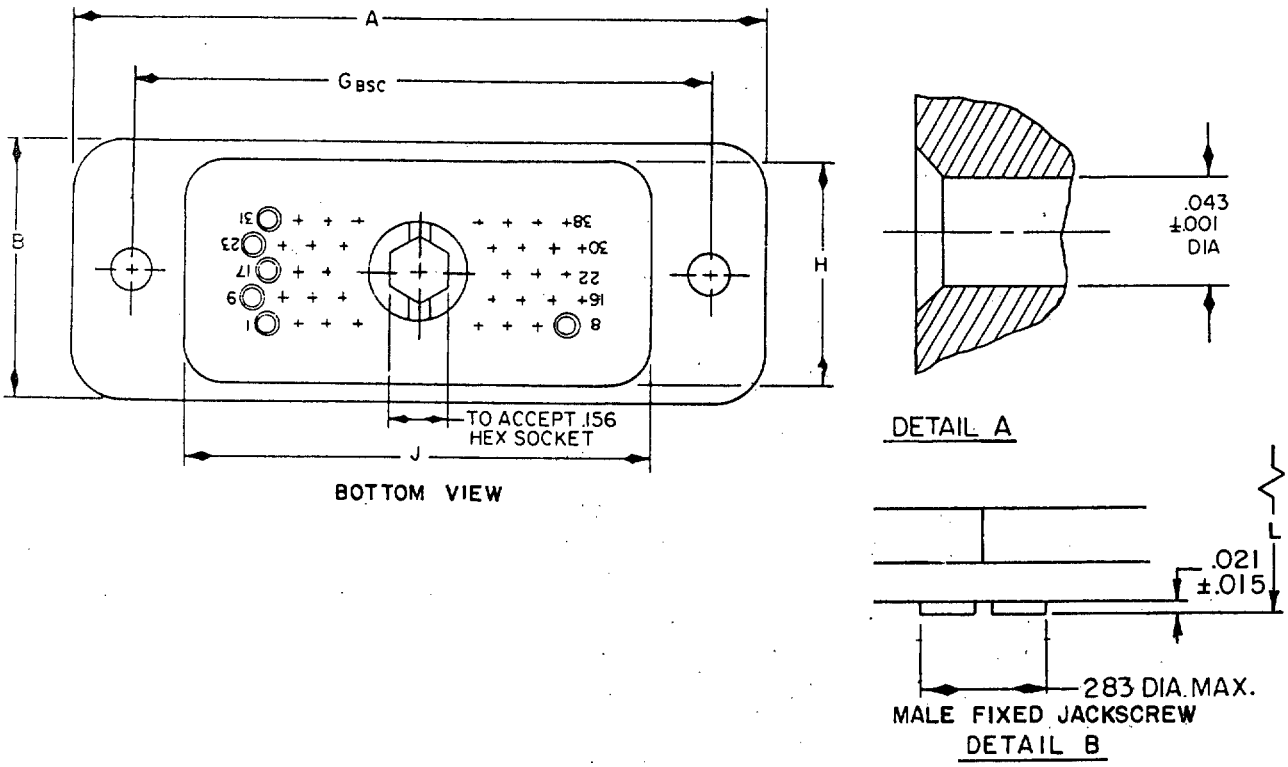

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.620	15.75	1.520	38.61
.005	0.13	.625	15.88	1.532	38.91
.008	0.20	.688	17.48	1.625	41.28
.010	0.25	.725	18.42	1.718	43.64
.015	0.38	.732	18.59	1.945	49.40
.043	1.09	.785	19.94	1.948	49.48
.050	1.27	.800	20.32	1.956	49.68
.058	1.47	.802	20.37	1.990	50.55
.100	2.54	.888	22.56	2.060	52.32
.123	3.12	.897	22.78	2.068	52.53
.125	3.18	.902	22.91	2.148	54.56
.138	3.51	.977	24.82	2.156	54.76
.156	3.96	1.077	27.36	2.460	62.48
.194	4.93	1.108	28.14	2.470	62.74
.195	4.95	1.220	30.48	2.780	70.61
.232	5.89	1.220	30.99	2.790	70.87
.28	7.1	1.308	33.22	3.406	86.51
.436	11.07	1.360	34.54	3.808	96.71
.548	13.92	1.444	36.68	4.128	104.85
.598	15.19				

FIGURE 1. Connector, crimp removable pin contacts, class G - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:02Z
Check the source to verify that this is the current version before use.

Dash no. 1/ 2/	Shell size	No. of contacts	Insert arrangement no. 3/	A ±.015	B ±0.15	C ±.005	D ±.005	E ±.005	F ±.005	G BSC	H ±.008	J ±.008	K ±.005	L ±.025	Weight (max) (w/contacts)
1	8	14	Section 10 No. 1	1.520	.725	.800	.548	.688	.436	1.200	.625	.888	.050	1.360	16.5 grams
2	10	38	Section 20 No. 1	1.945	.725	1.200	.548	1,108	.436	1.625	.625	1,308	.050		23.0
3	12	88	Section 30 No. 1	2.780	.725	2.060	.548	1.948	.436	2.460	.625	2.148	.050		28.5
4	14	108	Section 40 No. 1	1.990	1.077	1.444	.897	1.332	.785	1.718	.977	1.532	.058		34.5
5	16	132	Section 50 No. 1	2.790	.902	.068	.732	1.956	.620	2.470	.802	2.156	.100		40.5
6	18	244	Section 60 No. 1	4.128	.902	3.406	.732	3.294	.620	3.808	.802	3.494	.100	1.360	46.0
7	8	14	Section 10 No. 1	1.520	.725	.800	.548	6.88	.436	1.200	.625	.888	.050	.898	16.5
8	10	38	Section 20 No. 1	1.945	.725	1.220	.548	1.108	.436	1.625	.625	1.308	.050		23.0
9	12	88	Section 30 No. 1	2.780	.725	2.060	.548	1.948	.436	2.460	.625	2.148	.050		28.5
10	14	108	Section 40 No. 1	1.990	1.077	1.444	.897	1.332	.785	1.718	.977	1.532	.058		34.5
11	16	132	Section 50 No. 1	2.790	.902	2.068	.732	1.956	.620	2.470	.625	2.148	.050		40.5
12	18	244	Section 60 No. 1	4.128	.902	3.406	.732	3.294	.620	3.808	.802	3.494	.100	.898	46.0 grams

1/ Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
2/ Dash numbers 1 thru 6 are supplied with male turning jackscrews; dash numbers 7 thru 12 are supplied with male fixed jackscrews.
3/ For insert arrangements, see MIL-STD-1632.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Connectors, crimp removable pin contacts, class G - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: Shall be in accordance with MIL-C-28804/9.

Mating connectors: M28804/2-1 thru -6 mates with M28804/1-1 thru -6, M28804/3-1 thru -6, M28804/5-1 thru -6, M28804/7-1 thru -6. M28804/2-7 thru -12 mates with M28804/1-7 thru -12, M28804/3-7 thru -12, M28804/5-7 thru -12, and M28804/7-7 thru -12.

Part number: M28804/2- (dash number from figure 1.)

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:02Z
Check the source to verify that this is the current version before use.