
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS E

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1986 ©

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.

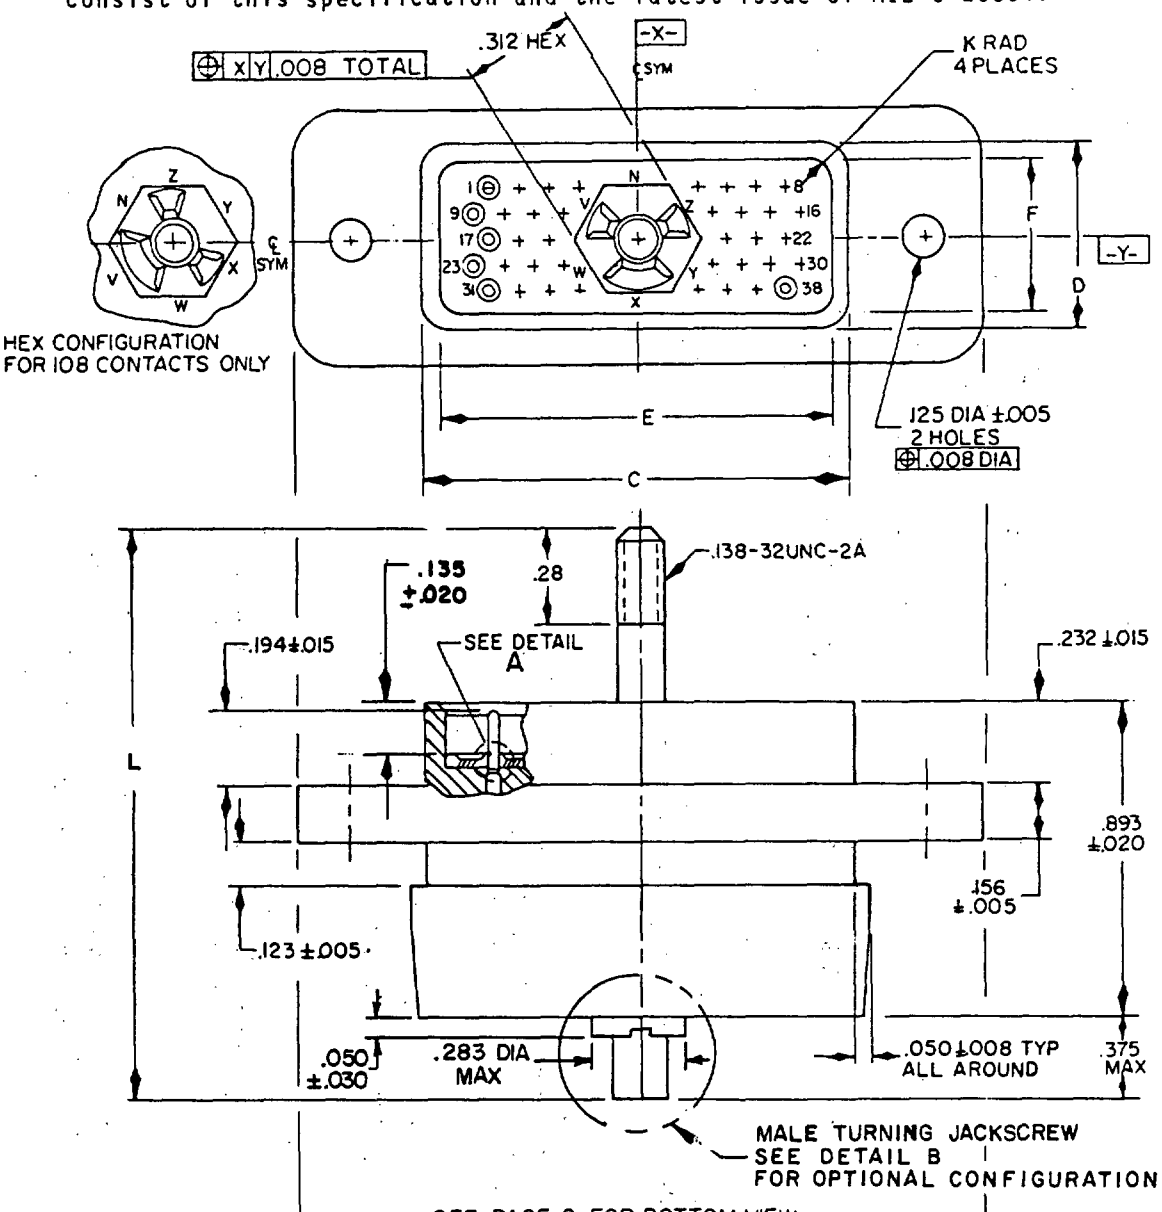

SEE PAGE 2 FOR BOTTOM VIEW


FIGURE 1. Connector, crimp removable pin contacts, class E.

© Denotes change


AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:03Z
Check the source to verify that this is the current version before use.

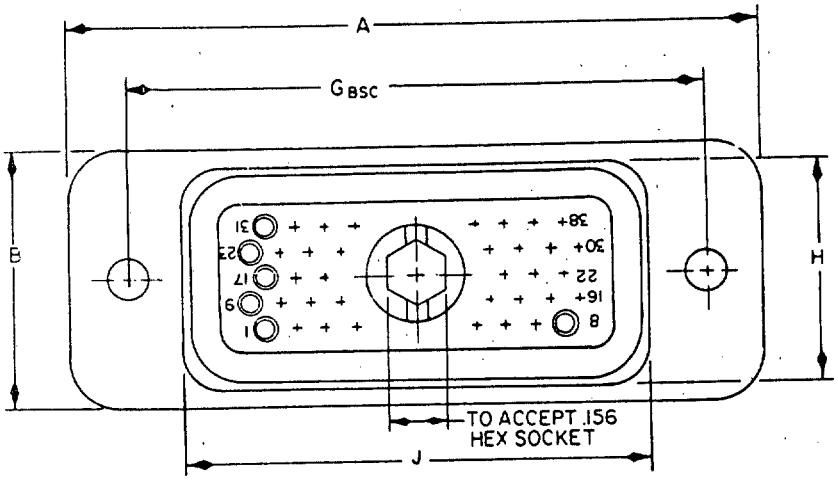

BOTTOM VIEW

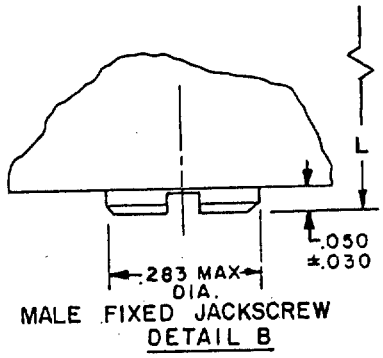

MALE FIXED JACKSCREW
DETAIL B

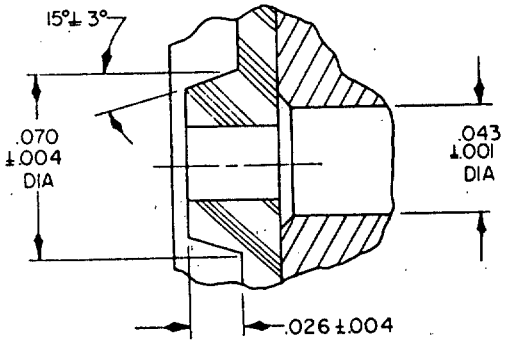

DETAIL A

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.436	11.07	1.520	38.61
.004	0.10	.548	13.92	1.532	38.91
.005	0.13	.620	15.75	1.625	41.28
.008	0.20	.625	15.88	1.716	43.59
.010	0.25	.688	17.48	1.718	43.64
.015	0.38	.725	18.42	1.945	49.40
.020	0.51	.732	18.59	1.948	49.48
.026	0.66	.785	19.94	1.956	49.68
.043	1.09	.800	20.32	1.990	50.55
.050	1.27	.802	20.37	2.060	52.32
.058	1.47	.888	22.56	2.068	52.53
.070	1.78	.893	22.68	2.148	54.56
.100	2.54	.897	22.78	2.156	54.76
.123	3.12	.902	22.91	2.460	62.48
.137	3.48	1.108	28.14	2.790	70.87
.156	3.96	1.200	30.48	3.294	83.67
.190	4.93	1.216	30.89	3.406	86.51
.194	4.93	1.220	30.99	3.494	88.75
.195	4.95	1.308	33.22	3.808	96.72
.232	5.89	1.332	33.83	4.128	104.85
.28	7.1	1.444	36.68		
.312	7.82				
.375	9.52				

FIGURE 1. Connector, crimp removable pin contacts, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:03Z
Check the source to verify that this is the current version before use.

Dash no. 1/ 2/	Shell size	No. of contacts	Insert arrangement no. 3/	A ±.015	B ±0.15	C ±.005	D ±.005	E ±.005	F ±.005	G BSC	H ±.008	J ±.008	K ±.005	L ±.025	Weight (max) (w/contacts)
1	8	14	Section 10 No. 1	1.520	.725	.800	.548	.688	.436	1.200	.625	.888	.050	1.716	20.0 grams
2	10	38	Section 20 No. 1	1.945	.725	1.200	.548	1,108	.436	1.625	.625	1,308	.050		25.0
3	12	88	Section 30 No. 1	2.780	.725	2.060	.548	1.948	.436	2.460	.625	2.148	.050		35.0
4	14	108	Section 40 No. 1	1.990	1.077	1.444	.897	1.332	.785	1.718	.977	1.532	.058		43.0
5	16	132	Section 50 No. 1	2.790	.902	.068	.732	1.956	.620	2.470	.802	2.156	.100		51.0
6	18	244	Section 60 No. 1	4.128	.902	3.406	.732	3.294	.620	3.808	.802	3.494	.100	1.716	56.0
7	8	14	Section 10 No. 1	1.520	.725	.800	.548	6.88	.436	1.200	.625	.888	.050	1.216	20.0
8	10	38	Section 20 No. 1	1.945	.725	1.220	.548	1.108	.436	1.625	.625	1.308	.050		25.0
9	12	88	Section 30 No. 1	2.780	.725	2.060	.548	1.948	.436	2.460	.625	2.148	.050		35.0
10	14	108	Section 40 No. 1	1.990	1.077	1.444	.897	1.332	.785	1.718	.977	1.532	.058		43.0
11	16	132	Section 50 No. 1	2.790	.902	2.068	.732	1.956	.620	2.470	.625	2.148	.050		51.0
12	18	244	Section 60 No. 1	4.128	.902	3.406	.732	3.294	.620	3.808	.802	3.494	.100	1.216	56.0 grams

1/ Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
2/ Dash numbers 1 thru 6 are supplied with male turning jackscrews; dash numbers 7 thru 12 are supplied with male fixed jackscrews.
3/ For insert arrangements, see MIL-STD-1632.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Connector, crimp removable pin contacts, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: Shall be in accordance with MIL-C-28804/9.

Mating connectors: M28804/4-1 thru -6 mates with M28804/1-1 thru -6, M28804/3-1 thru -6, M28804/5-1 thru -6, M28804/7-1 thru -6. M28804/4-7 thru -12 mates with M28804/1-7 thru -12, M28804/3-7 thru -12, M28804/5-7 thru -12, and M28804/7-7 thru -12.

Part number: M28804/4- (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:03Z
Check the source to verify that this is the current version before use.