MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, SOLDER SOCKET CONTACTS, CLASS S

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1986 ©

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.


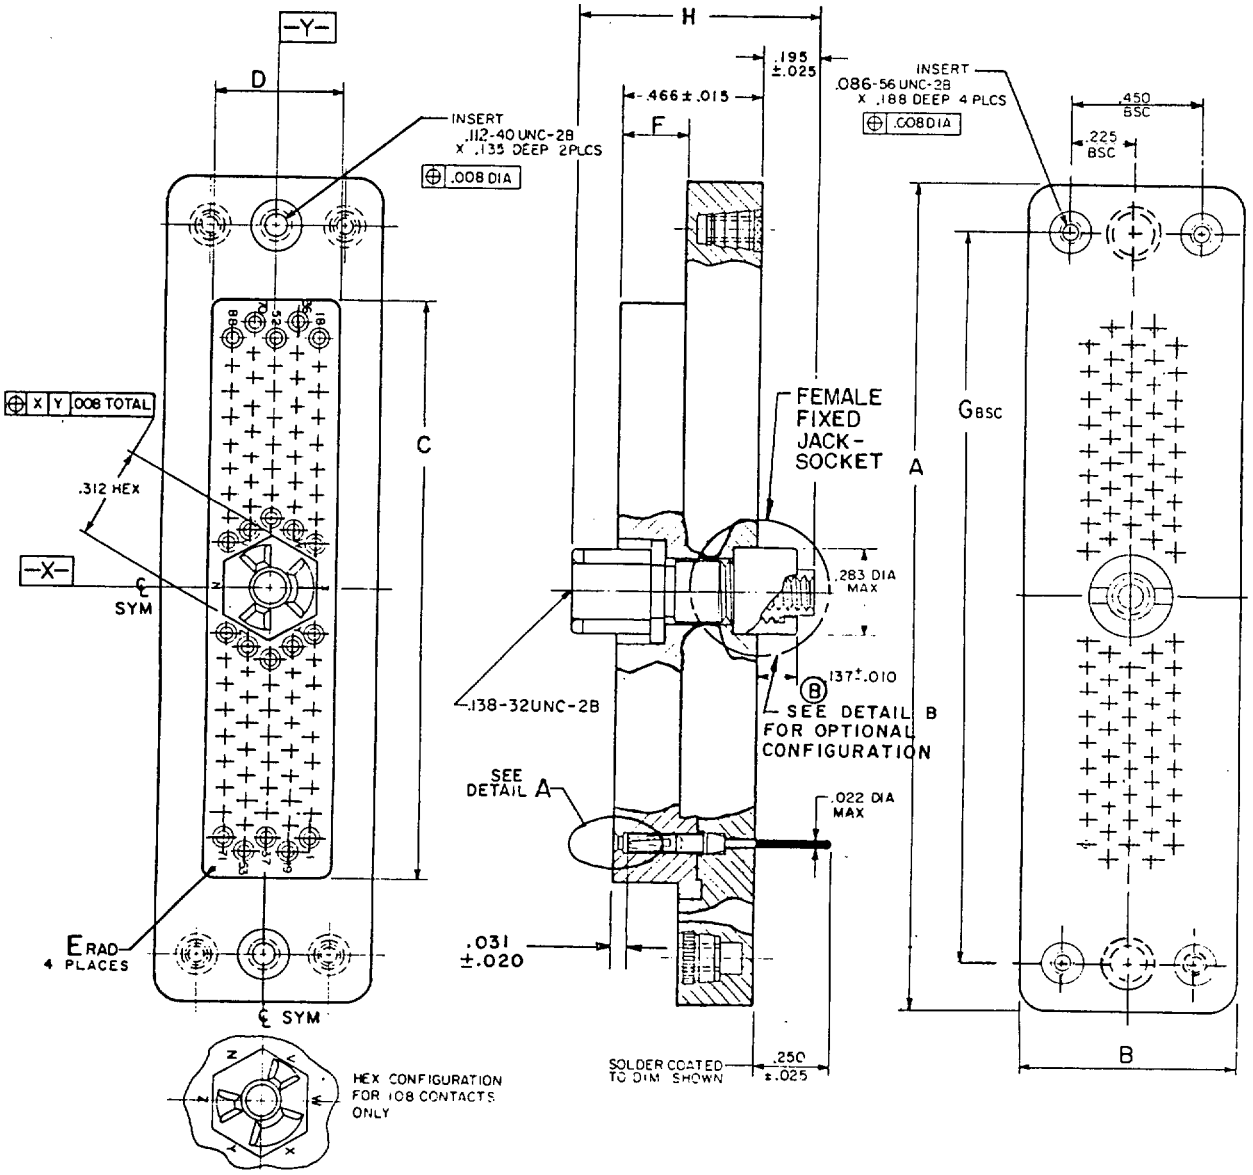


FIGURE 1. Connectors, socket contact, class S.

© Denotes change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-20T19:05Z
Check the source to verify that this is the current version before use.

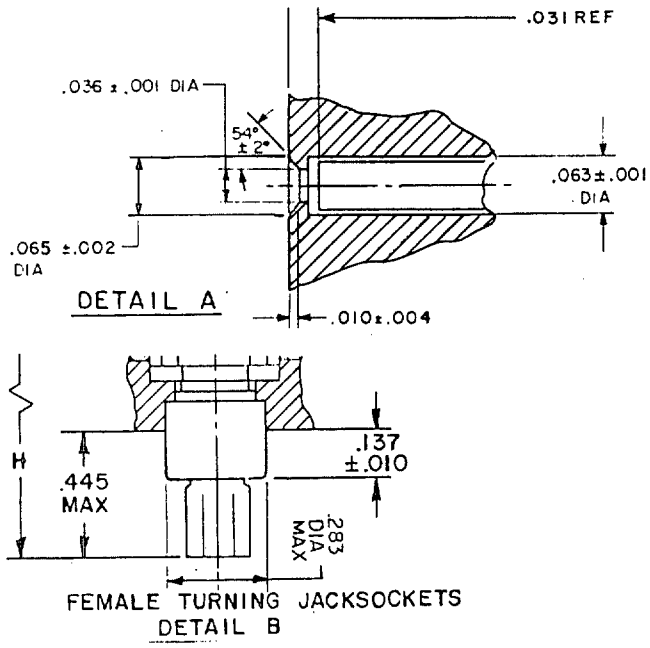

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.135	3.43	1.077	27.36
.002	0.05	.137	3.48	1.095	27.81
.004	0.10	.138	3.51	1.200	30.48
.005	0.13	.195	4.95	1.318	33.48
.008	0.10	.216	5.49	1.520	38.61
.010	0.25	.225	5.72	1.625	41.28
.015	0.38	.250	6.35	1.718	43.64
.020	0.51	.283	7.19	1.935	49.15
.022	0.56	.312	7.92	1.943	49.35
.025	0.64	.423	10.74	1.945	49.40
.031	0.79	.450	11.43	1.990	50.55
.036	0.91	.466	11.84	2.460	62.48
.056	1.42	.607	15.42	2.470	62.74
.063	1.60	.615	15.62	2.780	70.61
.064	1.63	.674	17.12	2.790	70.87
.086	2.18	.725	18.42	3.289	83.54
.106	2.69	.772	19.61	3.808	96.72
.110	2.79	.810	20.57	4.128	104.85
.112	2.84	.902	22.91		

FIGURE 1. Connector, socket contacts, class S - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:05Z
Check the source to verify that this is the current version before use.

Dash no. 1/ 2/	Shell size	No. of contacts	Insert arrangement no. 3/	A ±.015	B ±0.15	C ±.005	D ±.005	E ±.005	F ±.015	G BSC	H ±.025	Weight (max) (w/contacts)
1	8	14	Section 10 No. 1	1.520	.725	.674	.423	.056	.216	1.200	.810	13.5 grams
2	10	38	Section 20 No. 1	1.945	.725	1.095	.423	.056	.216	1.625	"	20.0 "
3	12	88	Section 30 No. 1	2.780	.725	1.935	.423	.056	.216	2.460	"	27.0 "
4	14	108	Section 40 No. 1	1.990	1.077	1.318	.772	.064	.216	1.718	"	33.5 "
5	16	132	Section 50 No. 1	2.790	.902	1.943	.607	.106	.216	2.470	"	38.5 "
6	18	244	Section 60 No. 1	4.128	.902	3.289	.615	.110	.216	3.808	.810	47.0 "
7	8	14	Section 10 No. 1	1.520	.725	.674	.423	.056	.216	1.200	1.007	16.0 "
8	10	38	Section 20 No. 1	1.945	.725	1.095	.423	.056	.216	1.625	"	22.5 "
9	12	88	Section 30 No. 1	2.780	.725	1.935	.423	.056	.216	2.460	"	29.5 "
10	14	108	Section 40 No. 1	1.990	1.077	1.318	.772	.064	.216	1.718	"	36.0 "
11	16	132	Section 50 No. 1	2.790	.902	1.943	.607	.106	.216	2.470	"	41.0 "
12	18	244	Section 60 No. 1	4.128	.902	3.289	.615	.110	.216	3.808	1.007	49.5 grams

1/ Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
2/ Dash numbers 1 thru 6 are supplied with female turning jacksockets; dash numbers 7 through 12 are supplied with female fixed jacksockets.
3/ For insert arrangements, see MIL-STD-1632.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Connector, socket contacts, class S - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mating end of the contacts: Shall be in accordance with MIL-C-28804/10.

Mating connectors: M28804/7-1 thru -6 mates with M28804/2-1 thru -6, M28804/4-1 thru -6, M28804/6-1 thru -6, M28804/8-1 thru -6, and M28804/11-1 thru -6. M28804/7-7 thru -12 mates with M28804/2-7 thru -12, M28804/4-7 thru -12, M28804/6-7 thru -12, M28804/8-7 thru -12, and M28804/11-7 thru -12.

Part number: M28804/7- (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-7)

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 704-036/45854

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:05Z
Check the source to verify that this is the current version before use.