MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PIN CONTACT, SIZE 22, CRIMP REMOVABLE

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1986

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.

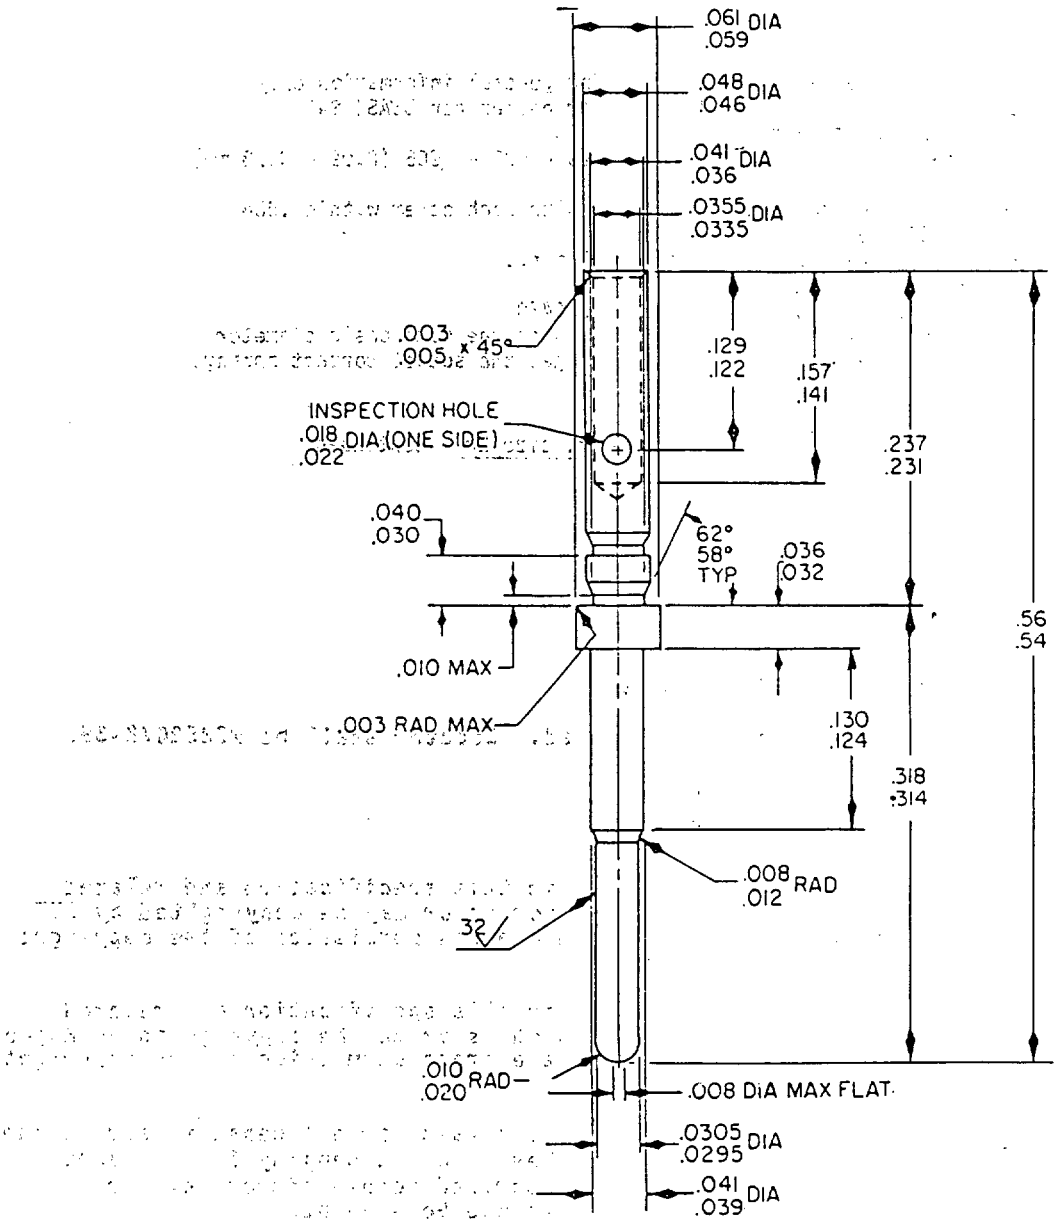


FIGURE 1. Connector, pin contact, size 22.

Ⓒ Denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:06Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Inches	mm	Inches	mm
.002	0.05	.046	1.17
.003	0.08	.047	1.19
.005	0.13	.048	1.22
.010	0.25	.059	1.50
.018	0.46	.061	1.55
.022	0.56	.122	3.10
.030	0.76	.129	3.28
.032	0.81	.141	3.58
.0335	0.851	.157	3.99
.034	0.86	.166	4.22
.035	0.89	.231	5.87
.0355	0.902	.237	6.02
.036	0.91	.302	7.67
.040	1.02	.312	7.92
.041	1.04	.541	13.74
.043	1.09		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Machined surfaces to have 63 or better per USASI B46.1 unless otherwise specified.
4. Remove all burrs and sharp edges - 003 - .005 (0.09 - 0.13 mm) RAD unless otherwise specified.
5. All diameters to be concentric with each other within .004 (0.10 mm) TIR.
6. Dimensions shown apply after plating.
7. For use in MIL-C-28804.
8. For matin contacts see MIL-C-28804/9.
9. Point at which a square ended pin of the same basic diameter as the mating contact first engages the socket contact spring.

FIGURE 1. Connector, pin contact, size 22 - Continued

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Locator: M22520/2-01 crimp tool shall be used. Locator shall be M22520/2-36.

Installing/Removal tool: M81969/1-01.

Part number: M28804/9-1.

Copyright notice. All information disclosed in this specification and related specification sheets and military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner.

Copyright notice. All information disclosed in this specification and related specification sheets and military standard which is or may be copyrighted by Hughes Aircraft Company is reproduced herein with the express permission of the copyright owner.

Rights in technical data. The Government has a royalty free license in and to the design and manufacturing details from the Hughes Aircraft Company for the benefit of manufacturers of the items disclosed and described herein either for the Government or for use in equipment delivered to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:06Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:06Z
Check the source to verify that this is the current version before use.