[INCH-POUND]
A-A-3069
November 1, 1996
TO SUPERSEDE
H-B-00481D(GSA-FSS)
October 15, 1970

COMMERCIAL ITEM DESCRIPTION

BRUSHES, SANITARY

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description (CID) covers light duty sanitary cleaning brushes.

2. CLASSIFICATION. Brushes covered by this CID shall be of the following types and classes:

Type I - Curved brush head.
Type II - Straight brush head, wood handle.
Type III - Straight brush head, wire handle.

Class 1 - Nylon filler
Class 2 - Polypropylene filler
Class 3 - Tampico filler

3. SALIENT CHARACTERISTICS

3.1 Type I, curved brush head. The type I brush shall meet the requirements of table I, and be configured similar to figure 1. The type I brushes shall have class 1 or class 2 filler as specified. The brush head shall be a twisted-in-wire type, horse collar shaped, and contoured to reach the inside surfaces of wash basins, toilet bowls, bedpans, etc. The handle shall be wood or plastic at the option of the manufacturer. The wire ends of the brush head shall be inserted into the handle to a depth of not less than 2 inches (5.1 cm) and secured by a commercial method suitable for the use intended. When an adhesive is used to secure the twisted wire ends of the brush head within the wood handle, or the components of the plastic handle, it shall be an adhesive that is water and chemical resistant.

Table I. Physical Requirements of Type I Brushes

Characteristic	Requirements
Handle, inches (cm)	
Length	14 ±1 (36 ±2.5)
Diameter (cylindrical)	7/8 ±1/8 (2 ±0.3)
Diameter (oval, optional for plastic handle only)	
Narrowest	1/2 (1.3) minimum
Widest	1 (2.5) minimum
Brush part, inches (cm)	
Length, overall	5-1/2 ±1 (14 ±2.5)
Width, overall	
At widest point	4-1/2 ±1 (11 ±2.5)
At handle	2-1/4 ±1/2 (6 ±1.3)
Thickness	1-7/8 (5) minimum
Filler weight per brush, oz (gm)	1.0 (28) minimum

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.1.1 Filler. The class 1 filler shall be crimped or level nylon with a minimum average diameter of 0.011 inch (0.27 mm), or a level X-shaped in cross-section with a minimum average diameter of 0.015 inch (0.38 mm), and shall be natural color (undyed) or black. The class 2 filler shall be polypropylene with a minimum average diameter of 0.011 inch (0.27 mm), and shall be natural color (undyed) or black. The filler shall be evenly and closely distributed in the twists of two wires, the wire ends shall be inserted into the handle. The filler shall project perpendicular from the wire in the brush head and flare around the circumference of the wire forming a dense working surface over the entire brush head. The filler shall be evenly trimmed.

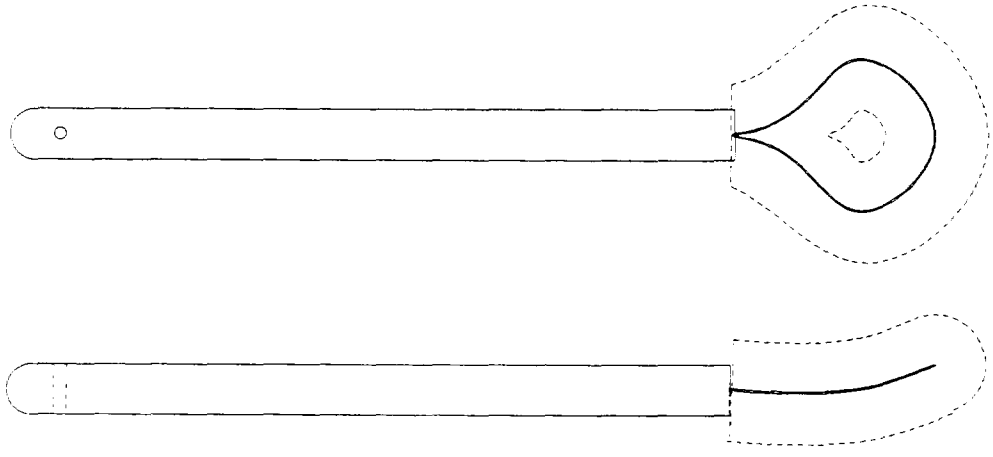


Figure 1

3.1.2 Wood handle. The wood handle of the type I brushes shall be close-grain and straight-grain hardwood, medium or high density, free from defects which may affect serviceability or appearance. The handle shall be straight, circular in cross-section, and of the same diameter throughout. The end opposite where the brush head inserts shall be rounded and have a hole for hanging the brush. The finished wood handle shall be coated with a clear, water resistant coating.

3.1.3 Plastic handle. The shape shall be in accordance with the manufacturers normal commercial practice provided it does not conflict with the requirements of this CID. One end of the handle shall have a center hole, an integral adapter, or an auxiliary adapter and collar of the same material or of a plastic material compatible with the material of the handle. The auxiliary adapter shall be bonded to the handle. The hole in the handle or in the adapter shall be of sufficient size to receive not less than 1-1/4 inches (3.8 cm) of the twisted wire ends of the brush part plus the bonding agent. The opposite end of the handle shall have a hole or other means of hanging the brush. If a bonding agent is used to secure any part of the brush, it shall be compatible with the other materials and resistant to water and chemicals.

3.2 Type II, straight brush head. The type II brush shall meet the requirements of table II and be configured similar to figure 2. The wood handle shall have spiral grooves around the circumference of the brush from which the filler extends. The end may be as depicted by figure 2 or may be a separated tuft extending out the end of the wood handle. The brush filler shall be class 2 or class 3 at the option of the manufacturer. The end of the wire near the handle shall be anchored to the handle by a nail. The filler shall project perpendicularly from the wood and flare around the circumference of the wood forming a dense, evenly trimmed working surface over the entire brush head.

3.2.1 Filler. The class 2 polypropylene filler shall have a minimum average diameter of 0.011 inch (0.27 mm), and shall be natural color (undyed) or black. The class 3 tampico filler shall be natural color (undyed), unbleached, tula tampico fiber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.2.2 Handle. The wood for the brush handle shall be close-grain and straight-grain hardwood, medium or high density and shall be free from defects which may affect serviceability or appearance. The handle shall be circular in cross section and of the same diameter throughout the brush and handle end, the handle shall be tapered or rounded at the end of the brush end similar to figure 2. The end of the handle shall be provided with a means for hanging the brush. The handles shall be finished with a clear, water resistant coating .

Table II. Physical Requirements of Type II Brushes

Characteristic	Requirements
Handle, inches (cm)	
Length from base of brush	16 ±1 (41 ±2.5)
Diameter	15/16 ±1/16 (2.4 ±0.2)
Brush part, inches (cm)	
Diameter	4 ±1/4 (10 ±0.6)
Length	5-1/2 ±1/4 (14 ±2.5)
Filler	
Length from handle, inches (cm)	1-1/2 (3.8) minimum
Weight per brush, ounces (gm)	
Polypropylene	1.40 (40) minimum
Tampico	1.96 (56) minimum

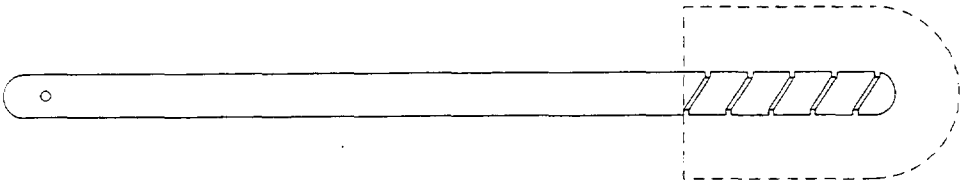


Figure 2

3.3 Type III, twisted-in-wire brush. The sanitary brush shall be a straight, twisted-in-wire type with nylon filaments. The brush shall meet the requirements of table III and be configured similar to figure 3. The brush shall be composed of a wire folded and twisted forming a loop in the handle in and capturing the nylon filaments at the brush end. The filaments shall be captured at their mid-point and shall be trimmed to the specified brush diameter and to present an even, clean, and dense working surface. The end of the brush shall be a fan or dome.

Table III, Physical requirements of type III brush

Characteristic	Requirement
Length, overall, inches (cm)	17 (43) minimum
Brush part, inches (cm)	
Length	6 (15) minimum
Diameter	2 (5) minimum
Handle, inches (cm)	
Handle end to offset	9 (23) minimum
Brush part to offset	3/4 (1.9) minimum
Offset	1 (2.5) minimum
Wire diameter	12 Gage, 0.106 ±0.003 (0.269 ±0.008)
Filaments	
Weight per brush, oz (g)	1.5 (43)

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:29Z
Check the source to verify that this is the current version before use.



Figure 3

3.3.1 Wire. The wire used in the brush shall be corrosion resistant steel, or steel plated resist corrosion and shall be to diameter specified in table III.

3.3.2 Filament. The filament shall be class 1, crimped or level nylon with a minimum average diameter of 0.011 inch (0.27 mm), or a level X-shaped in cross-section with a minimum average diameter of 0.015 inch (0.38 mm), and shall be natural color (undyed) or black.

3.4 Tuft retention. When subjected to a pulling force of 4 pounds (17.8 N) no tuft consisting of 50 strands of filler shall be dislodged from any brush head.

3.5 Chemical resistance. The brushes shall meet the following requirements after being completely immersed in a 1% sodium hypochlorite solution for 24 hours at 72°F ±2°F (22 ±1.1°C). The sodium hypochlorite solution shall be in accordance with CID A-A-1427 Grade A.

a) The bonding agent, if applicable, shall show no signs of softening or deterioration and shall not show evidence of shedding fibers.
b) Filler shall show no evidence of artificial color, or in the case of black filler, shall show no evidence of bleeding.
c) Filler shall show no evidence of damage or change in stiffness.
d) Wire and other metal parts shall be free from rust and otherwise unaffected.
e) Handles shall not crack, split, chip, or craze, as applicable, and coatings on wood handles shall not become soft, peel, or chip before or after testing.

3.6 Workmanship. Brushes shall be free from defects which may affect serviceability or appearance.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

4. REGULATORY REQUIREMENTS.

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PREPARATION FOR DELIVERY

6.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Intended use. The brushes covered by this description are primarily intended for cleaning wash basins, toilet bowls, and bedpans.


7.2 Referenced documents.

Commercial item description:

CID A-A-1427 - Sodium hypochlorite solution

Copies of commercial item descriptions are available from the General Services Administration, Federal Supply Service Bureau, Specification Section, Suite 800, 470 East L'Enfant Plaza SW, Washington, DC 20407.

7.3 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

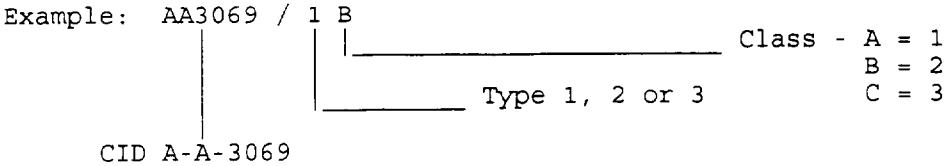

7.4 National stock numbers. The following NSN's have been identified as using this document:

NSN	Type, Class	Part No.
7920-00-772-5800	I 1	AA3069/1A
7920-00-141-5450	I 2	AA3069/1B
7920-00-234-9317	II 2 or 3	AA3069/2BC
7920-00-953-4175	III 1	AA3069/3A

Preparing Activity
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.