[INCH-POUND]
A-A-3082
February 24, 1997
SUPERSEDES
NN-H-104A
August 6, 1993

COMMERCIAL ITEM DESCRIPTION

HANDLES, WOOD,
THREADED AND TAPERED

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE

1.1 Scope. This commercial item description (CID) covers straight wood handles with tapered or threaded ends.

2. CLASSIFICATION

2.1 Classification. The handles shall be of he following types, sizes and lengths as specified:

Type I - ACME threaded metal end.
Type II - Tapered end.

Size A - 7/8 inch (22 mm) in diameter.
Size B - 15/16 inch (24 mm) in diameter.
Size C - 1-1/8 inch (29 mm) in diameter.

Length - 4 ft (1.2 m), 4-1/2 ft (1.4 m), 5 ft (1.5 m), and 8 ft (2.4 m), or as otherwise specified.

3. SALIENT CHARACTERISTICS

3.1 Wood. The handles shall be constructed of close-grained and straight wood. The handles shall not be fabricated from woods with a cross grain or spiral grain sloping more than 1 inch in 15 inches (2.5 cm in 38.1 cm). The wood shall be dried, seasoned, and prepared prior to fabrication.

3.2 Construction. The diameter of the handle shall be as specified and shall be uniform throughout it's length. The handle shall be straight and shall not have a crook, warp, or bow that causes an eccentricity of more than 3/8 inch (0.95 cm) when the handle is rolled on a flat surface. The handle ends opposite the attachment end shall be rounded. The attachment end for the type I handles shall have a threaded ferrule as specified in 3.2.1. The attachment end for the type II shall be tapered as specified in 3.2.2.

3.2.1 Type I end. The type I handle shall have a metal ferrule with 3/4" (1.9 cm) diameter, 5 threads per inch (2.5 cm) ACME form threads permanently attached to one end. The ferrule shall be composed of aluminum or corrosion resistant steel. The threads shall conform to the dimensions of figure 1, with a minimum of 4 full threads. The end of the ferrule shall be rounded or beveled. The attachment of the ferrule to the handle shall be sufficient to withstand a weight of 10 pounds (4.5 kg) attached to the ferrule being dropped 12 inches (30.5 cm) with the handle held vertically, ferrule end down; the ferrule shall not be displaced more than 1/4 inch (6 mm).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:29Z
Check the source to verify that this is the current version before use.

3.2.2 Type II end. The type II handles shall be tapered on one end, the dimensions shall be as specified by figure 2. The taper shall be straight, uniform, and with a round cross-section. The threaded length shall be 7/8 inch (2.2 cm) minimum.

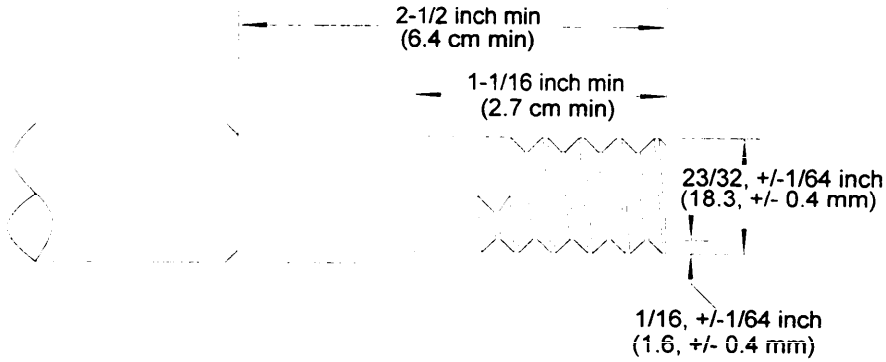


Figure 1

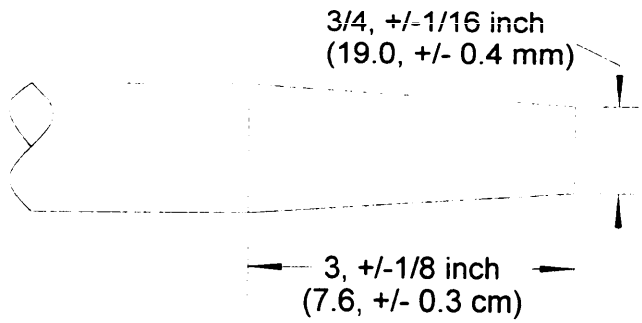


Figure 2

3.3 Size. Size A handles shall be 7/8 inch (22 mm) in diameter. Size B handles shall be 15/16 inch (24 mm) in diameter. Size C handles shall be 1-1/8 inch (29 mm) in diameter. The diameter tolerance shall be plus or minus 1/32 inch (0.8 mm).

3.4 Length. The handle length shall be specified by the contract or purchase order. Unless otherwise specified, the tolerance for the length specified shall be plus or minus 1/2 inch (1.3 cm). Unless otherwise specified, and except for the 8 foot (2.4 m) handle, all handles shall be one piece and fabricated from a single piece of wood. The 8 foot (2.4 m) long handle shall be a two piece handle made up of two 4 foot (1.2 m) sections connected by a positive locking metal connection device. The length shall be the overall length including any attached ends.

3.5 Finish. The handles, except for the tapered end or metal components, shall be sanded smooth and coated with a durable, protective, clear, and water resistant finish. The coating shall be continuous, smooth, uniform, and provide a glossy finish.

3.8 Workmanship. The handles shall be clean, straight, free from raised grain, smoothly finished, free of mold, and free of any defects that may affect serviceability, durability, or appearance.

Source: https://assist.dla.mil -- Downloaded: 20260-26T08:29Z
Check the source to verify that this is the current version before use.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING, PACKING AND MARKING


6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Ordering data. Purchases should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this document.
(b) Type, size and length required.
(c) Packaging, packing and marking required.

7.2 Part numbering system. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part numbers are not required to be placed on the product or container.

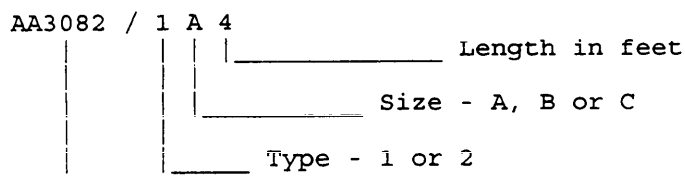

CID A-A-3082

7.3 National Stock Numbers (NSN's). The following NSN's reference this CID, this list may not be complete:

NSN	Type	Size	Length	Part Number
7920-00-982-6512	I	A	4	AA3082/1A4
7920-00-263-0328	II	B	5	AA3082/2B5
7920-00-177-5106	II	B	4-1/2	AA3082/2B4.5
7920-00-141-5452	II	C	4-1/2	AA3082/2C4.5
7920-00-263-0327	II	C	8	AA3082/2C8

Preparing Activity:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.