[INCH-POUND]
A-A-2945
December 29, 1995
SUPERSEDING
W-C-001750
May 11, 1973

COMMERCIAL ITEM DESCRIPTION

CLEANER, VACUUM, ELECTRIC (COMMERCIAL/INDUSTRIAL)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. SCOPE

1.1 Scope. This CID covers electric motor-powered vertical tank type vacuum cleaners for commercial and industrial use. The type I cleaners are for dry pickup only. The type II cleaners are for wet or dry pickup. The type III cleaners are designated explosion proof for use in NFPA 70 defined class 1, group D and class II, group G atmospheres and are for wet or dry pickup. The cleaners shall be designed to operate on a single phase power source of either 120 volts ac, 60 Hz, or 220 volts ac, 50 Hz as specified (see 7.2).

2. CLASSIFICATION

2.1 Classification. The vacuum cleaners shall be of the following types, classes, and sizes (see 7.2). All sizes are minimum recoverable capacities. To assure close adherence to the specified sizes, maximum recoverable capacity shall be limited to 3 gallons (11.4 L) greater than minimum recoverable capacity.

Type I - Dry pickup only.
  Class A - Enclosed filter
    Size 1 - 5 gallons (18.9 L).
    Size 2 - 10 gallons (37.9 L).
  Class B - Exposed filter
    Size 1 - 5 gallons (18.9 L).
    Size 2 - 10 gallons (37.9 L).

Type II - Wet pickup.
    Size 1 - 5 gallons (18.9 L).
    Size 2 - 10 gallons (37.9 L).

Type III - Explosion proof.
    Size 1 - 5 gallons (18.9 L).
    Size 2 - 10 gallons (37.9 L).

3. SALIENT CHARACTERISTICS

3.1 Standard Commercial Product. The vacuum cleaner shall be the manufacturer's standard commercial product except for any changes necessary for compliance with this CID.

3.2 Fire and Casualty Hazards. Vacuum cleaners shall meet the applicable requirements of UL 1017. Type III vacuum cleaners shall additionally meet the applicable requirements of the following standards for NFPA 70 defined class 1, group D and class II, group G atmospheres: UL 674, UL 698, UL 894, and UL 1203. Evidence of conformance with UL standards shall be a UL label(s) or listing mark(s), or a certified test report (based on tests conducted within the past two years) from an independent testing laboratory acceptable to the Government,

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

indicating the vacuum cleaner has passed all applicable tests. Type III vacuum cleaners shall meet the applicable requirements of NFPA 77. Evidence of conformance with NFPA standards shall be a certified test report (based on tests conducted within the past two years) from an independent testing laboratory acceptable to the Government, indicating the vacuum cleaner has passed all applicable tests.

3.3 Construction.

3.3.1 General. Each cleaner shall be complete, lubricated, and ready to operate (minor assembly is permitted). The design shall be simple in construction, shall permit easy accessibility to component parts for cleaning, inspection, adjustment, or replacement, and shall provide reliable operation. Similar component parts and assemblies of identical model number cleaners shall be fully interchangeable. Interchangeability shall not require alteration or modification.

3.3.2 Wet pickup. Cleaners with wet pickup capability shall be provided with an automatic shutoff mechanism and accessories required to convert the machine from wet to dry pickup.

3.4 Motor. For type III cleaners, motors shall conform to UL 674.

3.5 Power switch and controllers. Each cleaner shall be provided with a quick make and break type power switch. For type III cleaners, the power switch and enclosure shall conform to UL 894, and controllers, if used, shall conform to UL 698.

3.6 Wiring and conduit. All wiring and conduit in type III cleaners shall conform to UL 1203.

3.7 Power cord. For types I and II cleaners, the power cord assembly shall have three conductors and a three prong attachment plug, and shall have a minimum length of 24 feet (7.32 m). The cord length shall be measured from the point of exit from the machine to the point of entry into the attachment plug. For the type III cleaner, the power cord assembly shall have three conductors and a minimum length of 50 feet (15.3 m), but shall not have an attachment plug; the end user shall be responsible for providing and installing an attachment plug in accordance with local codes and insurance requirements.

3.8 Power cord storage. Each cleaner shall be provided with a means for coiling, wrapping, or otherwise storing the power cord when the cleaner is not in use.

3.9 Filtration system.

3.9.1 General. For type I cleaners, the filtration system shall consist of an enclosed filter (class A) or exposed bag filter (class B), and a tank assembly. For type II and III cleaners, the filtration system shall consist of a primary filter, wet pickup separator, and tank assembly. When type II and III cleaners are employed for dry pickup, the primary filter shall be employed. When type II and III cleaners are converted for liquid retrieval, the separator and automatic shutoff assembly shall take the place of the primary filter. For type III cleaners, the filtration system shall conform to UL 674, UL 1203, and NFPA 77.

3.9.2 Dry pickup. The primary filter shall filter particulate matter 1 µm and larger and shall retain this matter for easy disposal. This filter may be disposable. No ingested unfiltered air shall be exhausted from the cleaner.

3.9.3 Wet pickup. The machine shall be equipped with an effective separator which will prevent liquids and nonparticulate solid objects from passing through to the vacuum producer. An automatic shutoff assembly shall be provided which interrupts the air intake or power to the cleaner when the minimum liquid capacity is reached.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3.9.4 Tank. The tank shall be of stainless steel, plastic, or shall have a durable interior epoxy coating. For types II and III, the tank shall hold the minimum liquid capacity for the size specified before the shutoff mechanism activates, and tanks of 10-gallon (37.9 L) capacity shall have drain valves. The tank and drain valve for type III cleaners shall conform to UL 674, UL 1203, and NFPA 77.

3.10 Mobility. The cleaner shall have a bearing-equipped wheeled chassis or bearing-equipped wheels mounted on the tank to provide mobility. Wheels and casters are acceptable in any combination. The cleaner shall be equipped with a handle assembly suitable for use in cleaner movement. The cleaner shall be free-wheeling and easily transportable.

3.11 Attachments.

3.11.1 General. All cleaners shall be furnished with one 11-inch (279 mm) minimum length carpet tool, one 14-inch (356 mm) minimum length bare floor tool, one 9-inch (229 mm) minimum length crevice tool, one 48-inch (1220 mm) minimum length wand assembly, and one 1-1/2-inch (38.1 mm) minimum inside diameter, 120-inch (3050 mm) minimum length hose assembly. Type II and III cleaners shall also include one 14-inch (356 mm) minimum length squeegee tool, an automatic shutoff assembly, and any necessary attachments for conversion from dry to wet pickup. Type III attachments shall conform to UL 674, UL 1203, and NFPA 77.

3.11.2 Tool construction. The attachments for all cleaners shall be fabricated from a nonferrous alloy or a suitable synthetic material. Metal tools shall be suitably plated or finished to resist corrosion and prevent marking. Bristles, squeegee strips, etc., used in the tools shall be replaceable.

3.11.3 Hose construction. The hose shall be fabricated from nonmarking materials impervious to attack from common cleaning solutions. A swivel coupling shall be provided on the hose end attaching to the cleaner. The hose shall be able to withstand a minimum compressive load of 150 lb (667 N) applied to any portion of the hose no closer than 12 inches (305 mm) from any fitting by means of parallel flat surfaces having lengths of not more than 3 inches (76.2 mm) parallel to the axis of the hose for not less than 2 minutes. The compressive load shall cause no rupture of any portion of the hose and the resulting hose diameter shall not differ more than 1/16 inch (1.59 mm) from the diameter prior to the compressive load.

3.11.4 Couplings. The engaged wand, hose, and tools shall be able to withstand a tensile force of 25 lb (111 N) for 2 minutes at each coupling without separation. Couplings shall engage and release satisfactorily before and after being subjected to the 25-lb (111 N) tensile force.

3.12 Performance.

3.12.1 Noise. The maximum noise generated by the cleaners shall be 90 dbA for class B cleaners and 85 dbA for all others when tested in accordance with ASTM F1334.

3.12.2 Continuous duty. The cleaner shall be designed for continuous duty. Continuous duty is defined as constant operation for an 8-hour work day. As evidence of the continuous duty capability, the cleaner shall be capable of withstanding a continuous 10-hour run with the orifice wide open. All lubrication points except sealed bearings shall be visually checked after this run. The lubricant shall be visually examined and shall not contain any metallic particles and lubricant quantity shall be ample. Evidence of galling or similar deficiency or lack of lubrication shall be cause for rejection. The commutator(s) shall be visually examined. There shall be no evidence of burning or pitting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3.12.3 Vacuum producer water lift. When tested in accordance with ASTM F558, the vacuum producer shall perform according to values listed in table 1.

TABLE 1

VACUUM PRODUCER WATER LIFT

Vacuum Cleaner Type	Sealed Water Lift through a 3/4 inch (19.0 mm) Orifice (inches)	Sealed Water Lift through a 1-1/2 inch (38.1 mm) Orifice (inches)
Type I, Class A	40 (1,020 mm)	6 (152 mm)
Type I, Class B	45 (1,140 mm)	8 (203 mm)
Type II	40 (1,020 mm)	8 (203 mm)
Type III	35 (889 mm)	7 (178 mm)

3.13 Workmanship. The cleaner and all accessories shall be constructed, assembled, and finished in a manner to assure good quality equipment of a neat general appearance and free from imperfections which may affect durability, serviceability, and appearance.

3.14 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parentheses are provided to an accuracy of three significant digits and are for informational purposes only.

3.15 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

3.16 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Referenced Documents. The documents referenced in this CID shall be the issues in effect on the date of issuance of the invitation for bids or request for proposals unless otherwise specified. The documents form a part of this CID to the extent specified. In the event of a conflict between this CID and the documents referenced herein, this CID shall take precedence.

American Society for Testing and Materials Standards:

ASTM F1334 - Standard Test Method for Determining Sound Power Level of Vacuum Cleaners.

Application for copies of ASTM standards should be addressed to the American Society for Testing and Materials100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

National Fire Protection Association:

NFPA 70 - National Electrical Code.

NFPA 77 - Recommended Practice on Static Electricity.

Application for copies of NFPA standards should be addressed to the National Fire Protection Association, One Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

Underwriters Laboratories Inc., Standards:

UL 674 - Safety Electric Motors and Generators for Use in Division 1 Hazardous (Classified) Locations.

UL 698 - Safety Industrial Control Equipment for Use in Hazardous (Classified) Locations.

UL 894 - Safety Switches for Use in Hazardous (Classified) Locations.

UL 1017 - Safety Vacuum Cleaners and Blower Cleaners.

UL 1203 - Safety Explosion-Proof and Dust-Ignition-Proof Electrical Equipment for Use in Hazardous (Classified) Locations.


Application for copies of UL standards should be addressed to Underwriters Laboratories Inc., Publication Stock, 333 Pfingsten Road, Northbrook, IL 60062.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number, and date of this CID.
b. Voltage (see 1.1).
c. Type, class, and size (see 2.1).
d. Preservation, packing, and marking desired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

7.3 Part Numbering. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

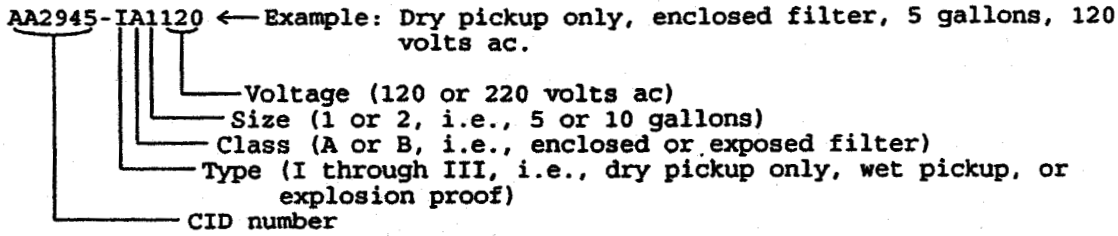

7.4 National Stock Numbers (NSNs). The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

NSN	Type	Class	Size	Voltage
7910-00-551-6858	I	A	1	120
7910-01-155-7154	I	A	1	220
7910-00-720-5541	I	A	2	120
7910-01-157-1033	I	A	2	220
7910-00-550-9105	I	B	1	120
7910-00-550-9120	II	-	1	120
7910-01-164-4355	II	-	1	220
7910-00-550-9111	II	-	2	120
7910-01-166-3478	II	-	2	220
7910-00-526-1959	III	-	1	120
7910-00-576-5893	III	-	2	120

MILITARY INTERESTS:

Custodians
Air Force - 99

Review Activities
Air Force - 84

Preparing Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.