[INCH-POUND]
A-A-2970
November 6, 1996

COMMERCIAL ITEM DESCRIPTION

JACK, SCREW

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of the type I, class 3, jacks specified in GGG-J-51E for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a bell-bottom screw jack used for handling heavy machinery, automotive equipment, and construction maintenance equipment.

2. CLASSIFICATION.

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The design of the screw jack shall consist of a barrel, screw, head, cap, and lever and shall be similar to that shown in Figure 1.

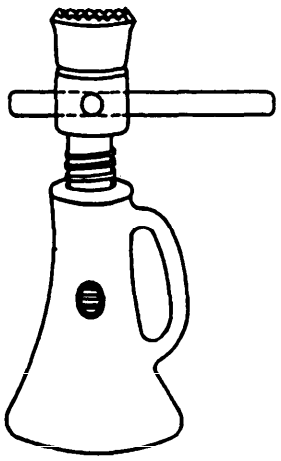


Figure 1. Screw, hand jack, bell-bottom.

3.1.1 Barrel. The barrel of the jack shall be of cast iron, malleable iron, or steel and shall be threaded internally to engage the threads of the screw. The barrel shall be formed with a bell-shaped base or equivalent, widening out to give a large bearing surface at the base. The bottom of the barrel shall be flat and perpendicular to the longitudinal axis of the screw. A handle, which forms an integral part of the barrel, shall be provided for carrying the jack. The barrel shall have a peephole to permit the operator to check against over-travel of the screw.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.1.2 Screw. The screw shall be of one-piece steel externally threaded to engage the threads in the barrel. The upper end of the screw shall have a head and a cap secured to the top.

3.1.3 Head and cap. The head shall be permanently secured to the screw below the cap (or may be integral with the screw) and contain holes of sufficient size for inserting an appropriate lever to turn the head and screw to raise or lower the load. The head holes shall be two through holes at right angles to each other. The nonremovable cap shall be secured to the head and shall rotate freely with a slight lateral movement. Plain friction-type or ball-bearing-type caps shall be used. Friction-type caps shall be of stress-relieved steel, malleable iron, or a high strength cast iron of at least 40,000 pounds per square inch tensile strength. The ball bearing shall be of malleable iron or steel. A lateral movement of not more than 1/8 inch in the ball bearing caps will be permitted. The ball bearings shall be spherical, entirely covered by the cap, and fully protected from dirt and dust. The top surface of the cap shall be corrugated or otherwise suitably roughened or designed to prevent slipping of the load.

3.1.4 Safety devices. The jack shall incorporate a positive stop to prevent over-travel, or shall be equipped with warning grooves or a stop indicator to indicate the limit of safe travel.

3.1.5 Lever. A suitable lever which fits the holes in the head shall be provided and shall conform to the dimensions specified in Table I.

TABLE I. Screw, hand jacks, bell-bottom

Rated capacity (Tons)	Closed height (maximum) (Inches)	Safe rise of screw (minimum) (Inches)	Diameter of screw (minimum) (Inches)	Weight of jack (maximum) (Pounds)	Size of cap (diameter) (minimum) (Inches)	Size of base (minimum) (Square Inches)	Length of lever (minimum) (Inches)
5	9-3/4	3-1/2	1-1/4	11	2-7/8	15	18-25
8	12-1/4	5	1-1/2	17	2-7/8	21	20-25
12	14-1/4	7	1-3/4	26	3-1/8	30	24-37
15	16-1/4	9	2	32	3-1/8	35	24-37

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item. The jacks shall be marked with the rated capacity in tons.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

5.5 Load tests. Sample jacks shall be subjected to the load tests specified in Table II. The load shall be applied with the jack in a vertical position, load-balanced, with the jack screw in any position except fully retracted.

TABLE II. Load tests

Rated capacity (Tons)	Test-load support (Tons)	Sustained load (10 minutes minimum) (Tons)
5	6	6.5
8	9	10
12	13	15
15	17	18

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(f) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the jack specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN	SIZE
5120-00-224-7520	5 ton
5120-00-224-7521	8 ton
5120-00-224-7522	12 ton
5120-00-224-7523	15 ton

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.