INCH-POUND
MIL-DTL-32686
w/AMENDMENT 1
11 December 2024
SUPERSEDING
MIL-DTL-32686
1 October 2021

DETAIL SPECIFICATION

BLOUSE, TROPICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the United States Marine Corps Tropical Combat Uniform (MCTCU) blouse with embroidered United States Marine Corps insignia.

1.2 Classification. The MCTCU blouses are of one type in the following classes, sizes, and lengths as specified (see 6.2).

1.2.1 Classes.

Class 1 – Woodland MCTCU

Class 2 – Desert MCTCU

1.2.2 Schedule of sizes. The blouses are to be constructed in the sizes and lengths indicated in table I and table II.

TABLE I. Schedule of alpha sizes.

Sizes	X-Small	Small	Medium	Large	X-Large	XX-Large
Lengths	XX-Short	XX-Short	XX-Short	-	-	-
	X-Short	X-Short	X-Short	X-Short	-	-
	Short	Short	Short	Short	Short	-
	Regular	Regular	Regular	Regular	Regular	Regular
	Long	Long	Long	Long	Long	Long
	-	X-Long	X-Long	X-Long	X-Long	X-Long
	-	-	XX-Long	-	XX-Long	-

Comments, suggestions, or questions on this document should be addressed to Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-SE-STDS or emailed to USMC_STDZ@usmc.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8415

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE II. Schedule of numeric sizes.

Sizes	32	35	39
Lengths	X-Short	X-Short	-
	Short	Short	Short
	-	Regular	-

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50198 - Thread, Gimp, Cotton, Buttonhole

A-A-50199 - Thread, Polyester Core, Cotton or Polyester-Covered

A-A-55126 - Fastener Tapes, Hook and Loop, Synthetic

A-A-59826 - Thread, Nylon

A-A-59994 - Button, Sewing Hole, and Button, Staple, (Plastic)

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage, (General Use)

MIL-DTL-32439 - Cloth, Duck, Textured Nylon

MIL-PRF-32659 - Textiles: Vector Protection Treatment of

MIL-DTL-32679 - Cloth, Tropical, Nylon and Cotton

MIL-C-44296 - Cloth, Fusibles

(Copies of these documents are available online at https://quicksearch.dla.mil/.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEFENSE LOGISTICS AGENCY (DLA) TROOP SUPPORT

DLA Troop Support Clothing & Textiles Additional Quality Assurance Requirements

(Copies of this document are available online at www.dla.mil.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

U.S. ARMY COMBAT CAPABILITIES DEVELOPMENT COMMAND SOLDIER CENTER

Eagle, Globe, and Anchor (EGA) Embroidery File

(Copies of the EGA Embroidery File are available from the U.S. Army Combat Capabilities Development Command Soldier Center, ATTN: FCDD-SCP-WC, 10 General Greene Avenue, Natick, MA 01760-5019.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC EP9 - Visual Assessment of Color Difference of Textiles

AATCC TM150 - Dimensional Changes of Garments after Home Laundering

(Copies of these documents are available online at www.aatcc.org.)

AMERICAN SOCIETY FOR QUALITY

ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available online at www.asq.org.)

ASTM INTERNATIONAL

ASTM D3990 - Standard Terminology Relating to Fabric Defects

ASTM D5034 - Standard Test Method for Breaking Strength and Elongation of Textile Fabrics (Grab Test)

ASTM D6193 - Standard Practice for Stitches and Seams

(Copies of these documents are available online at www.astm.org.)

DELETED

DELETED

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.2.

3.1.2 Conformance inspection. When specified (see 6.2), a sample shall be subjected to conformance inspection in accordance with 4.3.

3.2 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

3.3 Design. The MCTCU blouse shall be the United States Marine Corps design described in table III as shown in figure 1 through figure 9. The blouse shall be constructed from basic material that has been treated with insect repellent in yardage form, or the blouse may be constructed from untreated basic material and then treated with insect repellent in the garment form.

TABLE III. Design.

Design Feature	Detail
Front closure	Single breasted with a concealed front button closure
Collar	Band collar with curved collar ends
Long sleeves	Adjustable wrist tabs (1 button/3 buttonholes)
	One piece, single layer, external elbow reinforcement patches
Breast pockets (right and left)	Angled (65-degree) patch pocket on each chest
	Rectangular pocket flaps with hook and loop tape closure
Left breast pocket (as worn)	Embroidered Eagle, Globe, and Anchor (EGA), centered
	Pen opening centered in flap
Upper sleeve pockets (right and left)	Side and bottom bellows
	Drainage eyelet in bottom bellow (near front of pocket)
	Tapered flap with concealed two button closure
Waist	Tapered
Bottom	Straight cut
Fusible interfacing	Applied to collar and all pocket flaps

3.4 Materials and components.

3.4.1 Treated basic material. The blouse shall be made of a lightweight nylon/cotton cloth that has been treated with an insect repellent. The basic material for the class 1 blouse shall conform to MIL-DTL-32679, type II, class 1 and the basic material for the class 2 blouse shall conform to MIL-DTL-32679, type II, class 2, when tested as specified in 4.3.1.2. The camouflage pattern execution shall meet the drawings referenced in MIL-DTL-32679 and as displayed by the standard sample.

3.4.1.1 Untreated basic material. An untreated basic material may be used to construct the blouse. After construction, the blouse shall be treated with an insect repellent in garment form in accordance with MIL-PRF-32659. After treatment, the material for the class 1 blouse shall conform to MIL-DTL-32679, type II, class 1, and the material for the class 2 blouse shall conform to MIL-DTL-32679, type II, class 2, when tested as specified in 4.3.2.2. The camouflage pattern execution shall conform to the drawings referenced in MIL-DTL-32679 and as displayed by the standard sample.

3.4.2 Reinforcement material. The reinforcement material for the elbows shall be a 330 denier, 4.0 ounce (untreated) textured nylon duck material conforming to the requirements in table IV when tested as specified in 4.3.1.2.

TABLE IV. Reinforcement material requirements.

Blouse	Requirement
Class 1	MIL-DTL 32439, type IV, class 1, style E (Woodland MARPAT)
Class 2	MIL-DTL 32439, type IV, class 1, style F (Desert MARPAT)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

3.4.3 Interfacing. The fusible interfacing for the collar and pocket flaps shall conform to MIL-C-44296, type V, class 3, style B when tested as specified in 4.3.1.2. The fusible interfacing shall have the same life expectancy as the garment.

3.4.4 Thread. The threads shall conform to the requirements of table V when tested as specified in 4.3.1.2. The thread color for the class 1 blouse shall be Camouflage Green 483, and the thread color for the class 2 blouse shall be Khaki P-1.

TABLE V. Thread requirements.

Thread	Location	Needle/Bobbin	Requirement	Size (Ticket/Tex)
A	High stress seams (see 3.9)	Needle	A-A-59826, type II, class B	B/50
		Bobbin (looper)	A-A-50199 1/	50/36 to 50
B	All bartacks and all other seams except high stress seems (see 3.9)	Needle and bobbin (looper)	A-A-50199, type I 1/	50/36 to 50
		Optional bobbin (looper)	A-A-50199, type I 2/	70/31 to 35
C	Button attachment	-	A-A-59826, type II, class A, size B	B/45 to 51
D	Buttonhole reinforcement	-	A-A-50198, type I	-/210

FOOTNOTES:
1/ Minimum breaking strength of 3.2 pounds.
2/ Minimum breaking strength of 2.6 pounds.

3.4.5 Embroidery thread. The thread used for embroidery on the blouse shall conform to the requirements of table VI when tested as specified in 4.3.1.2.

TABLE VI. Embroidery thread requirements.

Characteristic	Requirement
Needle thread	100 percent polyester, bright, continuous filament (see 6.11)
Bobbin thread	100 percent nylon conforming to A-A-59826, type I, class A, 210 denier, Tex 70, 3-ply
Color for class 1 blouse	Black 477
Color for class 2 blouse	Burnt Taupe

3.4.6 Hook and loop fastener tape. The hook and loop fastener tapes for the breast pocket closure shall conform to the requirements of table VII when tested as specified in 4.3.1.2.

TABLE VII. Hook and loop fastener tape requirements.

Characteristic	Requirement
Physical requirements	A-A-55126, type II, class 1
Color for class 1 blouse	Camo Green 483
Color for class 2 blouse	Khaki 475
Length and width	1±1/16 wide by 1±1/16 inches long
Cut edge	Finished to ensure no raveling for the life of the garment

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

3.4.7 Buttons. The buttons shall conform to the requirements of table VIII when tested as specified in 4.3.1.2.

TABLE VIII. Button requirements.

Characteristic	Requirement
Physical requirements	A-A-59994, type I, class 1, style 26
Color for class 1 blouse	Marine Olive Drab Green
Color for class 2 blouse	Tan 380
Finish	Matte finish #21
Size	30 ligne

3.4.8 Labels. The blouse labels shall conform to the requirements of table IX when tested as specified in 4.3.1.2. The permanent label inscription, legibility, label material, and label attachment method shall be in accordance with the requirements of table IX and shall last the expected life of the uniform. Dimensional tolerance is ±⅛ inch. A sample of each label shall be submitted to the Government prior to use (see 6.2).

TABLE IX. Labels.

Label Features	Requirements
1-A. Marine Corps Exclusive	
a. Physical requirements	(1) Minnewawa style LR5398 (A-C), or equal.
	(2) Black background.
	(3) Woven, cut single, with a fused edge.
	(4) 2 inches wide by 4 inches long.
b. Inscription	(1) In accordance with figure 8.
	(2) Gold lettering.
c. Location	(1) Center back of the collar.
	(2) Sewn into the collar setting seam.
	(3) Stitched on all four sides. The stitching is not through the text.
2. Size label	
a. Physical requirements	(1) MIL-DTL-32075, type VI, class 2 and the following exceptions:
	(2) Dimensions: 1-3/4 inches wide by 1-1/4 inches long (excluding seam allowance).
	(3) Background color:
	(3.a) Class 1 blouse: Medium Green, Cable No. 70034, 70130, or 70131
	(3.b) Class 2 blouse: Khaki, Cable No. 70188
b. Inscription	(1) In accordance with figure 8.
	(2) 10 point Arial font, black.
	(3) Size and body measurements (height and chest) in accordance with table X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE IX. Labels – Continued.

Label Features	Requirements
c. Location	(1) Directly below the Exclusive label.
	(2) Top of the size label caught in the lower row of stitching of the Exclusive label with a 1/4-inch seam allowance.
	(3) As an alternate, may be positioned directly below the Exclusive label and attached by stitching across the top of the label.
	(4) The stitching is not through the text.
3. Combination label (identification and instruction)	
a. Physical requirements	(1) MIL-DTL-32075, type VI, class 15 and the following exceptions:
	(2) Background color:
	(a) Class 1 blouse: Medium Green, Cable No. 70034, 70130, or 70131.
	(b) Class 2 blouse: Khaki, Cable No. 70188.
	(3) Dimensions: no larger than the pocket behind which it is attached.
b. Inscription	(1) In accordance with figure 9.
	(2) Identification inscription:
	(a) For the class1 blouse: BLOUSE, WOODLAND MARPAT™ CAMOUFLAGE, MCTCU 50% Cotton/50% Nylon Contract information
	(b) For the class 2 blouse: BLOUSE, DESERT MARPAT™ CAMOUFLAGE, MCTCU 50% Cotton/50% Nylon Contract information
	As an alternate, the inscription from the size label may be added to the combination label between the fiber content and the contract information.
c. Location	(1) Backside of the right breast pocket (as worn) with the inscription facing the wearer.
	(2) Sewn on all four sides (stitching is not visible on the outside of the garment).
	(3) The stitching is not through the text.
4-A. Insect protection label (including brand identification)	
a. Physical requirements	(1) MIL-PRF-32659.
	(2) No larger than the pocket behind which it is attached.
b. Inscription	(1) MIL-PRF-32659.
c. Location	(1) Backside of the left breast pocket (as worn) with the inscription facing the wearer, in alignment with the combination label on the right breast pocket.
	(2) Sewn on all four sides (stitching is not visible on the outside of the garment).
	(3) The stitching is not through the text.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE IX. Labels – Continued.

Label Features	Requirements
4-B. Alternate insect protection label with separate brand identification label	
a. Physical requirements	(1) Same as 4-A.a except the insect protection and the brand identification labels may be two separate labels.
b. Inscription	(1) MIL-PRF-32659.
c. Location	(1) Same requirements as label 4-A.c with the two labels in vertical alignment.
5. Insect protection hang tag	
a. Physical requirements	(1) MIL-PRF-32659.
b. Inscription	(1) MIL-PRF-32659.
c. Location	(1) Completely visible on the item when the item is folded or packaged as specified in 5.1.
	(2 Location and attachment method cause no damage to the item.
6. Lot designation	
a. Physical requirements	(1) DLA Troop Support Clothing & Textiles Additional Quality Assurance Requirements – Lot numbering procedure.
b. Inscription	(1) DLA Troop Support Clothing & Textiles Additional Quality Assurance Requirements – Lot numbering procedure.
c. Location	(1) Next to or above the combination label behind the right breast pocket.
7. Barcode label	
a. Physical requirements	(1) MIL-DTL-32075, type VIII, class 17.
b. Inscription	(1) MIL-DTL-32075, type VIII, class 17.
c. Location	(1) Attached to the garment by a fastener.
	(2) Completely visible on the item when the item is folded or packaged as specified in 5.1.
	(3) Location and attachment method cause no damage to the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE X. Size and body measurements.

Alpha		
Characteristic	**Size**	**Body Measurement (inches)**
Height (Length of blouse)	XX-Short	55 to 59
	X-Short	59 to 63
	Short	63 to 67
	Regular	67 to 71
	Long	71 to 75
	X-Long	75 to 79
	XX-Long	Above 79
Chest (Size of blouse)	X-Small	Up to 33
	Small	33 to 37
	Medium	37 to 41
	Large	41 to 45
	X-Large	45 to 49
	XX-Large	49 to 53
Numeric		
Height (Length of blouse)	X-Short	59 to 63
	Short	63 to 67
	Regular	67 to 71
Chest (Size of blouse)	32	Up to 33
	35	33 to 37
	39	37 to 41

3.5 End item physical requirements. The finished blouses shall conform to the physical requirements specified in table XI when tested as specified in 4.3.2.2.

TABLE XI. End item physical requirements.

Characteristic	Requirement
Basic material (after insect repellent treatment has been applied to cloth or garment)	
Class 1 blouse	MIL-DTL-32679, type II, class 1
Class 2 blouse	MIL-DTL-32679, type II, class 2
Garment (made from either the treated basic material or the basic material that has been treated with the insect repellent in garment form)	
Dry out time (maximum): Medium-Regular size	2 hours
Weight of the blouse (maximum): Medium-Regular size	1 pound, 1 ounce
Button pull test (minimum)	40 pounds
Toxicity	See 3.5.1

3.5.1 Toxicity. Toxicity testing (see 4.3.2.6) shall be conducted as specified by the contract (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

3.6 Figures. When inconsistencies exist between the written specification and figures 1 through 9, the written specification shall govern.

3.7 Patterns. Standard patterns will be furnished by the Government (see 6.2). Government patterns show size and directional lines for cutting and are marked or notched for the proper placement and assembly of component parts. The directional lines indicate the warp direction of the cloth unless otherwise indicated on the patterns. Patterns provide a seam allowance of 3/8 inch for single needle seams and 1/2 inch for double needle seams. The list of pattern parts and computer nomenclature is provided to ensure that the pattern set provided is complete. Additional notching is permitted if needed to facilitate manufacture. Minor modifications are permitted where necessary to accommodate the manufacturer's processes and the use of automated equipment provided the modifications do not alter the dimensional, serviceability, or appearance requirements cited in this document or governed by the Government pattern.

3.7.1 Patterns when using treated basic material. When using the treated basic material (see 3.4.1), the Government patterns shall be utilized to construct the blouses, and the finished blouses shall meet the dimensional requirements of 3.8 and 3.8.1.

3.7.2 Patterns when using untreated basic material. When using the untreated basic material (see 3.4.1.1), the contractor shall prepare a set of working patterns by modifying the Government patterns to accommodate for the shrinkage of the blouse during the insect repellent application process. When specified (see 6.2), the contractor shall submit that working pattern file to the Government for review prior to cutting. Once approved, those working patterns shall be used to cut and construct blouses to meet the dimensional requirements of 3.8 and 3.8.1.

3.7.3 List of blouse pattern parts. Component parts shall be cut from the materials and the number of parts specified in table XII and table XIII. The pattern part lists in table XII and table XIII are provided for first quality fabrics. Two different sets of patterns are provided–one for alpha sizing (32686A) and one for numeric sizing (32686N).

TABLE XII. List of alpha sizing blouse pattern parts.

Material	Piece Name	Cut Parts
Basic material (see 3.4.1 and 3.7.1) or untreated basic material (see 3.4.1.1 and 3.7.2)	FRONT	2
	BACK	1
	LEFT FRONT FLY	1
	TOP SLEEVE	2
	UNDER SLEEVE	2
	COLLAR	2
	SLEEVE POCKET	2
	SLEEVE POCKET FLAP TAB	2
	BREAST POCKET	2
	BREAST POCKET FLAP	2
	CUFF	2
	CUFF TAB	2
Reinforcement material (see 3.4.2)	ELBOW PATCH	2
Interfacing (fusible) (see 3.4.3)	TOP COLLAR FUSIBLE	1
	SLEEVE POCKET FLAP FUSIBLE	2
	BREAST POCKET FLAP FUSIBLE	2
Template/shaper	COLLAR TEMPLATE	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XIII. List of numeric sizing blouse pattern parts.

Material	Piece Name	Cut Parts
Basic material (see 3.4.1 and 3.7.1) or untreated basic material (see 3.4.1.1 and 3.7.2)	FRONT	2
	BACK	1
	LEFT FRONT FLY	1
	TOP SLEEVE	2
	UNDER SLEEVE	2
	COLLAR	2
	SLEEVE POCKET	2
	SLEEVE POCKET FLAP TAB	2
	BREAST POCKET	2
	BREAST POCKET FLAP	2
	CUFF	2
	CUFF TAB	2
Reinforcement material (see 3.4.2)	ELBOW PATCH	2
Interfacing (fusible) (see 3.4.3)	TOP COLLAR FUSIBLE	1
	SLEEVE POCKET FLAP FUSIBLE	2
	BREAST POCKET FLAP FUSIBLE	2
Template/shaper	COLLAR TEMPLATE	0

3.8 Finished dimensions. Finished dimensions are provided below for the finished blouses (either made from insect repellent treated basic material or after application of an insect repellent treatment in the garment form). The finished alpha sizing blouses shall conform to the finished dimensions of table XIV, and the finished numeric sizing blouses shall conform to the dimensions of table XV, as defined in table XVI, when tested as specified in 4.3.5. All measurements shall be taken with the garment buttoned and laid flat on a table. Dimensions and tolerances are expressed in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XIV. Alpha sizing finished blouse dimensions.

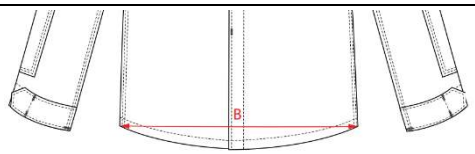
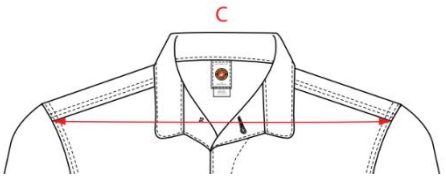

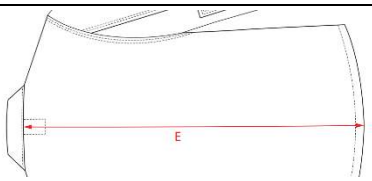
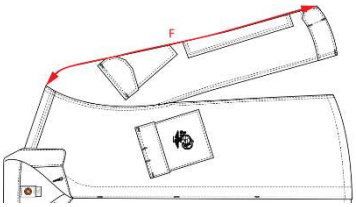
Letter	Measurement	Size/ Length	X-Small	Small	Medium	Large	X-Large	XX-Large	Tolerance
A	**Half chest**	All lengths	20-1/4	22-1/4	24-1/4	26-1/4	28-1/4	30-1/4	±3/4
B	**Half sweep**	All lengths	20	22	24	26	28	30	±3/4
C	**Shoulder**	All lengths	17-1/2	18-1/2	19-1/2	20-1/2	21-1/2	22-1/2	±1/2
D	**Collar width**	All lengths	2-3/8	2-3/8	2-3/8	2-3/8	2-3/8	2-3/8	±1/8
E	**Back length**	XX-Short	26	26-1/2	27	-	-	-	±3/4
		X-Short	27	27-1/2	28	28-1/2	-	-	
		Short	28	28-1/2	29	29-1/2	30	-	
		Regular	29-1/2	30	30-1/2	31	31-1/2	32	
		Long	30-7/8	31-3/8	31-7/8	32-3/8	32-7/8	33-1/8	
		X-Long	-	32-3/4	33-1/4	33-3/4	34-1/4	34-3/4	
		XX-Long	-	-	34-5/8	-	35-5/8		
F	**Sleeve length**	XX-Short	21-1/4	21-3/4	22-1/4	-	-	-	±3/4
		X-Short	22-1/4	22-3/4	23-1/4	23-3/4	-	-	
		Short	23-1/4	23-3/4	24-1/4	24-3/4	25-1/4	-	
		Regular	24-1/4	24-3/4	25-1/4	25-3/4	26-1/4	26-3/4	
		Long	25-1/4	25-3/4	26-1/4	26-3/4	27-1/4	27-3/4	
		X-Long	-	2-3/4	27-1/4	27-3/4	28-1/4	28-3/4	
		XX-Long	-	-	28-1/4	-	29-1/4	-	

TABLE XV. Numeric sizing finished blouse dimensions.

Letter	Measurement	Size/Length	32	35	39	Tolerance
A	**Half chest**	All lengths	21	22-1/2	24	±3/4
B	**Half sweep**	All lengths	22-1/2	24	25-1/2	±3/4
C	**Shoulder**	All lengths	16	16-3/4	17-1/2	±1/2
D	**Collar width**	All lengths	2-3/8	2-3/8	2-3/8	±1/8
E	**Back length**	X-Short	25-7/8	26-1/4	-	±3/4
		Short	26-7/8	27-1/4	27-5/8	
		Regular	-	28-3/4	-	
F	**Sleeve length**	X-Short	23-1/4	23-3/4	-	±3/4
		Short	24-1/4	24-3/4	25-1/4	
		Regular	-	25-3/4	-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XVI. Methods of measure for finished blouse dimensions (alpha and numeric).

Letter	Measurement	Method	Measurement Depiction
A	**Half chest**	From side seam folded edge to opposite side seam folded edge across blouse chest in line with pit of armhole (bottom of seam).	
B	**Half sweep**	From side seam folded edge horizontally across to the opposite side seam folded edge with the facing closed at the center front.	
C	**Shoulder**	From the intersection of the shoulder seam/sleeve seam horizontally across to the intersection of the opposite shoulder seam/sleeve seam.	
D	**Collar width**	Along center back of collar from setting seam to top of collar.	
E	**Back length**	Along center back from undercollar seam to bottom edge of blouse (in line with grain of fabric for straight line).	
F	**Sleeve length**	With sleeve folded along underarm seam, taken from the top edge of the sleeve at the armhole seam to the bottom of the sleeve cuff, along the top folded edge of the sleeve.	





3.8.1 Blouse pocket and flap finished dimensions. The pockets and flaps of the finished blouses shall conform to the finished dimensions of table XVII, as defined in table XVIII, when tested as specified in 4.3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XVII. Finished blouse pocket and flap dimensions (alpha and numeric).





Letter	Measurement	Alpha	Numeric	Dimension	Tolerance
G	**Breast pocket flap, length**	All sizes	All sizes	2-1/8	±1/4 inch
H	**Breast pocket flap, width**	X-Small	32	5-1/8	±1/4 inch
		Small through XX-Large	35 and 39	5-5/8	±1/4 inch
I	**Breast pocket, length**	All sizes	All sizes	6-1/2	±1/4 inch
J	**Breast pocket, width**	X-Small	32	4-7/8	±1/4 inch
		Small through XX-Large	35 and 39	5-3/8	±1/4 inch
K	**Sleeve pocket flap, length**	All sizes	All sizes	2-5/8	±1/4 inch
L	**Sleeve pocket flap, width at center**	All sizes	All sizes	5-1/8	±1/4 inch
M	**Sleeve pocket, length**	All sizes	All sizes	6	±1/4 inch
N	**Sleeve pocket, width**	All sizes	All sizes	4-7/8	±1/4 inch

TABLE XVIII. Methods of measure for finished blouse pocket and flap dimensions (alpha and numeric).

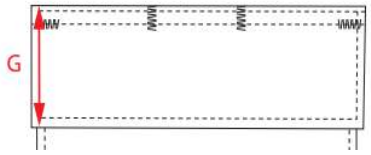Letter	Measurement	Method	Measurement Depiction
G	**Breast pocket flap, length**	From the left side, top edge vertically down to the left side, bottom edge.	
H	**Breast pocket flap, width**	From the left side, top edge horizontally across to the right side, top edge.	
I	**Breast pocket, length**	From the left side, top edge vertically down to the left side, bottom edge.	
J	**Breast pocket, width**	From the left side, top edge horizontally across to the right side, top edge.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Methods of measure for finished blouse pocket and flap dimensions (alpha and numeric) – Continued.

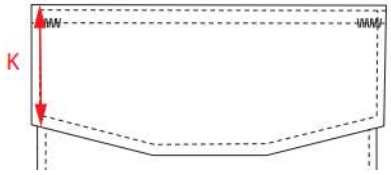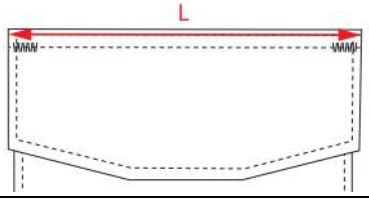Letter	Measurement	Method	Measurement Depiction
K	**Sleeve pocket flap, length**	From the left side, top edge vertically down to the left side, bottom edge.	
L	**Sleeve pocket flap, width**	From the left side, top edge horizontally across to the right side, top edge.	
M	**Sleeve pocket, length**	From the left side, top edge vertically down to the left side, bottom edge.	
N	**Sleeve pocket, width**	From the left side, top edge horizontally across to the right side, top edge.	

3.9 Construction requirements. End item construction and appearance shall conform to the requirements in table XIX and table XX, figure 1 through figure 9, and the finished dimensions cited in 3.8 and 3.8.1 to maintain end item configuration as verified in 4.3.4 and 4.3.5.

TABLE XIX. Construction details.

Construction Feature	Requirement
1. Thread	
a. Location	(1) Thread A (see table V) – high stress seams: armholes, side seams, blouse hem, elbow patch.
	(2) Thread B (see table V) – all other seams except high stress seams.
b. Tension	(1) Maintained so that there is no tight, loose, or unbalanced stitching.
c. Shade	(1) Consistent thread shade on the outside of the garment. Multiple shades of thread on the outside of the garment are not allowed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XIX. Construction details – Continued.

Construction Feature	Requirement
d. Breaks (all stitch types)	(1) Secured by stitching back of the break not less than 1/4 inch or 1/2 inch overlap.
	(2) If 401 stitch type, repaired using 301 stitch type.
e. Ends	(1) Trimmed to 1/4 inch or less.
f. Loose	(1) All removed.
2. Stitches and seams	
a. Stitch and seam types	(1) In accordance with ASTM D6193.
	(2) In accordance with table XX.
b. Appearance	(1) Consistent, exhibiting a uniform appearance.
c. Underside of seams (inside the garment)	(1) Flat, with no protruding seam allowances or raw edges which could cause irritation, discomfort, or poor appearance.
d. Stitches per inch	(1) All outside visible stitching: 10 to 14 stitches per inch.
	(2) Overedging or prehemming: 6 to 10 stitches per inch.
e. 401 or 101 stitch type	(1) Loops of the chain finish on the inside of the garment.
f. Overedging	(1) Knife set to trim the loose threads and raveled edge without cutting the material.
g. Seams and seam allowances	(1) Maintained with seam uniformly sewn so that no raw edges, runoffs, twists, pleats, puckers, gathers, other distortions, or open seams result.
h. Raw edges	(1) Raw edges on the outside of the garment are not allowed.
	(2) Raw edges on the inside along the double needle seams are not allowed.
	(3) Raw edges greater than 1/8 inch on the inside of the garment are not allowed.
	(4) Raw edges may be turned-in, turned-under, or serged to prevent raveling.
i. Beginning and ending of seams	(1) Start and finish evenly.
j. Joined components	(1) Lie smooth and flat.
k. Ends of seams and stitching – 301 stitch type	(1) If not caught in another line of stitching: backstitched not less than 1/4 inch.
l. Skipped stitches (301 or 401)	(1) Repaired by using 301 stitch type.
m. Edge, raise, and topstitching	(1) Edge and raise stitching: positioned 1/16 inch from the edge.
	(2) Topstitching: positioned 1/4 inch from the edge.
3. Fusible interfacings	(1) Applied in accordance with the supplier's recommendation for time, temperature, and pressure.
	(2) Centered on the basic material component part according to the pattern.
4. Buttons	(1) Securely fastened to the garment by locking stitches.
	(2) Minimum of 16 stitches per button.
	(3) "C" stitch pattern.
5. Pocket drainage eyelets	(1) Minimum of 19 stitches each.
	(2) Purling on the outside.
	(3) Material edges shall be securely caught in the eyelet stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XIX. Construction details – Continued.

Construction Feature	Requirement
6. Buttonholes	(1) Positioned in accordance with marks on patterns.
	(2) Eyelet end, tapered bar, with 7/8-inch cut opening and 52 to 56 stitches per inch.
	(3) Purling between tab and flap plies, front facing and front plies, and on the outside of the blouse.
	(4) Front cut edge positioned 3/4±1/8 inch from front folded edge for the blouse.
7. Bartacks	(1) 3/8±1/16bartack positioned in accordance with specific construction features (front closure, sleeves, sleeve pockets, and breast pockets) and as shown in figure 1, figure 3, and figure 6.
	(2) Thread B (see table V), 20 to 27 stitches per bartack.
8. Front closure	(1) Top button in accordance with the patterns (see figure 1 and figure 3).
	(2) Left front fly piece, including vertical bartacks, in accordance with the patterns (see figure 1 and figure 3).
9. Banded collar	(1) Curved collar ends shaped in accordance with template/shaper.
10. Sleeves	(1) Wrist adjustment tabs, buttons, and buttonholes constructed in accordance with marks on patterns (see figure 1, figure 2, and figure 6).
	(2) Reinforcement elbow patches positioned in accordance with marks on patterns.
	(3) Horizontal bartack positioned on each sleeve inseam at the bottom edge.
	(4) Vertical bartack positioned at each end of cuff tab along vertical stitching.
11. Sleeve pockets	(1) Construction in accordance with figure 1 and figure 7.
	(2) Positioned on sleeve in accordance with marks on patterns.
	(3) Flap buttonholes positioned in accordance with marks on patterns.
	(4) Flaps finish 1/2+1/8 inch above top pocket when measured from top of finished pocket to pocket flaps setting seam. (Note: positioning mark on pattern indicates required finished location of pocket flap.)
	(5) Vertical bartacks positioned at top corners of sleeve pockets.
	(6) Horizontal bartacks positioned at top corners of sleeve pocket flaps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XIX. Construction details – Continued.

Construction Feature	Requirement
12. Breast pockets	(1) Positioned on fronts in accordance with marks on patterns (see figure 1).
	(2) Two 1- by 1-inch pieces of hook fastener tape (flap) and two 1- by 1-inch pieces of loop fastener tape (pocket) positioned in accordance with marks on patterns.
	(3) Flaps finish 1/2±1/8 inch above top pocket when measured from top of finished pocket to pocket flap setting seam. (Note: positioning mark on pattern indicates required finished location of pocket flap.)
	(4) End of flaps backstitched 1/2 inch, back and forth three times, positioned at top right and left corners.
	(5) Vertical bartacks positioned at top corners of breast pockets.
	(6) Horizontal bartacks positioned at top corners of breast pocket flaps.
	(7) Vertical bartacks positioned at each side of pen opening on left breast pocket flap.
	(8) Pen opening: 1-1/2±1/4 inch between bartacks.
13. EGA embroidery	(1) Positioned in accordance with pattern marks, centered on the left breast pocket (as worn) (see figure 5).
	(2) Overall dimensions: 2-1/4 by 2-1/2 inches (see figure 5).
	(3) Stitch pattern, minimum number of stitches, and dimensions in accordance with the Government provided EGA Embroidery File (see 6.2).
	(4) Embroidery applied without puckering, deformation, loose threads, missed stitches, missed trim, poor registration, incomplete stitching, broken or skipped stitches, incomplete coverage of background material, bunched or tangled threads, tight or loose tension affecting appearance, stitches out of alignment affecting appearance.

TABLE XX. Seam types.

Seam Placement	Seam Type	Gage	Stitch Type
1. Sleeve seams, shoulder seams, and side seams	LSc-2	3/16 to 5/16 inch gage	301 or 401
2. Top stitching for pocket flaps, collar, cuff and cuff tab, fly, and front edges	OSf-1	1/8 to 1/4 inch from the edge	301
3. Attachment of patch pockets	LSd-1	1/16 to 1/8 inch from finished edge	301
4. Pocket flap attachment – double needle flap stitching	LSbj-2 (modified)	Two rows of double needle stitching 3/16 to 1/4 inch apart	301
5. Attachment of elbow patch	LSd-2	Edge stitched with two rows 3/16 to 1/4 inch apart	301
6. Label attachment	LSbj-1	1/8 to 3/16 inch from edges	301
7. Body hem	EFb-1	3/4 to 7/8 inch from edge	301

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. The treated blouse shall conform to the quality of product established by this document, be uniform, and be free from defects specified in 4.3.4.2 and those defects that adversely affect form, fit, or function. Defects shall not exceed the established Acceptance Quality Limits (AQLs) (see 6.2) and shall not adversely affect the serviceability, appearance, and uniformity of the product.

3.10.1 Disposal of class 1 and class 2. For class 1 and class 2, all scraps, garment seconds, irregulars, extra material, and extra garments shall be disposed of as specified in the contract (see 6.2).

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.2 First article inspection. Unless otherwise specified in the contract (see 6.2), the first article, in accordance with 3.1.1, shall be examined in accordance with 4.3.1 through 4.3.5 for compliance with the appearance, color, finish, design, configuration, workmanship, dimensional, and testing requirements as specified in this document.

4.2.1 First article samples and acceptance criteria. Unless otherwise specified in the contract (see 6.2), first article samples shall be provided. The lot size shall be expressed in units of blouses. The sample size and the sample unit shall be as specified in the contract (see 6.2). The presence of excessive defects or failure of any testing shall be cause for rejection of the first article.

4.3 Conformance inspection. Unless otherwise specified in the contract (see 6.2), conformance inspection, in accordance with 3.1.2, shall consist of the examinations and tests as specified in 4.3.1 through 4.3.5. The Government reserves the right to inspect and test all components, materials, and end items to determine conformance to stated requirements.

4.3.1 Materials and components (see 3.4).

4.3.1.1 Sampling and acceptance criteria for verification of materials and components. Unless otherwise specified in referenced documents or procurement documents (see 6.2), material and component sampling shall be in accordance with table XXI. The unit for expressing lot size and sample unit shall be in accordance with the applicable reference documents. The component lot shall be unacceptable if one or more sample units fail to meet any test requirements specified in this document.

TABLE XXI. Materials and component sampling.

Lot Size	Sample Size (# of Sample Units)
800 or less	2
801 through 22,000	3
22,001 and over	5

4.3.1.2 Materials and components examinations and tests. In accordance with 3.4, the materials and components shall be examined and tested in accordance with the specified examinations and tests referenced in table XXII unless otherwise excluded, amended, or modified in this document or applicable procurement documents (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XXII. Material and component verification.

Material/Component	Requirement	Verification
Treated basic material 1/	3.4.1	MIL-DTL-32679
Reinforcement material	3.4.2	MIL-DTL-32439
Interfacing	3.4.3	MIL-C-44296
Thread	3.4.4	Per specific thread specification listed in table V
Embroidery thread	3.4.5	Per specific thread specification listed in table VI
Hook and loop fastener tape	3.4.6	A-A-55126
Buttons	3.4.7	A-A-59994
Button shade	3.4.7	AATCC EP9, option C
Labels	3.4.8	Per specific label specification listed in table IX

FOOTNOTE:

1/ When the untreated basic material is used and the insect repellent is applied in garment form, the verification of the material shall be conducted in accordance with the 4.3.2.

4.3.2 End item physical requirements.

4.3.2.1 Sampling and acceptance criteria for verification of end item physical requirements. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed conforming to ASQ/ANSI Z1.4; the lot size shall be expressed in units of finished blouses, and the sample unit shall be six blouses; and the presence of excessive defects or failure of any testing as specified shall be cause for rejection of the lot.

4.3.2.2 End item physical requirements examination and tests. The finished end items shall be examined and tested in accordance with the specified examinations and tests referenced in table XXIII unless otherwise excluded, amended, or modified in this document or applicable procurement documents (see 6.2). Garment physical tests apply to finished blouses made from treated basic material or to finished blouses made from the untreated basic material which have been treated with insect protection in the garment form. All weights of finished items and components shall be obtained using standard laboratory procedures and a calibrated scale.

TABLE XXIII. End item physical requirements verification.

Characteristic	Requirement	Verification
Basic material (after garment has been treated with insect repellent)		
Class 1 blouse	3.5	MIL-DTL-32679, type II, class 1
Class 2 blouse	3.5	MIL-DTL-32679, type II, class 2
Garment physical tests		
Dry out time (Medium-Regular size)	3.5	See 4.3.2.3
Blouse weight (Medium-Regular size)	3.5	See 4.3.2.4
Button pull	3.5	See 4.3.2.5
Toxicity	3.5.1	See 4.3.2.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

4.3.2.3 Dry out time. The finished blouse shall be tested for dry out time. The blouse shall be washed and dried, in accordance with AATCC TM150, option 3, V, Aiii one cycle before conditioning and measurements. After laundering, the blouse shall be conditioned at 90 °F and 80 percent relative humidity (RH) for a minimum of 24 hours and then weighed. This is the dry mass. After recording the dry mass, the blouse shall be thoroughly soaked in water at 80 °F for 4 minutes in an AATCC approved washer and then run through the spin cycle. After the spin cycle, the blouse shall be removed and weighed. This is the spun mass, and the weight shall be recorded. Each blouse shall be placed in an environmental test chamber set at 90 °F and 80 percent RH. The weight of the blouse shall be continuously recorded. The blouse dry out time is the time elapsed when there is 4 ounces of water remaining in the blouse.

4.3.2.4 Blouse weight. The blouse shall be conditioned for a minimum of 24 hours at standard laboratory conditions (i.e., 70 °F and 65 percent RH) and then weighed.

4.3.2.5 Button pull test. The buttons attached to the blouse shall meet the requirements stated in 3.5 when tested in accordance with ASTM D5034 except that the button shall be slid on top of 1-inch wide grips separated at least ⅜ inch so that the button loosely rests evenly on top of grips. Only manually adjusted grips shall be allowed, not pneumatic. The button attachment stitching shall be placed in the middle of the bottom grips and adjusted an additional ⅜ inch down so that the grips grab the fabric just below stitching and not on the stitching. The tensile machine shall be run per the test method and the force required to pull the button from sewn garment shall be recorded.

4.3.2.6 Toxicity test. When the toxicity requirement (see 3.5.1) can be demonstrated with historical use data, toxicity testing may not be required on the finishing treatments used. If dermal toxicity testing is required, it shall be performed in accordance with the contract (see 6.2).

4.3.3 In-process examination. Visual examinations shall be made at any point, or during any phase, of the manufacturing process to determine whether material or construction details, which cannot be examined in the finished product, are in accordance with the requirements specified in section 3. Materials that contain defects and damages, as defined in the visual examination of 4.3.4, shall be removed from production. Any in-process nonconformance remaining in the finished material shall be classified as a defect in accordance with the visual examination of 4.3.4.

4.3.4 Visual inspection of end items.

4.3.4.1 Sampling and acceptance criteria for visual inspection of end items. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed conforming to ASQ/ANSI Z1.4; the lot size shall be expressed in units of blouses, and the sample unit shall be one blouse; and the presence of excessive defects) or failure of any testing as specified shall be cause for rejection of the lot.

4.3.4.2 Visual inspection. The blouse shall be examined for defects in color, shade, design, materials, construction, workmanship, and marking. Defects shall be classified in accordance with the list of defects specified in table XXIV. Table XXV provides guidance regarding methods of measurement to determine evenness between garment parts which include, but are not limited to, inseams, pocket alignment, etc. The inspection conditions and AQLs shall be as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Defects.

Part	Defects	Classification	
		Major	Minor
1. Material	a. Any hole, slub, cut, tear, abrasion mark, smash, burn, drill hole, run, needle chew, missing or broken yarn, visible mend, knot, thin place, dye streak, or misweave affecting appearance or serviceability.	101	
2. Camouflage pattern (basic and reinforcement material)	a. Camouflage pattern design not equal to standard sample or drawing, incorrect color in any part of the pattern.	102	
	b. DELETED		
	c. Skitteriness (mottles, uneven color) of pattern exceeds that shown by the standard sample.	104	
	d. Grinning (off register, gap where ground shade shows through) of pattern exceeds that shown by the standard sample.	105	
	e. Haloing or trapping (overlapping of colors) of pattern exceeds that shown by the standard sample.	106	
3. Material and components assembly	a. Material or component part not as specified or omitted.	107	
	b. Distorted, full, tight, or twisted; any part of the blouse caught in any unrelated stitching.	108	
	c. The edge of any component part required to be forced out having folds of more than 1/8 inch.		201
	d. Fullness creating unwanted permanent fold, pleat, or crease.		202
	e. Any required operation or assembly not as specified, omitted, or improperly performed.	109	
	f. Component part not cut on warp or as specified.	110	
	g. Bubbling, delaminating, wrinkling, puckering.		203
4. Shade	a. Shade variation within a part or between parts. 1/		204
	b. Component part color not as specified.		205
5. Blouse evenness 2/	a. Length of blouse fronts uneven by more than 1/4 inch at top or bottom when buttoned.		206
	b. End of collar and edge of front facing out of alignment by more than 1/8 inch when buttoned.	111	
	c. Blouse collar rounded ends vary by more than 1/8 inch.		207
	d. Sleeve lengths vary by more than 1/2 inch.	112	
	e. Cuff and cuff tab out of alignment with bottom folded edge of sleeve hem by more than 1/8 inch.		208

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Defects – Continued.

Part	Defects	Classification	
		Major	Minor
6. Stitching and seams	a. Seam, seam allowance, or stitch type not as specified.	113	
	b. Seams irregular, puckered, distorted, pleated, wavy, full, or twisted.		209
	c. Open seam, raw edge on outside, raw edge on inside along double needle seam, raw edge greater than 1/8 inch on inside of garment.	114	
	d. Raw edge:		
	(1) On outside.	115	
	(2) On inside:		
	(a) Up to 1/2 inch.		210
	(b) 1/2 inch or greater.	116	
	e. Loose or tight stitch tension, broken or missing thread or stitch.		211
	f. Broken stitching not repaired as specified.		212
	g. End of seam not secured as specified.	117	
	h. Double needle intersecting seams staggered by more than 1/4 inch.		213
	i. Edge or raised stitching sewn too close to edge (resulting in damage to cloth), needle chew, visible mend.		214
	j. Run off for edge and raise stitching greater than 1/8 inch.		215
7. Bartacks	a. Bartack missing or not secure.		216
	b. Bartack not positioned as specified.		217
	c. Bartack not required length or width.		218
	d. Number of stitches not as specified or broken stitches.		219
8. Fly lining	a. Blouse fly lining exposed more than 1/16 inch.		220
9. Hems	a. Hem at blouse bottom or sleeve bottom twisted, wavy, omitted, or not as specified.		221
	b. Hem width of blouse bottom less than 1/2 or more than 3/4 inch, sleeve hem width less than 2-3/8 or more than 2-5/8 inch. (Note: hem measurement taken from top to bottom fold.)		222

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Defects – Continued.

Part	Defects	Classification	
		Major	Minor
10. Buttons & Buttonholes	a. Any button and buttonhole out of alignment causing bulge, twist, or distortion when buttoned.	118	
	b. Cut opening of pocket flap buttonhole caught in topstitching.	119	
	c. Buttonhole omitted or added, type not as specified, location or direction not as specified, cut length not as specified.	120	
	d. Buttonhole not clean cut or not securely caught in fabric.		223
	e. Sleeve buttonhole placement not as specified (see figure 6): first buttonhole not aligned with cuff tab button, second buttonhole less than 4-1/8 or more than 4-3/8 inches from first, third buttonhole less than 1-7/8 or more than 2-1/8 inches from second.		224
	f. Eyelet end of sleeve buttonhole less than 5/8 or more than 7/8 inch from bottom edge of sleeve hem.		225
	g. Buttonhole opening greater than 7/8 inch.		226
	h. Gimp omitted from buttonhole or not as specified.	121	
	i. Button missing, broken, defective, or insecurely sewn.		227
	j. Stitching not locked at end of cycle (determined by tugging loose end of thread).		228
	k. Purling not on side specified.		229
	l. Button not attached with “C” stitch pattern.		230
11. Pockets and pocket flaps	a. Pocket companions not uniform in size or shape.		231
	b. Pocket or flap not stitched as specified, not positioned as specified, incorrect size.		232
	c. Pocket or pocket flap twisted, curled, or puckered.		233
	d. Pocket flap not completely covering pocket opening.		234
	e. Pocket flaps not centered over pocket opening. Flap width extends past finished pocket edge by more than 1/8 inch on either side.		235
	f. Sleeve pocket bellows exposed beyond edge of pocket by more than 1/8 inch.	122	
	g. Sleeve pocket out of horizontal alignment by more than 1/2 inch.	123	
	h. Any pocket or pocket flap measurement not as specified.		236
	i. Breast pockets out of horizontal alignment by more than 1/4 inch.		237
	j. Front edge of breast pocket not at 65-degree angle to front edge of blouse by 1/4 inch or more.		238
	k. Breast pocket not matching the grain of the camouflage material.		239
	l. Breast pocket hem stitching exposed below pocket flap.		240
	m. Pen pocket opening width less than 1-1/4 or more than 1-3/4 inches.		241
12. Eyelets	a. Omitted, added, misplaced, improper size or type, or caught in top stitching.		242
	b. Not clean cut, not securely caught in material.		243
	c. Eyelet not positioned as specified.		244

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Defects – Continued.

Part	Defects	Classification	
		Major	Minor
13. Hook and loop fastener tape	a. Hook and loop out of alignment by more than 1/4 inch.		245
	b. Omitted or not positioned as specified.	124	
	c. Any tape not securely attached, distorted, full, tight, frayed, damaged or twisted.		246
14. Reinforcement patches	a. Not attached as specified or not positioned as specified on pattern.	125	
	b. Elbow patches out of horizontal alignment by more than 1/2 inch.		247
15. Labels	a. Label omitted; incorrect type, size, color, or configuration; illegible; incorrect inscription; spelling errors, improperly attached; not attached as specified; peeling.	126	
	b. Barcode not readable by scanner, human-readable interpretation omitted or illegible.	127	
	c. Barcode not visible on folded, packaged item.		248
	d. Barcode attachment causes damage to the item.	128	
16. Embroidered EGA	a. Omitted, not positioned as specified, misplaced stitching, improperly sized, color not as specified, puckered, deformed, loose threads, missed stitches.	129	
	b. Any deviation from the Government provided EGA Embroidery File, minimum number of stitches not met.	130	
	c. Missed trim, poor registration, stitching incomplete, broken or skipped stitches, incomplete coverage of background material, bunched or tangled threads.	131	
	d. Loose or tight tension affecting appearance, stitches out of alignment affecting appearance.		249
	e. More than two free ends or three or more occurrences of untrimmed thread 1/2 inch or longer.		250
	f. Overall measurement outside of the ±1/16 inch tolerance.		251
17. Collar	a. Collar curled, puckered, pleated, or twisted.		252
18. Cleanliness	a. Spot or stain (more than 1 inch in any dimension), odor, embedded foreign matter, overall uncleanliness.	132	
	b. More than two thread ends not trimmed to 1/2 inch or less on outside of garment, more than five thread ends not trimmed to 1/2 inch or less on inside of garment.		253
	c. Five or more loose threads of 1 inch or more not removed throughout the garment (inside and outside combined).		254
	d. Two or more tickets not removed.		255
19. Packaging	a. Any blouse not packaged in accordance with the contract or purchase order.		256

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

TABLE XXIV. Defects – Continued.

FOOTNOTES:

1/ Parts suspected of being off shade shall be examined at a distance of 3 feet against a background of the other parts and colors of the garment. When the shade difference is discernable under these examination conditions, it shall be scored as a shaded part.

2 Evenness can be determined by comparing measurements of companion parts or by aligning parts and measuring the difference in lengths as described in table XXV. Except for the collar, evenness comparisons shall be conducted by extending the portions of the garments in parallel between two hands without stretching and then inspecting for evenness. Where evenness defects are found, the garments shall be laid flat on a measuring surface and the difference in lengths recorded.

TABLE XXV. Evenness verification.

Letter	Location	Description
A	Collar	Assessed by folding the collar at the center back and aligning the collar halves at the setting seam to the front collar ends. The aligned rounded front collar edges shall be compared for height, shape, and curve.
B	Sleeves	Align both sleeves from the top of the shoulder seam down along the sleeve crease to the sleeve hem edge. The aligned sleeves shall be inspected for evenness of sleeve lengths.
C	Breast pocket alignment	With the blouse lying flat, a measuring device shall be extended between the inner pocket flap corners in a straight line following the grain of the fabric. When unevenness is found, measurements shall be taken in a vertical line from the shoulder seam to the upper pocket flap corner on both pockets and recorded.
D	Elbow patch alignment	Align sleeves by matching shoulder seams and armhole seams and extending the sleeves. The aligned sleeves shall be inspected for elbow patch alignment.

4.3.5 Dimensional examination of end items.

4.3.5.1 Sampling and acceptance criteria for dimensional examination of end items. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed conforming to ASQ/ANSI Z1.4. The lot size shall be expressed in units of blouses, and the sample unit shall be one blouse. The presence of excessive defects as specified (see 6.2) shall be cause for rejection of the lot.

4.3.5.2 Dimensional examination. The blouses shall be examined for conformance to the dimensions specified in table XIV and table XV when measured as specified in table XVI, as well as pocket dimensions specified in table XVII when measured as specified in table XVIII. Any measurement deviating from dimensions and tolerances specified shall be scored as a measurement defect. The inspection conditions and the AQL shall be as specified (see 6.2).

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The blouse is a component of the MCTCU for wear by military personnel of the United States Marine Corps in hot weather combat environments.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Classes, sizes, and lengths required (see 1.2).

c. DELETED

d. When first article is required (see 3.1.1, 4.2, and 6.4).

e. When conformance inspection is required (see 3.1.2).

f. When Government approval of the label inscription is required (see 3.4.8).

g. Applicable Government patterns, drawings, standard samples, EGA Embroidery File, and reference standards (including revisions) (see 3.7 and 3.9).

h. When Government approval of the contractor's working files is required (see 3.7.2).

i. AQLs (see 3.10, 4.3.4.2, and 4.3.5.2).

j. Disposal of class 1 and class 2 (see 3.10.1 and 6.6.1).

k. First article sampling and acceptance criteria, including sample size and sample unit (see 4.2.1).

l. Conformance inspection criteria (see 4.3).

m. Materials and components sampling and acceptance criteria (see 4.3.1.1).

n. Materials and components examinations and tests (see 4.3.1.2).

o. End item physical requirements sampling and acceptance criteria (see 4.3.2.1).

p. End item physical requirements examination and tests (see 4.3.2.2).

q. Toxicity requirements and testing (see 4.3.2.6).

r. Visual examination sampling and acceptance criteria (see 4.3.4.1).

s. Visual inspections conditions (see 4.3.4.2).

t. Dimensional examination sampling and acceptance criteria (see 4.3.5.1).

u. Dimensional examination (see 4.3.5.2).

v. Packaging requirements (see 5.1 and 6.10).

w. National stock numbers (NSNs) (see 6.9).

6.3 Information requests. For access to information such as specifications, drawings, and standard shade samples of cloth, go to http://www.dla.mil/TroopSupport/ClothingandTextiles/SpecRequest.aspx for DLA's Troop Support's Clothing and Textile Specification/Pattern/Drawing request form. Complete the request form and then submit the form. Request to use equivalent materials or components should be sent to the contracting officer for approval by the military service.

6.4 First article. When first article inspection (see 4.2) is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be first article sample, a first production item, or a standard production item from the contractor's current inventory, and the number of items to be tested as specified in 4.2.1. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product that has been previously acquired or tested by the Government and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for pending contract. Bidders should not alternate submit bids unless specifically requested to do so in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

6.5 Replacement document (in part). This document replaces the blouse requirements previously stated in MIL-PRF-MCTCU dated APR 2020.

6.6 Government intellectual property and trademark rights notification. The Government possesses intellectual property/trademark rights for the following United States Marine Corps patterns and logos (collectively referred to as "intellectual property"): the EGA logo, including the EGA logo as it appears embedded in the fabric pattern. The Government further has title to the invention disclosed and claimed in United States Design Patent No. D491,372 issued on 15 June 2004 for "Camouflage Pattern for Sheet Material and Uniforms" and the invention disclosed and claimed in United States Patent No. 6,805,957 issued on 19 October 2004 for "Camouflage U.S. Marine Corps Utility Uniform: Pattern, Fabric, and Design." The Government claims exclusive ownership of the above mentioned intellectual property; therefore, no entity other than the Government, or those contracted by or having obtained proper permission or licenses from the Government to do so, are permitted to produce, sell, or transfer in any manner any items (clothing or non-clothing) containing or copying, in whole or in part, the intellectual property. Doing so will be considered an infringement on the Government's intellectual property rights and will be subject to legal action.

6.6.1 Disposal of class 1 and class 2. For class 1 and class 2, all scraps, garment seconds, irregulars, extra material, and extra garments containing the aforementioned intellectual property/trademarks that are not utilized for Government contracts or a purpose authorized in writing by the Government, are to be destroyed and not sold or transferred in any manner. This restriction applies to the prime contractor, as well as all subcontractors, and is to be incorporated into all agreements with subcontractors (see 6.2).

6.7 Thread source. A known source of the thread is American and Efird (https://www.amefird.com/). The thread shade match should be confirmed prior to use in production.

6.7.1 Class 1 blouse embroidery thread. Embroidery thread color for class 1 blouse embroidery is Black 477, which is similar in shade to AMS-STD-595, color chip 37029.

6.7.2 Class 2 blouse embroidery thread. Embroidery thread color for class 1 blouse embroidery is AMS-STD-595, color chip 20068.

6.8 Button source. A known source of the buttons is Emsig Manufacturing Corporation (www.usbutton.com): shade M3738 for the class 1 blouse and shade M2138 for the class 2 blouse.

6.9 NSNs. For informational purposes only, NSN 8415-01-680-5190 has been assigned to the class 1 Medium-Regular blouse. A full listing of NSNs covered in a particular contract or order may be found in the contract or order (see 6.2).

6.10 Class 1 and class 2 insect repellent treated item packaging. Unless otherwise specified (see 6.2), packaging of class 1 and class 2 blouses should be in accordance with MIL-PRF-32659.

6.11 Toxicity testing. OECD Test No. 406: Skin Sensitization and OECD Test No. 404: Acute Dermal Irritation/Corrosion adequately are suggested to assess the requirement in 3.5.1, but other methods may be used.

6.12 Subject term (key word) listing.

Camouflage
Desert
Insect repellant
Jungle
Marine Corps
MARPAT
MCTCU
Type VI Label
Woodland

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

6.13 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.



FIGURE 1. Front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

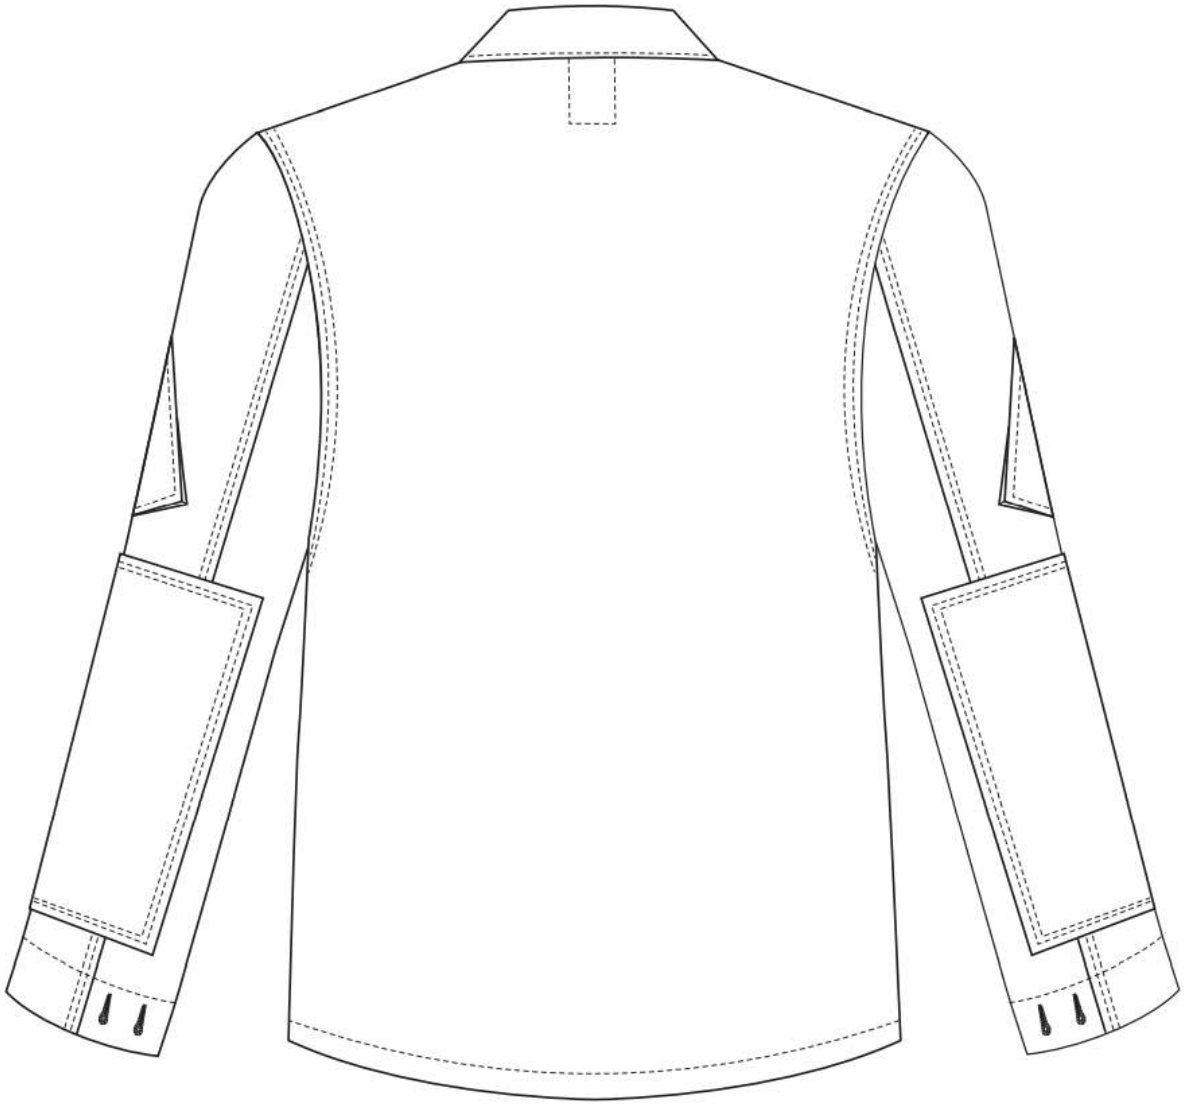


FIGURE 2. Back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.



FIGURE 3. Inside front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.



FIGURE 4. Inside back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.


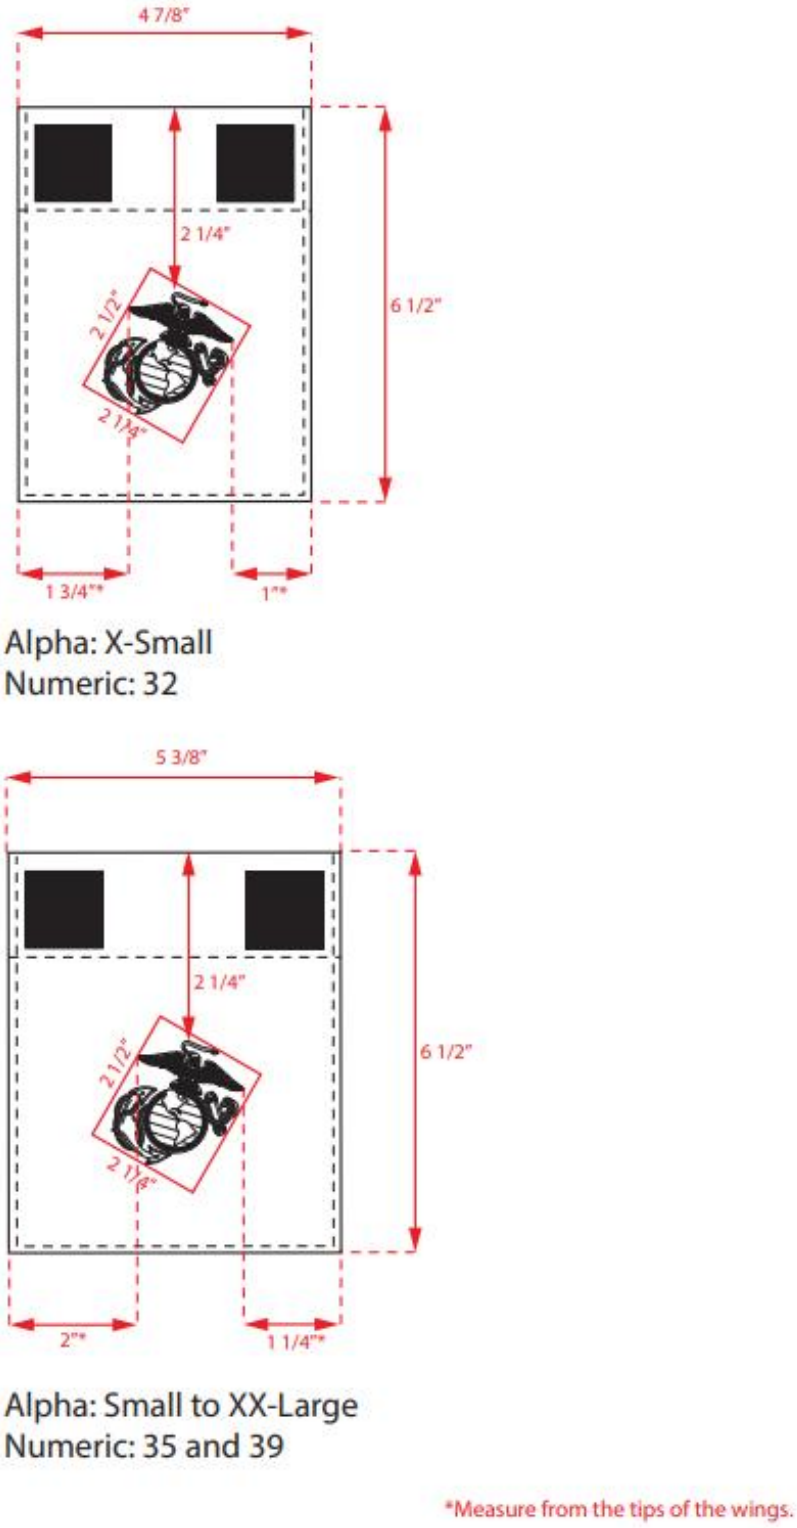


FIGURE 5. Breast pocket finished dimensions and EGA positioning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

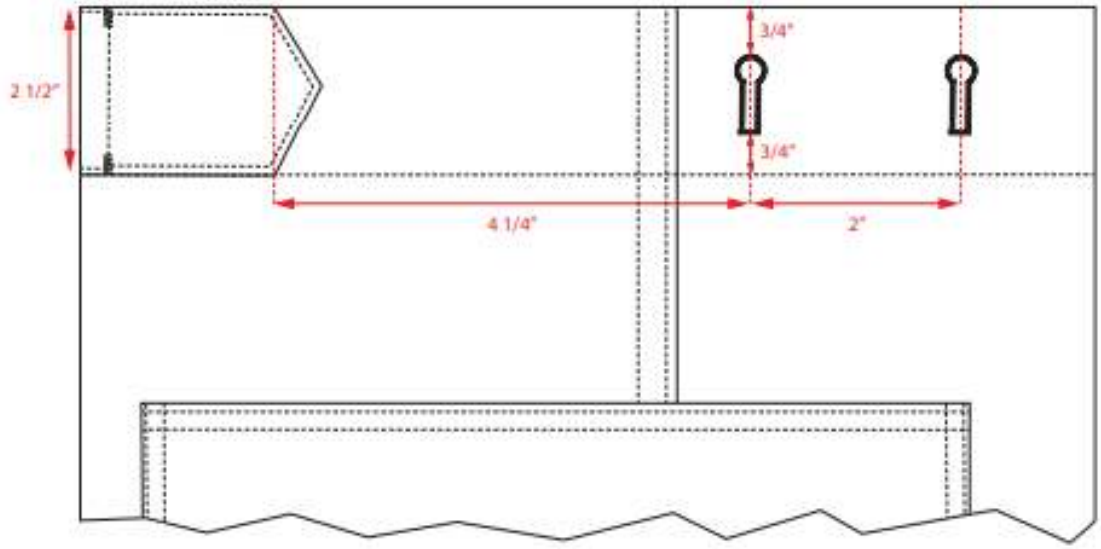

NOTES:

1. One buttonhole shall be aligned with the button positioned on underside of the sleeve tab. (Note: the buttonhole is hidden under tab in this figure.)
2. The second buttonhole shall be positioned 4-1/4±1/8 inches from the center of first buttonhole.
3. The third buttonhole shall be 2±1/8 inches from the center of the second buttonhole.
4. All buttonholes shall be positioned with the cut opening 3/4±1/8 inch from bottom edge of sleeve.

FIGURE 6. Sleeve buttonhole placement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

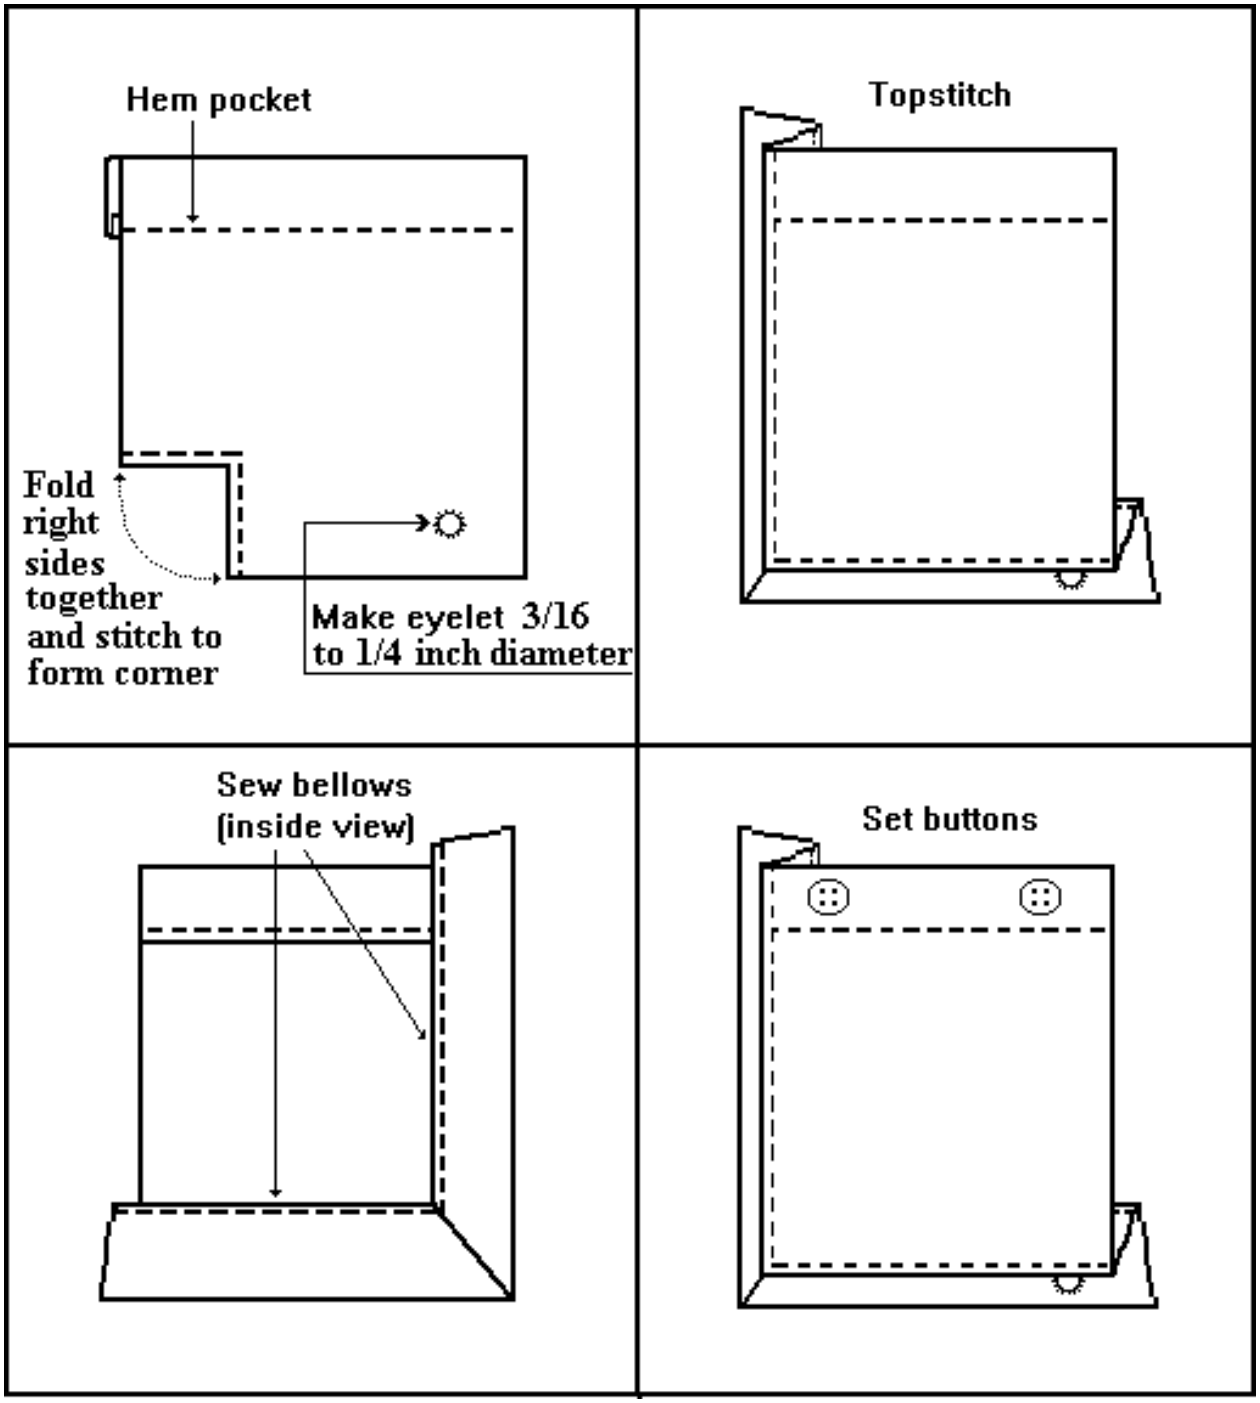


FIGURE 7. Sleeve pocket construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

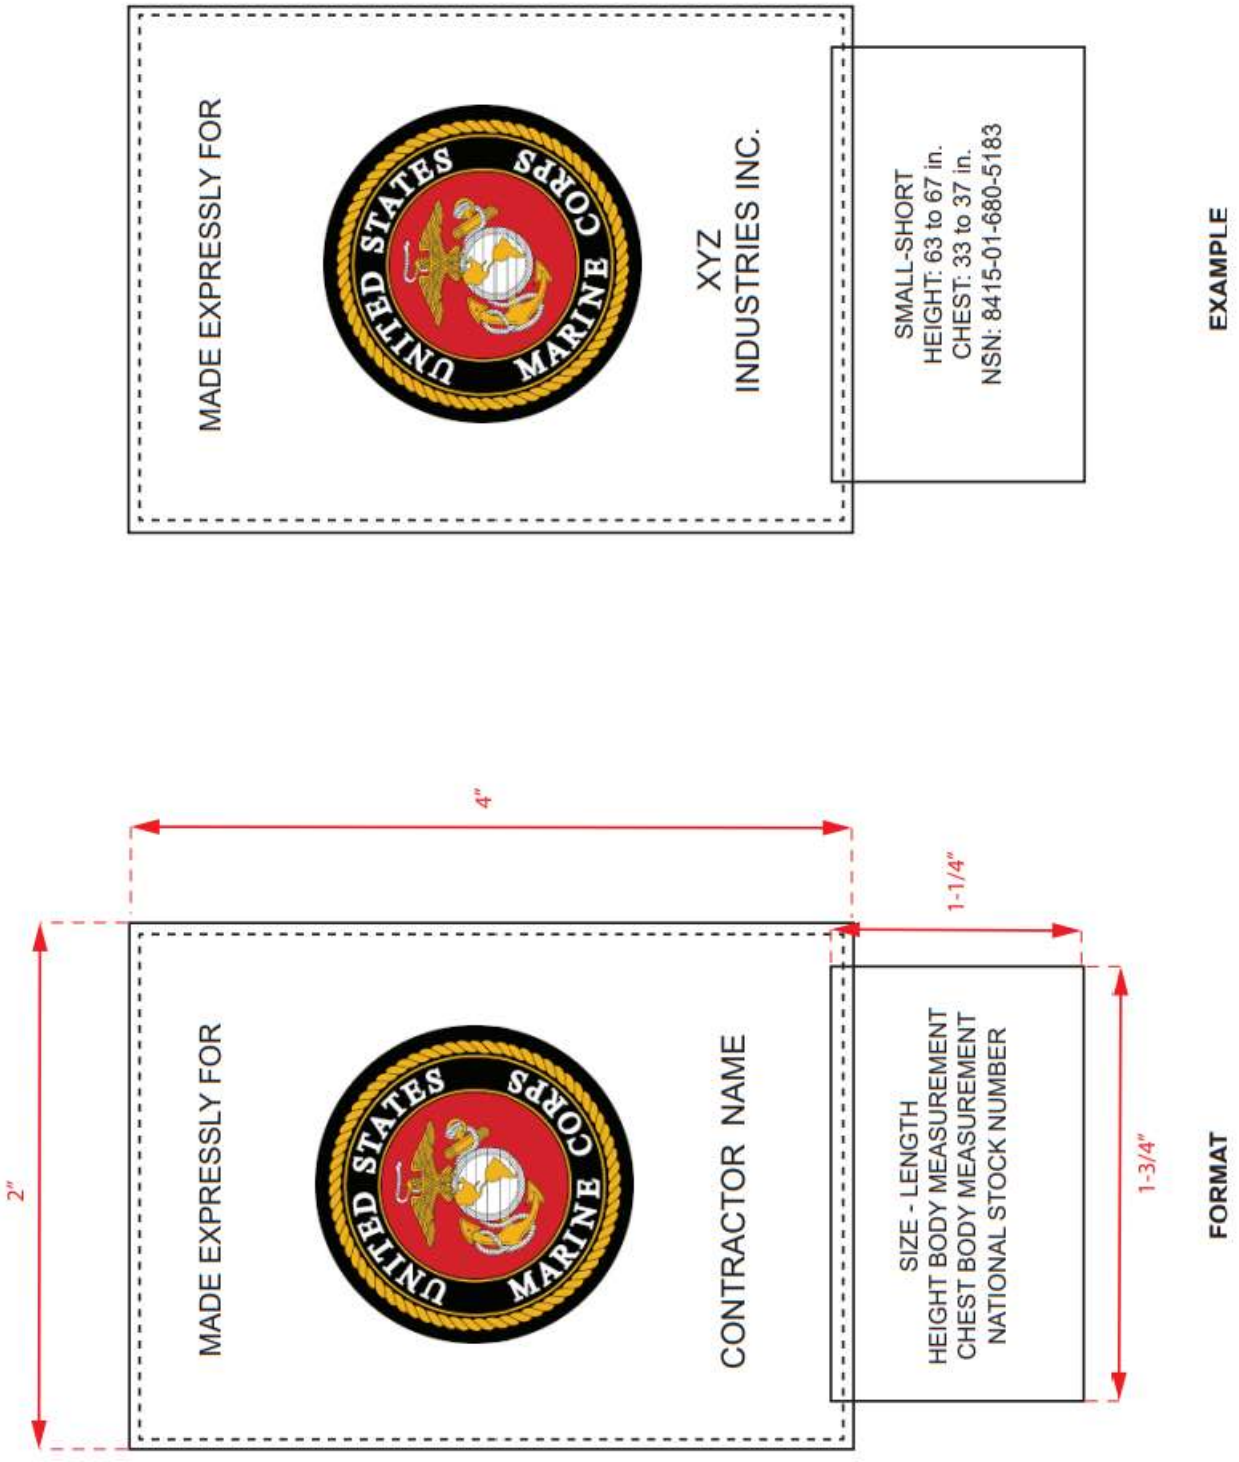
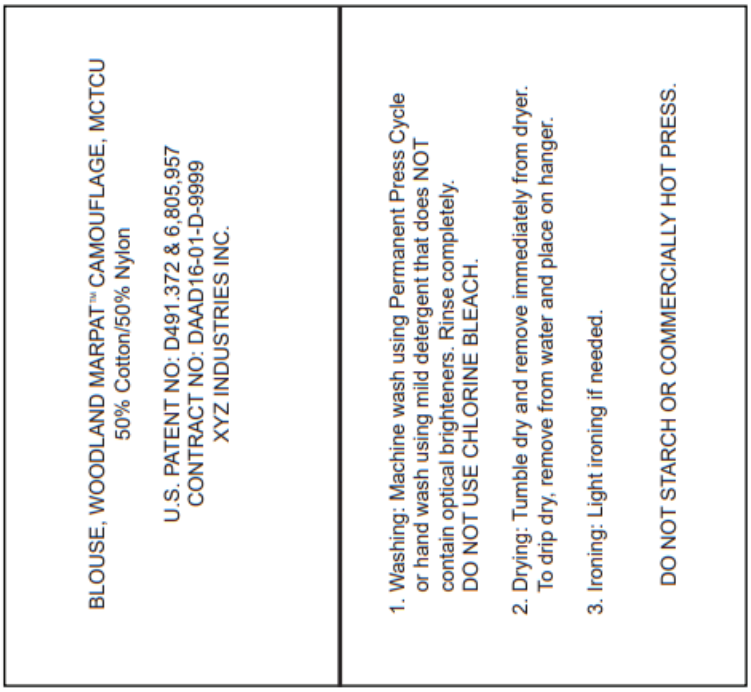


FIGURE 8. Marine Corps Exclusive label and size label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.



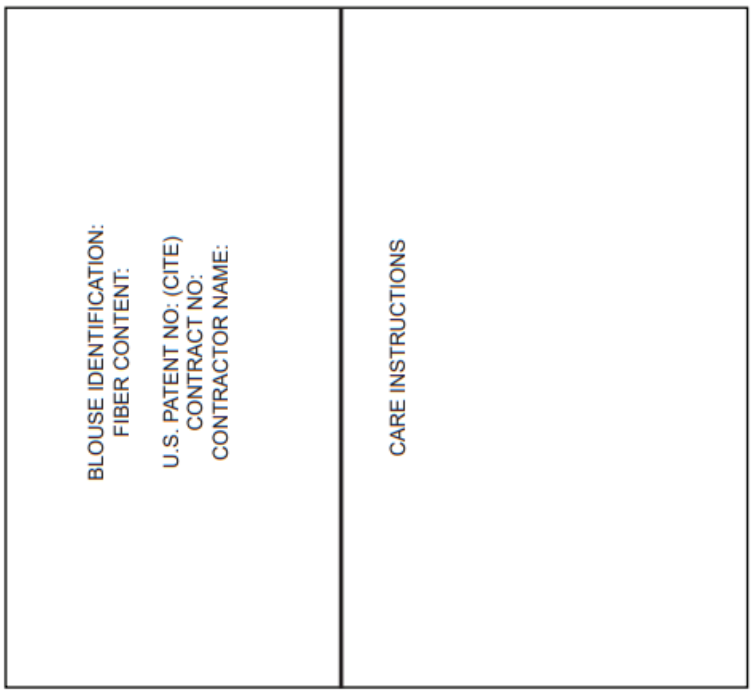


FIGURE 9. Combination label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – GL
Navy – MC

Preparing activity:
Navy – MC
(Project 8415-2024-016)

Review activities:
Army – AV, CR, MI
Navy – AS, CG1, NU
DLA – CT

Civil agency:
GSA – FAS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:33Z
Check the source to verify that this is the current version before use.