INCH-POUND


MIL-DTL-32689/2
w/AMENDMENT 1
28 July 2022
SUPERCEEDING
MIL-DTL-32689/2
19 November 2021

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PLUG, STRAIGHT, TRI-START THREADED, REMOVABLE CRIMP CONTACTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32689.

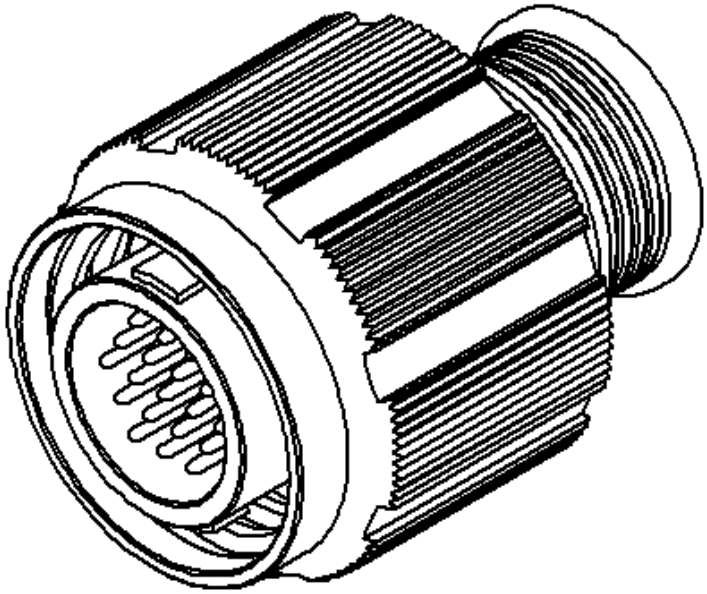


Isometric view of plug with integral banding platform

FIGURE 1. Plug, straight.


AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.

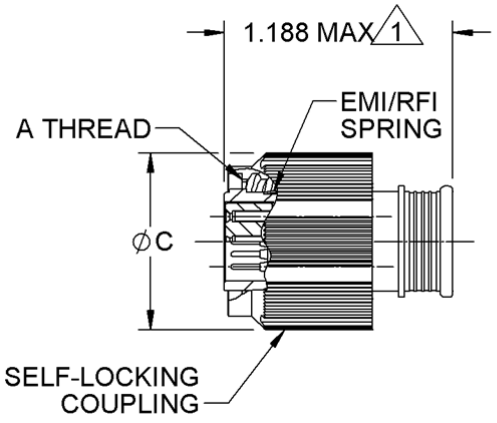

Plug with integral banding platform

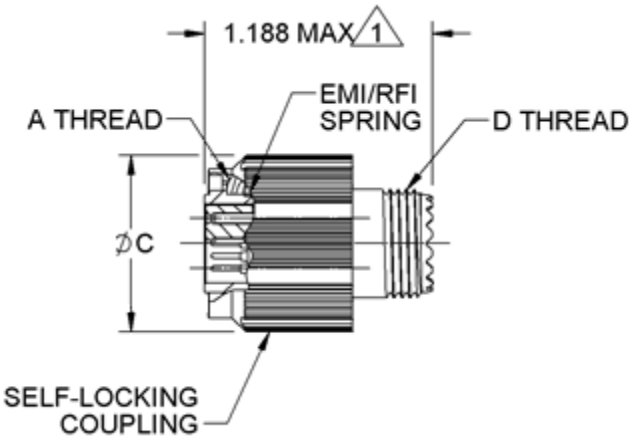

Plug with rear accessory threads



Plug master key.

FIGURE 1. Plug, straight – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.

Shell size	A thread	C dia nominal OD over pattern ± .005	C thread
8	.5000.1P-.3L-TS-2B	.691	.3750-32 UNEF-2A
9	.5625.1P-.3L-TS-2B	.787	.4375-28 UNEF-2A
10	.6250.1P-.3L-TS-2B	.826	.5000-28 UNEF-2A
11	.6875.1P-.3L-TS-2B	.925	.5625-24 UNEF-2A
12	.7500.1P-.3L-TS-2B	.982	.6250-24 UNEF-2A
15	.9375.1P-.3L-TS-2B	1.105	.7500-20 UNEF-2A
18	1.1250.1P-.3L-TS-2B	1.275	.9375-20 UNEF-2A
19	1.1875.1P-.3L-TS-2B	1.310	.9375-20 UNEF-2A
23	1.4375.1P-.3L-TS-2B	1.562	1.1875-18 UNEF-2A

NOTES:

1. Total connector length. Furthest feature (for the front face of the connector) varies based on shell size. The shell barrel extends furthest on smaller shell sizes. For larger shell sizes, the coupling nut extends furthest. Differences are small (a few hundredths of an inch). The furthest feature is used for this requirement.
2. Dimensions are in inches.
3. For connector front and rear configuration details, see MIL-DTL-32689.

FIGURE 1. Plug, straight – Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Interface dimensions shall be in accordance with MIL-DTL-32689.

Part or Identifying Number (PIN) example:

M32689/2 - 1 F 08 - 07 P A

M32689/2	"M" prefix, base spec number, "/", and specification sheet number
1	Shell style
F	Class
08	Shell size (two digits, zero pad if single digit)
07	Insert arrangement (two digits, zero pad if single digit)
P	Contact style
A	Polarization
H	Jam Nut Style

Referenced documents. This document references MIL-DTL-32689.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-144)

Review activities:
Navy - EC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.