INCH-POUND


MIL-DTL-32689/3
w/AMENDMENT 1
28 July 2022
SUPERCEEDING
MIL-DTL-32689/3
19 November 2021

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECEPTACLE, SQUARE WALL FLANGE, TRI-START THREADED, REMOVABLE CRIMP CONTACTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32689.

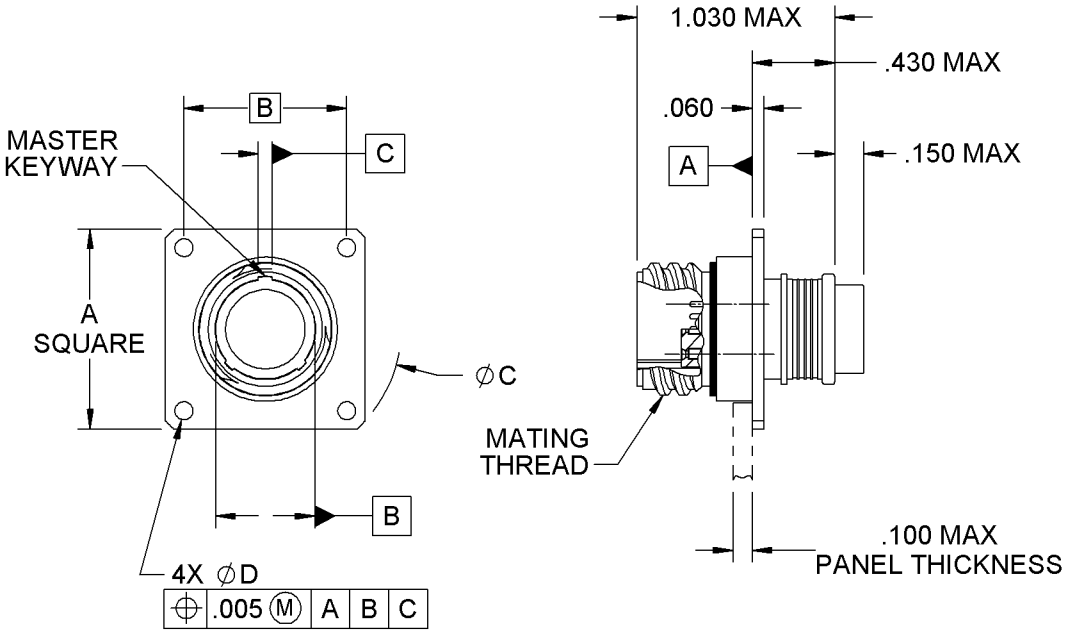


Note: This connector is generally intended to be mounted with the connector flange behind the panel. Variation is not prohibited.

Front view of receptacle (left) and receptacle with integral banding platform (right)

FIGURE 1. Receptacle, flange mount.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.

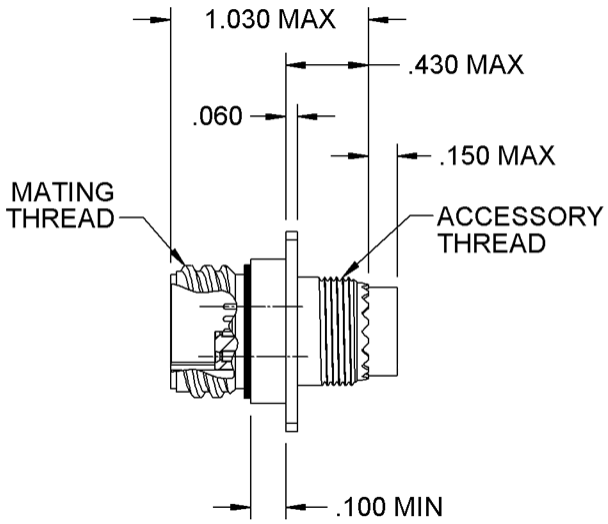


Receptacle with rear accessory threads

Shell size	Shell size code	A square	B BSC	C dia.	D dia mounting holes (± .003)
8	A	.853	.660	1.153	.091
9	B	.916	.723	1.233	.091
10	C	.978	.785	1.333	.091
11	D	1.042	.848	1.413	.091
12	E	1.102	.909	1.503	.091
15	F	1.291	1.058	1.753	.125
18	G	1.478	1.255	2.003	.125
19	H	1.540	1.327	2.097	.125
23	J	1.790	1.570	2.443	.125

NOTES:
1. Dimensions are in inches.
2. To ensure full mating of the plug or full coupling of the backshell, the thickness of the mounting panel should not exceed the .100 max.
3. For connector front and rear configuration details, see MIL-DTL-32689.
4. This connector is generally intended to be mounted with the connector flange behind the panel. Variation is not prohibited.

FIGURE 1. Receptacle, flange mount – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.

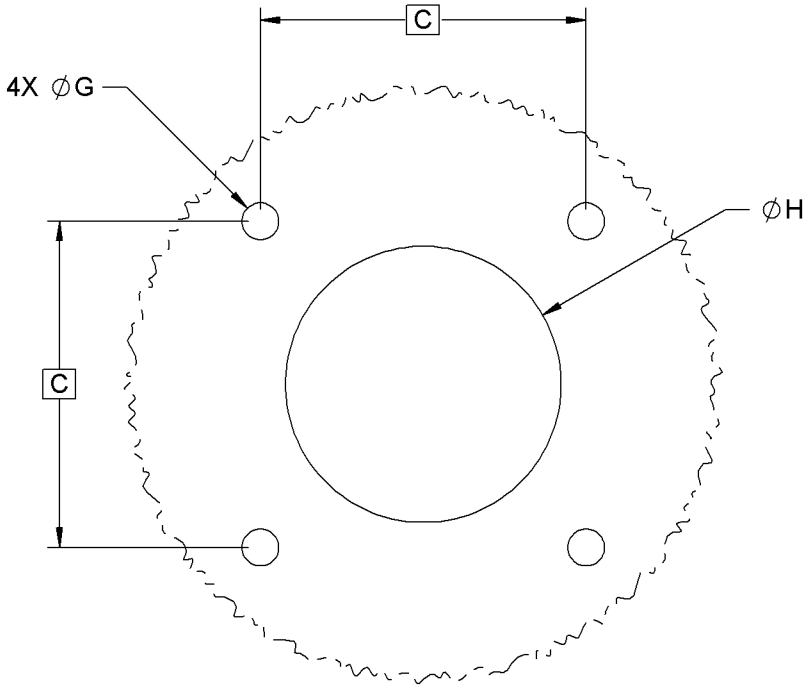

Recommended panel cutout				
Shell size	Shell size code	H dia max ± .005	C BSC	G dia max +/- .003
8	A	.510	.660	.091
9	B	.573	.723	
10	C	.635	.785	
11	D	.698	.848	
12	E	.760	.909	
15	F	.948	1.058	.125
18	G	1.135	1.255	
19	H	1.198	1.327	
23	J	1.448	1.570	

FIGURE 2. Receptacle, flange mount, recommended panel cutout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Interface dimensions shall conform to MIL-DTL-32689.

Part or Identifying Number (PIN) example:

M32689/3 - 1 F 08 - 07 P A

M32689/3	"M" prefix, base spec number, "/", and specification sheet number
1	Shell style
F	Class
08	Shell size (two digits, zero pad if single digit)
07	Insert arrangement (two digits, zero pad if single digit)
P	Contact style
A	Polarization
H	Jam Nut Style

Not ideal for sealed applications. A wall mounted flange is more difficult to seal due to mounting hardware (screws and washers). A jam nut receptacle is typically easier to seal.

Referenced documents. This document references MIL-DTL-32689.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-145)

Review activities:
Navy - EC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:35Z
Check the source to verify that this is the current version before use.