RR-C-430A
AMENDMENT-2
August 30, 1968
SUPERSEDING
Int. Amendment-1
June 26, 1967

FEDERAL SPECIFICATION

CLIMBER SET, TREE AND POLE: STEEL, INTERCHANGEABLE

GAFF, W/NYLON-NEOPRENE COATED STRAPS

This amendment, which forms a part of Federal Specification RR-C-430A, dated October 31, 1966, was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

PAGE 2

Paragraph 2.2: Add:

Society of Automotive Engineers, Incorporated Standards:

SAE J404 - Chemical Compositions of SAE Alloy Steels.

(Copies of SAE publications may be obtained upon application to the Society of Automotive Engineers, Incorporated, 485 Lexington Avenue, New York, N.Y. 10017.)

3.2.1, delete and substitute:

3.2.1 Leg irons. Leg irons shall be of forged steel SAE 8630 or SAE 8640 with a quenched and tempered structure. Leg irons shall conform to the required shapes of the finished pieces. The design of the leg irons shall be such that the maximum tensile stress at points subjected to fluctuating bending stresses shall not exceed 27,000 psi when a force of 300 pounds is applied to the center of the stirrup. Steel properties shall be as follows:

Elongation in 2"	15% minimum
Hardness	23-47 Rockwell 'C'
	243-442 Brinell hardness 1/
Tensile strength	110,000 psi minimum
Transition temperature	-20° F. maximum 2/

1/ Brinell Hardness Number with 3,000 Kg load, 10-mm ball.
2/ 20-ft. lb. impact criterion."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.2.2, line 9: Delete "125 pounds" and substitute "20 pounds".

PAGE 3

4.4.2.2, line 6: Delete "4 inches" and substitute "2 inches".

4.4.2.3, line 11: Delete "4 inches" and substitute "2 inches".

4.4.2.3, line 14: Delete "125 pounds" and substitute "20 pounds".

4.4.2.4, line 8: Delete "4 inches" and substitute "2 inches".

Add new paragraph 4.4.2.5:

4.4.2.5 Leg iron test. Each leg iron shall be tested with a maximum force of 300 pounds applied to the center of the stirrup section. Failure of the leg iron to withstand a maximum tensile stress of 27,000 psi by bending shall constitute failure of this test. The maximum stress area shall be as indicated for leg irons in EEIS AP-2."

PAGE 4

5.1.1, line 3: Delete "IC-5" and substitute "III, using a box conforming to PPP-B-636, W6c, style RSC. The box shall be waterproof sealed with tape as specified for slotted style boxes in the appendix to the box specification."

PAGE 9

Figure 4: Delete and substitute revised figure 4.

MILITARY INTEREST:

Custodians:

Army - ME
Navy - YD
Air Force - 84

Review activities:

Army - SM, MU

User activities:

Army - EL
Navy - MC

Preparing activity:


Army - ME

CIVIL AGENCY INTEREST:

Interested Activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

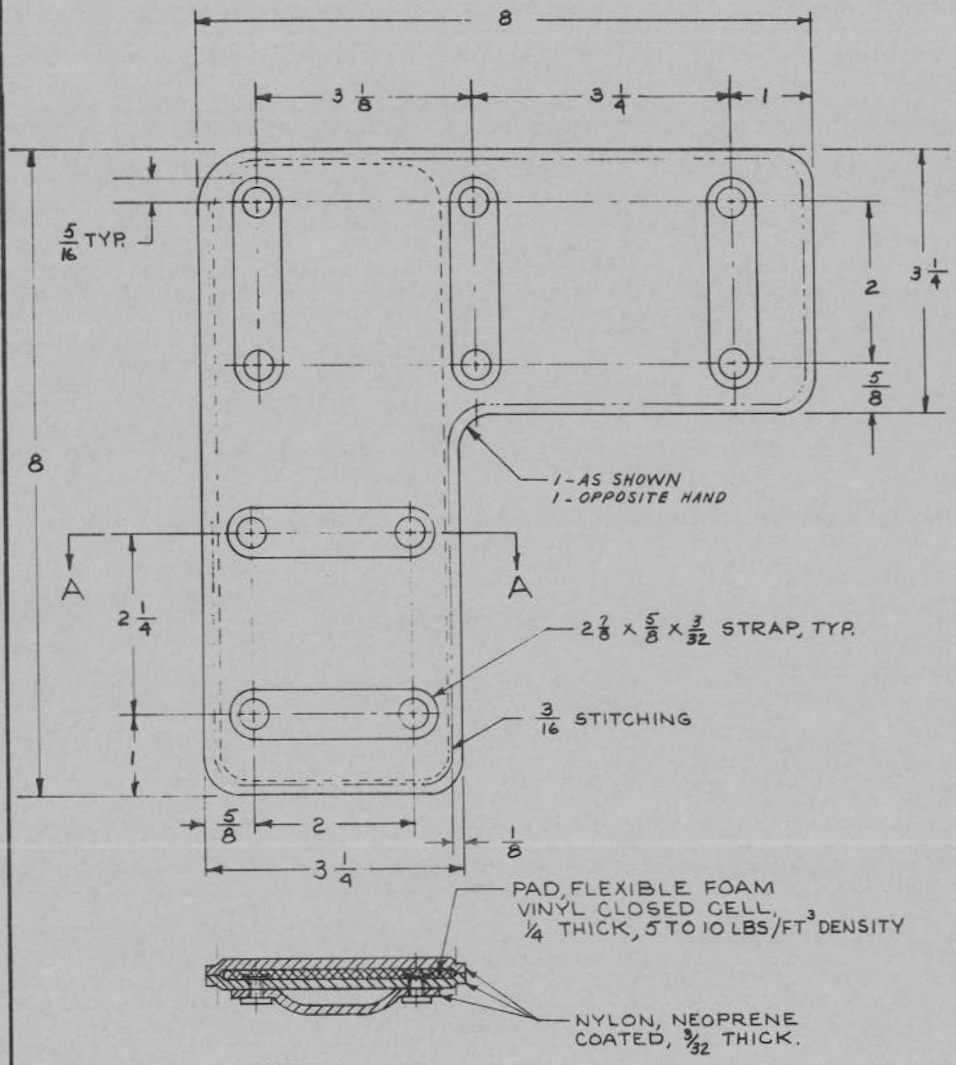

SECTION A-A

NOTES:
1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES ARE ± 1/32
2. MATERIAL: AS NOTED

FIGURE 4. CALF PAD ASSEMBLY, TYPICAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.