AMSTE-RP-702-100
Test Operations Procedure 1-2-610
AD No. A226480

15 May 1990

U.S. ARMY

TEST AND EVALUATION COMMAND



HUMAN FACTORS ENGINEERING

PART II

HEDGE

HUMAN FACTORS ENGINEERING DATA GUIDE FOR EVALUATION

Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

The criteria contained in this document reflect those in effect on the date of publication. Test requirements and criteria referred to as Design Requirements are contained in the current issue of MIL-STD-1472 which shall have precedence in case of conflict.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TOP 1-2-610 Part II

Human Factors Engineering Data Guide for Evaluation

HEDGE

Contents **Page**

1.0 STEPS IN PREPARATION FOR AN HFE TEST 5

2.0 HOW TO USE HEDGE 7
2.1 Step 1 - Classify the Test Item 7
2.2 Step 2 - Determine the Applicable Test Functions 8
2.2.1 Operability 8
2.2.2 Maintainability 8
2.2.3 Transportability 8
2.2.4 Portability/Usability 9
2.2.5 Erectability 9
2.2.6 Habitability 9
2.3 Step 3 - Identify Use Conditions 11
2.4 Step 4 - Identify/Analyze Operator/Maintainer Tasks 11
2.4.1 Task Identification and Analysis 11
2.4.2 Task Criticality Definitions 12
2.4.3 Criticality Analysis 12
2.4.4 Tailored Task Checklists 13
2.5 Step 5 - Conduct Preliminary Human Factors Engineering Analysis 13
2.6 Step 6 - Identify Design Test Criteria 13
2.6.1 Using Design Checklists 13
2.6.2 Design Checklist and Test Item Component Definitions 13
2.6.3 Identifying Applicable Design Checklists 16
2.6.4 References to MIL-STD-1472D 18
2.6.5 Design Checklist Data 18
2.6.6 Human Factors Engineering Consideration 18
2.6.7 Tailored Design Checklists 19
2.7 Steps 7 - 12 20

Part II. Figures

1. Steps in HFE Test Preparation 4
2. Index to Test Item Class/Subclass and Test Functions 6
3. Index to Design Checklists 17

Part II. Tables

1. List of Sample Task Checklists 10
2. List of Sample Design Checklists 14

Part II. Appendixes

A. Sample Task Checklists A-1
B. Sample Design Checklists B-1
C. HEDGE Figures C-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

Part II. Appendix A - Sample Task Checklists **Page**

OPERABILITY
I. Vehicles
A. Maneuvering A-2
B. Air A-9
C. Non-Maneuvering A-15
II. Weapons
A. Individual A-22
B. Crew Served A-28
III. Materiel Handlers
A. Soldier-Operated A-34
B. Soldier-Monitored A-48
IV. Electronics/Signals
A. Sensors A-48
B. Information/Command-Control Systems A-55
V. Operational Support
A. Maintenance & Repair Equipment A-62
B. Materiel Production & Environment Control A-68
VI. Troop Support Equipment
A. Consumables A-75

MAINTAINABILITY
I. Vehicles A-82
II. Weapons A-89
III. Materiel Handlers A-96
IV. Electronics/Signals A-103
V. Operational Support A-109

TRANSPORTABILITY A-116

PORTABILITY/USABILITY (Clothing and Personal Equipment) A-122

ERECTABILITY A-129

HABITABILITY A-134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

Part II. Appendix B - Sample Design Checklists

Page

1. LABELS, MANUALS & MARKINGS B-2
2. STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS B-16
3. DOORS, HATCHES & PASSAGES B-29
4. EXTERNAL COMPONENTS B-38
5. CONTROLS B-47
6. SPECIAL CONTROLS B-147
7. DISPLAYS B-155
8. SPECIAL DISPLAYS B-216
9. COMMUNICATIONS B-222
10. LINES, HOSES & CABLES B-235
11. WORKSPACE B-244
12. FASTENERS & CONNECTORS B-269
13. HANDLES B-279
14. OPTICS B-288
15. OPERATING ELEMENTS B-296
16. PACKAGING B-307
17. ACCESSES, COVERS & CAPS B-315
18. MEASURES B-324
19. REPLACEABLE UNITS B-328
20. TEST ELEMENTS & TOOLS B-335
21. CLOTHING & PERSONAL EQUIPMENT B-342
22. STRUCTURAL COMPONENTS B-357

Part II. Appendix C - HEDGE Figures

C-1. Preferred Letter Format C-2
C-2. Preferred Numerical Format C-3
C-3. Other Acceptable Fonts C-4
C-4. Airborne Noise Levels for Ship Compartments C-6
C-5. Minimum Access Dimensions for Construction and Industrial Machinery C-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

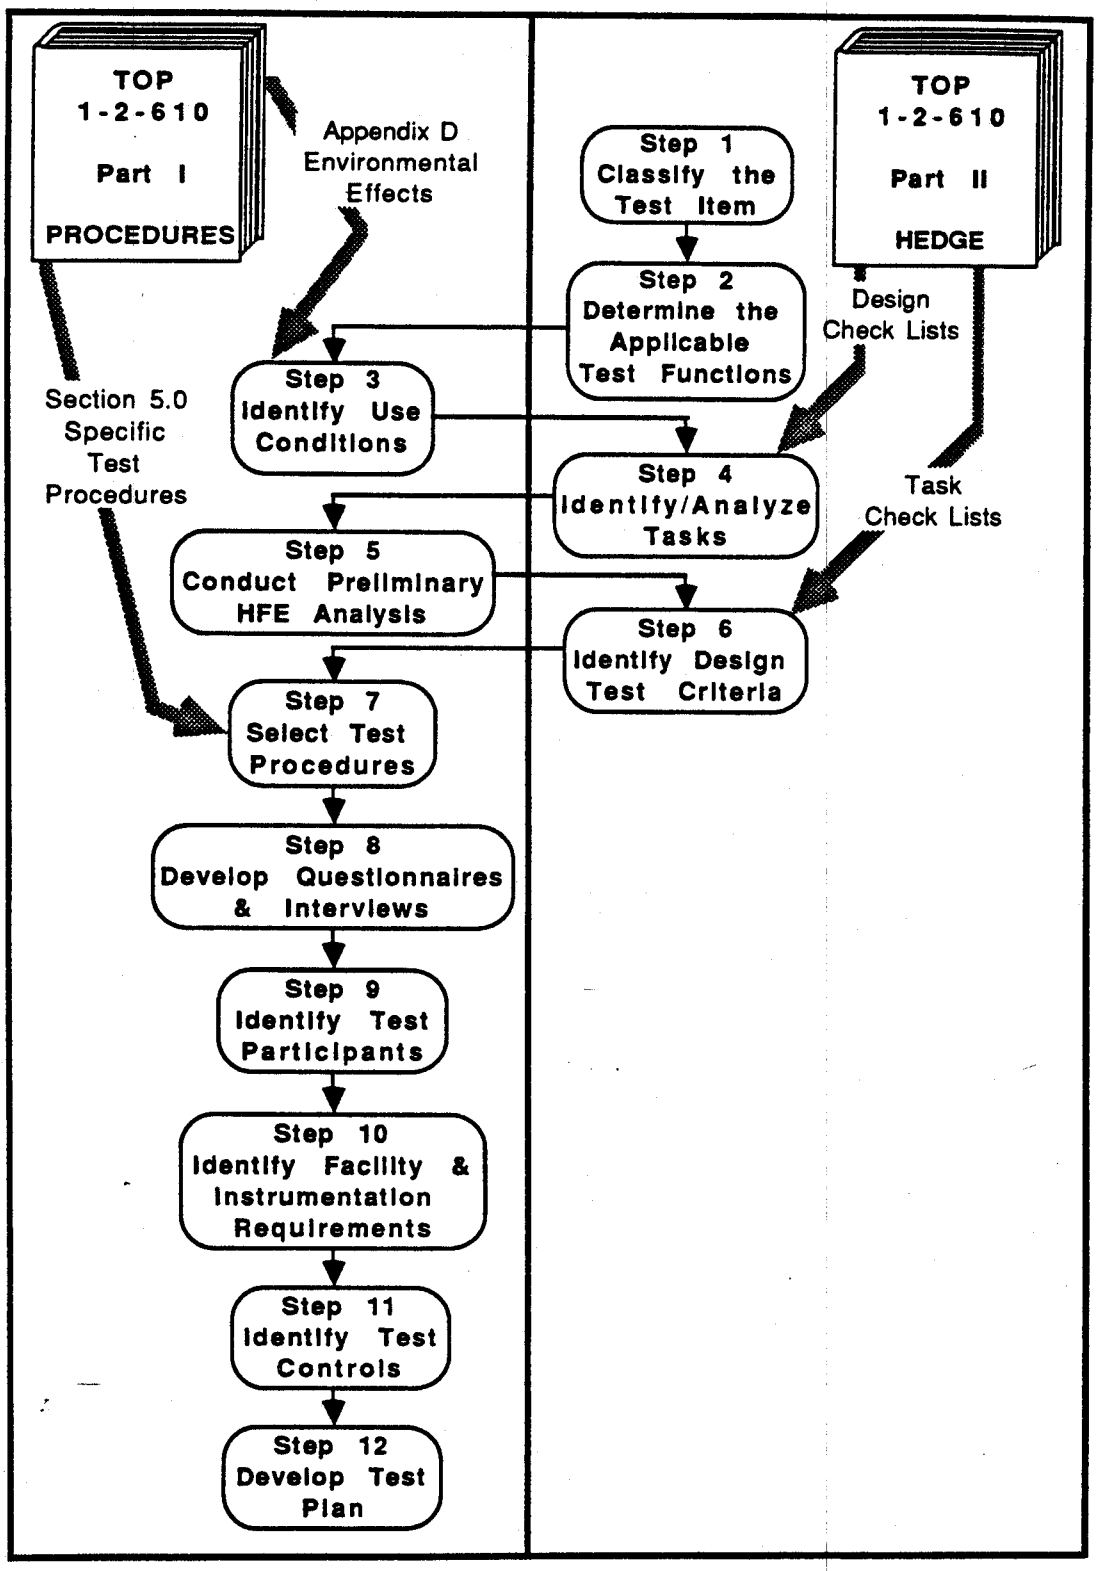


Figure 1. Steps in Preparation for an HFE Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

1.0 STEPS IN PREPARATION FOR AN HFE TEST

Prior to using HEDGE to plan an HFE test, obtain copies of the following for the test item:

a. TECOM Independent Assessment Plan (IAP), Army Materiel Systems Analysis Activity (AMSAA) Independent Evaluation Plan (IEP) or AMSAA Test Design Plan (TDP)
b. System MANPRINT Management Plan
c. Technical Manuals
d. Required Operational Capability (ROC) and/or System Specification

To get copies of these documents, contact:

a. the Test Activity Test Director
b. the HFE counterpart in the RAM/ILS/HFE Division at TECOM HQ
c. the TD&E Officer at AMSAA
d. the Test or Assessment Officer at TECOM HQ

Part II of TOP 1-2-610 is the Human Factors Engineering Data Guide for Evaluation (HEDGE). HEDGE is intended to accompany Part I of the TOP and to provide data, references and guidance in conducting the test preparation steps described in Part I. The steps are as follows:

1. Classify the Test Item
2. Determine the Applicable Test Functions
3. Identify Use Conditions
4. Identify/Analyze Operator/Maintainer Tasks
5. Conduct Preliminary Human Factors Engineering Analysis
6. Identify Design Test Criteria
7. Select Test Procedures
8. Develop Questionnaires and Interviews
9. Identify Test Participants
10. Identify Test Facility and Instrumentation Requirements
11. Identify Test Controls
12. Develop Test Plan

The test preparation steps are shown in FIGURE 1. The left side of FIGURE 1 shows test preparation steps for which TOP 1-2-610 Part I is the primary source of information while the right side shows steps for which HEDGE is used. HEDGE is primarily applicable to the following steps:

1. Classify the Test Item
2. Determine the Applicable Test Functions
4. Identify/Analyze Operator/Maintainer Tasks
6. Identify Design Test Criteria

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

INDEX TO TEST ITEM CLASS / SUBCLASS AND TEST FUNCTIONS			Test Functions					
Test Item Class	Test Item Subclass	Examples	OPERABILITY	MAINTAINABILITY	TRANSPORTABILITY	PORTABILITY/USABILITY	ERECTABILITY	HABITABILITY
I. VEHICLES	A. Maneuvering	Trucks, Boats, Landing Craft, Tanks, Aircraft, Self Propelled Guns	•	•	•			
	B. Air	Airplanes, Gliders, Helicopters	•	•	•			
	C. Non-Maneuvering	Vans, Railroad Cars, Barges, Cargo Trailers	•	•	•			
II. WEAPONS	A. Individual	Rifles, Sidearms, Aircraft Mounted Weapons, Hand Grenades	•	•		•		
	B. Crew Served	Howitzers, Mortars, Missile Sites, Anti-Aircraft,Guns, Tank Mounted Guns	•	•	•	•	•	
	C. Ammunition	Bombs, Artillery Rounds, Mines, Missiles Demolition Explosives, Clip & Belt Ammunition			•	•		
III. MATERIEL HANDLERS	A. Soldier-Operated	Cranes, Booms, Winches, Power Shovels, Hand Trucks, Fork Lifts, Sleds	•	•	•		•	
	B. Soldier-Monitored	Conveyor Belts, Chutes, Hoses, POL Storage & Distribution, Liquid Loaders, Pressure Cylinders	•	•	•			
IV. ELECTRONICS/ SIGNALS	A. Sensors & Detectors	Radars, Mine Detectors, Range Finders,Proximity Sensors, Radiation & Chemical Sensors	•	•	•	•		
	B. Information/ Command-Control Systems	Recorders, Information Retrieval & Optical Systems, Amplifiers, Avionics, Data Processing	•	•	•	•		
V. OPERATIONAL SUPPORT	A. Maintenance & Repair Equipment	Hand Tools, Service & Lubrication Equipment, Inspection Devices, Pipeline Cleaners	•	•	•			
	B. Materiel Production & Environmental Control	Printing Presses, Bakeries, Machine Tools, Dust Controllers, Dehimidifiers, Noise Attenuators	•	•	•			
	C. Major Construction Items	Erection Kits, Portable Shelters, Prefabricated Buildings, Towers, Antennas			•		•	
VI. TROOP SUPPORT	A. Consumables	Foods, Medical Supplies, Skin Ointments	•		•			
	B. Clothing	Protective, Regular				•		
	C. Personal Equipment	Protective Equipment, Mess Gear, Back Packs, Sleeping Gear, Entrenching Tools, Skis				•		
	D. Living & Working Areas	Tents, Shelters, Vans						•

Figure 2. Index to Test Item Class/Subclass and Test Functions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

2.0 HOW TO USE HEDGE

2.1 Step 1 - Classify The Test Item Test Item Classes, Subclasses and examples are listed in FIGURE 2. FIGURE 2 shows the major Classes and the Subclasses according to which HEDGE is arranged. Identify the Test Item Class which best defines the item you are going to test. Then identify the Subclass which best defines the test item. Definitions of Test Item Classes and Subclasses are provided below:

I. **VEHICLES** - Items that move personnel or materiel from place to place.
- A. **Maneuvering** - Items that use their own power on land or water.
- B. **Air** - Items that move through the air.
- C. **Non-Maneuvering** - Items that use a prime mover.

II. **WEAPONS** - Items that are used in offensive or defensive combat.
- A. **Individual** - Items that are used by a single soldier.
- B. **Crew Served** - Items that are operated by two or more soldiers.
- C. **Ammunition** - Explosive items used in weapons as well as those that are complete weapons within themselves.

III. **MATERIEL HANDLERS** - Items that distribute or move materiel.
- A. **Soldier-Operated** - Items requiring direct action by an individual for loading, distributing or moving materiel.
- B. **Soldier-Monitored** - Items in which the personnel function is limited to initiating, monitoring and terminating the loading, distributing or moving of materiel. The monitoring function will include verification and such corrective action as may be required.

IV. **ELECTRONICS/SIGNALS** - Items used for transmitting, receiving, disseminating and storing of information.
- A. **Sensors & Detectors** - Items that detect the presence of metals, electromagnetic or nuclear radiation, noxious gasses or other objects.
- B. **Information/Command-Control Systems** - Items used in the collection, processing and presentation of data.

V. **OPERATIONAL SUPPORT** - Items used in construction, production and maintenance of materiel, control of the environment, or performance of various troop and unit support services.
- A. **Maintenance & Repair Equipment** - Items used to assemble, maintain and repair equipment.
- B. **Materiel Production & Environmental Control** - Items used to control or modify the environment.
- C. **Major Construction Items** - Oversized items requiring major assembly.

VI. **TROOP SUPPORT EQUIPMENT** - Items primarily used for individual troop support and subsistence.
- A. **Consumables** - Items eaten, drunk or medicinally used.
- B. **Clothing** - Items protecting the body under normal or emergency conditions.
- C. **Personal Equipment** - Items carried and/or used by an individual.
- D. **Living & Working Areas** - Items used by personnel while working or relaxing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

2.2 Step 2 - Determine the Applicable Test Functions Test Functions describe, in general or at the top level, how the test item is used. FIGURE 2 shows the Test Functions which are often found to be applicable to test items depending on the Test Item Class and Subclass from Step 1. However, the test item documentation should be reviewed to determine all applicable Test Functions whether or not they are indicated as applicable in FIGURE 2. Definitions of Test Functions are provided below:

2.2.1 OPERABILITY The purpose of this test function is to determine the adequacy of the operator/machine interface to perform in conformance with the requirements stated in the military and technical characteristics and standard military specifications. The emphasis in Operability testing is on the adequacy of the design for performance of operator tasks involved in the functioning of the test item for the intended mission.

The Operability Test Function addresses, but is not limited to, test item components and procedures required for:

a. Item set-up.
b. Inter-connection with other items.
c. Operational check-out.
d. Adjustments, calibration and verifying connections.
e. Gaining access and egress.
f. Activation and deactivation of item.
g. Performance of required functions.
h. Accommodation of item and operator to applicable operating conditions.

2.2.2 MAINTAINABILITY The purpose of this Test Function is to determine if the test item can be maintained under field conditions at the level specified by the directive. In some cases the maintenance requirements will be precisely defined. In others, you will have to make this determination based on your familiarity with similar items. The emphasis in Maintainability testing is on the adequacy of the design for performance of maintainer tasks involved in diagnosis, unit replacement and fault correction necessary to maintain the functional status of the item.

The Maintainability Test Function addresses, but is not limited to, test item components and procedures required for:

a. Routine operator-performed preventive maintenance checks and tasks (scheduled maintenance).
b. Contingency tasks at the field operator level (non-scheduled maintenance).
c. Detection of malfunctions.
d. Troubleshooting.
e. Removal, repair and replacement of components.

2.2.3 TRANSPORTABILITY The purpose of this Test Function is to evaluate the test item for adequacy of the human factors aspects of moving the item by rail, air, water or land. Many of the items tested by TECOM are tested for this aspect only (i.e. missile trailers, weapons, various types of electronic gear, etc.). Some of the items which appear at first to require only Transportability testing may be found to involve soldier/item interactions to which other test functions are applicable. A line-haul test of a vehicle, for example, may involve the engineering testing of operating components, but also require that it can be driven and maintained during the test. If the item should be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

evaluated based on the ability of operators to drive it, then the Operability Test Function will also be applicable. Similarly, if the item should be evaluated for maintenance design, then the Maintainability Test Function will be applicable.

When the test is limited to those aspects of an item which pertain to transporting it by means other than its own power, then the Transportability Test Function is applicable. This addresses, but is not limited to test item components and procedures for:

a. Preparation of the item for transfer including crating, removal of projecting components, fastening down of loose elements and installation of moving blocks, braces, pads, etc.

b. Attachment of cables, hooks, etc. to the item.

c. Pushing, sliding or lifting the item.

d. Fastening down of the item in the carrier vehicle.

2.2.4 PORTABILITY/USABILITY The purpose of this Test Function is to determine whether the item can be carried and used as designed by a fully encumbered combat soldier and also to determine if it will interfere with the performance of other tasks required of the soldier.

The Portability/Usability Test Function addresses, but is not limited to, test item components and procedures for:

a. Preparing the item for carrying including disassembly, retraction of elements, placement in carrying case, etc.

b. Securing item on body via belt, pack, carrying case, etc.

c. Lifting and transporting item.

d. Performing required tasks with item attached to body.

e. Unloading item.

f. Use of item in a combat situation.

2.2.5 ERECTABILITY The purpose of this Test Function is to determine the adequacy of the design of a test item for assembly under field conditions where the assembly function is considered to be of primary importance. Examples include bridges, pipelines, prefabricated buildings and power sources. The Operability Test Function may also be applicable after the test item has been erected/assembled.

The Erectability Test Function addresses, but is not limited to, test item components and procedures for:

a. Pre-erection alignment of parts.

b. Connection of components.

c. Sealing of joints.

d. Testing of item integrity after erection.

e. Disassembly of item after use.

2.2.6 HABITABILITY The purpose of this Test Function is to determine whether the design of items such as tents, shelters or buildings allows personnel inhabiting them to live, work and move about in the internal space.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

The Habitability Test Function addresses, but is not limited to, test item components and procedures for:

a. Moving about and carrying materiel.

b. Performing duties.

c. Resting, relaxing, eating and taking care of personal hygiene.

d. Providing life support and sustaining environment.

Table 1. List of Sample Task Checklists

OPERABILITY

- **I. Vehicles**
  - A. Maneuvering
  - B. Air
  - C. Non-Maneuvering
- **II. Weapons**
  - A. Individual
  - B. Crew Served
- **III. Materiel Handlers**
  - A. Soldier-Operated
  - B. Soldier-Monitored
- **IV. Electronics/Signals**
  - A. Sensors & Detectors
  - B. Information/Command-Control Systems
- **V. Operational Support**
  - A. Maintenance & Repair Equipment
  - B. Materiel Production & Environment Control
- **VI. Troop Support Equipment**
  - A. Consumables

MAINTAINABILITY

- **I. Vehicles**
- **II. Weapons**
- **III. Materiel Handlers**
- **IV. Electronics/Signals**
- **V. Operational Support**

TRANSPORTABILITY

PORTABILITY/USABILITY (Clothing and Personal Equipment)

ERECTABILITY

HABITABILITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

2.3 Step 3 - Identify Use Conditions Identification of conditions under which the item may be operated and which may affect the evaluation is carried out using considerations presented in section 3.3 of TOP 1-2-610 Part I. Appendix D of Part I is particularly applicable in identifying environmental conditions which may affect operator/maintainer performance.

2.4 Step 4 - Identify/Analyze Operator/Maintainer Tasks One of the primary objectives of HFE testing is to verify that design characteristics of the test item are or are not adequate to support the intended use of the item. The intended use is best specified by a set of tasks which the operator/maintainer will perform. Types of Soldier/Item Tasks which are applicable to a particular test item can be identified using the Sample Task Checklists contained in Appendix A of HEDGE as a point of departure. Once the test item has been classified in Step 1 and the applicable Test Functions identified in Step 2, the applicable Sample Task Checklists will follow.

Appendix A of HEDGE contains Sample Task Checklists which are organized by applicable Test Function, Test Item Class and Subclass. Operability Task Checklists are organized by Test Item Class and Subclass. Maintainability Task Checklists are organized by Test Item Class only. Task Checklists for Transportability, Portability/Usability, Erectability and Habitability are can be used for any Item to which these Test Functions are applicable regardless of Test Item Class. The available Sample Task Checklists in Appendix A of HEDGE are listed in TABLE 1. Those applicable to the test item should be identified based on the Test Item Class and Subclass and on the applicable Test Functions.

Once a set of tasks has been defined for each of the applicable test functions, Task Checklists can then be used to verify that the design is adequate for performance of the task or that a human factors engineering problem exists for the task. Identification of tasks to be analyzed begins with a review of the test support data package accompanying the test directive and test item.

2.4.1 Task Identification and Analysis Sources of Soldier/Item Task information may include any or all of the following:

a. Contractor Task Analyses In some cases results of task analyses performed by the contractor will be included in the test item data package, or descriptions of tasks to be assessed may be provided.

b. Generic Soldier/Item Tasks Generic task names are identified in the Sample Task Checklists in Appendix A of HEDGE. Tasks in the categories identified will often be found to be associated with a test item in a particular class as determined in Step 1 . The generic tasks, however, will need to be modified to represent specific tasks performed in connection with the test item. Certain generic tasks will not be applicable and will need to be deleted. Other item specific tasks not addressed in the generic Task Checklists will need to be added.

c. Test Item Operating and Maintenance Manuals Test item technical manuals are essential data in the identification of Soldier/Item Tasks. Frequently the Generic Tasks from HEDGE Appendix A can be used to suggest potentially applicable generic tasks which can then be changed to item specific tasks using procedural information from the test item manuals.

d. Operator/Maintainer Experience Walk-Throughs and/or Talk-Throughs with trained and experienced operators/maintainers using the actual equipment can serve as a valuable source of task information. This method can be used as a primary source of task data in conjunction with other sources

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

listed above or can be used to verify tasks and task characteristics identified using the other sources.

At a minimum, all high and moderate criticality tasks shall be identified as defined in paragraph 2.4.2. The test plan will be organized to verify suitability of design characteristics for the performance of these tasks or to detect HFE problems in task performance. All critical tasks shall be recorded on the Preliminary HF Analysis form provided in Appendix A of TOP 1-2-610 Part I.

2.4.2 Task Criticality Definitions The criticality analysis is performed at two levels. The initial analysis is conducted to identify critical tasks or those which must be included in the evaluation. The second level analysis is conducted to identify performance requirements associated with the critical tasks. Task criticality is classified at three levels: High criticality, Moderate criticality, and Low criticality. All tasks are to be observed and those tasks which are judged to be of High or Moderate criticality shall be included in the plan. The criticality scaling dimensions are as follows:

2.4.2.1 High Criticality A task is judged of High criticality if its performance or failure to perform it properly results in: (1) hazardous or unsafe conditions for personnel using, maintaining, or depending on the equipment, or (2) in the destruction or impaired performance of a major tactical end item (missile, tank, vehicle).

2.4.2.2 Moderate Criticality A task is judged of Moderate criticality if its performance or failure to perform it properly results in: (1) immediate or ultimate failure of the equipment or component or immediate cessation of the operation; (2) reduced usability or inefficient performance of a major component of the equipment; or (3) unnecessary difficulty or significant loss of time to the operator/maintainer.

2.4.2.3 Low Criticality A task is judged of Low criticality if its performance or failure to perform has no substantial effect on the performance of the equipment or on the safety of the operator/maintainer. It may result in minor degradation in subsystem performance but no significant degradation in overall system performance.

2.4.3 Criticality Analysis When the critical tasks and task sequence have been identified, an analysis shall be performed to determine:

a. Who performs the task?

b. What performance criteria apply to the task (time, rate, sequence, etc.)?

c. If controls and displays are involved?

d. What information input is required from other personnel?

e. What commands are required from other personnel?

f. Any potential errors associated with the task?

g. How the operator or HFE specialist knows that an error has occurred (feedback)?

h. What environmental conditions (both climatological and technical or equipment produced) may be expected to influence performance of the task?

i. What conditions specific to the operation will affect performance of the task (body size, clothing, skill level)?

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

2.4.4 Tailored Task Checklists As the sequence of tasks is identified, a Task Checklist appropriate to the Test Item Class and Subclass shall be completed. This involves developing an item-specific task checklist from the appropriate generic Soldier/Item Task Checklists in Appendix A of HEDGE, adding any other tasks judged to be of high or moderate criticality and deleting generic tasks found not applicable to the test item. The Task Checklist must be completed at this point in the planning process so that it can be used to identify potential problems and areas where further investigation will be required in the HFE test.

2.5. Step 5 - Conduct Preliminary Human Factors Engineering Analysis The Preliminary Human Factors Engineering Analysis is conducted as described in section 3.5 of TOP 1-2-610 Part I.

2.6. Step 6 - Identify Design Test Criteria Design criteria against which items are tested are the standard HFE criteria which specify limits of forces, dimensions, workspace, noise, visibility constraints, weights, clearances, arrangements, and operational conditions. These criteria, derived from MIL-STD-1472D and other applicable military standards and specifications, are contained in a set of Sample Design Checklists which are included in Appendix B of HEDGE.

2.6.1 Using Design Checklists The Sample Design Checklists serve two purposes. First, they provide an index to the design criteria contained in MIL-STD-1472D and other HFE documents. Second, the Design Checklists can be modified by deleting checklist items which are not applicable to the test item and adding applicable checklist items. The item-specific Design Checklists can then be used for data collection.

2.6.2 Design Checklist and Test Item Component Definitions The Design Checklists in Appendix B of HEDGE are organized by Test Item Components and are listed in TABLE 2. Definitions of the classes of components to which these checklists apply are given below.

2.6.2.1 LABELS, MANUALS & MARKINGS support identification of components and provide technical guidance in the form of written material, schematics, diagrams, illustrations and instruction plates. They also inform the operator/maintainer of hazards and provide special guidance or instructions.

2.6.2.2 STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS provide surfaces and grasp points to accommodate the user's feet and hands while climbing on and accessing the test item and in transporting loads. Wheels, hubs and structural members used for foot surfaces while climbing are evaluated as ladders. Door handles, structural members, etc. used for gripping or balance are evaluated as handholds.

2.6.2.3 DOORS, HATCHES & PASSAGES provide a means for entering and leaving the workspace or openings for loading or unloading materiel. Components are evaluated for both normal and emergency use. Some doors serve dual purposes and are also evaluated as steps, ramps or platforms.

2.6.2.4 EXTERNAL COMPONENTS includes components outside of the cab or normal working position which are involved in checkout and are necessary for operation, loading, tiedown, etc. External components include such things as tires, tracks, lights, batteries, vent pipes, fill pipes, test points, indicators, dip sticks, winches, starter cranks, pulleys, material handlers, jacks, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

Table 2. List of Sample Design Checklists

1.	LABELS, MANUALS & MARKINGS
2.	STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS
3.	DOORS, HATCHES & PASSAGES
4.	EXTERNAL COMPONENTS
5.	CONTROLS
6.	SPECIAL CONTROLS
7.	DISPLAYS
8.	SPECIAL DISPLAYS
9.	COMMUNICATIONS
10.	LINES, HOSES AND CABLES
11.	WORKSPACE
12.	FASTENERS & CONNECTORS
13.	HANDLES
14.	OPTICS
15.	OPERATING ELEMENTS
16.	PACKAGING
17.	ACCESSES, COVERS & CAPS
18.	MEASURES
19.	REPLACEABLE UNITS
20.	TEST ELEMENTS & TOOLS
21.	CLOTHING & PERSONAL EQUIPMENT
22.	STRUCTURAL COMPONENTS

2.6.2.5 CONTROLS includes components used to activate, deactivate and modify the equipment power and to modulate the operating elements. Controls are manipulated by operators/maintainers to change the state of item components or to increase/decrease system output. The CONTROLS checklists address controls in general and specific types of controls such as rotary switches, toggle switches, joysticks, levers, pedals, keyboards, etc. Controls evaluated are those associated with the test item, not with equipment placed on or in it.

2.6.2.6 SPECIAL CONTROLS includes controls for special purposes which are used only on specific equipment and which are an addition to the normal complement of controls. They are associated largely with aircraft.

2.6.2.7 DISPLAYS are components that provide visual and auditory information to the operator concerning the status of operation. Displays also provide indication of equipment malfunctions. The DISPLAYS checklists address displays in general and specific types of displays such as transilluminated displays, CRTs, counters, etc. Displays evaluated are those associated with the test item, not with equipment placed on or in it.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

2.6.2.8 SPECIAL DISPLAYS includes displays for special purposes which are used only on specific equipment and which are an addition to the normal complement of displays. They are associated largely with aircraft.

2.6.2.9 COMMUNICATIONS includes devices and techniques for exchange of information between soldiers who constitute the crew of the test item, between the crew and externally located individuals, and between the crew and remotely located personnel. Antennas are included where applicable.

2.6.2.10 LINES, HOSES AND CABLES are any cables, wires, lines, hoses, pipes, vents, etc. that pass to or from the test item as well as plugs, sockets, connectors, quick-disconnect fittings, etc. for the above. Components used for transport as well as those for operation are included.

2.6.2.11 WORKSPACE is the area within which the user operates/maintains the test item. This includes space for controls, displays, optics, electronic devices, weapons, and windows as well as standing areas, consoles, and seats. Workspace includes provisions for storage of and access to documentation, excess clothing, personal gear, weapons, tools, and equipment used occasionally. Where applicable, workspace also includes life support and protection of the operator/maintainer from adverse environmental effects. The WORKSPACE checklists address workspace design features in general as well as specific topics such as consoles, seating, noise, lighting, etc.

2.6.2.12 FASTENERS & CONNECTORS are securing devices used to assemble, package, or hold equipment in place. These include catches, hooks, screws, bolts, nuts, latches which are quick-release or tool-operated, and fastener and connector alignment and locking devices such as lock pins, safety wires, pins, nuts, electrical plugs, and fittings.

2.6.2.13 HANDLES are components used to grasp, hold, grip, or heft an equipment item for lifting, moving, steadying, or aiming whether the component was specifically designed as a handle or serves some other purpose and is only used incidentally as a handle. Where components not specifically designed as handles are used as handles, they should be evaluated as handles including the provision of suitable non-slip surfaces. Lack of handles where they are needed is also an HFE concern.

2.6.2.14 OPTICS are components that aid the human eye for sighting, aiming, or viewing. This includes eyepieces, reticles, filters, sighting mechanisms, range finders and viewers but does not include visual displays.

2.6.2.15 OPERATING ELEMENTS are components which directly initiate or terminate the operation of the test item. This includes triggers, fuses, cranks, etc. but does not include controls as such although the applicable criteria overlap.

2.6.2.16 PACKAGING includes components used as equipment containers for storage or transportation such as cartons, packing cases, boxes, bags, and covers that are not part of the test item but are used to store or transport it. It also includes carrying cases, protective covers, and storage boxes specifically designed for the equipment item as part of the item configuration.

2.6.2.17 ACCESSES, COVERS & CAPS includes openings in a test item that allow manipulation of controls, connection/disconnection of fasteners or connectors, visual checking of displays or components utilizing test points, and inserting or removing materials. Coverings, if any, of access openings are included.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

2.6.2.18 MEASURES includes measuring devices such as spoons, containers, scales, etc. that are used to determine a specified amount of material.

2.6.2.19 REPLACEABLE UNITS addresses reservoir fill points and drains/vents for lubricants, fuel, hydraulic fluid, other liquids, air gasses, etc. It includes filters for air, fuel, oil etc. as well as electrical and electronic parts which require frequent replacement such as bulbs, fuses, modules, etc,

2.6.2.20 TEST ELEMENTS & TOOLS are common and special purpose tools and test instruments used for assembly, adjustment, calibration, alignment, etc. This includes special maintenance equipment such as lubrication points, pouring spouts, filter tubes, nozzles, etc.

2.6.2.21 CLOTHING & PERSONAL EQUIPMENT includes:

a. Bodywear includes clothing such as shirts, trousers, under-garments, jackets, protective clothing (rain, cold, NBC), and specialized apparel of various types.

b. Headwear includes helmets, fatigue and field caps, uniform hats and caps, head nets, NBC and rain covers, safety helmets, arctic hoods, and other special head gear.

c. Handwear includes wet/cold and arctic gloves and mittens as well as special purpose (anti-contact) gloves required for electrical or chemical protection.

d. Footwear includes standard combat boots, anti-mine or spike boots, dress shoes, waterproof and arctic boots, soft shoes (sneakers), socks, stockings, and shoe/boot inserts.

e. Personal Equipment includes sleeping gear such as sleeping bags, covers, blankets and air mattresses.

f. Combat Hardware includes web equipments carried on the body to contain or protect other items, packs, pack frames, harnesses, weapons and slings ammunition cases or magazines, first aid kits, binoculars, entrenching tools, field telephones, hygenic items, flashlights, gas masks, canteens, axes, compasses, goggles, life preservers, etc.

2.6.2.22 STRUCTURAL COMPONENTS are initially separate items that must be connected with other components to form sub-assemblies. This includes such things as single girders, poles, pre-assembled motorized units, doors, pipe sections, tents, etc.

2.6.3 Identifying Applicable Design Checklists Design Checklists are provided for the classes of Test Item Components shown in TABLE 2. Identification of the Design Checklists which are applicable to a test item is done using FIGURE 3. FIGURE 3 shows the Design Checklists from TABLE 2 as rows and the combinations of Test Functions and Test Item Class as columns. Applicability of Design Checklists to each Test Function and Test Item Class is indicated in FIGURE 3. FIGURE 3 should be used as a guide. Based on the Test Item Class and applicable Test Functions from Steps 1 and 2, the indicated Design Checklists are often applicable. This may or may not be the case for a particular test item, however. Design Checklists indicated in FIGURE 3 may not be applicable and Design Checklists not indicated in FIGURE 3 may be applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

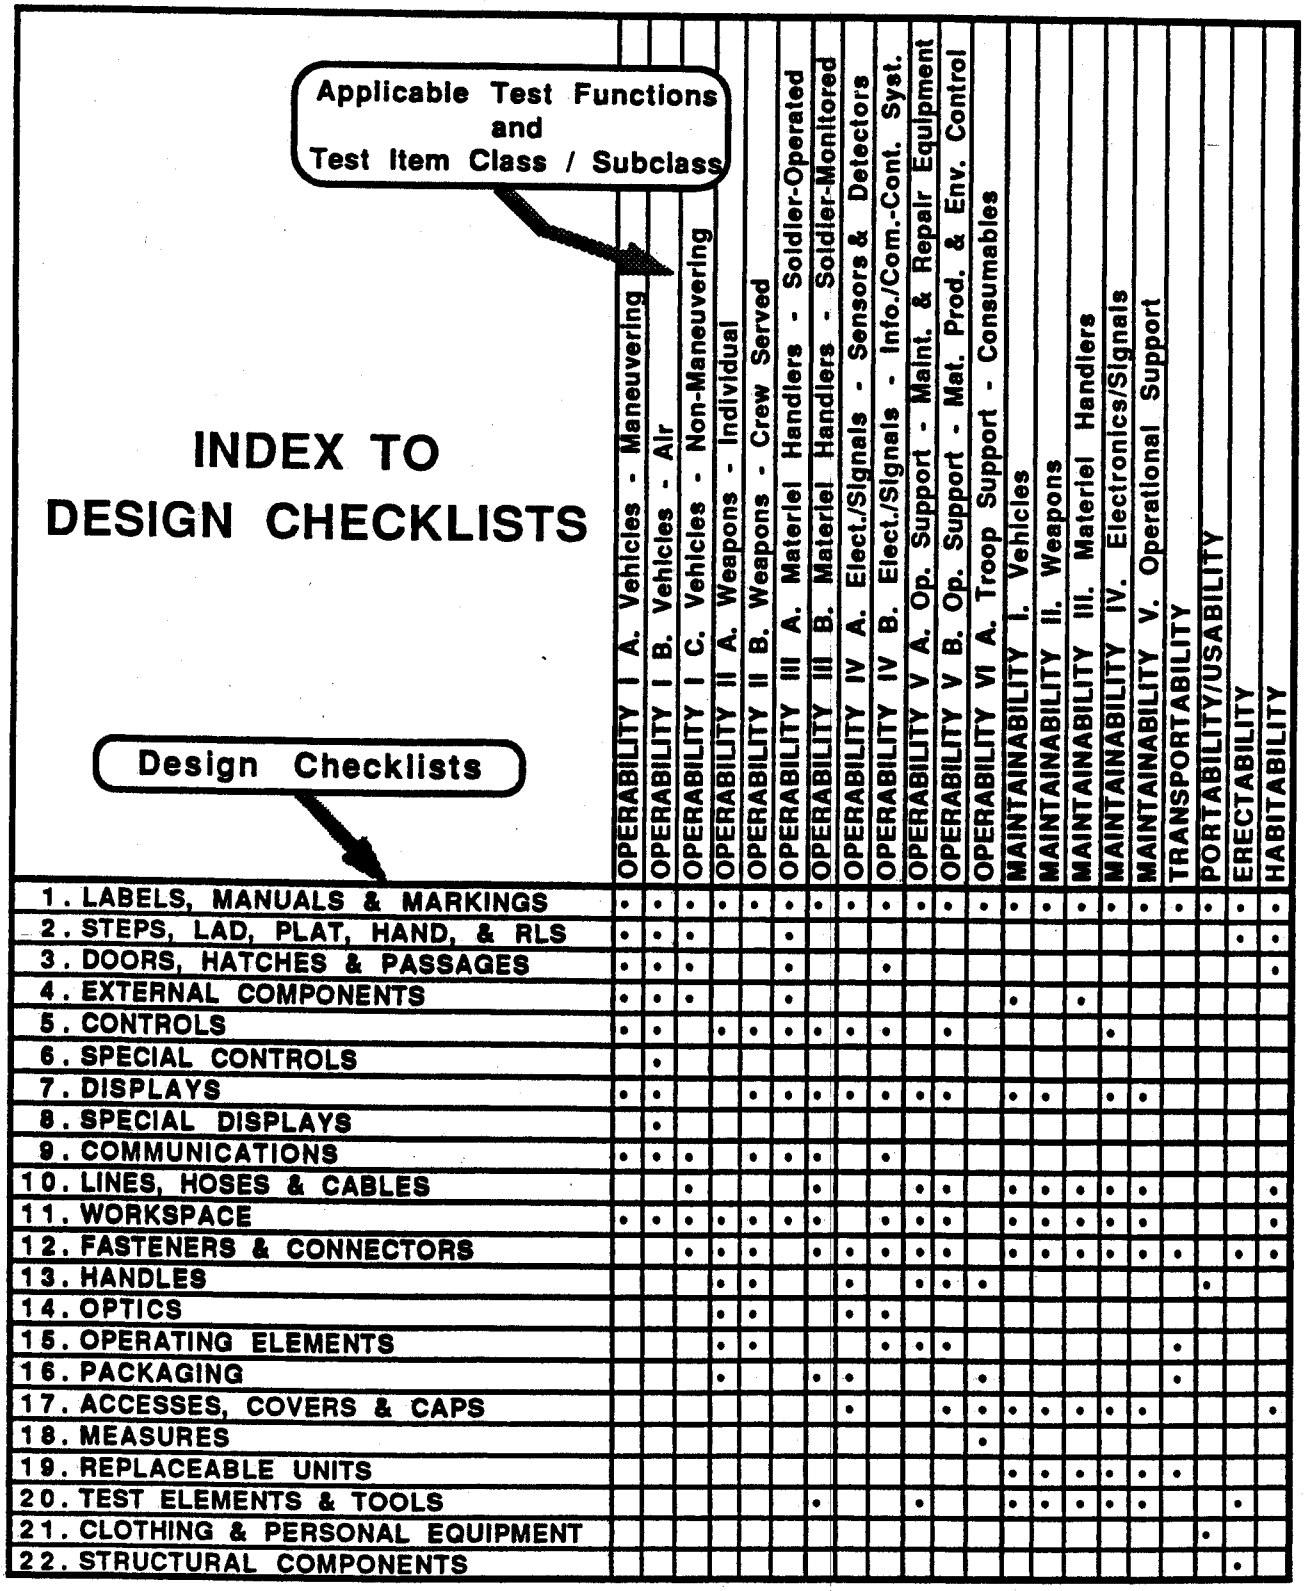


Figure 3. Index to Design Checklists

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

Components of the test item and functions of the test item should be reviewed to establish the applicability of Design Checklists. Task Checklists selected in Step 4 may also be useful since generic components of test item components are often included in the task descriptions. The column headings in FIGURE 3 are the same as the list of Task Checklists in TABLE 1 and applicability of a given Task Checklist will often suggest that the Design Checklists indicated in the corresponding column of FIGURE 3 will be applicable. For example, if a test item is a crew served weapon, the Sample Task Checklist for OPERABILITY - Crew Served Weapons will generally be applicable. One of the Design Checklists indicated in the OPERABILITY - Crew Served Weapons column of FIGURE 3 is Controls so the Controls Design Checklist will generally be applicable to a crew served weapon.

2.6.4 References to MIL-STD-1472D Design Checklists are provided for classes of Test Item Components. Within a particular Design Checklist, items are grouped according to HFE Considerations. Where a Design Checklist item is based on requirements of MIL-STD-1472D, a reference is provided to the appropriate paragraph in MIL-STD-1472D. If a Design Checklist item does not contain a paragraph reference, then it was taken from HFE sources other than MIL-STD-1472D and is provided for purposes of guidance. Where a MIL-STD-1472D reference is included, the referenced paragraph in MIL-STD-1472D should be consulted to determine applicability and to obtain detailed information on which to base a decision on design adequacy of the test item.

2.6.5 Design Checklist Data Data are gathered by using the checklists at each work-station or maintenance position. Indications of whether component design is adequate or inadequate on specific criteria are recorded. If the test item component is judged to be in compliance with the checklist item then the design is Adequate and the YES column is checked. If the component is not in compliance with the item then the design is Inadequate. The NO column is checked and the Comments column (and additional pages if necessary) is used to characterize the design problem.

2.6.6 Human Factors Considerations Each Design Checklist associated with a particular test item class is organized into sections which correspond to Human Factors Engineering Considerations defined as follows:

a. Functionality Functionality considerations refer to functional and structural aspects of a component as these relate to human use. One aspect of functionality is the suitability of the type of component provided (as opposed to some other type) for the intended use. Functionality considerations are directed particularly at controls and displays. Certain types of controls (toggle switches, legend switches, discrete rotary controls etc.) may be preferred for certain types of control functions. Functionality would refer to the suitability of the control type selected by the designer for the function in question. Other aspects of functionality include presence/absence of design features which facilitate or degrade operator performance and component construction/materials as these relate to human use.

b. Location and Arrangement Location and arrangement considerations refer to the positioning of a component as it affects the ability of the operator to reach, operate or manipulate it. Location and arrangement considerations include location of openings (accesses), cover and door operation, location of controls and displays relative to operator reach constraints, logical positioning of controls and displays based on use, and co-location of related components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

c. Size and Shape Size and shape considerations refer to the maximum and minimum dimensions and configuration of components for human use. Size and shape includes dimensions of components relative to anthropometric data, dimensions required for use while wearing special clothing, and the shape and contour of handles, controls, handholds, etc. to enhance both identification and use of the component.

d. Direction and Force Direction and force considerations refer to dynamic properties of components which are moved by operators in the course of use. Direction considerations focus on movement of controls relative to user expectations and to related displays. Force and resistance of controls affect their proper manipulation, and force required to operate or move components is constrained by human strength capabilities.

e. Clearance and Separation Clearance and separation considerations refer to the unobstructed space surrounding a component which allows the operator/maintainer to access the component. In operability functions, the emphasis is on separation between adjacent controls and between controls and surrounding structures. In other functions such as maintainability and erectability, emphasis is on clearance and access to components. Where appropriate, clearance and separation considerations are put forth for operators/maintainers wearing gloves, mittens, or other protective equipment.

f. Visibility and Identification Visibility and identification considerations address those aspects of a component which affect the ability of the operator/maintainer to visually access the component, to localize it, and to identify it. These considerations include location, size, shape, color, contrast,viewing distance, reflectance and illumination.

g. Use Conditions Use conditions refer to features of the item which affect usability and/or maintainability given the environmental and mission conditions under which the item will be used and characteristics of the user.

h. Safety Safety considerations refer to aspects of a test item which could cause injury to the operator/maintainer or to other personnel including preventative aspects for inclement weather or reduced visibility and accidental contact with electrical, thermal, chemical, radiation or pressurization hazards.

i. Operating Procedures Procedural considerations address operational and information aspects of a test item such as those found in operating and maintenance manuals, checklists, training materials, job aids or trouble shooting guides including hazard warning information.

2.6.7 Tailored Design Checklists As the applicable Design Checklists are identified, these should be modified to produce Design Checklists which are appropriate to the Test Item Class and Subclass. This involves developing item-specific Design Checklists from the sample Design Checklists in Appendix B by deleting checklist items which are not applicable to the test item and adding applicable checklist items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

2.7 Steps 7-12 After test preparation steps 1 through 6 have been completed using HEDGE as applicable, Steps 7 through 12 of the HFE test preparation process are accomplished using the appropriate sections of TOP 1-2-610 Part I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

APPENDIX A

SAMPLE TASK CHECKLISTS

This appendix presents a series of sample Task Checklists covering the twenty-one Test Function/Item Class/Subclass combinations listed in Figure 3 of HEDGE. These checklists should not be used verbatim. Inappropriate items should be deleted and appropriate items should be added where necessary.

Task Checklist	Page
OPERABILITY	
I. Vehicles	
A. Maneuvering	A-2
B. Air	A-9
C. Non-Maneuvering	A-15
II. Weapons	
A. Individual	A-22
B. Crew Served	A-28
III. Materiel Handlers	
A. Soldier-Operated	A-34
B. Soldier-Monitored	A-41
IV. Electronics/Signals	
A. Sensors & Detectors	A-48
B. Information/Command-Control Systems	A-55
V. Operational Support	
A. Maintenance & Repair Equipment	A-62
B. Materiel Production & Environment Control	A-68
VI. Troop Support Equipment	
A. Consumables	A-75
MAINTAINABILITY	
I. Vehicles	A-82
II. Weapons	A-89
III. Materiel Handlers	A-96
IV. Electronics/Signals	A-103
V. Operational Support	A-109
TRANSPORTABILITY	A-116
PORTABILITY/USABILITY (Clothing and Personal Equipment)	A-122
ERECTABILITY	A-129
HABITABILITY	A-134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY I A

Vehicles - Maneuvering

Function	Subfunction	Abbreviation	Page
Gain Access/Egress	Climb Up/Down	Climb	A-3
Gain Access/Egress	Open/Close	Open	A-4
Prepare for Operation	Checkout	Check	A-5
Prepare for Operation	Take/Leave Position	Take	A-6
Operate	Start/Monitor/Stop	Strt	A-7
Operate	Control Direction/Speed	Cont	A-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I A
Item Class - Subclass	Vehicles - Maneuvering
Function	Gain Access/Egress
Subfunction	Climb Up/Down
Abbreviation	Climb

Test Title
Test Project No. Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Mount steps, ladders, or ramps.				
2. Use tires, hubs, or structural members for mounting.				
3. Use handholds or railings.				
4. Carry loads while ascending and descending.				
5. Raise load to step/platform.				
6. Read and observe warning and instruction labels.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I A
Item Class - Subclass	Vehicles - Maneuvering
Function	Gain Access/Egress
Subfunction	Open/Close
Abbreviation	Open

Soldier/Item Tasks	YES	NO	N/A	Comment
7. Grasp door handle.				
8. Unlock or lock door latch.				
9. Unlatch or latch door.				
10. Push or pull door open or closed.				
11. Use handhold.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I A
Item Class - Subclass	Vehicles - Maneuvering
Function	Prepare for Operation
Subfunction	Checkout
Abbreviation	Check

Soldier/Item Tasks	YES	NO	N/A	Comment
12. Visually inspect external operating components.				
13. Verify adjustments, structural integrity, and operational readiness.				
14. Follow published procedures where applicable.				
15. Input test signals to displays; read and interpret results.				
16. Determine control readiness.				
17. Set controls.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I A
Item Class - Subclass	Vehicles - Maneuvering
Function	Prepare for Operation
Subfunction	Take/Leave Position
Abbreviation	Take

Soldier/Item Tasks	YES	NO	N / A	Comment
18. Step through entry.				
19. Take or leave seat.				
20. Doff or don clothing items.				
21. Place clothing, tools, weapons, etc., into storage area.				
22. Adjust seats, windows, belts, and mirrors.				
23. Adjust seat belts and shoulder harness.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I A
Item Class - Subclass	Vehicles - Maneuvering
Function	Operate
Subfunction	Start/Monitor/Stop
Abbreviation	Strt

Soldier/Item Tasks	YES	NO	N / A	Comment
24. Remove restraints (wheel chocks, dock lines, etc.).				
25. Read labels.				
26. Preset operating controls (choke, throttle, gearshift, etc.).				
27. Activate vehicle.				
28. Check displays.				
29. Manipulate controls.				
30. Communicate with crew members and/or passengers.				
31. Perform post-operational check (follow procedures if applicable).				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I A
Item Class - Subclass	Vehicles - Maneuvering
Function	Operate
Subfunction	Control Direction/Speed
Abbreviation	Cont

Soldier/Item Tasks	YES	NO	N/A	Comment
32. View external conditions by means of mirrors and windows.				
33. Check maps and charts.				
34. Identify destination and route.				
35. Operate steering control.				
36. Operate directional control.				
37. Operate speed control.				
38. Operate environment controls.				
39. Operate lighting controls.				
40. Operate visibility controls.				
41. Avoid obstacles.				
42. Communicate with crew/other vehicles/command post.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY I B

Vehicles - Air

Function	Subfunction	Abbreviation	Page
Gain Access/Egress	Climb Up/Down	Climb	A-10
Gain Access/Egress	Take/Leave Position	Take	A-11
Perform Flight Operations	Checkout/Fly	Check	A-12
Perform Flight Operations	Intercept Targets	Intercept	A-13
Perform Flight Operations	Perform In-Flight Missions	Mission	A-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I B
Item Class - Subclass	Vehicles - Air
Function	Gain Access/Egress
Subfunction	Climb Up/Down
Abbreviation	Climb

Test Title
Test Project No. Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Mount steps or portable ladders.				
2. Use structures for mounting.				
3. Use handholds and railings.				
4. Carry loads.				
5. Read labels and warnings.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I B
Item Class - Subclass	Vehicles - Air
Function	Gain Access/Egress
Subfunction	Take/Leave Position
Abbreviation	Take

Soldier/Item Tasks	YES	NO	N/A	Comment
6. Open or close door or canopy.				
7. Prepare entry.				
8. Access seat area.				
9. Enter seat.				
10. Connect or disconnect G suits, cables, oxygen lines, restraints, etc.				
11. Adjust seats and restraints.				
12. Adjust visors.				
13. Remove or install safety pins.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I B
Item Class - Subclass	Vehicles - Air
Function	Perform Flight Operations
Subfunction	Checkout/Fly
Abbreviation	Check

Soldier/Item Tasks	YES	NO	N/A	Comment
14. Perform static check.				
15. Perform dynamic check.				
16. Taxi.				
17. Takeoff.				
18. Read displays.				
19. Cruise.				
20. Approach.				
21. Land.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I B
Item Class - Subclass	Vehicles - Air
Function	Perform Flight Operations
Subfunction	Intercept Targets
Abbreviation	Intercept

Soldier/Item Tasks	YES	NO	N/A	Comment
22. Detect target.				
23. Locate target.				
24. Track target.				
25. Monitor spatial relationships.				
26. Identify target.				
27. Perform intercept.				
28. Read weapon display.				
29. Select weapon.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I B
Item Class - Subclass	Vehicles - Air
Function	Perform Flight Operations
Subfunction	Perform In-Flight Missions
Abbreviation	Mission

Soldier/Item Tasks	YES	NO	N/A	Comment
30. Remain on station.				
31. Perform ELINT.				
32. Perform ECM/ECCM.				
33. Attack.				
34. Evaluate effects of attack.				
35. Communicate.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY I C

Vehicles - Non-Maneuvering

Function	Subfunction	Abbreviation	Page
Prepare for Use	Load/Unload Materiel	Load	A-16
Prepare for Use	Set Up for Use	Set Up	A-17
Connect/Disconnect	Engage Prime Mover	Eng	A-18
Connect/Disconnect	Verify Operational Status	Ver	A-19
Utilize	Gain Access/Egress	Acc	A-20
Utilize	Use as Workspace	Work	A-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I C
Item Class - Subclass	Vehicles - Non-Maneuvering
Function	Prepare for Use
Subfunction	Load/Unload Materiel
Abbreviation	Load

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Mate loading position with loading device.				
2. Open or close cargo doors.				
3. Lower or raise platform or ramp.				
4. Mount steps, etc., with load.				
5. Pass load up to platform or entryway.				
6. Transfer load to storage area.				
7. Secure load in or on item.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I C
Item Class - Subclass	Vehicles - Non-Maneuvering
Function	Prepare for Use
Subfunction	Set Up for Use
Abbreviation	Set Up

Soldier/Item Tasks	YES	NO	N/A	Comment
8. Transfer item to destination with prime mover.				
9. Install permanent equipment.				
10. Block or lock wheels.				
11. Level item.				
12. Attach temporary steps or stairs.				
13. Connect powerlines, cables, and hoses.				
14. Deploy expandable units.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I C
Item Class - Subclass	Vehicles - Non-Maneuvering
Function	Connect/Disconnect
Subfunction	Engage Prime Mover
Abbreviation	Eng

Soldier/Item Tasks	YES	NO	N/A	Comment
15. Connect lines or hoses from mover to item.				
16. Prepare hitch or connection.				
17. Align and mate prime mover and item.				
18. Fasten or connect prime mover and item.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I C
Item Class - Subclass	Vehicles - Non-Maneuvering
Function	Connect/Disconnect
Subfunction	Verify Operational Status
Abbreviation	Ver

Soldier/Item Tasks	YES	NO	N/A	Comment
19. Inspect hose and cable connections.				
20. Manually and visually verify connection tightness.				
21. Tighten and adjust connection.				
22. Inspect external operating components.				
23. Read labels.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I C
Item Class - Subclass	Vehicles - Non-Maneuvering
Function	Utilize
Subfunction	Gain Access/Egress
Abbreviation	Acc

Soldier/Item Tasks	YES	NO	N/A	Comment
24. Set up removable stairs or ladders.				
25. Climb steps and footholds.				
26. Use handholds.				
27. Open or close doors or hatches.				
28. Pass through entryway.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY I C
Item Class - Subclass	Vehicles - Non-Maneuvering
Function	Utilize
Subfunction	Use as Workspace
Abbreviation	Work

Soldier/Item Tasks	YES	NO	N/A	Comment
29. Inhabit test item.				
30. Move about.				
31. Take position.				
32. Stow weapons, publications, and clothing.				
33. Communicate within/without workspace.				
34. Conduct operations.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY II A

Weapons - Individual

Function	Subfunction	Abbreviation	Page
Prepare for Use	Pre-Operational Activities	Pre-Op	A-23
Prepare for Use	Assemble/Emplace	Assem	A-24
Prepare for Use	Load/Prepare	Prep	A-25
Use Weapon	Aim	Aim	A-26
Use Weapon	Fire/Cease Firing	Fire	A-27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II A
Item Class - Subclass	Weapons - Individual
Function	Prepare for Use
Subfunction	Pre-Operational Activities
Abbreviation	Pre-Op

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Store in or on vehicle.				
2. Unstow or unpack.				
3. Pick up or put down.				
4. Carry in hand.				
5. Carry on body.				
6. Field-strip.				
7. Clean parts.				
8. Mate parts.				
9. Tighten connections.				
10. Adjust slings.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II A
Item Class - Subclass	Weapons - Individual
Function	Prepare for Use
Subfunction	Assemble/Emplace
Abbreviation	Assem

Soldier/Item Tasks	YES	NO	N/A	Comment
11. Mate subassemblies.				
12. Make connections.				
13. Emplace.				
14. Position for firing.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II A
Item Class - Subclass	Weapons - Individual
Function	Prepare for Use
Subfunction	Load/Prepare
Abbreviation	Prep

Soldier/Item Tasks	YES	NO	N/A	Comment
15. Select ammunition.				
16. Mate ammunition.				
17. Activate ammunition feed.				
18. Ready sights and aiming aids.				
19. Ready aiming and tracking aids.				
20. Ready visual aids.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II A
Item Class - Subclass	Weapons - Individual
Function	Use Weapon
Subfunction	Aim
Abbreviation	Aim

Soldier/Item Tasks	YES	NO	N/A	Comment
21. Take firing position.				
22. Position weapon for aiming.				
23. Locate target.				
24. Aim.				
25. Communicate.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II A
Item Class - Subclass	Weapons - Individual
Function	Use Weapon
Subfunction	Fire/Cease Firing
Abbreviation	Fire

Soldier/Item Tasks	YES	NO	N/A	Comment
26. Fire designated burst.				
27. Alter aiming.				
28. Continue to fire.				
29. Communicate.				
30. Monitor firing.				
31. Verify effectiveness.				
32. Safe weapon.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY II B

Weapons - Crew Served

Function	Subfunction	Abbreviation	Page
Prepare for Use	Pre-Operational Activities	Pre-Op	A-29
Prepare for Use	Assemble/Emplace	Assem	A-30
Prepare for Use	Load/Prepare	Prep	A-31
Use Weapon	Aim/Position for Firing	Aim	A-32
Use Weapon	Fire/Cease Firing	Fire	A-33

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II B
Item Class - Subclass	Weapons - Crew Served
Function	Prepare for Use
Subfunction	Pre-Operational Activities
Abbreviation	Pre-Op

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Unpack or unstow.				
2. Select modes of operation.				
3. Perform static checkout.				
4. Perform cleaning.				
5. Tighten connections.				
6. Verify readiness.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II B
Item Class - Subclass	Weapons - Crew Served
Function	Prepare for Use
Subfunction	Assemble/Emplace
Abbreviation	Assem

Soldier/Item Tasks	YES	NO	N/A	Comment
7. Read instructions.				
8. Mate subassemblies.				
9. Emplace weapon.				
10. Identify ammunition.				
11. Stabilize weapon.				
12. Communicate.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II B
Item Class - Subclass	Weapons - Crew Served
Function	Prepare for Use
Subfunction	Load/Prepare
Abbreviation	Prep

Soldier/Item Tasks	YES	NO	N/A	Comment
13. Select ammunition.				
14. Ready ammunition.				
15. Ready weapon for loading.				
16. Load ammunition.				
17. Verify loading.				
18. Ready sighting and ranging devices.				
19. Ready aiming aids.				
20. Ready visual aids.				
21. Ready sensors.				
22. Ready weapon control system.				
23. Ready support systems.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II B
Item Class - Subclass	Weapons - Crew Served
Function	Use Weapon
Subfunction	Aim/Position for Firing
Abbreviation	Aim

Soldier/Item Tasks	YES	NO	N/A	Comment
24. Position weapon for aiming.				
25. Activate aiming aids.				
26. Find target.				
27. Lay on target.				
28. Communicate.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY II B
Item Class - Subclass	Weapons - Crew Served
Function	Use Weapon
Subfunction	Fire/Cease Firing
Abbreviation	Fire

Soldier/Item Tasks	YES	NO	N/A	Comment
29. Determine when to fire.				
30. Fire.				
31. Alter aiming.				
32. Continue to fire.				
33. Communicate.				
34. Monitor firing.				
35. Verify effectiveness.				
36. Safe weapon.				
37. Configure weapon for transportation.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY III A

Materiel Handlers - Soldier-Operated

Function	Subfunction	Abbreviation	Page
Gain Access/Egress	Climb Up/Down	Climb	A-35
Gain Access/Egress	Open/Close	Open	A-36
Prepare for Operation	Checkout	Check	A-37
Prepare for Operation	Take/Leave Position	Take	A-38
Handle Materiel	Engage Load	Eng	A-39
Handle Materiel	Lift/Move/Deposit Materiel	L/M	A-40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III A
Item Class - Subclass	Materiel Handlers - Soldier-Operated
Function	Gain Access/Egress
Subfunction	Climb Up/Down
Abbreviation	Climb

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Mount steps, ladders, ramps, etc.				
2. Use handholds.				
3. Use footholds.				
4. Carry load.				
5. Lift or lower load to or from platform or ledge.				
6. Read instructions, labels, and warnings.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III A
Item Class - Subclass	Materiel Handlers - Soldier-Operated
Function	Gain Access/Egress
Subfunction	Open/Close
Abbreviation	Open

Soldier/Item Tasks	YES	NO	N/A	Comment
7. Grasp door handle.				
8. Unlock or lock door latch.				
9. Unlatch or latch door.				
10. Push or pull door open or shut.				
11. Use handholds.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III A
Item Class - Subclass	Materiel Handlers - Soldier-Operated
Function	Prepare for Operation
Subfunction	Checkout
Abbreviation	Check

Soldier/Item Tasks	YES	NO	N/A	Comment
12. Visually inspect external operating components.				
13. Verify adjustment, structural integrity, and operational readiness.				
14. Input test signals to displays.				
15. Read and interpret displays.				
16. Determine control readiness.				
17. Set controls.				
18. Check load transport system.				
19. Check load lift system.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III A
Item Class - Subclass	Materiel Handlers - Soldier-Operated
Function	Prepare for Operation
Subfunction	Take/Leave Position
Abbreviation	Take

Soldier/Item Tasks	YES	NO	N/A	Comment
20. Step into/out of work area.				
21. Take or leave seat.				
22. Move to or from operating position.				
23. Remove clothing items and encumbrances.				
24. Stow clothing/encumbrances.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III A
Item Class - Subclass	Materiel Handlers - Soldier-Operated
Function	Handle Materiel
Subfunction	Engage Load
Abbreviation	Eng

Soldier/Item Tasks	YES	NO	N/A	Comment
25. Activate item.				
26. Position materiel handling device.				
27. Orient materiel handling device.				
28. Identify load.				
29. Move materiel handling device to load.				
30. Control direction and speed of item.				
31. Acquire load.				
32. Verify acquisition.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III A
Item Class - Subclass	Materiel Handlers - Soldier-Operated
Function	Handle Materiel
Subfunction	Lift/Move/Deposit Materiel
Abbreviation	L/M

Soldier/Item Tasks	YES	NO	N/A	Comment
33. Read labels and instructions.				
34. Operate controls.				
35. Read and interpret displays.				
36. Lift load.				
37. Transport load.				
38. Identify deposit area.				
39. Deposit load.				
40. Monitor external objects and conditions.				
41. Communicate as required.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY III B

Materiel Handlers - Soldier-Monitored

Function	Subfunction	Abbreviation	Page
Assemble/Install	Assemble/Disassemble	Assem	A-42
Assemble/Install	Attach/Remove	Att	A-43
Prepare for Use	Checkout	Check	A-44
Prepare for Use	Align/Adjust	Adj	A-45
Start/Monitor/Stop	Initiate/Terminate	Init	A-46
Start/Monitor/Stop	Monitor	Mon	A-47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III B
Item Class - Subclass	Materiel Handlers - Soldier-Monitored
Function	Assemble/Install
Subfunction	Assemble/Disassemble
Abbreviation	Assem

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Unpackage items and components.				
2. Read instructions.				
3. Obtain tools.				
4. Identify parts.				
5. Assemble parts.				
6. Disassemble parts.				
7. Store parts.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III B
Item Class - Subclass	Materiel Handlers - Soldier-Monitored
Function	Assemble/Install
Subfunction	Attach/Remove
Abbreviation	Att

Soldier/Item Tasks	YES	NO	N/A	Comment
8. Place and align item.				
9. Connect fasteners.				
10. Attach lines, hoses, cables, wires, pipes, etc.				
11. Level as necessary.				
12. Configure for use.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III B
Item Class - Subclass	Materiel Handlers - Soldier-Monitored
Function	Prepare for Use
Subfunction	Checkout
Abbreviation	Check

Soldier/Item Tasks	YES	NO	N/A	Comment
13. Visually inspect components.				
14. Read labels.				
15. Manually verify connections.				
16. Set controls.				
17. Remove and inspect components, measurement devices, etc.				
18. Perform operational check.				
19. Verify readiness.				
20. Communicate.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III B
Item Class - Subclass	Materiel Handlers - Soldier-Monitored
Function	Prepare for Use
Subfunction	Align/Adjust
Abbreviation	Adj

Soldier/Item Tasks	YES	NO	N/A	Comment
21. Make gross calibrations and adjustments manually.				
22. Use tools and controls for fine adjustments.				
23. Tighten connections.				
24. Realign components as required.				
25. Change control settings.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III B
Item Class - Subclass	Materiel Handlers - Soldier-Monitored
Function	Start/Monitor/Stop
Subfunction	Initiate/Terminate
Abbreviation	Init

Soldier/Item Tasks	YES	NO	N/A	Comment
26. Take operating position.				
27. Determine when to start.				
28. Start or stop power.				
29. Operate power setting control.				
30. Begin loading and/or transferring operations.				
31. Operate controls for continued operation.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY III B
Item Class - Subclass	Materiel Handlers - Soldier-Monitored
Function	Start/Monitor/Stop
Subfunction	Monitor
Abbreviation	Mon

Soldier/Item Tasks	YES	NO	N/A	Comment
32. Observe operation.				
33. Observe status.				
34. Observe performance.				
35. Determine rate of flow.				
36. Obtain samples.				
37. Identify problems.				
38. Communicate.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY IV A

Electronics/Signals - Sensors & Detectors

Function	Subfunction	Abbreviation	Page
Prepare for Use	Unpack/Assemble	Assem	A-49
Prepare for Use	Configure for Use	Config	A-50
Utilize	Position for Use	Posit	A-51
Utilize	Activate/Adjust/Deactivate	Act	A-52
Monitor Information Feedback	Acquire/Interpret Information	Acq	A-53
Monitor Information Feedback	Determine Operational Status	Stat	A-54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV A
Item Class - Subclass	Electronics/Signals - Sensors & Detectors
Function	Prepare for Use
Subfunction	Unpack/Assemble
Abbreviation	Assem

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Read special handling instructions.				
2. Identify sensor.				
3. Retrieve from storage.				
4. Unpackage.				
5. Handle sensor.				
6. Deploy parts.				
7. Assemble parts.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV A
Item Class - Subclass	Electronics/Signals - Sensors & Detectors
Function	Prepare for Use
Subfunction	Configure for Use
Abbreviation	Config

Soldier/Item Tasks	YES	NO	N/A	Comment
8. Select modes of operation.				
9. Prepare interfaces and connections.				
10. Select technical parameters.				
11. Connect lines, cables, etc.				
12. Perform static checkout.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV A
Item Class - Subclass	Electronics/Signals - Sensors & Detectors
Function	Utilize
Subfunction	Position for Use
Abbreviation	Posit

Soldier/Item Tasks	YES	NO	N/A	Comment
13. If stationary: emplace, position, or orient.				
14. If moving: attach to locomotion device.				
15. Point or aim.				
16. Conceal or camouflage as required.				
17. Reorient as required.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV A
Item Class - Subclass	Electronics/Signals - Sensors & Detectors
Function	Utilize
Subfunction	Activate/Adjust/Deactivate
Abbreviation	Act

Soldier/Item Tasks	YES	NO	N/A	Comment
18. Activate sensor.				
19. Verify activation.				
20. Follow safety procedures.				
21. Read instructions.				
22. Communicate.				
23. Perform dynamic checkout.				
24. Perform quick deactivation.				
25. Control location, position, operation, and feedback of data.				
26. Control rate of motion and field of view.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV A
Item Class - Subclass	Electronics/Signals - Sensors & Detectors
Function	Monitor Information Feedback
Subfunction	Acquire/Interpret Information
Abbreviation	Acq

Soldier/Item Tasks	YES	NO	N/A	Comment
27. Activate displays.				
28. Acquire and interpret sensed data.				
29. Verify validity of sensed data.				
30. Integrate data from different sensors.				
31. Assess data quality.				
32. Assess data quantity.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV A
Item Class - Subclass	Electronics/Signals - Sensors & Detectors
Function	Monitor Information Feedback
Subfunction	Determine Operational Status
Abbreviation	Stat

Soldier/Item Tasks	YES	NO	N/A	Comment
33. Identify problems.				
34. Isolate problems.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY IV B

Electronics/Signals - Information/Command-Control

Function	Subfunction	Abbreviation	Page
Enter/Leave Station	Enter Station	Ent	A-56
Enter/Leave Station	Take Position at Station	Take	A-57
Prepare for Operation	Configure Station	Config	A-58
Prepare for Operation	Perfrom Checkout	Check	A-59
Operate Station	Acquire/Interpret Information	Acq	A-60
Operate Station	Control/Adjust Operation	Adj	A-61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV B
Item Class - Subclass	Electronics/Signals - Information/Command-Control
Function	Enter/Leave Station
Subfunction	Enter Station
Abbreviation	Ent

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Grasp and operate door control.				
2. Push, pull, or slide door open or closed.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV B
Item Class - Subclass	Electronics/Signals - Information/Command-Control
Function	Enter/Leave Station
Subfunction	Take Position at Station
Abbreviation	Take

Soldier/Item Tasks	YES	NO	N/A	Comment
3. Step into or out of work area.				
4. Take or leave seat.				
5. Move to or from standing operator position.				
6. Remove excess clothing (rain, NBC, cold regions, etc.).				
7. Stow clothing, tools, packs, and other encumbrances.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV B
Item Class - Subclass	Electronics/Signals - Information/Command-Control
Function	Prepare for Operation
Subfunction	Configure Station
Abbreviation	Config

Soldier/Item Tasks	YES	NO	N/A	Comment
8. Adjust environment controls.				
9. Select modes of operation.				
10. Integrate with other operators.				
11. Establish command links.				
12. Make connections.				
13. Follow procedures.				
14. Communicate.				
15. Interact with support systems.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV B
Item Class - Subclass	Electronics/Signals - Information/Command-Control
Function	Prepare for Operation
Subfunction	Perform Checkout
Abbreviation	Check

Soldier/Item Tasks	YES	NO	N/A	Comment
16. Check control settings.				
17. Check data return quality.				
18. Check data return format.				
19. Check links.				
20. Verify operational readiness.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV B
Item Class - Subclass	Electronics/Signals - Information/Command-Control
Function	Operate Station
Subfunction	Acquire/Interpret Information
Abbreviation	Acq

Soldier/Item Tasks	YES	NO	N/A	Comment
21. Obtain and monitor continuous data.				
22. Obtain and monitor discrete data.				
23. Obtain and monitor status data.				
24. Obtain verification data.				
25. Identify and isolate problems.				
26. Assess requirement to modify operations.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY IV B
Item Class - Subclass	Electronics/Signals - Information/Command-Control
Function	Operate Station
Subfunction	Control/Adjust Operation
Abbreviation	Adj

Soldier/Item Tasks	YES	NO	N/A	Comment
27. Activate system and change control settings.				
28. Change system configuration.				
29. Change software.				
30. Input discrete commands.				
31. Input continuous control.				
32. Monitor computer/ communications/sensor systems.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY V A

Operational Support - Maintenance & Repair

Function	Subfunction	Abbreviation	Page
Prepare Item	Unstow/Configure	Unst	A-63
Prepare Item	Emplace/Position at Worksite	Posit	A-64
Prepare Worksite	Configure Workstation	Config	A-65
Perform	Control/Adjust Operation	Adj	A-66
Perform	Monitor/Verify Operation	Mon	A-67

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V A
Item Class - Subclass	Operational Support - Maintenance & Repair
Function	Prepare Item
Subfunction	Unstow/Configure
Abbreviation	Unst

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Identify parts.				
2. Unstow parts.				
3. Lay out and deploy parts.				
4. Align and adjust parts.				
5. Make connections.				
6. Assemble parts.				
7. Mate subassemblies.				
8. Prepare rigs.				
9. Read instructions.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V A
Item Class - Subclass	Operational Support - Maintenance & Repair
Function	Prepare Item
Subfunction	Emplace/Position at Worksite
Abbreviation	Posit

Soldier/Item Tasks	YES	NO	N/A	Comment
10. Move assembly.				
11. Position and orient components.				
12. Emplace at worksite.				
13. Locate components at worksite.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V A
Item Class - Subclass	Operational Support - Maintenance & Repair
Function	Prepare Worksite
Subfunction	Configure Workstation
Abbreviation	Config

Soldier/Item Tasks	YES	NO	N/A	Comment
14. Take position.				
15. Adjust seats.				
16. Set up station.				
17. Prepare materiel.				
18. Select operating modes.				
19. Perform checkout.				
20. Read instructions.				
21. Prepare support systems.				
22. Locate and prepare support personnel.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V A
Item Class - Subclass	Operational Support - Maintenance & Repair
Function	Perform
Subfunction	Control/Adjust Operation
Abbreviation	Adj

Soldier/Item Tasks	YES	NO	N/A	Comment
23. Activate power.				
24. Change control settings.				
25. Perform test.				
26. Perform inspection.				
27. Perform removal/replacement.				
28. Perform repair.				
29. Perform site leveling.				
30. Perform construction.				
31. Perform resupply and refurbishment.				
32. Perform materiel erection.				
33. Emplace and orient tools.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V A
Item Class - Subclass	Operational Support - Maintenance & Repair
Function	Perform
Subfunction	Monitor/Verify Operation
Abbreviation	Mon

Soldier/Item Tasks	YES	NO	N/A	Comment
34. Observe operations.				
35. Observe location of objects.				
36. Detect obstacles.				
37. Monitor performance.				
38. Monitor status.				
39. Verify operations.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY V B

Operational Support - Materiel Production & Environmental Control

Function	Subfunction	Abbreviation	Page
Assemble/Set Up	Assemble/Disassemble	Assem	A-69
Assemble/Set Up	Emplace	Emp	A-70
Prepare for Use	Align/Calibrate/Adjust	Adj	A-71
Prepare for Use	Service	Serv	A-72
Utilize	Activate/Deactivate	Act	A-73
Utilize	Perform Prime Function	Perf	A-74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V B
Item Class - Subclass	Op. Support - Materiel Production & Environ. Control
Function	Assemble/Set Up
Subfunction	Assemble/Disassemble
Abbreviation	Assem

Test Title
Test Project No. Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Unstow or stow components.				
2. Read and interpret instructions and technical manuals.				
3. Identify parts.				
4. Connect components.				
5. Mate components to chassis.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V B
Item Class - Subclass	Op. Support - Materiel Production & Environ. Control
Function	Assemble/Set Up
Subfunction	Emplace
Abbreviation	Emp

Soldier/Item Tasks	YES	NO	N/A	Comment
6. Install subassemblies.				
7. Make connections.				
8. Position for use.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V B
Item Class - Subclass	Op. Support - Materiel Production & Environ. Control
Function	Prepare for Use
Subfunction	Align/Calibrate/Adjust
Abbreviation	Adj

Soldier/Item Tasks	YES	NO	N/A	Comment
9. Interpret technical manuals and labels.				
10. Tighten or loosen fasteners.				
11. Set and adjust controls.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V B
Item Class - Subclass	Op. Support - Materiel Production & Environ. Control
Function	Prepare for Use
Subfunction	Service
Abbreviation	Serv

Soldier/Item Tasks	YES	NO	N/A	Comment
12. Determine status of expendables.				
13. Open or close access covers.				
14. Remove or replace filler caps.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V B
Item Class - Subclass	Op. Support - Materiel Production & Environ. Control
Function	Utilize
Subfunction	Activate/Deactivate
Abbreviation	Act

Soldier/Item Tasks	YES	NO	N/A	Comment
15. Start gasoline engines.				
16. Ignite pilot light or burner.				
17. Turn on electrical power.				
18. Initiate air and hydraulic power.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY V B
Item Class - Subclass	Op. Support - Materiel Production & Environ. Control
Function	Utilize
Subfunction	Perform Prime Function
Abbreviation	Perf

Soldier/Item Tasks	YES	NO	N/A	Comment
19. Operate equipment according to operating manuals.				
20. Manipulate controls.				
21. Observe and monitor displays.				
22. Perform manual and tool assisted operations.				
23. Observe and test status of materiels.				
24. Remove and inspect finished product.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

OPERABILITY VI A

Troop Support Equipment - Consumables

Function	Subfunction	Abbreviation	Page
Unpackage/Package	Stow/Unstow	Stow	A-76
Unpackage/Package	Open/Close Package	Open	A-77
Prepare	Premix	Prem	A-78
Prepare	Heat/Agitate	Heat	A-79
Utilize/Consume	Apply/Remove	App	A-80
Utilize/Consume	Ingest	Ing	A-81

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY VI A
Item Class - Subclass	Troop Support Equipment - Consumables
Function	Unpackage/Package
Subfunction	Stow/Unstow
Abbreviation	Stow

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N / A	Comment
1. Insert item into or remove item from carrying case.				
2. Place item in or remove item from pockets, shirt, or pack.				
3. Strap or connect item to personal carrying gear.				
4. Remove large item from storage area.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY VI A
Item Class - Subclass	Troop Support Equipment - Consumables
Function	Unpackage/Package
Subfunction	Open/Close Package
Abbreviation	Open

Soldier/Item Tasks	YES	NO	N/A	Comment
5. Rip or tear plastic, foil, paper, sacks, or envelopes.				
6. Open or pierce metal or plastic containers (not recloseable).				
7. Remove or replace caps and covers.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY VI A
Item Class - Subclass	Troop Support Equipment - Consumables
Function	Prepare
Subfunction	Premix
Abbreviation	Prem

Soldier/Item Tasks	YES	NO	N/A	Comment
8. Measure water and other liquids.				
9. Measure dry materiels.				
10. Add liquid and dry materiels in correct proportions.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY VI A
Item Class - Subclass	Troop Support Equipment - Consumables
Function	Prepare
Subfunction	Heat/Agitate
Abbreviation	Heat

Soldier/Item Tasks	YES	NO	N/A	Comment
11. Place item over fire or in hot water.				
12. Empty consumable into cooking or eating utensil.				
13. Stir materiel.				
14. Agitate package.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY VI A
Item Class - Subclass	Troop Support Equipment - Consumables
Function	Utilize/Consume
Subfunction	Apply/Remove
Abbreviation	App

Soldier/Item Tasks	YES	NO	N/A	Comment
15. Remove or replace cap or cover.				
16. Obtain and prepare applicator.				
17. Clean and prepare skin.				
18. Apply or remove salve or oil.				
19. Sprinkle or spread powder.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	OPERABILITY VI A
Item Class - Subclass	Troop Support Equipment - Consumables
Function	Utilize/Consume
Subfunction	Ingest
Abbreviation	Ing

Soldier/Item Tasks	YES	NO	N/A	Comment
20. Eat or drink item.				
21. Utilize pouring or drinking spout.				
22. Dispose of wastes.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

MAINTAINABILITY I

Vehicles

Function	Subfunction	Abbreviation	Page
Perform Preventive Maintenance	Perform Routine Servicing	Serv	A-83
Perform Preventive Maintenance	Inspect/Checkout	Insp	A-84
Perform Preventive Maintenance	Replenish/Resupply	Replen	A-85
Perform Corrective Maintenance	Detect/Isolate Faults	Det	A-86
Perform Corrective Maintenance	Prepare for Repair	Prep	A-87
Perform Corrective Maintenance	Repair	Repr	A-88

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY I
Item Class	Vehicles
Function	Perform Preventive Maintenance
Subfunction	Perform Routine Servicing
Abbreviation	Serv

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Gain access to components.				
2. Assemble tools and support equipment.				
3. Clean components.				
4. Tighten components.				
5. Adjust components.				
6. Align components.				
7. Calibrate components.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY I
Item Class	Vehicles
Function	Perform Preventive Maintenance
Subfunction	Inspect/Checkout
Abbreviation	Insp

Soldier/Item Tasks	YES	NO	N/A	Comment
8. Retrieve checklists and inspection procedure.				
9. Conduct walk around inspection.				
10. Conduct static checkout.				
11. Conduct dynamic checkout.				
12. Check fittings.				
13. Check valves.				
14. Check fluid pumps.				
15. Check flow rates.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY I
Item Class	Vehicles
Function	Perform Preventive Maintenance
Subfunction	Replenish/Resupply
Abbreviation	Replen

Soldier/Item Tasks	YES	NO	N / A	Comment
16. Remove and replace.				
17. Attach lines and hoses.				
18. Refill.				
19. Charge.				
20. Disconnect lines.				
21. Blow or clean lines.				
22. Remove covers.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY I
Item Class	Vehicles
Function	Perform Corrective Maintenance
Subfunction	Detect/Isolate Faults
Abbreviation	Det

Soldier/Item Tasks	YES	NO	N/A	Comment
23. Identify failure.				
24. Identify affected system.				
25. Identify faulty component.				
26. Identify faulty part.				
27. Read displays.				
28. Use test sets.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY I
Item Class	Vehicles
Function	Perform Corrective Maintenance
Subfunction	Prepare for Repair
Abbreviation	Prep

Soldier/Item Tasks	YES	NO	N/A	Comment
29. Configure system.				
30. Configure component.				
31. Configure part.				
32. Select tools.				
33. Configure support systems.				
34. Remove component.				
35. Disassemble component.				
36. Inspect parts.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY I
Item Class	Vehicles
Function	Perform Corrective Maintenance
Subfunction	Repair
Abbreviation	Repr

Soldier/Item Tasks	YES	NO	N/A	Comment
37. Perform electrical repair.				
38. Perform mechanical repair.				
39. Perform hydraulic repair.				
40. Remove and replace parts.				
41. Repair parts.				
42. Conduct tests.				
43. Verify readiness. (See Inspect/Checkout.)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

MAINTAINABILITY II

Weapons

Function	Subfunction	Abbreviation	Page
Perform Preventive Maintenance	Adjust/Align	Adj	A-90
Perform Preventive Maintenance	Service	Serv	A-91
Perform Preventive Maintenance	Remove/Replace	Remv	A-92
Perform Corrective Maintenance	Troubleshoot	Trouble	A-93
Perform Corrective Maintenance	Repair	Repr	A-94
Perform Corrective Maintenance	Test & Calibration	Cal	A-95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY II
Item Class	Weapons
Function	Perform Preventive Maintenance
Subfunction	Adjust/Align
Abbreviation	Adj

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Identify requirements.				
2. Consult publications.				
3. Read labels.				
4. Assemble tools.				
5. Access test points.				
6. Gain access to parts.				
7. Align and adjust parts.				
8. Use controls and tools.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY II
Item Class	Weapons
Function	Perform Preventive Maintenance
Subfunction	Service
Abbreviation	Serv

Soldier/Item Tasks	YES	NO	N/A	Comment
9. Remove covers.				
10. Access service points, drains, and parts.				
11. Lubricate item.				
12. Fill with fluid.				
13. Read displays.				
14. Disassemble.				
15. Clean components.				
16. Tighten parts.				
17. Disconnect lines.				
18. Blow or clean lines.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY II
Item Class	Weapons
Function	Perform Preventive Maintenance
Subfunction	Remove/Replace
Abbreviation	Remv

Soldier/Item Tasks	YES	NO	N/A	Comment
19. Handle expendables and replaceables.				
20. Prepare system for module removal.				
21. Prepare module for removal.				
22. Prepare workspace for module.				
23. Stow module.				
24. Install fresh module.				
25. Replace module.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY II
Item Class	Weapons
Function	Perform Corrective Maintenance
Subfunction	Troubleshoot
Abbreviation	Trouble

Soldier/Item Tasks	YES	NO	N/A	Comment
26. Detect faults.				
27. Access test points.				
28. Acquire measures and data.				
29. Interpret data.				
30. Consult publications.				
31. Isolate fault to component.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY II
Item Class	Weapons
Function	Perform Corrective Maintenance
Subfunction	Repair
Abbreviation	Repr

Soldier/Item Tasks	YES	NO	N/A	Comment
32. Assemble tools.				
33. Arrange lines and cables.				
34. Configure system.				
35. Configure support equipment.				
36. Conduct structural repair.				
37. Conduct mechanical repair.				
38. Conduct electrical repair.				
39. Disassemble component.				
40. Inspect parts.				
41. Replace parts.				
42. Repair parts.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY II
Item Class	Weapons
Function	Perform Corrective Maintenance
Subfunction	Test & Calibration
Abbreviation	Cal

Soldier/Item Tasks	YES	NO	N/A	Comment
43. Set up test stand.				
44. Obtain data.				
45. Interpret data.				
46. Consult publications.				
47. Consult calibration tables.				
48. Validate repair.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

MAINTAINABILITY III

Materiel Handlers

Function	Subfunction	Abbreviation	Page
Perform Preventive Maintenance	Perform Routine Servicing	Serv	A-97
Perform Preventive Maintenance	Inspect/Checkout	Insp	A-98
Perform Preventive Maintenance	Replenish/Resupply	Replen	A-99
Perform Corrective Maintenance	Detect/Isolate Faults	Det	A-100
Perform Corrective Maintenance	Prepare for Repair	Prep	A-101
Perform Corrective Maintenance	Repair	Repr	A-102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY III
Item Class	Materiel Handlers
Function	Perform Preventive Maintenance
Subfunction	Perform Routine Servicing
Abbreviation	Serv

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Clean components.				
2. Tighten components.				
3. Adjust components.				
4. Align components.				
5. Calibrate components.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY III
Item Class	Materiel Handlers
Function	Perform Preventive Maintenance
Subfunction	Inspect/Checkout
Abbreviation	Insp

Soldier/Item Tasks	YES	NO	N/A	Comment
6. Conduct walk around inspection.				
7. Conduct static checkout.				
8. Conduct dynamic checkout.				
9. Verify readiness.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY III
Item Class	Materiel Handlers
Function	Perform Preventive Maintenance
Subfunction	Replenish/Resupply
Abbreviation	Replen

Soldier/Item Tasks	YES	NO	N/A	Comment
10. Remove and replace.				
11. Attach lines and hoses.				
12. Refill.				
13. Charge.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY III
Item Class	Materiel Handlers
Function	Perform Corrective Maintenance
Subfunction	Detect/Isolate Faults
Abbreviation	Det

Soldier/Item Tasks	YES	NO	N/A	Comment
14. Identify failure.				
15. Identify affected system.				
16. Identify component.				
17. Identify faulty part.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY III
Item Class	Materiel Handlers
Function	Perform Corrective Maintenance
Subfunction	Prepare for Repair
Abbreviation	Prep

Soldier/Item Tasks	YES	NO	N/A	Comment
18. Configure system.				
19. Configure component.				
20. Configure part.				
21. Select tools.				
22. Configure support systems.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY III
Item Class	Materiel Handlers
Function	Perform Corrective Maintenance
Subfunction	Repair
Abbreviation	Repr

Soldier/Item Tasks	YES	NO	N/A	Comment
23. Perform electrical repair.				
24. Perform mechanical repair.				
25. Perform hydraulic repair.				
26. Verify repair. (See Inspect/Checkout.)				

YES = Adequate. NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

MAINTAINABILITY IV

Electronics/Signals

Function	Subfunction	Abbreviation	Page
Perform Preventive Maintenance	Service	Serv	A-104
Perform Preventive Maintenance	Inspect/Checkout	Insp	A-105
Perform Corrective Maintenance	Troubleshoot	Trouble	A-106
Perform Corrective Maintenance	Repair/Replace	Repr	A-107
Perform Corrective Maintenance	Test/Calibrate	Cal	A-108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY IV
Item Class	Electronics/Signals
Function	Perform Preventive Maintenance
Subfunction	Service
Abbreviation	Serv

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Access components.				
2. Tighten components.				
3. Clean components.				
4. Align components.				
5. Adjust components.				
6. Calibrate components.				
7. Remove components.				
8. Replace components.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY IV
Item Class	Electronics/Signals
Function	Perform Preventive Maintenance
Subfunction	Inspect/Checkout
Abbreviation	Insp

Soldier/Item Tasks	YES	NO	N/A	Comment
9. Acquire checklist.				
10. Access components.				
11. Adjust controls.				
12. Read displays.				
13. Read labels.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY IV
Item Class	Electronics/Signals
Function	Perform Corrective Maintenance
Subfunction	Troubleshoot
Abbreviation	Trouble

Soldier/Item Tasks	YES	NO	N/A	Comment
14. Activate controls.				
15. Acquire performance aids.				
16. Read displays.				
17. Access test points.				
18. Activate test equipment.				
19. Read signals.				
20. Make decisions.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY IV
Item Class	Electronics/Signals
Function	Perform Corrective Maintenance
Subfunction	Repair/Replace
Abbreviation	Repr

Soldier/Item Tasks	YES	NO	N/A	Comment
21. Identify component.				
22. Break connections.				
23. Remove component.				
24. Repair component.				
25. Align component.				
26. Replace component.				
27. Make connection.				
28. Verify connection.				
29. Remove and replace module.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY IV
Item Class	Electronics/Signals
Function	Perform Corrective Maintenance
Subfunction	Test/Calibrate
Abbreviation	Cal

Soldier/Item Tasks	YES	NO	N/A	Comment
30. Acquire job performance aids.				
31. Prepare test equipment.				
32. Mate component with test equipment.				
33. Control inputs.				
34. Read outputs.				
35. Check calibration charts.				
36. Verify repair. (See Inspect/Checkout.)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

MAINTAINABILITY V

Operational Support

Function	Subfunction	Abbreviation	Page
Perform Preventive Maintenance	Inspect/Checkout	Insp	A-110
Perform Preventive Maintenance	Perform Routine PM	Rout	A-111
Perform Non-Scheduled Maintenance	Detect Malfunction	Det	A-112
Perform Non-Scheduled Maintenance	Isolate/Identify Causes	Isol	A-113
Remove/Replace	Remove Malfng. Component	Remv	A-114
Remove/Replace	Replacement/Repair on Item	Repr	A-115

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY V
Item Class	Operational Support
Function	Perform Preventive Maintenance
Subfunction	Inspect/Checkout
Abbreviation	Insp

Test Title
Test Project No. Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Inspect structural components.				
2. Check tightness of fasteners and connectors.				
3. Determine status of expendable materiels.				
4. Determine condition and expected life of line replaceable parts.				
5. Verify operational status of displays.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY V
Item Class	Operational Support
Function	Perform Preventive Maintenance
Subfunction	Perform Routine PM
Abbreviation	Rout

Soldier/Item Tasks	YES	NO	N/A	Comment
6. Clean and paint.				
7. Add preservatives.				
8. Remove and replace minor items (lightbulbs, filters, etc.).				
9. Lubricate.				
10. Add expendables.				
11. Tighten fasteners and connectors.				
12. Adjust, calibrate, and align components.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY V
Item Class	Operational Support
Function	Perform Non-Scheduled Maintenance
Subfunction	Detect Malfunction
Abbreviation	Det

Soldier/Item Tasks	YES	NO	N/A	Comment
13. Monitor displays.				
14. Utilize visual and auditory cues.				
15. Detect changes in system operation.				
16. Read malfunctioning indicator.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY V
Item Class	Operational Support
Function	Perform Non-Scheduled Maintenance
Subfunction	Isolate/Identify Causes
Abbreviation	Isol

Soldier/Item Tasks	YES	NO	N/A	Comment
17. Visually inspect components.				
18. Read built-in test meters.				
19. Apply troubleshooting strategy.				
20. Apply auxiliary test equipment to test points.				
21. Obtain readouts.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY V
Item Class	Operational Support
Function	Remove/Replace
Subfunction	Remove Malfunctioning Component
Abbreviation	Remv

Soldier/Item Tasks	YES	NO	N/A	Comment
22. Open and secure accesses.				
23. Remove fasteners and connectors.				
24. Lift, pull, slide, or push components off of or out of item.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	MAINTAINABILITY V
Item Class	Operational Support
Function	Remove/Replace
Subfunction	Replacement/Repair on Item
Abbreviation	Repr

Soldier/Item Tasks	YES	NO	N/A	Comment
25. Place and hold component in position.				
26. Apply and tighten fasteners and connectors.				
27. Attach cables, hoses, and wires.				
28. Verify adequacy of replacement.				
29. Repair component while mounted on item.				
30. Recalibrate and realign.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

TRANSPORTABILITY

Function	Subfunction	Abbreviation	Page
Prepare for Transport	Place in Transit Configuration	Config	A-117
Prepare for Transport	Package	Pack	A-118
Load/Unload	Load onto Carrier	Load	A-119
Secure/Unfasten	Immobilize Item	Immob	A-120
Secure/Unfasten	Prepare for Use	Prep	A-121

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	TRANSPORTABILITY
Function	Prepare for Transport
Subfunction	Place In Transit Configuration
Abbreviation	Config

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Position and lock movable components.				
2. Remove and secure loose and projecting components.				
3. Apply protective covering.				
4. Remove expendable liquids.				
5. Connect or remove auxiliary equipment (fording or winterizing kits).				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	TRANSPORTABILITY
Function	Prepare for Transport
Subfunction	Package
Abbreviation	Pack

Soldier/Item Tasks	YES	NO	N/A	Comment
6. Disassemble item elements.				
7. Obtain or construct package.				
8. Insert item into package.				
9. Insert shock proofing materiel.				
10. Anchor item.				
11. Close package.				
12. Apply labeling.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	TRANSPORTABILITY
Function	Load/Unload
Subfunction	Load onto Carrier
Abbreviation	Load

Soldier/Item Tasks	YES	NO	N/A	Comment
13. Attach or remove hooks and cables to or from lifting points on item or package.				
14. Engage item with materiel handling components (forks).				
15. Place item on or in pallets, cargo nets, slings, or other lifting and loading devices.				
16. Attach item where required - lifting, sliding, or rolling item to do so.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	**TRANSPORTABILITY**
Function	**Secure/Unfasten**
Subfunction	**Immobilize Item**
Abbreviation	**Immob**

Soldier/Item Tasks	YES	NO	N/A	Comment
17. Secure ties to item.				
18. Secure ties to carrier.				
19. Increase or decrease tension of ties during or after initial task.				
20. Check out tie-downs during transit to verify connection and tension.				
21. Check wheels; lock tracks.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	TRANSPORTABILITY
Function	Secure/Unfasten
Subfunction	Prepare for Use
Abbreviation	Prep

Soldier/Item Tasks	YES	NO	N/A	Comment
22. Open package.				
23. Remove item or components.				
24. Assemble item.				
25. Clean, lubricate, etc.				
26. Install, set up, and distribute item.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

PORTABILITY/USABILITY

Function	Subfunction	Abbreviation	Page
Carry/Wear Item	Don/Doff	Don	A-123
Carry/Wear Item	Wear	Wr	A-124
Carry/Wear Item	Carry Item	Car	A-125
Carry/Wear Item	Perform Combat Functions	Comb	A-126
Utilize Item	Prepare for Use	Prep	A-127
Utilize Item	Use	Us	A-128

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	PORTABILITY/USABILITY
Function	Carry/Wear Item
Subfunction	Don/Doff
Abbreviation	Don

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Put on or take off shirt, gloves, boots, trousers, and protective clothing.				
2. Button, snap, and tie clothing.				
3. Attach or emplace load into or onto pack, load carrier, or carrying case.				
4. Buckle straps, snap catches, or otherwise attach portable gear to body, cartridge belt, or pack harness.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	**PORTABILITY/USABILITY**
Function	**Carry/Wear Item**
Subfunction	**Wear**
Abbreviation	**W r**

Soldier/Item Tasks	YES	NO	N/A	Comment
5. Wear clothing.				
6. Wear personal equipment items (backpack, cartridge belt, etc.).				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	PORTABILITY/USABILITY
Function	Carry/Wear Item
Subfunction	Carry Item
Abbreviation	Car

Soldier/Item Tasks	YES	NO	N/A	Comment
7. Carry item on back or body (no hands).				
8. Adjust carrying elements (straps and holders).				
9. Carry item in one or both hands.				
10. Carry item by one or more soldiers.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	PORTABILITY/USABILITY
Function	Carry/Wear Item
Subfunction	Perform Combat Functions
Abbreviation	Comb

Soldier/Item Tasks	YES	NO	N/A	Comment
11. Fasten item securely to body to prevent flapping or interference.				
12. Discard item in emergency (snagged on vegetation or barbed wire).				
13. Disconnect or raise item for wading if wetting is a problem.				
14. Carry item while performing various combat tasks.				
15. Eliminate noise sources caused by or relative to the item.				
16. Cover or modify visible or reflecting surfaces to ensure camouflage.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	**PORTABILITY/USABILITY**
Function	**Utilize Item**
Subfunction	**Prepare for Use**
Abbreviation	**Prep**

Soldier/Item Tasks	YES	NO	N/A	Comment
17. Open access flaps or covers.				
18. Remove item from case.				
19. Connect components.				
20. Extend and fasten collapsible and folding components.				
21. Manipulate adjustment controls.				
22. Verify operational status.				
23. Clean and adjust optics.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	PORTABILITY/USABILITY
Function	Utilize Item
Subfunction	Use
Abbreviation	Us

Soldier/Item Tasks	YES	NO	N/A	Comment
24. Put on and adjust item (goggles, life preserver, etc.).				
25. Use item as designed (dig, illuminate, etc.).				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

ERECTABILITY

Function	Subfunction	Abbreviation	Page
Prepare	Layout/Inspect	Insp	A-130
Assemble	Perform Subassembly	Sub	A-131
Assemble	Perform Major Assembly	Assem	A-132
Verify Construction	Final Inspection	Fin	A-133

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	ERECTABILITY
Function	Prepare
Subfunction	Layout/Inspect
Abbreviation	Insp

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Unpackage or uncover components.				
2. Move components into proper relationship to each other according to S.O.P. or technical instructions.				
3. Check out structural integrity of components as well as status of moving or sliding parts.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	ERECTABILITY
Function	Assemble
Subfunction	Perform Subassembly
Abbreviation	Sub

Soldier/Item Tasks	YES	NO	N/A	Comment
4. Prepare connecting points (clean, abrade, apply adhesive, etc.).				
5. Join structural elements.				
6. Insert and tighten fasteners and connectors.				
7. Align structural elements.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	**ERECTABILITY**
Function	**Assemble**
Subfunction	**Perform Major Assembly**
Abbreviation	**Assem**

Soldier/Item Tasks	YES	NO	N/A	Comment
8. Raise or move subassembly to connection point.				
9. Climb or stand on parts of item, ladders, scaffolding, or watercraft.				
10. Manipulate subassembly into proper position.				
11. Mate and fasten components.				
12. Insert gaskets.				
13. Connect cables, hoses, guywires, and other elements as required.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	ERECTABILITY
Function	Verify Construction
Subfunction	Final Inspection
Abbreviation	Fin

Soldier/Item Tasks	YES	NO	N/A	Comment
14. Conduct "engineering" type test (strain, leakage, bearing strength, etc.).				
15. Drive or place maximum load on item.				
16. Visually inspect subassembly placement and connection.				
17. Manually determine status of fasteners and connectors.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

HABITABILITY

Function	Subfunction	Abbreviation	Page
Translate/Transport	Move About	Mov	A-135
Translate/Transport	Transport Materiel	Trans	A-136
Perform On-Duty Activities	Work	Work	A-137
Perform Off-Duty Activities	Perform Rest & Relaxation	R&R	A-138
Perform Off-Duty Activities	Perform Living Activities	Liv	A-139

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	HABITABILITY
Function	Translate/Transport
Subfunction	Move About
Abbreviation	Mov

Test Title	
Test Project No.	Date

Soldier/Item Tasks	YES	NO	N/A	Comment
1. Move through hallways.				
2. Climb ladders.				
3. Move through doors and hatches.				
4. Identify location.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	HABITABILITY
Function	Translate/Transport
Subfunction	Transport Materiel
Abbreviation	Trans

Soldier/Item Tasks	YES	NO	N/A	Comment
5. Carry loads.				
6. Move loads using transport aid.				
7. Move loads to and from storage.				
8. Secure or unsecure loads.				
9. Monitor loads during transport.				
10. Read labels and warnings.				
11. Avoid obstacles.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	HABITABILITY
Function	Perform On-Duty Activities
Subfunction	Work
Abbreviation	Work

Soldier/Item Tasks	YES	NO	N/A	Comment
12. Take position.				
13. Stow or unstow equipment.				
14. Inspect station.				
15. Communicate.				
16. Move about the building.				
17. Occupy workspace.				
18. Control workspace environment.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	HABITABILITY
Function	Perform Off-Duty Activities
Subfunction	Perform Rest and Relaxation
Abbreviation	R&R

Soldier/Item Tasks	YES	NO	N/A	Comment
19. Prepare area.				
20. Stow or unstow equipment.				
21. Control environment.				
22. Sleep or rest.				
23. Perform solitary activity.				
24. Perform group activity.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

TASK CHECKLIST

Test Function - Checklist	HABITABILITY
Function	Perform Off-Duty Activities
Subfunction	Perform Living Activities
Abbreviation	Liv

Soldier/Item Tasks	YES	NO	N/A	Comment
25. Stow or unstow items.				
26. Perform self care.				
27. Perform medical care.				
28. Perform dental care.				
29. Perform eating.				
30. Perform waste elimination.				
31. Modify area decor.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

APPENDIX B

SAMPLE DESIGN CHECKLISTS

This appendix presents a series of sample Design Checklists covering the twenty-two Item Component categories listed in Figure 3 of HEDGE. These checklists should not be used verbatim. Inappropriate items should be deleted and appropriate items should be added in order to achieve a complete checklist. In the Design Checklists, MIL-STD-1472D design requirements are documented using paragraph references. Other checklist items are to be considered as guidance data (MIL-HDBK-759, etc.).

Design Checklist		Page
1.	LABELS, MANUALS & MARKINGS	B-2
2.	STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS	B-16
3.	DOORS, HATCHES & PASSAGES	B-29
4.	EXTERNAL COMPONENTS	B-38
5.	CONTROLS	B-47
6.	SPECIAL CONTROLS	B-147
7.	DISPLAYS	B-155
8.	SPECIAL DISPLAYS	B-216
9.	COMMUNICATIONS	B-222
10.	LINES, HOSES & CABLES	B-235
11.	WORKSPACE	B-244
12.	FASTENERS & CONNECTORS	B-269
13.	HANDLES	B-279
14.	OPTICS	B-288
15.	OPERATING ELEMENTS	B-296
16.	PACKAGING	B-307
17.	ACCESSES, COVERS & CAPS	B-315
18.	MEASURES	B-324
19.	REPLACEABLE UNITS	B-328
20.	TEST ELEMENTS & TOOLS	B-335
21.	CLOTHING & PERSONAL EQUIPMENT	B-342
22.	STRUCTURAL COMPONENTS	B-357

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

1. LABELS, MANUALS & MARKINGS

Contents	Abbreviation	Page
Functionality	Function	B-3
Location & Arrangement	Loc	B-6
Size & Shape	Size	B-7
Visibility & Identification	Vis	B-9
Safety	Safety	B-12
Operating Procedures	Op	B-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LABELS, MANUALS & MARKINGS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Controls, displays, and other items of equipment are clearly marked and labeled except in cases where use is obvious to the operator. (5.5.1.1)				
2. Equipment subassemblies and parts are clearly labeled. (5.5.6.1.1)				
3. Load capacity is marked on lifting equipment. (5.13.2.3)				
4. Lubrication points are labeled to show frequency and type of lubricant. (5.9.5.2)				
5. Where fasteners must be torqued, a label is provided showing torque values and tightening sequence. (5.9.10.8)				
6. Where appropriate, the center of gravity and weight of equipment is provided on a label. (5.13.2.2)				
7. Hand grasp areas on equipment are conspicuously labeled.(5.13.2.7)				
8. Control labeling is functionally based and includes calibration data where applicable. (5.5.6.2.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LABELS, MANUALS & MARKINGS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
9. Trademarks and company names or other similar markings not related to panel or component function do not appear on labeling. (5.2.1.3.8, 5.5.3.3)				
10. Labels are concise with a minimum of repetitive information. (5.5.4.1)				
11. Abstract symbols are used only if meaningful. (5.5.4.2)				
12. Labels are constructed to remain legible for the life of the equipment. (5.5.4.5)				
13. Labels on production equipment are as durable as the equipment. (5.5.1.3)				
14. Labels for prototype equipment are easily affixed, altered, and removed. (5.5.1.3)				
15. Markings and tags are as permanent as the equipment to which applied and able to withstand environmental and cleaning conditions. (5.5.4.5)				
16. Computer data groups or messages have the content designated by a title, word or similar device. (5.15.3.1.10)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Function**

Detailed Design Considerations	YES	NO	N / A	Comment
17. The relationship of the computer data label to the group, field, or message being described is unambiguous. (5.15.3.1.10)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N / A	Comment
18. Labels are placed on or near the item to be identified. (5.5.2.2)				
19. Labels do not cover any other information and are not located behind controls. They can be seen easily by the operator and are not obscured by the operator's hand activating a control. (5.5.2.2)				
20. Labels are located in a consistent manner throughout the equipment and system. (5.5.2.3)				
21. Labels are not covered by other equipment and are located on the flattest, least cluttered, and cleanest surface available. (5.5.6.1.2)				
22. Labels are mounted so that they cannot be accidentally damaged or removed. (5.5.6.1.2)				
23. Where instructions are lettered on hinged door, lettering is set so that it can be read when the door is open. (5.9.9.3)				
24. Computer data labels are located in a consistent fashion adjacent to the data group or message they describe. (5.15.3.1.10)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Size & Shape**
Abbreviation	**Size**

Detailed Design Considerations	YES	NO	N/A	Comment
25. Labels are graduated in size. Group label characters are at least 25% larger than those of individual controls and displays. (5.5.6.2.5)				
26. Control and display characters, in turn, are at least 25% larger than those identifying control positions. (5.5.6.2.5)				
27. Character height is determined by reading distance and luminance in accordance with Table XII in MIL-STD-1472D. (5.5.5.14, 5.5.5.15)				
28. Letter and numeral styles are in accordance with HEDGE FIGURES C-1 to C-3. (5.5.5.3)				
29. Character width:height ratio is 3:5 except: "4" is 1 stroke width wider. "M" & "W" = 4:5. "I" and "1" are 1 stroke width. (5.5.5.5, 5.5.5.6)				
30. Stroke width for black characters on light background is: 1/7 of character height min., 1/6 of character height max. (5.5.5.8)				
31. Where dark adaptation or nighttime legibility is required and white characters are used on a black background, the stroke width is: 1/8 of character height min., 1/7 of character height max. (5.5.5.9)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Size & Shape (Cont.)**
Abbreviation	**Size**

Detailed Design Considerations	YES	NO	N / A	Comment
32. For transilluminated characters, the stroke width is 1/10 of the character height. (5.5.5.10)				
33. Spacing between characters is a minimum of one stroke. (5.5.5.11)				
34. Spacing between words is a minimum of one character. (5.5.5.12)				
35. Line spacing is a minimum of 1/2 the character height.(5.5.5.13)				
36. Numerals on counters have separation of 1/4 to 1/2 of character width.(5.2.6.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
37. Labels are accessible and visible during maintenance. (5.9.4.3)				
38. Vertical labels are used only when the labels are not critical for personal safety and performance and space is limited. (5.5.2.1)				
39. Signs are all capitals except for instructional material. (5.5.5.4.4)				
40. Extended copy (instructions) is in lower case letters. (5.5.5.4.4)				
41. Abbreviations are capital letters, periods being omitted except when there is a possibility of misinterpretation. (5.5.3.2)				
42. Label characteristics are consistent with the following: a) Accuracy of identification required. b) Time available for response. c) Reading distance. d) Illuminant level and color. e) Criticality of function. f) Consistency of label design within and between systems. (5.5.1.2)				
43. Labels are easily read at operational reading distances with vibration/motion and lighting levels taken into consideration. (5.5.4.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LABELS, MANUALS & MARKINGS
HF Considerations	Visibility & Identification (Cont.)
Abbreviation	Vis

Detailed Design Considerations	YES	NO	N/A	Comment
44. Label color provides contrast with equipment. (5.5.4.6)				
45. Where dark adaptation is required, white characters on a dark background are used. (5.5.5.2)				
46. With illumination above .9 ft-c (10 lux), black letters on a light background are used. (5.5.5.1)				
47. For dark adaptation, characters are visible and do not interfere with night vision. (5.5.5.2)				
48. When letters, etc., are viewed by means of television, they are light against a dark background. (5.10.4.6)				
49. Numerals are Arabic rather than Roman. (5.15.3.5.6.4)				
50. Optical projections: Characters are all caps. Stroke width is 1/6 to 1/8 of character height. Width subtends at least 15 arcmin. (4 mrad) of visual angle.				
51. Where chart reading is required, materials conform to requirements of Table XXII of MIL-STD-1472D.				
52. Functional groupings of components are set apart by outlining with contrasting lines which completely encompass the groups. (5.1.2.1.1.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Visibility & Identification (Cont.)**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
53. Noncritical functional groupings of components are outlined with a 1/16 in. (1.5 mm) black border. (5.1.2.1.1.3)				
54. Emergency or extremely critical components are outlined with a 3/16 in (5 mm) red border. (5.1.2.1.1.3)				
55. Computer data labels are highlighted or otherwise accentuated. (5.15.3.1.10)				
56. The technique used to accentuate computer data labels is different from, and easily distinguished from, that used to highlight or code emergency or critical messages. (5.15.3.1.10)				
57. Computer data labels are unique and meaningful. (5.15.3.1.10)				
58. Computer data labels are displayed in upper case only. (5.15.3.1.10)				
59. Abbreviations, mnemonics, or codes used in computer data labels are distinctive and have an association to normal language or job-related terminology. (5.15.2.1.9)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Safety**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
60. Equipment which presents personnel hazards has a conspicuous warning placard. (5.13.2.1)				
61. Where protective equipment is necessary, this is specified by a warning placard. (5.13.2.4)				
62. "NO STEP" warning labels are provided where personnel injury or equipment damage could result. (5.13.2.5)				
63. Electrical receptacles are clearly marked with voltage, phase, and frequency characteristics. (5.13.2.6)				
64. Pipe, hose, and tube lines are clearly labeled as to contents, pressure, temperature, and hazards. (5.13.3)				
65. Warning placards are well illuminated. (5.13.4.5)				
66. Warning notices are clear and direct. Characters are 25% larger than any following instructions. (5.9.9.3)				
67. Placards are placed adjacent to hazards. (5.13.2.1)				
68. Circuit breakers are labeled and easily accessible. (5.9.17.2.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Safety (Cont.)**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
69. Items which weigh more than the one-person lifting limits given in paragraph 5.9.11.3.1 are prominently labeled with the object weight and lifting limitations. (5.9.11.3.9)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LABELS, MANUALS & MARKINGS**
HF Considerations	**Operating Procedures**
Abbreviation	**Op**

Detailed Design Considerations	YES	NO	N/A	Comment
70. Printed information is directly usable with a minimum of decoding and interpolation. (5.2.1.3.3)				
71. Labels do not describe the engineering characteristics or nomenclature of the piece of equipment, if at all possible. (5.5.3.1)				
72. Abbreviations are standard and conform to MIL-STD-12, MIL-STD-411 or MIL-STD-783. New abbreviations have obvious meaning.				
73. Instructional material in excess of several lines may use upper and lower case characters. For brief instructional material all capitals are preferred with a larger first letter of each paragraph, step, or procedure permitted. (5.5.5.4.3)				
74. Axes of graphs are labeled. (5.15.3.6.4)				
75. Linear scales are used for graphs. (5.2.3.1.4)				
76. Scale graduations progress by 1,2 or 5 units or decimal multiples of these. (5.2.3.1.5.1)				
77. The number of minor or intermediate marks between numerical scale pointers is nine or less. (5.2.3.1.5.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LABELS, MANUALS & MARKINGS
HF Considerations	Operating Procedures (Cont.)
Abbreviation	Op

Detailed Design Considerations	YES	NO	N/A	Comment
78. Scale numerals are integers starting at zero unless this is precluded by the nature of the measurement or function. (5.2.3.1.6)				
79. Aircraft advisory, caution and warning legends conform to the requirements of MIL-STD-411.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

2. STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS

Contents	Abbreviation	Page
Functionality	Function	B-17
Location & Arrangement	Loc	B-18
Size & Shape	Size	B-20
Visibility & Identification	Vis	B-22
Use Conditions	Use	B-23
Safety	Safety	B-25
Operating Procedures	Op	B-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Functionality**
Abbreviation	**Function**

Test Title	
Test Project No.	**Date**

Detailed Design Considerations	YES	NO	N/A	Comment
1. Adequate footholds are provided for crew to reach work site from ground. (5.14.3.2)				
2. Handholds are provided for emergency evacuation. (5.14.4.1.7)				
3. Stair ladders are metal with the tread open at the rear. (5.7.7.3)				
4. Stairs, ladders, platforms, and ramps are designed to withstand heaviest combined weight of user plus equipment plus safety factor.				
5. Stairs, stair-ladders, fixed ladders and ramps are equipped with a handrail on each side. (5.7.7.1.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
6. Sequence of stepping points ends with proper orientation to door or entryways.				
7. Where a ramp is used for both pedestrian and vehicle traffic, the vehicle surface is in the center of the ramp and the pedestrian surface is next to the handrails. (5.7.7.5.2)				
8. Step surfaces within or without workspace are easily reached from either direction.				
9. Fixed ladders between several levels are offset at each succeeding level. (5.7.7.4)				
10. Simultaneous two-way traffic uses separate up/down ladders.				
11. Handholds are furnished where needed and are within easy reach. (5.14.3.2)				
12. Handholds are integrated with doors and entryways for stability.				
13. Handholds do not intrude into workspace, snag clothing or provide a safety hazard. (5.7.1.2)				
14. Stairs and steps are not used where loads in excess of 29 lb. (13 kg) is required. (5.7.7.1.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Location & Arrangement (Cont.)**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
15. Trailer vans or other shelters with floors over 18 in. (45.72 cm) above ground have steps, stairs, or ladders. (5.12.7.2)				
16. Use of stairs, stair-ladders, fixed ladders and ramps conforms to FIGURE 33 in MIL-STD-1472D. (5.7.7.1.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Size & Shape**
Abbreviation	**Size**

Detailed Design Considerations	YES	NO	N/A	Comment
17. Stair dimensions conform to FIGURE 34 in MIL-STD-1472D. (5.7.7.2)				
18. Stair-ladder dimensions conform to FIGURE 35 in MIL-STD-1472D. (5.7.7.3)				
19. Fixed ladder dimensions conform to FIGURE 36 in MIL-STD-1472D. (5.7.7.4)				
20. Where cleats are provided on pedestrian ramps, spacing between cleats is 14 in. (360 mm). (5.7.7.5.1)				
21. Gross (limiting) dimensions based on 5th & 95th percentile body dimensions of users are conformed to as expressed in TABLES XIII to XVII in MIL-STD-1472D.				
22. Stair, stair-ladder, fixed ladder dimensions do not exceed the maximum dimensions given in FIGURES 34 to 36 in MIL-STD-1472D.				
23. Platform to work surface distance is 6 in. (15.24 cm) max.				
24. Platforms are 2 ft. x 3 ft. (.61 m x .91 m) min.				
25. Handrail dimensions are consistent with FIGURES 34 to 36 in MIL-STD-1472D.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Size & Shape (Cont.)**
Abbreviation	**Size**

Detailed Design Considerations	YES	NO	N/A	Comment
26. Handhold length is a minimum of 6 in.(15.24 cm).				
27. Handhold opening has minimum dimensions of 6 in. x 4 in. (15.24 cm x 10.21 cm).				
28. Handholds are shaped to provide a suitable grip.				
29. Folding ladder lift height is 5 ft. (1.5 m) maximum.				
30. Finger clearance is provided in folding steps and telescoping ladders. (5.13.7.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
31. Stairway illumination level is: 20 ft-c.(215 lux) recommended, 10 ft-c (110 lux) min. (5.13.4.5)				
32. Visual obstructions or blind footholds are avoided. (5.13.4.4)				
33. Treads contrast with structure and are conspicuous in dim light.				
34. For reduced lighting, reflective materials are used.				
35. Handholds are coded to enhance visibility and prevent grasping error.				
36. Handholds are marked and identified. (5.13.2.7)				
37. Footholds are marked and identified. (5.7.8.3)				
38. "No Step" markings are provided if applicable. (5.13.2.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS
HF Considerations	Use Conditions
Abbreviation	Use

Detailed Design Considerations	YES	NO	N/A	Comment
39. Handholds accommodate use of arctic mittens as prescribed in FIGURE 2-12 in MIL-HDBK-759A (MI).				
40. Stairs, ladders & platforms accommodate 5th to 95th percentile users wearing arctic clothing per TABLES 2-9 and 2-10 in MIL-HDBK-759A (MI).				
41. Step width and spacing accommodate user wearing boots per TABLE 2-9 in MIL-HDBK-759A (MI).				
42. Folding ladder latches, locks are operable while wearing arctic mittens per FIGURE 2-12 in MIL-HDBK-759A(MI).				
43. Handholds are useable with gloves or arctic mittens. (5.14.4.1.7)				
44. Steps are usable if wet or icy.				
45. Rung ladders are not used for frequent passage.				
46. Two-section extension ladders have captive hardware.				
47. Wheeled platforms have wheel locks.				
48. Access is provided between areas.				
49. Stairs and ladders accommodate 5th-95th percentile user wearing arctic clothing.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Use Conditions (Cont.)**
Abbreviation	**Use**

Detailed Design Considerations	YES	NO	N/A	Comment
50. Handholds are usable if wet or icy.				
51. Handgrip is usable with bare hands in hot climates and high temperature. (5.9.11.5.7)				
52. Collapsible handholds are erectable while wearing arctic mittens. (5.9.11.5.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Safety**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N / A	Comment
53. Stairs, stair-ladders, and ramps with handrails which open on one or both sides have intermediate guardrails. (5.7.7.1.3)				
54. Exterior personnel platforms and work areas have open metal grating or nonskid surface. (5.7.7.6)				
55. Open sides of personnel platforms have: a) Guardrails with intermediate rails. b) A top rail with height of 42 in. (1.07 m) minimum. c) Rails set back from edge 2 1/2 in. (65 mm) minimum. d) Toeboard or guard screen with height of 3 in. (75 mm) min. (5.7.7.6)				
56. Stairs, ladders, hand-rails have a nonslip surface. (5.7.7.3)				
57. Handrails, safety bars, or chains around platforms or stair openings are placed 42 in. (1.067 m) above standing surface. (5.7.7.6, 5.13.6.2)				
58. Where personnel movement is required inside a vehicle in motion, adequate handholds are provided and are 36 in. (915 mm) above the walking surface. (5.14.3.5.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Safety (Cont.)**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
59. Self-locking devices are used on elevating stands and platforms. (5.13.6.1)				
60. Ladders are not provided when equipment is to be hand carried. (5.7.7.1.2)				
61. Fixed ladders over 20 ft. (6 m) in height are equipped with a device to provide protection from falls. (5.7.7.4)				
62. Safety mesh is installed under open gratings. (5.13.6.3)				
63. Ladders and stairs have a nonslip surface. (5.13.4.3)				
64. Step openings have safety bars or chains. (5.13.6.2)				
65. Obstructions and sharp edges are padded.				
66. Ladders are located away from moving parts and electrical sources and other hazards. (5.13.5.2)				
67. Movable ladders have non-slip feet.				
68. There are no obstructions or projections on stairs or ladders to snag bulky clothing.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Safety (Cont.)**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
69. Portable ladder conforms to lifting limits for one soldier: Up to 3 ft. (.92 m) 87 lb. (39.5 kg) max. Up to 5 ft. (1.53 m) 56 lb. (25.4 kg) max. (5.9.11.3.1)				
70. Inappropriate structures or wires cannot be used as hand holds. (5.9.13.6)				
71. Railings have no projections or snags.				
72. Elevators, inclinators, and hydraulic work platforms, when provided, have: a) Maximum load signs. b) Lift control guards. c) Limit stops. d) Automatic fail-safe brake. e) Provision for manually lowering platform or elevator. f) Metal grating or nonskid surface.				
73. Warning labels are attached for hazards. (5.13.2.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STEPS, LADDERS, PLATFORMS, HANDHOLDS & RAILINGS**
HF Considerations	**Operating Procedures**
Abbreviation	**Op**

Detailed Design Considerations	YES	NO	N/A	Comment
74. Ladders are carried, positioned, or handled by 2 soldiers maximum.				
75. Procedures are available for stowing, placing ladders, ramps, platforms.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

3. DOORS, HATCHES & PASSAGES

Contents	Abbreviation	Page
Functionality	Function	B-30
Size & Shape, Location & Arrangement	Size	B-31
Direction & Force	Dir	B-33
Visibility & Identification	Vis	B-34
Use Conditions	Use	B-35
Safety	Safety	B-36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DOORS, HATCHES & PASSAGES**
HF Considerations	**Functionality**
Abbreviation	**Function**

Test Title
Test Project No. **Date**

Detailed Design Considerations	YES	NO	N/A	Comment
1. Wall hatches are flush with the floor wherever structurally possible. (5.7.8.2.1)				
2. Hatches open with a single motion of hand or foot. (5.7.8.2.1)				
3. Sliding doors are not installed as the only personnel exit. (5.7.8.1)				
4. Doors are designed to minimize jamming. (5.14.3.4.1)				
5. Suitable handholds are provided where necessary. (5.14.3.2)				
6. Suitable footholds are provided where necessary. (5.14.3.2)				
7. Latch handle placement is uniform throughout the test item. (5.14.3.4.2)				
8. Doors and hatches are quick opening, easily operated, and have standard latch handle operation throughout. (5.14.4.2.3)				
9. Overhead hatches are padded inside and equipped for hand operation.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DOORS, HATCHES & PASSAGES
HF Considerations	Size & Shape, Location & Arrangement
Abbreviation	Size

Detailed Design Considerations	YES	NO	N/A	Comment
10. Clearance dimensions for passageways and accesses are based on the 95th percentile values for applicable body dimensions from TABLES XIII - XVIII in MIL-STD-1472D. (5.6.3.2)				
11. Fixed equipment is located 3 in. (75 mm) minimum from swept area of doors. (5.7.8.1)				
12. Dimensions of rectangular hatch conform to requirements of FIGURE 37 in MIL-STD-1472D as follows: a) Light clothing: Top and bottom access: Depth: 13 in. (33 cm) min. Width: 23 in. (58 cm) min. Side access: Depth: 26 in. (66 cm) min. Width: 30 in. (76 cm) min. b) Bulky clothing: Top and bottom access: Depth: 16 in. (41 cm) min. Width: 27 in. (69 cm) min. Side access: Depth: 29 in. (74 cm) min. Width: 34 in. (86 cm) min. (5.7.8.2.3, 5.7.8.3)				
13. Minimum diameters for oval hatch in armored vehicle are 17, 28 in. (43, 71 cm). (5.7.8.3				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DOORS, HATCHES & PASSAGES
HF Considerations	Size & Shape, Location & Arrangement (Cont.)
Abbreviation	Size

Detailed Design Considerations	YES	NO	N/A	Comment
14. If "step down" through a top access exceeds 27 in. (69 cm), appropriate footrests and steps are provided. (5.7.8.3)				
15. Minimum diameter for circular hatch or tunnel is 30 in. (76 cm). (5.7.8.3, 5.14.3.3.1)				
16. Tunnel dimensions permit the passage of the user with equipment and clothing. (5.14.3.3.2)				
17. Corridor width is based on peak load, traffic flows and number and size of entrances per FIGURE 2-27 in MIL-HDBK-759A(MI).				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DOORS, HATCHES & PASSAGES**
HF Considerations	**Direction & Force**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
18. The maximum hatch handle unlocking force is 20 lb. (90 N). (5.7.8.2.2)				
19. Overhead hatch has maximum opening force of 50 lb. (220 N) and is operable by a suitably equipped and clothed user with 5th percentile arm and hand strength per FIGURE 21 in MIL-STD-1472D. (5.7.8.2.2)				
20. Emergency exit release handle requires maximum force of 25 lb. (110 N) in the lateral direction and 45 lb. (200 N) maximum pull force. (5.14.4.2.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DOORS, HATCHES & PASSAGES**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
21. Passageway illumination level is: 20 ft-c. (215 lux) recommended, 10 ft-c. (110 lux) min. (5.8.2)				
22. Exits are identifiable in dim light. (5.14.3.1.1)				
23. Clear visual indication of latch handle position is provided. (5.10.1.4)				
24. Emergency lights: a) Are located at each exit. b) Have self-contained power. c) Are automatic. d) Are removable for emergencies. (5.14.4.2.1)				
25. Correct movement of latch handle is diagrammed and labeled. (5.14.3.4.2)				
26. Hallway boundaries are clearly marked.				
27. Door jamb or coaming height allows full view of step point.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DOORS, HATCHES & PASSAGES**
HF Considerations	**Use Conditions**
Abbreviation	**Use**

Detailed Design Considerations	YES	NO	N/A	Comment
28. Handles and handgrips are usable with arctic mitts. (5.9.11.55)				
29. Handles can be reached and operated by troops in bulky clothing.				
30. Entry and egress is possible while wearing vapor barrier boots.				
31. Windows intended for viewing (as opposed to those providing general illumination) do not ice up.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DOORS, HATCHES & PASSAGES**
HF Considerations	**Safety**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
32. Exit instructions are legible, brief and clearly worded. (5.14.3.1.1)				
33. Passage floors are non-slip. (5.14.3.6)				
34. Emergency evacuation of all persons can be completed within 60 seconds, using only one-half of the exits. (5.14.4.1.2)				
35. Doors and emergency exits are easily reached, unobstructed and quick-opening (3 sec. maximum). (5.14.4.1.2)				
36. Hatches over 72 in. (1.83 m) above ground have evacuation aids such as slides, poles, ladders and ropes. (5.14.4.1.6)				
37. Ropes, as evacuation aids, stand off from structure to permit use by more than one person at a time. (5.14.4.1.6)				
38. Escape openings are smooth edged, have no obstructions and permit passage with survival equipment. (5.14.4.2.2)				
39. Escape exits do not open inadvertently (5.14.4.2.5)				
40. Escape exit handles are not lock-wired. (5.14.4.2.5)				
41. Corridors have non-skid floors.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DOORS, HATCHES & PASSAGES
HF Considerations	Safety (Cont.)
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
42. Glass in doors is shatterproof.				
43. No hazards or obstructions are found in entryways or on either side.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

4. EXTERNAL COMPONENTS

Contents	Abbreviation	Page
Functionality	Function	B-39
Location & Arrangement, Size & Shape	Loc	B-41
Clearance & Separation	Clear	B-42
Visibility & Identification	Vis	B-43
Use Conditions	Use	B-44
Safety	Safety	B-45
Operating Procedures	Op	B-46

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	EXTERNAL COMPONENTS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Trucks have glare-proof, west coast type and spotter mirrors on each side of the cab. (5.12.5.5)				
2. Winch and vehicle power trains are capable of simultaneous operation. (5.12.9.4.2)				
3. Winch controls are operable from cab as well as from winch. (5.12.9.4.4)				
4. Windshield wiper blades return to stored position when turned off. (5.12.5.8)				
5. Windshield wipers and washer are provided. (5.12.5.8)				
6. Windshield wipers can be operated manually if power fails. (5.12.5.8)				
7. Combat vehicle fuel tanks with capacity over 50 gal. can be re-fueled at 50 gal./min. (189.25 l/min.).				
8. Fuel tanks with capacity under 50 gal. (189.25 l) can be filled within one minute.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**EXTERNAL COMPONENTS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Function**

Detailed Design Considerations	YES	NO	N/A	Comment
9. Compressed air, vacuum brake reservoir has warning system.				
10. Mirrors are braced against vibration.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**EXTERNAL COMPONENTS**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
11. Components requiring adjustment are readily accessible. (5.12.9.1.3)				
12. Drain valves are minimum in number, readily accessible, reliable, hand-operated. (5.12.9.1.1)				
13. Munition tie-down facilities are easily installed/removed. (5.12.7.1.3)				
14. Trailer brake controls are within reach when positioning trailer manually and are not exposed to traffic. (5.12.7.1.1)				
15. Fuel fillpipe is located outside cab or body.				
16. Drain plugs and valves are same size, or number of sizes is minimized. (5.12.9.1.1)				
17. Battery terminals are of different sizes and polarity is marked. (5.12.9.1.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	EXTERNAL COMPONENTS
HF Considerations	Clearance & Separation
Abbreviation	Clear

Detailed Design Considerations	YES	NO	N/A	Comment
18. Dual wheels allow inner and outer tires to be checked/inflated. (5.12.9.2.1)				
19. Spare tire is easily removed and replaced in carrier with vehicle fully loaded. (5.12.9.2.2)				
20. Spare tire can be checked and inflated when stowed. (5.12.9.2.2)				
21. Hinged access covers open down.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**EXTERNAL COMPONENTS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
22. Electrical connections are labeled. (5.13.2.6)				
23. Filters are accessible for inspection. (5.12.9.1.2)				
24. Fuel, oil, coolant and hydraulic fill points are labeled as to type/grade. (5.13.3)				
25. Pipes, lines, hoses and dip sticks are color-coded and labeled. (5.13.3)				
26. Timing marks and other indicators minimize parallax and are readily visible. (5.12.9.1.3)				
27. Tire pressure is labeled. (5.13.3)				
28. Winch instruction is visible. (5.12.9.4.1)				
29. Winch operation is observable from both winch and cab locations. (5.12.9.4.4)				
30. Fuel tank capacity is labeled.				
31. Airbrake and hydraulic hoses are identifiable at each end.				
32. Components which must be visible are color-coded and contrast with background.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**EXTERNAL COMPONENTS**
HF Considerations	**Use Conditions**
Abbreviation	**Use**

Detailed Design Considerations	YES	NO	N/A	Comment
33. Components can be handled, removed, installed using artic mitts. (5.9.11.5.5)				
34. Battery compartment has space for heating pads and insulation used to winterize vehicle.				
35. Components are within reach of user wearing bulky or restrictive clothing.				
36. Small parts handled with arctic mitts are captive.				
37. Special handling, assembly and operating procedures and precautions for cold weather are provided.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**EXTERNAL COMPONENTS**
HF Considerations	**Safety**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
38. Weight capacity is indicated on stands, lifts, hoists and jacks. (5.13.2.3)				
39. Battery compartment is well ventilated.				
40. Bus exhaust pipe extends beyond rear of vehicle body.				
41. Exhaust system is located and protected so user cannot contact hot surfaces.				
42. Fuel tank and lines are not within vehicle body.				
43. Safety chains do not damage or disconnect air lines, hydraulic lines or electrical cables.				
44. Two separate ways to apply brakes are provided.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**EXTERNAL COMPONENTS**
HF Considerations	**Operating Procedures**
Abbreviation	**Op**

Detailed Design Considerations	YES	NO	N / A	Comment
45. Special tools for operational adjustment are mounted nearby. (5.9.1.2)				
46. Winch cable is easily played out by one soldier. (5.12.9.4.3)				
47. Battery can be removed by one soldier.				
48. Jacking operation is feasible.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

5. CONTROLS

Contents	Abbreviation	Page
CONTROLS - Functionality	Function	B-48
CONTROLS - Location & Arrangement	Loc	B-51
CONTROLS - Size & Shape	Size	B-55
CONTROLS - Direction & Force	Dir	B-56
CONTROLS - Visibility & Identification	Vis	B-58
CONTROLS - Operating Procedures	Op	B-59
ROTARY SELECTOR SWITCHES	Rot Sel	B-60
KEY-OPERATED SWITCHES	Key Op	B-63
DISCRETE THUMBWHEEL	Disc Thumb	B-64
CONTINUOUS ROTARY KNOBS	Cont Knob	B-67
GANGED ROTARY KNOBS	Gang Knob	B-70
CONTINUOUS THUMBWHEELS	Cont Thumb	B-73
CRANKS	Crank	B-75
HANDWHEELS	Hand Wheel	B-78
PUSHBUTTONS (FINGER OR HAND OPERATED)	Push Hand	B-81
PUSHBUTTONS (FOOT OPERATED)	Push Foot	B-84
KEYBOARDS	Keyboard	B-87
FIXED FUNCTION KEYS	Fixed Key	B-90
VARIABLE FUNCTION KEYS	Var Key	B-92
TOGGLE SWITCHES	Toggle	B-93
LEGEND SWITCHES	Legend	B-96
ROCKER SWITCHES	Rocker	B-98
SLIDE SWITCHES	Slide	B-100
DISCRETE PUSH-PULL CONTROLS	Push Pull	B-102
PRINTED CIRCUIT SWITCHES	Print Circ	B-106
LEVERS	Lever	B-107
DISPLACEMENT (ISOTONIC) JOYSTICKS	Disp Stick	B-109
FORCE (STIFF OR ISOMETRIC) JOYSTICKS	Force Stick	B-114
BALL CONTROLS	Ball	B-117
GRID & STYLUS DEVICES	Grid	B-120
FREE MOVING XY CONTROLLER (MOUSE)	Mouse	B-122
LIGHT PEN	Light Pen	B-124
PEDALS	Pedal	B-126
HIGH FORCE CONTROLS	High Force	B-130
MINIATURE CONTROLS	Min	B-131
TOUCH-SCREENS	Touch	B-132
CIRCUIT BREAKERS	Breaker	B-134
CONTROLLED CURSORS	Cursor	B-135
COMPUTER DATA ENTRY	Data Entry	B-137
INTERACTIVE COMPUTER CONTROL	Int Control	B-138
MENU SELECTION COMPUTER CONTROL	Menu	B-141
FORM FILLING COMPUTER CONTROL	Form	B-142
COMMAND LANGUAGE COMPUTER CONTROL	Cmd Lang	B-143
TEXT/PROGRAM EDITING CONTROL	Edit	B-146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Functionality**
Abbreviation	**Function**

Test Title	
Test Project No.	**Date**

Detailed Design Considerations	YES	NO	N/A	Comment
1. Control motion is minimized, not cycled through ON/OFF unnecessarily. (5.4.1.3.1)				
2. Critical and sensitive adjustment controls are located or guarded to prevent accidental activation. (5.9.3.5, 5.4.1.8.1)				
3. If there is a possibility of inadvertent activation causing a hazardous condition, controls are recessed or shielded by a physical barrier. (5.4.1.8.4)				
4. Resistance is built-in so that definite or sustained effort is required for activation. (5.4.1.8.4)				
5. "Dead-man" controls are used when operator incapacity can produce a critical condition. (5.4.1.8.5)				
6. Controls are usable in the time required despite protection against inadvertent operation (guards). (5.4.1.8.3)				
7. All controls have appropriate scales or indexing. (5.2.3, 5.5.6.2.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	CONTROLS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
8. The time lag between the response of a system to a control input and the display presentation of the response is minimized. (5.1.3.2)				
9. When a knob is provided for making coarse display element settings on linear scales, having 0.016 to 0.100 in. (0.4 to 2.5 mm) of tolerance, approximately 6 in. (150 mm) of display element movement is provided for one complete turn of the knob. (5.1.4.3)				
10. For fine setting on linear scales having 0.008 to 0.016 in. (0.2 to 0.4 mm) of tolerance, the display element movement for one rotation of the knob is: 1 in. (25 mm) min., 2 in. (50 mm) max. (5.1.4.4)				
11. When bracketing is used to locate a maximum or minimum rather than a specific value (e.g., as in tuning a transmitter), the control knob swings through an arc of: 10° (175 mrad) min., 30° (525 mrad) max. (5.1.4.5)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Function**

Detailed Design Considerations	YES	NO	N/A	Comment
12. When a lever is provided for coarse settings, having 0.016 to 0.100 in. (0.4 to 2.5 mm) of tolerance, one unit of display element movement is used to three units of lever movement. (5.1.4.6)				
13. When a lever is provided to make settings in two dimensions to coarse tolerances on the order of 0.1 in. (2.5 mm), one unit of display element movement is used to two and one-half units of lever movement. (5.1.4.7)				
14. When counters are provided, the control-display ratio is such that one revolution of the knob produces approximately 50 counts (i.e., the right hand drum rotates 5 times). (5.1.4.8)				
15. Controls are not adversely affected by distortion, shock, and vibration. (5.12.3.1)				
16. Failure of power steering does not incapacitate steering. (5.12.3.2)				
17. Adjustment controls are easy to set and lock.				
18. Critical controls are designed and located so that they are not susceptible to being moved accidentally.				
19. The main power ON/OFF switch cuts all power to the equipment.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
20. Controls are located adjacent to their associated displays. (5.1.1.1)				
21. Functionally related controls and displays are grouped together. (5.1.2.1)				
22. Controls in functional groups are located in accordance with operational sequence and/or function. (5.4.1.3.1)				
23. Control groups used for sequential operations have left-to-right or top-to-bottom order of use. (5.4.1.3.2)				
24. Controls most often used are located in the best position for ease of reaching and grasping. (5.4.1.3.3)				
25. Groups with similar functions are similarly arranged throughout the system. (5.4.1.3.4)				
26. Control/display groups used only for maintenance are not located in prime operating space. (5.4.1.3.6)				
27. Lifting equipment controls are within easy reach with the load visible. (5.12.8.3)				
28. Controls operated without visual reference are located in front of rather than to the side of or behind the operator. (5.4.1.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Location & Arrangement (Cont.)**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N / A	Comment
29. Internally mounted controls are located away from dangerous voltage heat, moving parts, radiation or other hazards. (5.13.5.2)				
30. Emergency controls are located close to related warning displays or nearest available hand in normal operating position. (5.1.2.3.8)				
31. Controls are located adjacent to their associated displays (preferably under or to the right of the displays). (5.1.1.1)				
32. Controls are positioned such that neither the control nor the operator's hand obscures the display. (5.1.1.1)				
33. Controls are located so that they cannot be moved accidentally. (5.4.1.8.1)				
34. When control operation requires reading several displays, the control is located beneath and in the middle of the display group. (5.1.2.3.4)				
35. When separate displays are affected by a combined control, the control is located beneath and in the middle of the display group. (5.1.2.3.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Location & Arrangement (Cont.)**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
36. Controls are selected and distributed so that none of the operator's limbs are overburdened. (5.4.1.1.1)				
37. Mirror image arrangements are not used. (5.1.2.1.1.4)				
38. When related controls and displays must be located on separate panels and both panels are mounted at approximately the same angle relative to the operator, the control positions on one panel correspond to the associated display positions on the other panel. The two panels are not mounted facing each other. (5.1.2.3.6)				
39. When a group of equipment components has the same function, the related control and display positions are oriented to correspond to those of the controlled and monitored components. (5.1.2.3.7)				
40. For standing operations, controls requiring precise or frequent operation and emergency controls are mounted as follows: Height above standing surface: 34 in. (860 mm) min., 53 in. (1.35 m) max. Lateral distance from centerline: 21 in. (530 mm) max. (5.7.2.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Location & Arrangement (Cont.)**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
41. Range of control action does not interfere with other controls. (5.4.1.3.7)				
42. For seated operations, controls mounted on a vertical surface and used in normal equipment operation are located at a height above the sitting surface of: 8 in. (200 mm) min., 34 in. (860 mm) max. (5.7.3.9)				
43. For seated operations, controls mounted on a vertical surface and requiring precise or frequent operation are located at a height above the sitting surface of: 8 in. (200 mm) min., 29 in. (740 mm) max. (5.7.3.10)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Size & Shape**
Abbreviation	**Size**

Detailed Design Considerations	YES	NO	N/A	Comment
44. Controls used for the same function on different types of equipment are of the same size and shape. (5.4.1.4.3, 5.4.1.4.4)				
45. Controls that are shape-coded are free of sharp edges. (5.4.2.1.2.3)				
46. A maximum of 3 sizes are used for coding; 2 sizes for key operated switches. (5.4.1.4.3, 5.4.2.1.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Direction & Force**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
47. When circular, fixed-pointer or moving-scale indicators are used, clockwise movement of a rotary control or movement of a linear control forward, up, or to the right, produce a counterclockwise movement of the scale and an increase in the magnitude of the reading. (5.1.3.5)				
48. Controls are selected so that the direction of movement of the control will be consistent with the related movement of an associated display, equipment component, or vehicle. (5.1.3.8)				
49. Direction-of-movement relationships are adhered to when control and display are parallel in line of movement. (5.1.3.9)				
50. Rotary controls turn to the right (clockwise) to increase, and left (counterclockwise) to decrease. (5.4.1.2.1)				
51. Rotary valve controls open counterclockwise. (5.4.1.2.4)				
52. Remote controls are designed for direction-of-movement consistency. (5.4.1.3.5)				
53. Control movement conforms with corresponding related display. (5.4.1.2.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	CONTROLS
HF Considerations	Direction & Force (Cont.)
Abbreviation	Dir

Detailed Design Considerations	YES	NO	N/A	Comment
54. Stops are provided at the beginning and end of the control travel. (5.4.1.1.5)				
55. Controls meant to have a limited degree of motion have adequate mechanical stops. (5.9.3.4)				
56. Selector switches have sufficient spring loading to keep from stopping between detents.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
57. Controls are labeled with basic information for proper identification, utilization, actuation, or manipulation of the elements. (5.5.6.2.1)				
58. Controls are labeled as to function and method of operation by means of arrows and appropriate legends. (5.5.6.2.3)				
59. Coding is uniform throughout the system. (5.4.1.4.1)				
60. Shape-coded controls are visually and tactually identifiable. (5.4.1.4.4)				
61. Controls are black or gray unless color coded. (5.4.1.4.5.1)				
62. Color coded controls are red, green, orange-yellow or white. (5.4.1.4.5.1)				
63. Control color has high contrast with background. (5.4.1.4.5.4)				
64. Ambient light color determines usable control colors. (5.4.1.4.5.5)				
65. If red lighting is used, red is not used for coding. Black and yellow striping is used instead. (5.4.1.4.5.5)				
66. Main power switch is labeled.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLS**
HF Considerations	**Operating Procedures (Cont.)**
Abbreviation	**Op**

Detailed Design Considerations	YES	NO	N/A	Comment
67. Operating instructions are provided except where use is obvious. (5.12.4.1)				
68. Diagrams are used wherever possible. (5.12.4.2)				
69. Calibration instructions are placed as close to the calibrating control as possible. (5.2.3.1.9)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ROTARY SELECTOR SWITCHES**
HF Considerations	**Functionality, Location & Arrangement**
Abbreviation	**Rot Sel**

Detailed Design Considerations	YES	NO	N/A	Comment
70. Rotary selector switches which are not visible to the operator during normal system operation have no more than 12 positions. (5.4.2.1.1.4)				
71. Rotary selector switches that are constantly visible to the operator have no more than 24 positions. (5.4.2.1.1.4)				
72. A reference line is provided on rotary switch controls which has at least 3.0 luminance contrast. (5.4.2.1.1.5)				
73. Rotary selector switches are not placed opposite one another unless it is obvious which end is the pointer. (5.4.2.1.1.4)				
74. Knob pointers are mounted sufficiently close to the scale so that parallax errors do not exceed 25% of the distance between scale markings. (5.4.2.1.1.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ROTARY SELECTOR SWITCHES**
HF Considerations	**Size & Shape**
Abbreviation	**Rot Sel**

Detailed Design Considerations	YES	NO	N/A	Comment
75. DIMENSIONS: Length 1.0 in. (25 mm) min., 4.0 in. (100 mm) max. Width 1.0 in. (25 mm) min. Depth 0.625 in. (16 mm) min., 3.0 in. (75 mm) max. See FIGURE 4 in MIL-STD-1472D. (5.4.2.1.1.7)				
76. DISPLACEMENT: Large separation or tactually positioned 30°(525 mrad) min., 90°(1570 mrad) max. For facilitating performance 15° (262 mrad) min., 40° (700 mrad) max. See FIGURE 4 in MIL-STD-1472D. (5.4.2.1.1.7)				
77. Rotary selector switches are bar shaped with parallel sides and the index end tapering to a point (except when shape coding is required or when space is restricted and torque is light). (5.4.2.1.1.3)				
78. Rotary controls are shape coded when a group of similar type but different function is placed on the same panel and control confusion might exist. (5.4.2.1.1.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ROTARY SELECTOR SWITCHES**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Rot Sel**

Detailed Design Considerations	YES	NO	N/A	Comment
79. RESISTANCE: 1.0 in.-lb. (113 mN-m) min., 6.0 in.-lb. (678 mN-m) max. See FIGURE 4 in MIL-STD-1472D. (5.4.2.1.1.7)				
80. SEPARATION: One-Hand Random 1.0 in. (25 mm) min., 2.0 in. (50 mm) preferred. Two-Hand Operation 3.0 in. (75 mm) min., 5.0 in. (125 mm) preferred. See FIGURE 4 in MIL-STD-1472D. (5.4.2.1.1.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**KEY OPERATED SWITCHES**
HF Considerations	**Size & Shape, Direction & Force, Visibility & Identification**
Abbreviation	**Key Op**

Detailed Design Considerations	YES	NO	N/A	Comment
81. HEIGHT: 0.5 in. (13 mm) min., 3.0 in. (75 mm) max. See FIGURE 5 in MIL-STD-1472D. (5.4.2.1.2.2)				
82. DISPLACEMENT: 30°(525 mrad) min., 90° (1570 mrad) max See FIGURE 5 in MIL-STD-1472D. (5.4.2.1.2.2)				
83. RESISTANCE: 1 in.-lb (115 mN-m) min., 6 in.-lb (680 mN-m) max. See FIGURE 5 in MIL-STD-1472D. (5.4.2.1.2.2)				
84. Key-operated switches use color coding or are identified by use location if adequate illumination exists. (5.4.2.1.2.3)				
85. Red (#11105 or 21105 of FED-STD-595) is reserved for emergency functions. (5.4.2.1.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISCRETE THUMBWHEELS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Disc Thumb**

Detailed Design Considerations	YES	NO	N/A	Comment
86. Use is restricted to applications where a compact control device and a readout for verification of manual entry are required. (5.4.2.1.3.1)				
87. Discrete thumbwheel controls provide 10 detent positions (0-9) in digital or binary (3 or 4 bits and complement) outputs. (5.4.2.1.3.1)				
88. DIMENSIONS: Diameter 1.125 in. (30 mm) min., 3 in. (75 mm) max. Trough Distance 0.45 in. (11 mm) min., 0.75 in. (19 mm) max. Width 0.1 in. (3 mm) min. Depth 0.125 in. (3 mm) min., 0.5 in. (13 mm) max. See FIGURE 6 in MIL-STD-1472D. (5.4.2.1.3.7)				
89. Each position formed by detents has a concave surface or is separated by a raised high-friction area. (5.4.2.1.3.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISCRETE THUMBWHEELS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Disc Thumb**

Detailed Design Considerations	YES	NO	N/A	Comment
90. RESISTANCE: 6 oz. (170 mN) min., 20 oz. (560 mN) max. See FIGURE 6 in MIL-STD-1472D. (5.4.2.1.3.7)				
91. SEPARATION: 0.4 in. (10 mm) min. See FIGURE 6 in MIL-STD-1472D. (5.4.2.1.3.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DISCRETE THUMBWHEELS
HF Considerations	Visibility & Identification
Abbreviation	Disc Thumb

Detailed Design Considerations	YES	NO	N/A	Comment
92. For areas in which ambient illumination will provide display brightness below 1 ft-L (3.5 cd/sq m), thumbwheels are internally illuminated. (5.4.2.1.3.5.1)				
93. For areas in which ambient illumination will provide display brightness below 1 ft-L (3.5 cd/sq m), digits appear as illuminated characters on a black background. (5.4.2.1.3.5.1)				
94. For areas in which ambient illumination will provide display brightness above 1 ft-L (3.5 cd/sq m), digits appear as black characters on a light background. (5.4.2.1.3.5.2)				
95. Thumbwheel numerals: a) Height:width ratio = 3:2. b) Height is a minimum of 3/16 in. (4.8 mm). c) Stroke width for internally illuminated numerals = 1/10 of height. d) Stroke width for externally illuminated numerals = 1/5 of height. (5.4.2.1.3.5.1, 5.4.2.1.3.5.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTINUOUS ROTARY KNOBS**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Cont Knob**

Detailed Design Considerations	YES	NO	N/A	Comment
96. In right-hand operations, knobs are placed below or to the right of displays. (5.1.1.1)				
97. For left-hand operations, knobs are placed below or to the left of displays. (5.1.1.1)				
98. If knob diameter is used to code controls, minimum differences between diameters are .5 in. (13 mm). (5.4.1.4.3)				
99. When bracketing is used, control knob swings through an arc of: 10° (175 mrad) min., 30° (525 mrad) max. (5.1.4.5)				
100. If thickness is used for coding, minimum differences between thicknesses are 0.4 in. (10 mm). (5.4.1.4.3)				
101. Shape coding: a) Does not interfere with ease of control manipulation. b) Is identifiable regardless of control position and orientation. c) Is tactually identifiable when gloves are worn. d) Is associated with or resembles control function. (5.4.1.4.4)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTINUOUS ROTARY KNOBS**
HF Considerations	**Size & Shape (Cont.)**
Abbreviation	**Cont Knob**

Detailed Design Considerations	YES	NO	N/A	Comment
102. Shape-coded knobs and handles are attached to shafts to preclude incorrect attachment. (5.4.1.4.4)				
103. Continuous adjustment rotary knobs have serrated edges, fine serrations for precise adjustment knobs, and coarse serrations for gross adjustment knobs. (5.4.2.2.2.3)				
104. DIMENSIONS: Fingertip Grasp Height 0.5 in. (13 mm) min., 1.0 in. (25 mm) max. Diameter 0.375 in. (10 mm) min., 4.0 in. (100 mm) max. Thumb and Finger Encircled Diameter 1.0 in. (25 mm) min., 3.0 in. (75 mm) max. Palm Grasp Diameter 1.5 in. (38 mm) min., 3.0 in. (75 mm) max. Palm Grasp Length 3.0 in. (75 mm) min. See FIGURE 7 in MIL-STD-1472D. (5.4.2.2.1.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTINUOUS ROTARY KNOBS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Cont Knob**

Detailed Design Considerations	YES	NO	N/A	Comment
105. TORQUE: Diameter up to 1.0 in. (25mm) 4.5 in.-oz. (32 mN-m) max. Diameter greater than 1.0 in. (25mm) 6.0 in.-oz. (42 mN-m) max. See FIGURE 7 in MIL-STD-1472D. (5.4.2.2.1.2) 106. SEPARATION: One Hand Individually 1.0 in. (25 mm) min., 2.0 in. (50 mm) max. Two Hands Simultaneously 2.0 in. (50 mm) min., 5.0 in. (125 mm) max. See FIGURE 7 in MIL-STD-1472D. (5.4.2.2.1.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**GANGED ROTARY KNOBS**
HF Considerations	**Functionality**
Abbreviation	**Gang Knob**

Detailed Design Considerations	YES	NO	N / A	Comment
107. For ganged knobs 3 knobs is the maximum, 2 knobs is preferred. (5.4.2.2.2)				
108. Ganged knobs are not used: a) If accuracy and time is critical. b) When controls are frequently used. c) When heavy gloves are worn. d) When equipment is exposed to the weather. e) When equipment is used in the field. (5.4.2.2.2.1)				
109. Clearly differentiated indexing marks or pointers are provided for each knob in ganged set. (5.4.2.2.2.4)				
110. Ganged knob assemblies have a secondary knob control movement such as pressing while turning to prevent inadvertent operation. (5.4.2.2.2.6)				
111. For ganged knob assemblies, the knob closest to the panel is associated with the left-most display in a horizontal array, or the uppermost in a vertical array. (5.4.2.2.2.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**GANGED ROTARY KNOBS**
HF Considerations	**Size & Shape**
Abbreviation	**Gang Knob**

Detailed Design Considerations	YES	NO	N / A	Comment
112. DIMENSIONS: a) Two-knob assembly Height 1st knob 5/8 in. (16 mm) min. Height 2nd knob 1/2 in. (13 mm) min. Diameter 1st knob 1/2 in. (13 mm) min. Diameter 2nd knob 7/8 in. (22 mm) min., 4 in. (100 mm) max. b) Three-knob assembly Height 1st knob 3/4 in. (19 mm) min. Height 2nd knob 3/4 in. (19 mm) min. Height 3rd knob 1/4 in. (6 mm) min. Diameter 1st knob 1/2 in. (13 mm) min. Diameter 2nd knob 1 3/4 in. (44 mm) min. Diameter 3rd knob 3 in. (75 mm) min., 4 in. (100 mm) max. See FIGURE 8 in MIL-STD-1472D. (5.4.2.2.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**GANGED ROTARY KNOBS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Gang Knob**

Detailed Design Considerations	YES	NO	N/A	Comment
113. TORQUE: Up to and including 1 in. (25 mm) diameter knobs 4 1/2 in.-oz. (32 mN-m) max. Greater than 1 in. (25 mm) diameter knobs 6 in.-oz. (42 mN-m) max. See FIGURE 8 in MIL-STD-1472D. (5.4.2.2.2.2)				
114. SEPARATION: One-hand operation with glove 2 1/2 in. (63 mm) min., 3 1/2 in. (90 mm) optimum. One-hand operation without glove 1 in. (25 mm) min., 2 in. (50 mm) optimum. Two hand operation with glove 3 1/2 in. (90 mm) min., 4 in. (100 mm) optimum Two-hand operation without glove 2 in. (50 mm) min., 3 in. (75 mm) optimum. See FIGURE 8 in MIL-STD-1472D. (5.4.2.2.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTINUOUS ADJUSTMENT THUMBWHEELS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Cont Thumb**

Detailed Design Considerations	YES	NO	N/A	Comment
115. Usage is restricted to applications requiring a compact continuous control device. (5.4.2.2.3.1)				
116. Rims are serrated and detents provided for OFF positions. (5.4.2.2.3.3)				
117. DIMENSIONS: Rim exposure length 1 in. (25 mm) min., 4 in. (100 mm) max. Width 1/8 in. (3 mm) min., 7/8 in. (23 mm) max. See FIGURE 9 in MIL-STD-1472D. (5.4.2.2.3.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTINUOUS ADJUSTMENT THUMBWHEELS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Cont Thumb**

Detailed Design Considerations	YES	NO	N/A	Comment
118. RESISTANCE: min: To minimize effects of inadvertent input if operator subject to motion max: 12 oz. (3.3 N) See FIGURE 9 in MIL-STD-1472D. (5.4.2.2.3.4)				
119. Thumbwheel orientation and movement direction conforms to FIGURE 9 in MIL-STD-1472D. (5.4.2.2.3.2)				
120. For manipulation of vehicle motion, movement of thumbwheel upward causes the vehicle to move forward. (5.4.2.2.3.2)				
121. SEPARATION: Controls, side by side with gloves: 1 1/2 in. (38 mm) min. Controls, side by side without gloves: 1 in. (25 mm) min. Controls, end to end with gloves: 3 in. (75 mm) min. Controls, end to end without gloves: 2 in. (50 mm) min. See FIGURE 9 in MIL-STD-1472D. (5.4.2.2.3.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CRANKS**
HF Considerations	**Functionality**
Abbreviation	**Crank**

Detailed Design Considerations	YES	NO	N/A	Comment
122. Cranks are used for tasks requiring many control rotations and when rotation rate or forces are excessive. (5.4.2.2.4.1)				
123. Dual cranks are used for tasks requiring the setting of reticles or crosshairs in map reading or optical sighting. (5.4.2.2.4.1)				
124. Folding handle cranks are used when appropriate to protect persons from injury, or to prevent inadvertent actuation. (5.4.2.2.4.4)				
125. Folding handles are spring loaded. (5.4.2.2.4.4)				
126. Where resistance is light, cranks are balanced to prevent motion from last setting. (5.4.2.2.4.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	CRANKS
HF Considerations	Size & Shape
Abbreviation	Crank

Detailed Design Considerations	YES	NO	N/A	Comment
127. DIMENSIONS: a) Diameter Light loads, less than 5 lb. (22 N) hand movement 3/8 in. (10 mm) min., 5/8 in. (16 mm) max., 1/2 in. (13 mm) preferred. Heavy loads, more than 5 lb. (22 N) arm movements 1 in. (25 mm) min., 1 1/2 in. (38 mm) max., 1 in. (25 mm) preferred. b) Length Light loads 1 in. (25 mm) min., 3 in. (75 mm) max., 1 1/2 in. (38mm) preferred. Heavy loads 3 in. (75 mm) min. 3-3/4 in. (95 mm) preferred. See FIGURE 10 in MIL-STD-1472D. (5.4.2.2.4.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CRANKS**
HF Considerations	**Size & Shape, Clearance & Separation**
Abbreviation	**Crank**

Detailed Design Considerations	YES	NO	N/A	Comment
128. TURNING RADIUS: a) Rate below 100 RPM Light loads 1 1/2 in. (38 mm) min., 5 in. (125 mm) max., 3 in. (75 mm) preferred. Heavy loads 7 1/2 in. (190 mm) min., 20 in. (510 mm) max. b) Rate above 100 RPM Light loads 1/2 in. (13 mm) min., 4 1/2 in. (115 mm) max., 2 1/2 in. (65 mm) preferred. Heavy loads 5 in. (125 mm) min., 9 in. (230 mm) max. See FIGURE 10 in MIL-STD-1472D. (5.4.2.2.4.3) 129. SEPARATION: 3 in. (75 mm) min. See FIGURE 10 in MIL-STD-1472D. (5.4.2.2.4.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HANDWHEELS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Hand Wheel**

Detailed Design Considerations	YES	NO	N/A	Comment
130. Handwheels are used when rotational forces are too high for one-handed controls (e.g., steering, latch securing, valve regulation, and direct linkage adjustment). (5.4.2.2.5.1)				
131. Maximum turning limit of vehicle is achieved in no more than 3 1/2 turns to meet force standards. (5.4.2.2.5.8)				
132. DIMENSIONS - Diameter: Continuous adjustment 8 in. (200 mm) min., 20 in. (510 mm) max. Continuous lock - unlock operation 8 in. (200 mm) for 5 lb. (22 N) min., 20 in. (510 mm) for 35 lb. (155 N) max. High torque valves overhead 8 in. (200 mm) min., 16 in. (400 mm) max. Other positions 8 in. (200 mm) min., 20 in. (510 mm) max. Above standing surface 12 in. (300 mm) min. 60 in. (1520 mm) max. Vehicle power steering 14 in. (355 mm) min., 16 in. (400 mm) max. Non power (max 50 lb. (220 N)) 16 in. (40 mm) min., 20 in. (510 mm) max. See TABLE IX in MIL-STD-1472D. (5.4.2.2.5.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HANDWHEELS**
HF Considerations	**Size & Shape**
Abbreviation	**Hand Wheel**

Detailed Design Considerations	YES	NO	N / A	Comment
133. DIMENSIONS - Rim diameter: Continuous adjustment 3/4 in. (19 mm) min., 1 1/4 in. (32 mm) max. Continuous lock - unlock operation 3/4 in. (19 mm) min., 1 1/4 in. (32 mm) max. High torque valves 3/4 in. (19 mm) min., 1 1/4 in. (32 mm) max. Vehicle power steering 3/4 in. (19 mm) min., 1 1/4 in. (32 mm) max. Vehicle steering - non power 3/4 in. (19 mm) min., 1 1/4 in. (32 mm) max. See TABLE IX in MIL-STD-1472D. (5.4.2.2.5.5)				
134. DIMENSIONS - Hand clearance around rim: Continuous adjustment 3 in. (75 mm) min. Continuous lock - unlock operation 3 in. (75 mm) min. High torque valves 3 in. (75 mm) min. See TABLE IX in MIL-STD-1472D. (5.4.2.2.5.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HANDWHEELS**
HF Considerations	**Size & Shape, Clearance & Separation**
Abbreviation	**Hand Wheel**

Detailed Design Considerations	YES	NO	N/A	Comment
135. DIMENSIONS - Slope: Vehicle power steering (light vehicle) preferred 30° (525 mrad) Vehicle steering - non power (heavy vehicle) preferred 45° (785 mrad) See TABLE IX in MIL-STD-1472D. (5.4.2.2.5.5)				
136. DISPLACEMENT: Where both hands must remain on wheel: ±120° (2/3 rad) max. See TABLE IX in MIL-STD-1472D. (5.4.2.2.5.5)				
137. SEPARATION: Continuous adjustment 28 in. (710 mm) min. Continuous lock - unlock operation 28 in. (710 mm) min. High torque valves 28 in. (710 mm) min. See TABLE IX in MIL-STD-1472D. (5.4.2.2.5.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PUSHBUTTONS (FINGER OR HAND OPERATED)**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Push Hand**

Detailed Design Considerations	YES	NO	N/A	Comment
138. Positive indication in provided of push button activation. (5.4.3.1.1.3)				
139. Channel or cover guard is provided where it is imperative to avoid accidental activation. (5.4.3.1.1.4)				
140. Cover guard in the open position does not interfere with pushbutton operation. (5.4.3.1.1.4)				
141. Mechanical interlocks or barriers are incorporated as an alternative to separation. (5.4.3.1.1.6)				
142. Pushbutton surface is concave or has non-slip surface. (5.4.3.1.1.2)				
143. DIMENSIONS - Diameter: Fingertip Operation 3/8 in. (9.5 mm) min., 1 in. (25 mm) max. Thumb or Heel of Hand Operation 0.75 in. (19 mm) min. See FIGURE 11 in MIL-STD-1472D. (5.4.3.1.1.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PUSHBUTTONS (FINGER OR HAND OPERATED)**
HF Considerations	**Size & Shape (Cont.)**
Abbreviation	**Push Hand**

Detailed Design Considerations	YES	NO	N/A	Comment
144. DISPLACEMENT: Thumb or Palm Operation 0.125 in. (3 mm) min., 1.5 in. (38 mm) max. Fingertip Operation 5/64 in. (2 mm) min., 1/4 in. (6 mm) max. See FIGURE 11 in MIL-STD-1472D. (5.4.3.1.1.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PUSHBUTTONS (FINGER OR HAND OPERATED)**
HF Considerations	**Direction & Force, Clearance & Separartion**
Abbreviation	**Push Hand**

Detailed Design Considerations	YES	NO	N/A	Comment
145. RESISTANCE: Single Finger Operation 10 oz. (2.8 N) min., 40 oz. (11.0 N) max. Different Finger operation 5 oz. (1.4 N) min., 20 oz. (5.6 N) max. Thumb or Palm Operation 10 oz. (2.8 N) min., 80 oz. (23 N) max. See FIGURE 11 in MIL-STD-1472D. (5.4.3.1.1.5)				
146. SEPARATION: Single Finger Operation 1/2 in. (13 mm) min., 2 in. (50 mm) preferred Single Finger Sequential Operation 1/4 in. (6 mm) min., 1/2 in. (13 mm) preferred Different Finger Operation 1/4 in. (6 mm) min., 1/2 in. (13 mm) preferred Thumb or Palm Operation 1 in. (25 mm) min., 6 in. (150 mm) preferred. See FIGURE 11 in MIL-STD-1472D. (5.4.3.1.1.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PUSHBUTTONS (FOOT OPERATED)**
HF Considerations	**Functionality**
Abbreviation	**Push Foot**

Detailed Design Considerations	YES	NO	N / A	Comment
147. Foot operated pushbuttons are used: a) When both operator's hands are busy with other controls. b) To conform to control stereotypes. c) As provision for alternate safety shut-down control. d) For distribution of workload. (5.4.1.8.6.1, 5.4.3.1.2.1)				
148. Foot operated pushbuttons are <u>not</u> used: a) If balance-imposed risks for standing operators exist. b) When selection among many controls is required. c) For critical or frequent control operations. (5.4.1.8.6.2)				
149. Foot operated pushbutton operation does <u>not</u> require: a) Frequent maximum reaching. b) Holding leg or foot in awkward position for extended period of time. c) Frequent operation or extended period of time in a twisted seating position. d) Maximum force application. frequently or for extended period of time. e) Search for one pushbutton among many. (5.4.1.8.6.3)				
150. Positive indication of switch actuation is provided. (5.4.3.1.2.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PUSHBUTTONS (FOOT OPERATED)**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Push Foot**

Detailed Design Considerations	YES	NO	N/A	Comment
151. Foot operated switch is positioned for operation by the toe or ball of the foot. (5.4.3.1.2.2)				
152. Foot operated switch location allows centering the ball of the foot on the button. (5.4.3.1.2.2)				
153. If switch may become wet, the switchcap surface has friction to prevent slippage.				
154. DIMENSIONS: Diameter 0.50 in. (13 mm) min. See FIGURE 12 in MIL-STD-1472D. (5.4.3.1.2.3)				
155. DISPLACEMENT: Normal Boot Operation 0.50 in. (13 mm) min., 2.5 in. (65 mm) max. Heavy Boot Operation 1.0 in. (25 mm) min., 2.5 in. (65 mm) max. Ankle Flexion Only 1.0 in. (25 mm) min., 2.5 in. (65 mm) max. Total Leg Movement 1.0 in. (25 mm) min., 4.0 in. (100 mm) max. See FIGURE 12 in MIL-STD-1472D. (5.4.3.1.2.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PUSHBUTTONS (FOOT OPERATED)**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Push Foot**

Detailed Design Considerations	YES	NO	N/A	Comment
156. RESISTANCE: Foot Will Not Rest on Control 4.0 lb. (18 N) min., 20.0 lb. (90 N) max. Foot Will Rest on Control 10.0 lb. (45 N) min., 20.0 lb. (90 N) max. See FIGURE 12 in MIL-STD-1472D. (5.4.3.1.2.3)				
157. If use of more than one foot operated switch per foot cannot be avoided, switches are placed at least 3 in. (66 mm) apart horizontally and 8 in. (203 mm) apart vertically. (5.4.3.1.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**KEYBOARDS**
HF Considerations	**Functionality**
Abbreviation	**Keyboard**

Detailed Design Considerations	YES	NO	N/A	Comment
158. Arrangement and number of keys is compatible with the predominant type of information to be entered into the system. (5.4.3.1.3.2)				
159. Alphanumeric keyboard design conforms to requirements of MIL-STD-1280. (5.4.3.1.3.2)				
160. Systems with more than one keyboard are standardized. (5.4.3.1.3.5)				
161. Feedback is provided to indicate if intended key was pressed and, if applicable, when the next operation may be initiated. (5.4.3.1.3.6)				
162. Keyed inputs are echoed on the display within 0.2 sec. (5.15.2.2.3)				
163. Length of individual data items is minimized, except extended text. (5.15.2.2.4)				
164. Columnar data is automatically decimal point, left margin, or right margin justified depending on the type of data. (5.15.2.2.5)				
165. Numeric keypad is provided if extensive numerical input is required. (5.15.2.2.6)				
166. Amount of keying required is minimized by using numbered lists and abbreviations. (5.15.2.2.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**KEYBOARDS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Keyboard**

Detailed Design Considerations	YES	NO	N / A	Comment
167. The configuration of a keyboard used to enter solely numeric information is a 3 x 3 + 1 matrix with the zero digit centered on the bottom row. (5.4.3.1.3.2)				
168. DIMENSIONS: Diameter Barehanded 0.385 in. (10 mm) min., 0.75 in. (19 mm) max, 0.5 in. (13 mm) preferred. Arctic Mittens 0.75 in. (19 mm) min., 0.75 in. (19 mm) preferred. See TABLE X in MIL-STD-1472D. (5.4.3.1.3.3)				
169. The slope of nonportable keyboards is 15°-25° (260-435 mrad) from the horizontal. (5.4.3.1.3.4)				
170. DISPLACEMENT: Numeric 0.03 in. (0.8 mm) min., 0.19 in. (4.8 mm) max. Alphanumeric 0.05 in. (1.3 mm) min., 0.25 in. (6.3 mm) max. Dual Function 0.03 in. (0.8 mm) min., 0.19 in. (4.8 mm) max. See TABLE X in MIL-STD-1472D. (5.4.3.1.3.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**KEYBOARDS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Keyboard**

Detailed Design Considerations	YES	NO	N / A	Comment
171. RESISTANCE: Numeric 3.5 oz. (1 N) min., 14.0 oz. (4 N) max. Alphanumeric 0.9 oz. (250 mN) min., 5.3 oz. (1.5 N) max. Dual Function 0.9 oz. (250 mN) min., 5.3 oz. (1.5 N) max. See TABLE X in MIL-STD-1472D. (5.4.3.1.3.3) 172. SEPARATION: Between Adjacent Key Tops 0.25 in. (6.4 mm) min., 0.25 in. (6.4 mm) preferred. See TABLE X in MIL-STD-1472D. (5.4.3.1.3.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FIXED FUNCTION KEYS**
HF Considerations	**Functionality**
Abbreviation	**Fixed Key**

Detailed Design Considerations	YES	NO	N/A	Comment
173. Fixed function keys are used for time-critical, error-critical, or frequently used control inputs. (5.15.2.3.1)				
174. Fixed function keys are standard throughout the system. (5.15.2.3.2)				
175. A fixed function key, once assigned a function, is not reassigned a different function for a given user. (5.15.2.3.3)				
176. Fixed function keys are used to control continuously available functions. (5.15.2.3.4)				
177. Lockout of fixed function keys is minimized. (5.15.2.3.4)				
178. Nonactive fixed function keys are replaced with a blank key. (5.15.2.3.5)				
179. Fixed function key function is accomplished with a single actuation. (5.15.2.3.7)				
180. Feedback is provided of system acknowledgement of fixed function key activation. (5.15.2.3.8)				
181. Fixed function key assignments are displayed at all times. (5.15.2.3.9)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FIXED FUNCTION KEYS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Fixed Key**

Detailed Design Considerations	YES	NO	N / A	Comment
182. Fixed function keys are logically grouped. (5.15.2.3.6)				
183. Fixed function keys are placed in distinctive locations on the keyboard. (5.15.2.3.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**VARIABLE FUNCTION KEYS**
HF Considerations	**Functionality**
Abbreviation	**Var Key**

Detailed Design Considerations	YES	NO	N/A	Comment
184. Variable function key current status is displayed. (5.15.2.4.2)				
185. Variable function keys with labeled default functions, when reprogrammed or turned off, have a visual warning of inaccessibility of the standard function. (5.15.2.4.3)				
186. Variable function keys are easily relabeled. (5.15.2.4.4)				
187. Variable function keys do not require the use of a shift key for each actuation. (5.15.2.4.5)				
188. Where functions assigned to keys change as a result of user inputs, a control action is provided to readily return the functions assigned to a base-level (or standard) set. (5.15.2.4.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TOGGLE SWITCHES**
HF Considerations	**Functionality**
Abbreviation	**Toggle**

Detailed Design Considerations	YES	NO	N/A	Comment
189. Guards, lift-to-unlock switches (resistance not to exceed 3 lbs.) or other means are used to prevent accidental activation when critical, dangerous, or hazardous conditions may result. (5.4.3.1.4.2)				
190. Cover guards in the open position do not interfere with control activation. (5.4.3.1.4.2)				
191. Three-position spring-loaded to center-off toggle switches with only one other position are not used if release from the spring-loaded position results in switch travel beyond the OFF position. (5.4.3.1.4.1)				
192. Minimum use is made of 3-position toggle switches and horizontally oriented toggle switches. (5.4.3.1.4.1, 5.4.3.1.4.5)				
193. Positive indication of control activation is provided. (5.4.3.1.4.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TOGGLE SWITCHES**
HF Considerations	**Size & Shape**
Abbreviation	**Toggle**

Detailed Design Considerations	YES	NO	N/A	Comment
194. DIMENSIONS: Arm Length (Bare Finger) 0.5 in. (13 mm) min., 2.0 in. (50 mm) max. Arm Length (Gloved Finger) 1.5 in. (38 mm) min., 2.0 in. (50 mm) max. Control Tip 0.125 in. (3 mm) min., 1.0 in. (25 mm) max. See FIGURE 13 in MIL-STD-1472D. (5.4.3.1.4.3)				
195. DISPLACEMENT: 2 Position Switch 30° (525 mrad) min., 80° (1400 mrad) max. 3 Position Switch 17° (295 mrad) min., 45°(700 mrad) max., 25° (435 mrad) desired. See FIGURE 13 in MIL-STD-1472D. (5.4.3.1.4.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TOGGLE SWITCHES**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Toggle**

Detailed Design Considerations	YES	NO	N/A	Comment
196. RESISTANCE: Small Switch 10 oz. (2.8 N) min., 16 oz. (4.5 N) max. Large Switch 10 oz. (2.8 N) min., 40 oz. (11 N) max. See FIGURE 13 in MIL-STD-1472D. (5.4.3.1.4.3)				
197. SEPARATION: Single Finger Operation 0.75 in. (19 mm) min., 2.0 in. (50 mm) optimum. Single Finger Operation-Lever Lock Toggle Switch 1.0 in. (25 mm) min., 2.0 in. (50 mm) optimum. Single Finger Sequential Operation 0.5 in. (13 mm) min., 1 in. (25 mm) optimum. Simultaneous Operation by Different Fingers 0.625 in. (16 mm) min., 0.75 in. (19 mm) optimum. See FIGURE 13 in MIL-STD-1472D. (5.4.3.1.4.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LEGEND SWITCHES**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Legend**

Detailed Design Considerations	YES	NO	N/A	Comment
198. Switch provides detent, click, or other positive indication of actuation. (5.4.3.1.5.3)				
199. Switch legend is legible with or without internal illumination. (5.4.3.1.5.3)				
200. Legend switch lamps are replaceable from the front of the panel by hand and the legends or covers are keyed to prevent the possibility of interchanging the legend covers. (5.4.3.1.5.3)				
201. DIMENSIONS: 0.75 in. (19 mm) min., 0.625 in. (15 mm) min., where switch is not depressed below panel 1.5 in. (38 mm) max. See FIGURE 14 in MIL-STD-1472D. (5.4.3.1.5.1)				
202. BARRIERS: Barrier Width 0.125 in. (3 mm) min., 0.25 in. (6 mm) max. Barrier Depth 0.88 in. (5 mm) min., 0.25 in. (6 mm) max. See FIGURE 14 in MIL-STD-1472D. (5.4.3.1.5.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LEGEND SWITCHES**
HF Considerations	**Clearance & Separation, Visibility & Identification**
Abbreviation	**Legend**

Detailed Design Considerations	YES	NO	N/A	Comment
203. DISPLACEMENT: 0.125 in. (3 mm) min., 3/16 in. (5 mm) min. for positive position switch, 0.25 in. (6 mm) max. See FIGURE 14 in MIL-STD-1472D. (5.4.3.1.5.1)				
204. RESISTANCE: 10 oz. (2.8 N) min., 20 oz. (5.6 N) min. for use in moving vehicles, 60 oz. (16.7 N) max. See FIGURE 14 in MIL-STD-1472D. (5.4.3.1.5.1)				
205. Legends appear illuminated on an opaque background with character dimensions as follows: a) Height: 3/16 in. (5 mm). b) Height-to-width ratio: 3:2. c) Height-to-Stroke-Width Ratio: 10:1. (5.4.3.1.6.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ROCKER SWITCHES**
HF Considerations	**Functionality**
Abbreviation	**Rocker**

Detailed Design Considerations	YES	NO	N/A	Comment
206. Rocker switches are used in place of toggle switches for functions which require two discrete positions where toggle switch protrusion is a problem. (5.4.3.1.6.1)				
207. Three-position rocker switches are used only when other types of controls (rotary, legend switch, etc.) are not feasible, or when rocker switch is the spring loaded type. (5.4.3.1.6.1)				
208. Positive indication of switch activation is provided. (5.4.3.1.6.3)				
209. Rocker switches are lit internally when ambient illumination causes display luminance to be below 1 Ft-L. (3.5 cd/sq m). (5.4.3.1.6.7)				
210. Horizontal orientation is used only when compatibility with the controlled function or equipment location is desirable. (5.4.3.1.6.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ROCKER SWITCHES**
HF Considerations	**Size & Shape, Direction & Force, Clearance & Separation**
Abbreviation	**Rocker**

Detailed Design Considerations	YES	NO	N/A	Comment
211. DIMENSIONS: Width 1/4 in. (6 mm) min. Length 1/2 in. (13 mm) min. See FIGURE 15 in MIL-STD-1472D. (5.4.3.1.6.4)				
212. DISPLACEMENT: Height depressed 1/8 in. (3 mm) min. Angle 30° (530 mrad) min. See FIGURE 15 in MIL-STD-1472D. (5.4.3.1.6.4)				
213. RESISTANCE: 10 oz. (280 mN) min., 40 oz. (11 N) max. See FIGURE 15 in MIL-STD-1472D. (5.4.3.1.6.4)				
214. SEPARATION: Bare hand, Center-to-center 3/4 in. (19 mm) min. Gloved hand, Center-to-center 1 1/4 in. (32 mm) min. See FIGURE 15 in MIL-STD-1472D. (5.4.3.1.6.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**SLIDE SWITCHES**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Slide**

Detailed Design Considerations	YES	NO	N/A	Comment
215. Resistance increases until switch snaps into position. (5.4.3.1.7.3)				
216. Switch does not stop between positions. (5.4.3.1.7.3)				
217. Channel guards are provided to prevent inadvertent operation. (5.4.3.1.7.2)				
218. Switches are vertically oriented such that activation of upper position turns on system; causes an increase in system function; or causes a forward, clockwise, or upward movement. (5.4.3.1.7.4)				
219. DIMENSIONS: Actuator height with gloves 1/2 in. (13 mm) min. Without gloves 1/4 in. (6 mm) min. Actuator width 1/8 in. (6 mm) min., 1 in. (25 mm) max. See FIGURE 16 in MIL-STD-1472D. (5.4.3.1.7.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**SLIDE SWITCHES**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Slide**

Detailed Design Considerations	YES	NO	N/A	Comment
220. RESISTANCE: Small switch 10 oz. (280 mN) min., 16 oz. (450 mN) max. Large switch 10 oz. (280 mN) min., 40 oz. (11 N) max. See FIGURE 16 in MIL-STD-1472D. (5.4.3.1.7.3) 221. SEPARATION: Single finger operation 3/4 in. (19 mm) min., 2 in. (50 mm) optimum. Single finger sequential operation 1/2 in. (13 mm) min., 1 in. (25 mm) optimum. Simultaneous operation by different fingers 5/8 in. (16 mm) min., 3/4 in. (19 mm) max. See FIGURE 16 in MIL-STD-1472D. (5.4.3.1.7.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISCRETE PUSH-PULL CONTROLS**
HF Considerations	**Functionality**
Abbreviation	**Push Pull**

Detailed Design Considerations	YES	NO	N/A	Comment
222. Push-pull controls are used for selection of two discrete functions when such applications are typically expected or in special cases when panel space is limited. (5.4.3.1.8.1)				
223. Three-position push-pull controls are used only when inadvertent activation poses no serious consequences. (5.4.3.1.8.1)				
224. Push-pull nonrotating controls are affixed to nonrotating shafts. (5.4.3.1.8.3)				
225. Use, location and operating axis of push-pull control precludes inadvertent activation or catching clothing, communications cables, etc. on control. (5.4.3.1.8.5)				
226. Push-pull rotating controls are equipped with a handle or serrated knob to facilitate a slip-free turning grip. (5.4.3.1.8.3)				
227. Mechanical detents are incorporated to provide tactile indication of positions. (5.4.3.1.8.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISCRETE PUSH-PULL CONTROLS**
HF Considerations	**Size & Shape**
Abbreviation	**Push Pull**

Detailed Design Considerations	YES	NO	N/A	Comment
228. DIMENSIONS: a) Diameter Low resistance push-pull two position 3/4 in. (19 mm) min. Miniature electrical panel switch 1/4 in. (6 mm) min. b) Width High force push-pull 4 in. (100 mm) min. Handle pulls with gloves 5 in. (125 mm) min. Handle pulls without gloves 4 in. (100 mm) min. c) Length Miniature electrical panel switch 3/4 in. (19 mm) min. d) Depth High force push-pull 5/8 in. (16 mm) min., 1 1/2 in. (38 mm) max. Handle pulls 5/8 in. (16 mm) min., 1 1/2 in. (38 mm) max. See TABLE XI in MIL-STD-1472D. (5.4.3.1.8.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISCRETE PUSH-PULL CONTROLS**
HF Considerations	**Size & Shape (Cont.)**
Abbreviation	**Push Pull**

Detailed Design Considerations	YES	NO	N/A	Comment
229. GRASP CLEARANCE: Low resistance push-pull, two position with gloves 1 1/2 in. (38 mm) min. Without gloves 1 in. (25 mm) min. High force push-pull with gloves 1 3/4 in. (31 mm) min. Without gloves 1 in. (25 mm) min. Handle pulls 1 1/2 in. (38 mm) min. See TABLE XI in MIL-STD-1472D. (5.4.3.1.8.2)				
230. DISPLACEMENT: Low resistance push-pull, two position 1/2 in. (13 mm) min., 1 1/2 in. (38 mm) max. Three position push-pull with rotary function 1/2 in. (13 mm) min. between positions. Miniature electrical panel switch 1/2 in. (13 mm) min. High force push-pull 1 in. (25 mm) min., 2 in. (50 mm) preferred. Handle pulls 1 in. (38 mm) min., 2 in. (50 mm) preferred. See TABLE XI in MIL-STD-1472D. (5.4.3.1.8.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISCRETE PUSH-PULL CONTROLS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Push Pull**

Detailed Design Considerations	YES	NO	N/A	Comment
231. Pull turns on or activates; push turns off or deactivates. (5.4.3.1.8.6)				
232. Clockwise rotation is used for increasing function of pull/rotary controls. (5.4.3.1.8.6)				
233. Force for finger pulled controls does not exceed 4 lbs. (1.8 kg). (5.4.3.1.8.7)				
234. Force for four-finger T-bar controls does not exceed 10 lbs. (4.5 kg). (5.4.3.1.8.7)				
235. SEPARATION: Low resistance push-pull, two position with gloves 2 in. (50 mm) min. Without gloves 1 1/2 in. (38 mm) min. Miniature electrical panel switch 1 in. (25 mm) min. Handle pulls 1/2 in. (13 mm) min. See TABLE XI in MIL-STD-1472D. (5.4.3.1.8.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PRINTED CIRCUIT SWITCHES**
HF Considerations	**Functionality**
Abbreviation	**Print Circ**

Detailed Design Considerations	YES	NO	N/A	Comment
236. Printed circuit switches are used when manual programming functions are required in systems characterized by printed circuit boards. (5.4.3.1.9.1)				
237. Actuator does not stop between positions. (5.4.3.1.9.2)				
238. When actuators are the slide type, the minimum displacement between settings is twice the length of the actuator. When of rocker type, the actuated wing is flush with module. (5.4.3.1.9.2)				
239. Manipulation of actuators does not require use of special tools. (5.4.3.1.9.2)				
240. Size of actuators permits error-free manipulation with use of some commonly available object as a stylus. (5.4.3.1.9.2)				
241. Actuator surface is sufficiently indented to accept stylus tip and prevent stylus slippage. (5.4.3.1.9.3)				
242. Resistance increases until actuator snaps into position. (5.4.3.1.9.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LEVERS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Lever**

Detailed Design Considerations	YES	NO	N/A	Comment
243. Latches on levers do not cause delay in operation. (5.4.1.8.3)				
244. Where levers are used for fine or continuous adjustment, limb support is provided as follows: Large hand movements - elbow support provided, Small hand movements - forearm support provided, Finger movements - wrist support provided. (5.4.3.2.1.4)				
245. DIMENSIONS - Handle Diameter: Finger Grasp 0.5 in. (13 mm) min., 1.5 in. (38 mm) max. Hand Grasp 1.5 in. (38 mm) min., 3.0 in. (75 mm) max. See FIGURE 17 in MIL-STD-1472D. (5.4.3.2.1.5)				
246. DISPLACEMENT: Forward 14.0 in. (360 mm) max. Lateral 38.0 in. (970 mm) max. (5.4.3.2.1.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LEVERS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Lever**

Detailed Design Considerations	YES	NO	N/A	Comment
247. RESISTANCE: Forward - One Hand 2 lb. (9 N) min., 30 lb. (135 N) max. Forward - Two Hands 2 lb. (9 N) min., 50 lb. (220 N) max. Lateral - One Hand 2 lb. (9 N) min., 20 lb. (90 N) max. Lateral - Two Hands 2 lb. (9 N) min., 30 lb. (135 N) max. See FIGURE 17 in MIL-STD-1472D. (5.4.3.2.1.6)				
248. SEPARATION: One Hand Random 2 in. (50 mm) min., 4 in. (100 mm) preferred. Two Hands Simultaneously 3 in. (75 mm) min., 5 in. (125 mm) preferred. See FIGURE 17 in MIL-STD-1472D. (5.4.3.2.1.7)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLACEMENT (ISOTONIC) JOYSTICKS**
HF Considerations	**Functionality**
Abbreviation	**Disp Stick**

Detailed Design Considerations	YES	NO	N/A	Comment
249. Displacement joysticks are used when task requires precise or continuous control movements in two or more related dimensions. (5.4.3.2.2)				
250. Displacement joysticks are used when positioning accuracy is more important than positioning speed. (5.4.3.2.2)				
251. A discrete mechanism is provided for activation/deactivation of the controller. (5.15.2.6.2)				
252. In rate control applications where the cursor or controlled element may move off the display, indication is provided to aid the operator in bringing it back onto the display. (5.4.3.2.2)				
253. In rate control applications, displacement joystick is spring loaded to return to center when the hand is removed. (5.4.3.2.2)				
254. Displacement joystick with center deadband or hysteresis has provision to maintain registration between display center and stick displacement center. (5.4.3.2.2)				
255. Controller movement is smooth in all directions. (5.4.3.2.2.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLACEMENT (ISOTONIC) JOYSTICKS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Disp Stick**

Detailed Design Considerations	YES	NO	N/A	Comment
256. Position control of the controlled element or cursor is attained without noticeable backlash, cross-coupling or need for multiple corrective movements. (5.4.3.2.2.1.2, 5.4.3.2.2.2.2)				
257. Control ratio, friction and inertia are suitable for both gross and fine positioning. (5.4.3.2.2.1.2, 5.4.3.2.2.2.2)				
258. Displacement joystick used for free-drawn CRT graphics results in the appearance of a continuous track. Delay between control input and screen response does not exceed 0.1 second. (5.4.3.2.2.1.2, 5.4.3.2.2.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLACEMENT (ISOTONIC) JOYSTICKS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Disp Stick**

Detailed Design Considerations	YES	NO	N / A	Comment
259. Location and mounting of modular controller device allows operation of the stick without slippage, movement or tilting of the mounting base. (5.4.3.2.2.1.3, 5.4.3.2.3.2.3, 5.4.3.2.3.3.3)				
260. Hand operated controllers are located and mounted to provide forearm support. (5.4.3.2.2.1.3)				
261. Finger operated controllers are mounted on a desk or shelf surface. (5.4.3.2.2.2.3)				
262. Finger operated controllers are located and mounted to provide forearm or wrist support. (5.4.3.2.2.2.3)				
263. Thumbtip or fingertip operated controllers are located and mounted to provide forearm or wrist support. (5.4.3.2.2.3.3)				
264. If a thumbtip or fingertip operated controller is mounted on a hand grip, the hand grip does not simultaneously function as a controller. (5.4.3.2.2.3.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLACEMENT (ISOTONIC) JOYSTICKS**
HF Considerations	**Size & Shape**
Abbreviation	**Disp Stick**

Detailed Design Considerations	YES	NO	N/A	Comment
265. DIMENSIONS: a) Hand Operated Controller Hand Grip Length 4.3 in. (110 mm) min., 7.1 in. (180 mm) max. Hand Grip Diameter 2.0 in. (50 mm) max. See FIGURE 18 in MIL-STD-1472D. (5.4.3.2.2.1.3) b) Finger Operated Controller Finger Grip Length 3.0 in. (75 mm) min., 6.0 in. (150 mm) max. Finger Grip Diameter 0.25 in. (6.5 mm) min., 0.625 in. (16 mm) max. See FIGURE 18 in MIL-STD-1472D. (5.4.3.2.2.2.3) 266. DISPLACEMENT: Angle From Center 45° (0.8 rad) max. See FIGURE 18 in MIL-STD-1472D. (5.4.3.2.2.1.2, 5.4.3.2.2.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLACEMENT (ISOTONIC) JOYSTICKS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Disp Stick**

Detailed Design Considerations	YES	NO	N/A	Comment
267. RESISTANCE: Finger Operated Controller 12 oz. (330 mN) min., 32 oz. (890 mN) max. See FIGURE 18 in MIL-STD-1472D. (5.4.3.2.2.2.3)				
268. CLEARANCE: a) Hand Operated Controller Sides 4.0 in. (100 mm) min. Rear 2.0 in. (50 mm) min. See FIGURE 18 in MIL-STD-1472D. (5.4.3.2.2.1.3)				
b) Finger Operated Controller Display to stick 0 min., 15 3/4 in. (400 mm) max. Around Stick Maximum stick excursion plus 4 in. (100 mm) Stick to shelf front 4 3/4 in. (120 mm) min. 9 7/8 in. (250 mm) max. See FIGURE 18 in MIL-STD-1472D. (5.4.3.2.2.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FORCE (STIFF OR ISOMETRIC) JOYSTICKS**
HF Considerations	**Functionality**
Abbreviation	**Force Stick**

Detailed Design Considerations	YES	NO	N/A	Comment
269. Force joysticks are used in applications which require: a) Precise return to center after each entry. b) Visual rather than kinesthetic response feedback. c) Minimal delay and tight coupling between control input and system reaction. d) Rapid positioning response rather than high positioning accuracy. (5.4.3.2.3)				
270. Force joysticks are <u>not</u> used in applications in which: a) The operator would be required to apply force over an extended period of time. b) There is no definitive feedback to indicate that maximum control inputs have been exceeded. (5.4.3.2.3)				
271. A discrete mechanism is provided for activation/deactivation of the controller. (5.15.2.6.2)				
272. In rate control applications where the cursor or controlled element may move off the display, indication is provided to aid the operator in bringing it back onto the display. (5.4.3.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FORCE (STIFF OR ISOMETRIC) JOYSTICKS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Force Stick**

Detailed Design Considerations	YES	NO	N/A	Comment
273. Location and mounting of modular controller device allows operation of the stick without slippage, movement or tilting of the mounting base. (5.4.3.2.3.1.3, 5.4.3.2.3.2.3, 5.4.3.2.3.3.3)				
274. Hand operated controllers are located and mounted to provide forearm support. (5.4.3.2.3.1.3)				
275. Finger operated controllers are mounted on a desk or shelf surface. (5.4.3.2.3.2.3)				
276. Finger operated controllers are located and mounted to provide forearm or wrist support. (5.4.3.2.3.2.3)				
277. Thumbtip or fingertip operated controllers are located and mounted to provide forearm or wrist support. (5.4.3.2.3.2.3)				
278. If a thumbtip or fingertip operated controller is mounted on a hand grip, the hand grip does not simultaneously function as a controller. 5.4.3.2.3.3.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FORCE (STIFF OR ISOMETRIC) JOYSTICKS**
HF Considerations	**Size & Shape, Direction & Force, Clearance & Separation**
Abbreviation	**Force Stick**

Detailed Design Considerations	YES	NO	N/A	Comment
279. DIMENSIONS: Hand-Operated Stick Hand Grip Length 4.3 in. (110 mm) min, 7.1 in. (180 mm) max. Hand Grip Diameter 2.0 in. (50 mm) max. (5.4.3.2.3.1.3)				
280. RESISTANCE: Hand-Operated Stick Force for Full Output 26.7 lb. (118 N) max. (5.4.3.2.3.1.2)				
281. CLEARANCE Hand-Operated Stick Sides 4.0 in. (100 mm) min. Rear 2.0 in. (50 mm) min. (5.4.3.2.3.1.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	BALL CONTROLS
HF Considerations	Functionality
Abbreviation	Ball

Detailed Design Considerations	YES	NO	N/A	Comment
282. Ball control is used for applications which require accumulative travel of the controlled element or cursor in a given direction. (5.4.3.2.4.1)				
283. Ball control is used only as a position control where cursor position is proportional to ball rotation angle. (5.4.3.2.4.1)				
284. In applications where the cursor or controlled element may move off the display, indication is provided to aid the operator in bringing it back onto the display. (5.4.3.2.4.1)				
285. Ball control is capable of rotation in any direction necessary to produce any combination of X and Y cursor positions. (5.4.3.2.4.2)				
286. Ball rotates smoothly in any direction without backlash or cross-coupling. (5.4.3.2.4.2)				
287. Control ratios and dynamic features are appropriate for both rapid gross and precise fine positioning. (5.4.3.2.4.2)				
288. A discrete mechanism is provided for activation/deactivation. (5.15.2.6.2)				
289. Suitable wrist and/or arm support is provided for precise or continuous adjustments. (5.4.3.2.4.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**BALL CONTROLS**
HF Considerations	**Size & Shape, Direction & Force**
Abbreviation	**Ball**

Detailed Design Considerations	YES	NO	N/A	Comment
290. DIMENSIONS: Diameter 2.0 in. (50 mm) min., 6.0 in. (150 mm) max., 4.0 in. (100 mm) preferred. Surface exposure 100° (1545 mrad) min., 140° (2445 mrad) max., 120° (2095 mrad) preferred. See FIGURE 19 in MIL-STD-1472D. (5.4.3.2.4.4)				
291. Smaller diameter ball controls are used only under severe space constraints and when precision is not essential. (5.4.3.2.4.4)				
292. RESISTANCE: Precision required 3.6 oz. (1 N) max., 1.1 oz. (0.3 N) preferred. Vibration or acceleration conditions 6 oz. (1.7 N) max. See FIGURE 19 in MIL-STD-1472D. (5.4.3.2.4.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**BALL CONTROLS**
HF Considerations	**Clearance & Separation**
Abbreviation	**Ball**

Detailed Design Considerations	YES	NO	N/A	Comment
293. CLEARANCE: Display to ball 0 min., 12.675 in. (320 mm) max. Around ball 2.0 in. (50 mm) min. Ball to shelf front 4.75 in. (120 mm) min., 9.75 in. (250 mm) max. See FIGURE 19 in MIL-STD-1472D. (5.4.3.2.4.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**GRID & STYLUS DEVICES**
HF Considerations	**Functionality**
Abbreviation	**Grid**

Detailed Design Considerations	YES	NO	N/A	Comment
294. Grid-and-stylus device is used for CRT data retrieval, entry of points on a display, generation of free-drawn graphics or similar applications. (5.4.3.2.5.1)				
295. Grid & stylus device is used only for position control where the cursor displacement is proportional to stylus displacement from the reference point. (5.4.3.2.5.1)				
296. Movement of stylus in any direction on the grid surface results in a proportional movement of cursor on display. (5.4.3.2.5.2)				
297. Discrete placement of stylus at any point on grid causes the cursor to move to the corresponding position and remain at this position until the stylus is moved along the grid or placed at another discrete point on the grid. (5.4.3.2.5.2)				
298. The refresh rate for the cursor is great enough to create the appearance of a continuous track for free drawn graphics. (5.4.3.2.5.2)				
299. A discrete mechanism is provided for activation/ deactivation. (5.15.2.6.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	GRID & STYLUS DEVICES
HF Considerations	Size & Shape
Abbreviation	Grid

Detailed Design Considerations	YES	NO	N/A	Comment
300. Transparent grids used as display overlays conform to the size of the display. (5.4.3.2.5.3)				
301. Displaced grids approximately the size of the display are mounted below the display. (5.4.3.2.5.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FREE MOVING XY CONTROLLER (MOUSE)**
HF Considerations	**Functionality**
Abbreviation	**Mouse**

Detailed Design Considerations	YES	NO	N / A	Comment
302. Free-moving controllers are used on flat surface to control the position of the cursor on the display. (5.4.3.2.6.1)				
303. Free-moving controllers are used for data retrieval or entry. (5.4.3.2.6.1)				
304. Free-moving controllers are <u>not</u> used for constructing free drawn graphics. (5.4.3.2.6.1)				
305. Cursor displacement is proportional to controller displacement. (5.4.3.2.6.2)				
306. Controller is operable with either hand. (5.4.3.2.6.2)				
307. In applications where the cursor or controlled element may move off the display, indication is provided to aid the operator in bringing it back onto the display. (5.4.3.2.6.2)				
308. The controller allows the operator to consistently orient it to within 10° (175 mrad) of the intended orientation. (5.4.3.2.6.2)				
309. The controller is readily operated in any direction without a change of hand grasp. (5.4.3.2.6.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FREE MOVING XY CONTROLLER (MOUSE)**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Mouse**

Detailed Design Considerations	YES	NO	N / A	Comment
310. A complete excursion of the controller from one side of the maneuvering area to the other moves the cursor from one side of the screen to the other regardless of scale setting unless expanded movement has been selected. (5.4.3.2.6.2)				
311. A discrete mechanism is provided for activation/ deactivation. (5.15.2.6.2)				
312. The free-moving controller is approximately rectangular in shape with no sharp edges. (5.4.3.2.6.3)				
313. DIMENSIONS Width spanned by finger to thumb grasp: 1.6 in. (40 mm) min., 2.8 in. (70 mm) max. Length: 2.8 in. (70 mm) min., 4.7 in. (120 mm) max. Thickness: 1.0 in. (25 mm) min., 1.6 in. (40 mm) max. (5.4.3.2.6.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LIGHT PEN**
HF Considerations	**Functionality**
Abbreviation	**Light Pen**

Detailed Design Considerations	YES	NO	N/A	Comment
314. Light pens are used as a track oriented designation device or as a substitute controller for grid and-stylus devices. (5.4.3.2.7.1)				
315. Light pens are used for item selection type data entry tasks. (5.15.2.5.1)				
316. Light pens are <u>not</u> used where critical or precise input functions are required. (5.15.2.5.1)				
317. Light pens are equipped with a discrete activating/deactivating mechanism. (5.15.2.5.3)				
318. A clip is installed at the lower right side of the CRT to serve as a pen holder. (5.4.3.2.7.3)				
319. Feedback is provided for light pen placement on the screen. (5.15.2.5.4)				
320. Feedback is provided for light pen actuation and reception of input. (5.15.2.5.4)				
321. Discrete placement of light pen at any point on grid causes the cursor to move to the corresponding position and remain at this position until the pen is moved along the grid or placed at another discrete point on the grid. (5.4.3.2.7.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LIGHT PEN**
HF Considerations	**Size & Shape, Dirction & Force**
Abbreviation	**Light Pen**

Detailed Design Considerations	YES	NO	N/A	Comment
322. DIMENSIONS: Length 4.7 in. (120 mm) min., 7.1 in. (180 mm) max. Diameter 0.3 in (7.6 mm) min., 0.8 in. (20.3 mm) max. (5.4.3.2.7.3) 323. RESISTANCE: Light pen push-tip switches, if used, require actuation force as follows: 2.0 oz. (0.5 N) min., 5.0 oz. (1.4 N) max. (5.15.2.5.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PEDALS**
HF Considerations	**Functionality**
Abbreviation	**Pedal**

Detailed Design Considerations	YES	NO	N/A	Comment
324. Pedals are used: a) When control operation requires greater force than upper body can supply. b) When force approaches upper body fatigue threshold. c) When both operator's hands are busy with other controls. d) To conform to control stereotypes. e) As provision for alternate safety shut-down control. f) For distribution of workload. (5.4.1.8.6.1, 5.4.3.2.8.1)				
325. Pedals are <u>not</u> used: a) If balance-imposed risks exist for standing operators. b) When control precision is required. c) When selection among many controls is required. (5.4.1.8.6.2)				
326. Pedal operation does <u>not</u> require: a) Frequent maximum reaching. b) Holding leg or foot in awkward position for extended period of time. c) Frequent operation or extended period of time in a twisted seating position. d) Maximum force application frequently or for extended period of time. e) Search for one pedal among many. (5.4.1.8.6.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PEDALS**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Pedal**

Detailed Design Considerations	YES	NO	N/A	Comment
327. Pedals can be reached without stretching or twisting at torso. (5.4.3.2.8.2)				
328. A heel rest is provided when pedal angle exceeds 20° from the horizontal. (5.4.3.2.8.2)				
329. Pedal returns to original position when foot is removed. (5.4.3.2.8.3)				
330. Pedal is located to avoid accidental activation, entrapment of the foot and entrapment of clothing. (5.4.1.8.6.3				
331. The following are provided to facilitate leverage where high pedal force is required : a) Seat backrests. b) Seat height/pedal arrangement to create an upper thigh to lower leg angle of approximately 160° (2790 mrad). c) Double width pedals. (5.4.3.2.8.5)				
332. DIMENSIONS: Height 1.0 in. (25 mm) min. Width 3.0 in. (75 mm) min. See FIGURE 20 in MIL-STD-1472D. (5.4.3.2.8.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PEDALS**
HF Considerations	**Size & Shape (Cont.)**
Abbreviation	**Pedal**

Detailed Design Considerations	YES	NO	N/A	Comment
333. DISPLACEMENT: Normal Operation 0.5 in. (13 mm) min., 2.5 in. (65 mm) max. Heavy Boots 1.0 in. (25 mm) min., 2.5 in. (65 mm) max. Ankle Flexion 1.0 in. (25 mm) min., 2.5 in. (65 mm) max. Total Leg Movement 1.0 in. (25 mm) min., 7.0 in. (180 mm) max. See FIGURE 20 in MIL-STD-1472D. (5.4.3.2.8.7)				
334. Pedals requiring high force application have non-skid surface. (5.4.3.2.8.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PEDALS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Pedal**

Detailed Design Considerations	YES	NO	N/A	Comment
335. RESISTANCE: Foot Not Resting on Pedal 4 lb. (18 N) min., 20 lb. (90 N) max. Foot Resting on Pedal 10 lb. (45 N) min., 20 lb. (90 N) max. Ankle Flexion Only 10 lb. (45 N) max. Total Leg Movement 10 lb. (45 N) min., 180 lb. (800 N) max. See FIGURE 20 in MIL-STD-1472D. (5.4.3.2.8.7)				
336. Sufficient resistance is incorporated to prevent inadvertent activation while foot is resting on pedal. (5.4.3.2.8.3)				
337. SEPARATION: One Foot Random 4.0 in. (100 mm) min., 6.0 in. (150 mm) preferred. One Foot Sequential 2.0 in. (50 mm) min., 4.0 in. (100 mm) preferred. See FIGURE 20 in MIL-STD-1472D. (5.4.3.2.8.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HIGH FORCE CONTROLS
HF Considerations	Location & Arrangement, Force, Operating Procedures
Abbreviation	High Force

Detailed Design Considerations	YES	NO	N/A	Comment
338. Forces are below strength limits of the lowest segment of the user population. (5.4.4.1)				
339. Controls provide appropriate limb and body support. (5.4.4.1)				
340. Maximum sustained operation is 3 seconds. (5.4.4.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**MINIATURE CONTROLS**
HF Considerations	**Functionality, Size, Force, Separation, Use Conditions**
Abbreviation	**Min**

Detailed Design Considerations	YES	NO	N/A	Comment
341. Miniature controls are used only under severe space constraints. (5.4.5.1)				
342. Miniature controls are used when heavy gloves or mittens are not required. (5.4.5.1)				
343. Size and separation is the maximum for the space allotted. (5.4.5.2)				
344. Resistance and displacement requirements are equivalent to standard size controls. (5.4.5.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TOUCH-SCREENS**
HF Considerations	**Functionality, Size, Force, Separation**
Abbreviation	**Touch**

Detailed Design Considerations	YES	NO	N / A	Comment
345. Touch-screen is used where direct visual reference and direct control access to a display device is required. (5.4.6.1)				
346. Positive indication is provided of the response of the system to the control action. (5.4.6.3)				
347. DIMENSIONS: The dimensions of responsive areas of the touch-screen conform to those required for legend switches as follows: 0.75 in. (19 mm) min., 1.5 in. (38 mm) max. See FIGURE 14 in MIL-STD-1472D. (5.4.6.4)				
348. RESISTANCE: 0.9 oz. (250 mN) min., 5.3 oz. (1.5 N) max. (5.4.6.5)				
349. SEPARATION: The separation between responsive areas of the touch-screen conforms to the barrier width required for legend switches as follows: 0.125 in. (3 mm) min., 0.25 in. (6 mm) max. See FIGURE 14 in MIL-STD-1472D. (5.4.6.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TOUCH-SCREENS
HF Considerations	Visibility & Identification
Abbreviation	Touch

Detailed Design Considerations	YES	NO	N/A	Comment
350. Luminance transmittance of touch-screen allows the display to be read easily in the intended illumination environment. (5.4.6.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CIRCUIT BREAKER**
HF Considerations	**Functionality, Size & Shape, Force, Separation**
Abbreviation	**Breaker**

Detailed Design Considerations	YES	NO	N/A	Comment
351. Circuit breaker controls are of the toggle bat or legend switch type. (5.9.17.2.4)				
352. Push-pull breakers are not used as power switches. (5.9.17.2.4)				
353. Toggle bat actuated breakers comply with design criteria for toggle switches. (5.9.17.2.5)				
354. Legend switch actuated breakers comply with design criteria for legend switches. (5.9.17.2.5)				
355. Push-pull actuated breakers comply with design criteria for discrete push-pull controls. (5.9.17.2.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLED CURSORS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Cursor**

Detailed Design Considerations	YES	NO	N/A	Comment
356. Cursor sensitivity/speed is adjustable by user. (5.15.2.1.8.1)				
357. If fine positioning accuracy is required, the cursor has a point designation feature. (5.15.2.1.8.2)				
358. Cursor home position is consistent across similar types of displays. (5.15.2.1.8.3)				
359. Where a position on the display is to be designated, this is accomplished by a control action distinct from that used to move the cursor. (5.15.2.1.8.4)				
360. Cursor movement increment (step size) is consistent horizontally (both right and left) and vertically (both up and down). (5.15.2.1.8.5)				
361. Where the primary task is keyboard data entry, the cursor is controlled by a key or by a device located on the main keyboard. (5.15.2.1.8.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROLED CURSORS**
HF Considerations	**Direction, Visibility & Illumination**
Abbreviation	**Cursor**

Detailed Design Considerations	YES	NO	N / A	Comment
362. The direction of cursor movement in response to a control input is consistent, predictable and compatible with the user's expectations. (5.15.2.1.8.7)				
363. Movable cursors can be readily distinguished from other display elements. (5.15.2.1.8.2)				
364. Movable cursors do not obscure other displayed information. (5.15.2.1.8.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER DATA ENTRY**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Data Entry**

Detailed Design Considerations	YES	NO	N/A	Comment
365. Data entry is paced by the user. (5.15.2.1.1)				
366. The system provides positive feedback to the user of the acceptance or rejection of a data entry. (5.15.2.1.2)				
367. Where system overload or other system conditions will result in a processing delay, the system: a) Acknowledges data entry. b) Provides an indication of the delay to the user. (5.15.2.1.3)				
368. Data entry requires an explicit completion action, such as the depression of an ENTER key. (5.15.2.1.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**INTERACTIVE COMPUTER CONTROL**
HF Considerations	**Functionality**
Abbreviation	**Int Control**

Detailed Design Considerations	YES	NO	N/A	Comment
369. Control dialog type is consistent with task requirements and user skills. (5.15.4.1)				
370. System response time following control action is consistent with operational requirements. (5.15.4.1.1)				
371. Keyboard lockout is provided where appropriate because of processing time. (5.15.4.1.1.1)				
372. If keyboard lockout occurs, indication is provided of the locked/available status of the keyboard. (5.15.4.1.1.2)				
373. If keyboard lockout occurs, a capability is provided to abort the transaction without losing inputs which occurred prior to the lockout. (5.15.4.1.1.3)				
374. Control/display relationships are straightforward and explicit. (5.15.4.1.2)				
375. Control actions are simple and direct. (5.15.4.1.2)				
376. Provisions are made to prevent accidental actuation of potentially destructive control actions, including the possibility of accidental erasure or memory dump. (5.15.4.1.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**INTERACTIVE COMPUTER CONTROL**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Int Control**

Detailed Design Considerations	YES	NO	N/A	Comment
377. Controls are compatible with the lowest anticipated user skill levels. (5.15.4.1.4)				
378. Information necessary to select or enter a control action is available to the user when the control action is appropriate. (5.15.4.1.5)				
379. User control inputs result in a positive feedback response displayed to indicate performance of requested actions. (5.15.4.1.6)				
380. Control feedback responses to correct user input consists of changes in state or value of those elements of the displays which are being controlled. (5.15.4.1.13)				
381. The displayed cursor is advanced by a tab key to the next data entry field when the user has completed entry of the current field. (5.15.4.3.6)				
382. A control is provided for user acceptance of stored data values or defaults. (5.15.6.7)				
383. Provision is made for the user to stop the computer control process and return to the state prior to the last control input. (5.15.8.6)				
384. In multi-step processes, provision is made for the user to return to previous levels. (5.15.8.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**INTERACTIVE COMPUTER CONTROL**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Int Control**

Detailed Design Considerations	YES	NO	N / A	Comment
385. When the user enters correction of an error, such corrections are implemented by an explicit action by the user (e.g., actuation of an ENTER key). (5.15.8.8)				
386. The system requires the user to acknowledge critical entries prior to their being implemented by the system. (5.15.8.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	MENU SELECTION COMPUTER CONTROL
HF Considerations	Functionality
Abbreviation	Menu

Detailed Design Considerations	YES	NO	N/A	Comment
387. System response time following menu input is 0.2 sec. or less. See TABLE XXVIII in MIL-STD-1472D. (5.15.4.1)				
388. Light pens or other pointing devices are used for menu selection. (5.15.4.2.2.1)				
389. Separate control actions are provided for: a) Designating a menu choice b) Entering the menu choice. (5.15.4.2.2.1)				
390. A capability is provided to stack menu choices for execution in a sequence without having each menu displayed. (5.15.4.2.2.3)				
391. Where a hierarchy of menus is used, a capability is provided to directly command items in submenus without having each menu displayed. (5.15.4.2.8)				
392. Where a hierarchy of menus is used, a capability is provided to return to the next higher level menu. (5.15.4.2.13)				
393. Where a hierarchy of menus is used, a capability is provided to return to the top level menu. (5.15.4.2.14)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	FORM FILLING COMPUTER CONTROL
HF Considerations	Functionality
Abbreviation	Form

Detailed Design Considerations	YES	NO	N / A	Comment
394. A TAB key or other control is provided to advance the cursor to the next field in the form. (5.15.4.3.6)				
395. Form filling dialog is provided where composition of complex control sequences is necessary. (5.15.4.3.16)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMMAND LANGUAGE COMPUTER CONTROL**
HF Considerations	**Functionality**
Abbreviation	**Cmd Lang**

Detailed Design Considerations	YES	NO	N/A	Comment
396. The command language reflects the user's point of view such that the commands are logically related to the user's conception of what is being done. (5.15.4.5.2)				
397. Commands are distinctive from one another. (5.15.4.5.3)				
398. The command language contains a minimum of punctuation or other special characters. (5.15.4.5.4)				
399. The user is permitted to enter the full command name or an abbreviation for any command of more than 5 characters. (5.15.4.5.5)				
400. All commands and their abbreviations, if any, are standardized and consistent with MIL-STD-12, MIL-STD-411, or MIL-STD-783. (5.15.4.5.6)				
401. Commands are entered and displayed in a standard location on the display. (5.15.4.5.7)				
402. The user is able to request prompts, as necessary, to determine required parameters in a command entry. (5.15.4.5.8)				
403. Command language structure and complexity is consistent with user skill level. (5.15.4.5.9)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMMAND LANGUAGE COMPUTER CONTROL**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Cmd Lang**

Detailed Design Considerations	YES	NO	N/A	Comment
404. User defined macro names which are the same as a reserved word in the command language are not accepted by the system. (5.15.4.5.10)				
405. Capability is provided for command editing using the same techniques employed for editing of other data entries. (5.15.4.5.11)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TEXT/PROGRAM EDITING CONTROL**
HF Considerations	**Functionality**
Abbreviation	**Edit**

Detailed Design Considerations	YES	NO	N/A	Comment
406. ROLL and SCROLL commands refer to the display window, not the text/data. (5.15.3.7.3)				
407. Easy-to-use special editing commands such as MOVE, COPY, and DELETE, for adding, inserting, or deleting text/program segments are provided. (5.15.3.7.4)				
408. Text editing commands are based on character, word, sentence, paragraph or higher-order segments. (5.15.3.7.4.1)				
409. Program editing commands are based on lines or subprograms. (5.15.3.7.4.2)				
410. When available, line-by-line syntax checking is under user control. (5.15.3.7.4.2)				
411. For editing programs or tabular data, cursor tab controls or other provisions for establishing and moving readily from field to field are provided. (5.15.3.7.4.3)				
412. Where editing commands are entered by keying onto the display, the editing commands are readily distinguishable from the displayed text. (5.15.3.7.5)				
413. An easy-to-use means is provided for specification of format control features during editing. (5.15.3.7.9)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TEXT/PROGRAM EDITING CONTROL
HF Considerations	Functionality (Cont.)
Abbreviation	Edit

Detailed Design Considerations	YES	NO	N/A	Comment
414. In printing text, the capability is provided for the user to select printing options. (5.15.3.7.14)				
415. Capability is provided to readily move the cursor to the head (start) or foot (end) of the text file. (5.15.3.7.15)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

6. SPECIAL CONTROLS

Contents	Abbreviation	Page
Functionality	Function	B-148
Location & Arrangement	Loc	B-150
Direction & Force	Dir	B-151
Clearance & Separation	Clear	B-153
Visibiltiy & Identification	Vis	B-154

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SPECIAL CONTROLS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Aircraft control design conforms to requirements of applicable standards for aircraft stations including: MIL-STD-203 MIL-STD-250 MIL-STD-411 MIL-STD-783 MIL-STD-850 MIL-STD-1333 MIL-STD-1776 MIL-STD-1787 MIL-STD-1800 MIL-STD-1801 MIL-L-5667 MIL-L-85762 MIL-L-87240 MIL-M-18012 MIL-P-7788 AFGS-87213A. (5.14.2.1)				
2. Firing mechanism for ejection seats is located or protected to preclude inadvertent actuation. (5.14.4.3.4)				
3. Aircraft ejection system design conforms to the requirements of MIL-S-9479 or MIL-S-18471. (5.14.4.3)				
4. Fixed wing aircraft control actuations conform to requirements of MIL-STD-203.				
5. Rotary wing aircraft control actuations conform to requirements of MIL-STD-250.				
6. Ejection controls are operable by 3rd to 98th percentile crewman.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SPECIAL CONTROLS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
7. Controls, switches, control guards, and covers are operable by gloved hand. (5.4.1.6)				
8. Rotary aircraft collective control design conforms to the requirements of MIL-STD-1333.				
9. Actuation of controls and switches involving flight safety are consistent with previous models of the particular aircraft.				
10. Ejection controls do not jeopardize user's safety or hinder emergency escape.				
11. Single, multiple throttle control design conforms to the requirements of MIL-STD-1333 except that multiple throttle design is based on forward most position of throttle farthest from crewman.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**SPECIAL CONTROLS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N / A	Comment
12. Ejection controls are readily accessible and are operable by either hand. (5.14.4.3.3)				
13. Landing gear lock/release is operable by hand or foot. (5.12.7.1.4)				
14. Fixed wing aircraft cockpit control locations conform to requirements of MIL-STD-203.				
15. Rotary wing aircraft cockpit control locations conform to requirements of MIL-STD-250.				
16. Aircraft controls are operable with shoulder harness locked.				
17. Rotary wing aircraft have no emergency control that requires the removal of the pilot's right hand from the cyclic stick.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**SPECIAL CONTROLS**
HF Considerations	**Direction & Force**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
18. All "conventional" controls have direction of movement which is consistent with the related movement of an associated display, equipment, component or vehicle. (5.4.1.2.1)				
19. All "performance-related" controls are designed so that actuation forward, clockwise, to the right or upward results in an increase in the quantity being controlled. (5.4.1.2.1)				
20. Controls for multidimensional operation have direction of motion relationships which are consistent with operator expectations. (5.4.1.2.2)				
21. Overhead switch actuation increases the quantity being controlled when moved: a) Upward, if the panel forms an angle of 0° to 30° (0 to 0.52 rad) with respect to the vertical axis. b) Forward, if the panel forms an angle greater than 30° (0.52 rad) and equal to or less than 90° (1.57 rad).				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**SPECIAL CONTROLS**
HF Considerations	**Direction & Force (Cont.)**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
22. Primary or curtain ejection control force : Extract 20 lb. (9 kg) min., 40 lb. (18 kg) max. Fire 30 lb. (14 kg) min., 40 lb. (18 kg) max. Alternate or D-ring: Extract 20 lb. (9 kg) min., 40 lb. (18 kg) max. Fire 30 lb. (14 kg) min., 40 lb. (18 kg) max.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SPECIAL CONTROLS
HF Considerations	Clearance & Separation
Abbreviation	Clear

Detailed Design Considerations	YES	NO	N/A	Comment
23. Pitch and roll control clearances conform to the requirements of MIL-STD-1333.				
24. Yaw control clearances conform to the requirements of MIL-STD-1333..				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**SPECIAL CONTROLS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
25. Emergency controls are coded using yellow and black stripes or background. (5.4.1.4.5.5)				
26. Emergency control colors are limited to grey, black, white or yellow.				
27. Printed instructions in the cockpit are minimized and lighted.				
28. Cockpit information is displayed: lettering, numbering, markings, symbols on displays, controls, and control panels; emergency procedures for exiting and ditching; flight and operational procedures; radio call signs.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

7. DISPLAYS

Contents	Abbreviation	Page
CONTROL DISPLAY INTEGRATION	CD Int	B-156
DISPLAYS - Functionality	Function	B-158
DISPLAYS - Location & Arrangement	Loc	B-160
DISPLAYS - Direction	Dir	B-162
DISPLAYS - Visibility & Identification	Vis	B-163
DISPLAYS - Use Conditions & Safety	Use	B-167
TRANSILLUMINATED DISPLAYS	Trans	B-168
SCALE INDICATORS	Scale	B-174
CATHODE RAY TUBE DISPLAYS	CRT	B-178
COMPUTER DISPLAY FORMATS	Format	B-180
COMPUTER DISPLAY CONTENT	Content	B-183
COMPUTER DISPLAY CODING	Coding	B-184
DYNAMIC COMPUTER DISPLAYS	Dyn	B-186
TABULAR COMPUTER DISPLAYS	Tab	B-187
COMPUTER TEXT DISPLAYS	Text	B-190
LARGE SCREEN DISPLAYS	Large	B-191
COUNTERS	Counter	B-196
PRINTERS	Print	B-198
PLOTTERS & RECORDERS	Plot Rec	B-200
FLAGS	Flag	B-202
LEDS, DOT MATRIX & SEGMENTED DISPLAYS	LED	B-203
ELECTROLUMINESCENT DISPLAYS	Electro	B-205
COMPUTER AUDIO DISPLAYS	Audio	B-206
INTERACTIVE COMPUTER DISPLAYS	Interact	B-207
MENU SELECTION COMPUTER DISPLAYS	Menu	B-208
FORM FILLING COMPUTER DISPLAYS	Form	B-209
COMPUTER FEEDBACK DISPLAYS	Feedback	B-211
COMPUTER PROMPPTING DISPLAYS	Prompt	B-213
COMPUTER ERROR CORRECTION DISPLAYS	Error	B-215

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	CONTROL/DISPLAY INTEGRATION
HF Considerations	Functionality
Abbreviation	CD Int

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Relationship between the display and its associated controls are unmistakable in terms of: a) The proper control to use. b) Direction of movement of the control. c) Rate and limits of movement of the control. (5.1.1.1)				
2. Functionally related units are grouped together and are similar from panel to panel. (5.1.2.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONTROL/DISPLAY INTEGRATION**
HF Considerations	**Location & Arrangement**
Abbreviation	**CD Int**

Detailed Design Considerations	YES	NO	N/A	Comment
3. A visual display which must be monitored concurrently while activating a related control is located to prevent parallax. (5.1.2.3.3)				
4. All displays are arranged in the sequence in which they are used. (5.1.2.1.1.1)				
5. Controls are located adjacent to (either under or to the right of) associated displays. (5.1.1.1)				
6. Displays in groups are located from left-to-right and/or top to-bottom order of use. (5.1.2.1.1.1)				
7. Displays used in system checkout are located so they can be observed from one position.				
8. Emergency visual displays are located within a 30° (0.52 rad) cone about the operator's normal line of sight. (5.1.2.3.8)				
9. If frequent or precision reading is required, displays are located 50 to 65 in. (127 to 165 cm) above standing surface. (5.7.2.3)				
10. Control & display groups for maintenance use only are not located in prime operating space. (5.1.2.1.1.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLAYS**
HF Considerations	**Functionality**
Abbreviation	**Function**

Detailed Design Considerations	YES	NO	N/A	Comment
11. Displays provide updated information in a synchronous manner corresponding to the degree of timeliness required by personnel in normal operating modes. (5.2.1.3.10)				
12. Displays which cannot or may not be watched continuously, but need continuous monitoring, have a suitable auditory or visual warning backup.				
13. Information displayed is at a level of accuracy required for the operator's action or decision. (5.2.1.3.1)				
14. Display scales are limited to only that information needed to make a decision or take action. All needed information is presented. (5.2.1.3.1)				
15. Multifunction displays providing integrated information advise or alert the operator to critical information within the display. (5.2.1.3.11)				
16. The information displayed is clear, specific, and useable and is not redundant or degraded by vibration. (5.2.1.4.5)				
17. The precision of the display presentation is consistent with system precision. (5.2.1.3.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLAYS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Function**

Detailed Design Considerations	YES	NO	N/A	Comment
18. Trademarks and company names or other similar markings not related to panel function are not displayed on the panel face. (5.2.1.3.8)				
19. Audio signals and visually displayed information are of sufficient duration to be reliably detected. (5.2.1.3.9)				
20. The display indicator ceases to move after the control movement stops. (5.1.3.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLAYS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N / A	Comment
21. Display arrangement is consistent from one situation to another. (5.2.1.4.10)				
22. Displays are located where they can be read to the required degree of accuracy. (5.2.1.4.1)				
23. Frequently used displays are grouped together and are placed in the optimal visual zone. See FIGURES 1 and 2 in MIL-STD-1472D. (5.2.1.4.8)				
24. Frequently used displays are grouped together. (5.2.1.4.8)				
25. If on separate panels, the positions of related controls and displays correspond and the panels do not face each other. (5.1.2.3.6)				
26. Important or critical displays are located in a privileged position within a 30° (0.52 rad) cone about the operator's normal line of sight or otherwise highlighted. (5.2.1.4.9)				
27. In sequential displays, the sequence progresses from left to right. (5.2.1.4.7)				
28. In standing positions, the most frequently used displays are located approximately at the eye level of the operator. (5.7.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLAYS**
HF Considerations	**Location & Arrangement (Cont.)**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
29. Information for different types of activities is not combined unless the activities require the same information. (5.2.1.3.5)				
30. Information is presented in such form that no interpretation or decoding is necessary. (5.2.1.3.3)				
31. Meters, dials, and instruments are so sized and arranged that they can be read from the normal operating position. (5.2.1.4.1)				
32. On units without an operational panel, maintenance displays are located on one face accessible in normal installation. (5.2.1.4.1)				
33. Trademarks, company names, and other unnecessary information are not on the panel face. (5.2.1.3.8)				
34. Unusual aids such as ladders, extra lighting, etc., are not needed to read or gain access to a display. (5.2.1.4.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLAYS**
HF Considerations	**Direction**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
35. Scale values and their indexes are consistent in direction of increase or decrease. (5.2.3.2.1)				
36. Rotation of controls is clockwise to increase the associated indication. (5.2.3.2.3.2)				
37. Display numbers increase from bottom to top or from left to right. (5.2.3.3.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLAYS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
38. A viewing distance of up to 30 inches (760 mm) is used with ejection seats. (5.2.1.4.11)				
39. A seated viewing distance of up to 25 inches (635 mm) is provided. (5.2.1.4.11)				
40. Adjustable illumination is provided for displays that must be monitored under variable lighting conditions. (5.1.1.5)				
41. Color or other coding technique is used where possible. (5.2.1.5.2)				
42. Cover glass on displays does not fog up.				
43. Dials are visible to arctic-clothed user. (5.6.4)				
44. Glare does not interfere with readability of the display at a location. (5.2.1.4.4)				
45. Illumination is uniform. (5.2.1.2)				
46. Integrally illuminated displays are uniformly lighted such that the ratio of the standard deviation of indicator element luminances to mean indicator luminance is not more than .25, using eight or more equally spaced test measurements. (5.2.1.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DISPLAYS
HF Considerations	Visibility & Identification (Cont.)
Abbreviation	Vis

Detailed Design Considerations	YES	NO	N/A	Comment
47. Most important displays are placed in the optimum visual zone. See FIGURES 1 and 2 in MIL-STD-1472D. (5.2.1.4.9)				
48. Panel light levels are continuously variable from 0.03 ft-L (0.1 cd/sq m) near OFF to 1.0 ft-L (3.5 cd/sq m) at 50% of clockwise rotation. (5.2.1.2.1.3)				
49. The display can be read quickly in the manner desired (quantitative, qualitative, or check reading). (5.2.1.3.3)				
50. The display face is not less than 45° (0.8 rad) from the operator's normal line of sight. See FIGURE 1 in MIL-STD-1472D. (5.2.1.4.3)				
51. The effective viewing distance to displays, with the exception of cathode ray tube displays and collimated displays, is not less than: 13 in (330 mm) min., 20 inches (510 mm) preferred. (5.2.1.4.12)				
52. The viewing distance from the eye reference point of the seated operator to displays located close to their associated controls does not exceed 25 in (635 mm). (5.2.1.4.11)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DISPLAYS
HF Considerations	Visibility & Identification (Cont.)
Abbreviation	Vis

Detailed Design Considerations	YES	NO	N/A	Comment
53. When complete dark adaptation is required, low luminance [0.02 - 0.10 ft-L (0.07 - 0.35 cd/sq m)] red light (greater than 620 nm) is provided. (5.2.1.2.1.1)				
54. When control or annunciator panels will be viewed by personnel out of doors at night, maximum panel illumination is provided when a dimming rotary control is at its extreme clockwise rotation. (5.2.1.2.1.3)				
55. When maximum dark adaptation is not required, low brightness white light is used. (5.2.1.2.1.1)				
56. Multiple displays grouped together will have brightness uniformity across the range of full ON to full OFF. (5.2.1.2)				
57. Where multiple displays are grouped together, lighting is balanced across the instrument panel such that the mean indicator luminances of any two instruments do not differ by more than 33% across the range of full ON to full OFF. (5.2.1.2.2)				
58. Where night vision device compatibility is required, display illumination color other than red is used. (5.2.1.2.1.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DISPLAYS
HF Considerations	Visibility & Identification (Cont.)
Abbreviation	Vis

Detailed Design Considerations	YES	NO	N / A	Comment
59. Where night vision device compatibility is required, lighting is continuously variable to the full OFF position. In the OFF position, no current flows through the lamps. (5.2.1.2.1.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**DISPLAYS**
HF Considerations	**Use Conditions, Safety**
Abbreviation	**Use**

Detailed Design Considerations	YES	NO	N/A	Comment
60. Mechanical overlays, such as coverings over keyboards or transparent sheets placed on displays, are not used. (5.15.10.1)				
61. Failure in the unit is clearly shown or the operator is otherwise warned. (5.2.1.3.6)				
62. Failure of a display circuit is immediately apparent. (5.2.1.3.6)				
63. Failure of the display circuit does not affect display equipment. (5.2.1.3.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TRANSILLUMINATED DISPLAYS**
HF Considerations	**Functionality**
Abbreviation	**Trans**

Detailed Design Considerations	YES	NO	N/A	Comment
64. Dimming capability to full OFF is provided only for lighted indicators providing non-critical operational information. (5.2.2.1.10)				
65. Flashing lights are used only to call the operator's attention to a condition requiring action. (5.2.2.1.19)				
66. Indicator lights are capable of providing flashing red for emergency or malfunction conditions. (5.2.2.1.9)				
67. Indicator lights only show information needed for effective system operation. (5.2.2.1.3)				
68. A signal absence denotes only a "power off" condition and does not denote "go ahead", "ready," etc. (5.2.2.1.4)				
69. Indicator lights show equipment response, not merely control position and are used sparingly. (5.2.2.1.2)				
70. Legend lights are used in preference to simple indicator lights. (5.2.2.2.1)				
71. Lighted indicators display qualitative information to the operator concerning system status or required immediate actions. (5.2.2.1.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TRANSILLUMINATED DISPLAYS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Trans**

Detailed Design Considerations	YES	NO	N/A	Comment
72. Luminance controls for lighted indicators are capable of making multiple step or continuously variable illumination adjustments. (5.2.2.1.10)				
73. Transilluminated (integrally lighted) panel assemblies are used to: a) Provide illuminated labels for a control panel. b) Provide a light source for transilluminated knobs and/or association markings on a control panel. c) Create a pictorialized representation of a system process. (5.2.2.4.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TRANSILLUMINATED DISPLAYS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Trans**

Detailed Design Considerations	YES	NO	N/A	Comment
74. With the exception of aircrew station signals (MIL-STD-411) and training equipment (MIL-T-23991) transilluminated, LED and incandescent displays conform to the following color code: a) Flashing red denotes only emergency conditions which require operator action without undue delay to avert personnel injury and/or equipment damage. b) Red alerts an operator that a system or any of its parts is inoperative or that a successful mission is not possible unless corrective action is taken. c) Yellow advises an operator of a marginal condition or alerts him to situations of caution, recheck or unexpected delay. d) Green indicates that monitored equipment is in tolerance or that a state of readiness exists. e) White shows system conditions that do not have "right" or "wrong" implications such as alternating functions, except that white is not used in aircraft flight stations. f) Blue is used for advisory lights only, except that blue is not used in aircraft flight stations. (5.2.2.1.18)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TRANSILLUMINATED DISPLAYS**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Trans**

Detailed Design Considerations	YES	NO	N/A	Comment
75. Indicator lights are immediately and unavoidably associated with the proper control. (5.2.2.1.6)				
76. On units with operator displays, maintenance displays are located behind access doors on the operator panel. (5.2.2.1.8)				
77. Viewing distance from the eye to the displays located close to controls is: 13 in. (330 mm) min., 25 in. (635 mm) max. (5.2.4.11, 5.2.4.12)				
78. Legend lights signifying danger are larger than other legend lights. (5.2.2.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TRANSILLUMINATED DISPLAYS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Trans**

Detailed Design Considerations	YES	NO	N/A	Comment
79. In alternately-presented legends only one legend is clearly visible at a time. (5.2.2.2.6)				
80. In stacked legends: a) Front legends do not obscure rear legends. b) Parallax is minimized. c) Front and rear legends are equal in brightness and contrast with background. (5.2.2.2.6)				
81. Indicators are not exposed to direct or reflected light. (5.2.2.1.11)				
82. Lighted indicators used solely for maintenance and adjustment are not visible during normal operation but are readily accessible when required. (5.2.2.1.8)				
83. Luminance contrast within the indicator is at least 0.1. (5.2.2.1.12)				
84. The luminance of transilluminated displays is at least 10% greater than the surrounding luminance. (5.2.2.1.9)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TRANSILLUMINATED DISPLAYS**
HF Considerations	**Use Conditions**
Abbreviation	**Trans**

Detailed Design Considerations	YES	NO	N/A	Comment
85. Changes in display status represent the functional state of the system rather than the results of control activation alone. (5.2.2.1.4)				
86. Flashing lights have a flash rate of 3 to 5 flashes per second; in case of flasher failure, the light illuminates and burns steadily. (5.2.2.1.19)				
87. Lighted indicators incorporate filament redundancy or dual lamps. (5.2.2.1.13)				
88. Simultaneously active flashing lights have synchronized flashes. (5.2.2.1.19)				
89. Where glare must be reduced, the luminance of transilluminated displays does not exceed 300% of the surrounding luminance. (5.2.2.I.9)				
90. Indicators used at night can be dimrned [0.02 to 1.0 ft-L (0.07 to 3.5 cd/sq m)]. (5.2.2.1.10)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SCALE INDICATORS
HF Considerations	Functionality, Location & Arrangement
Abbreviation	Scale

Detailed Design Considerations	YES	NO	N/A	Comment
91. The same numerical progression is used on all scales of combined displays. (5.2.3.2.1)				
92. Pointer tip is tapered at a 20° angle (40° included angle). (5.2.3.1.7.2)				
93. Scale pointers are tapered at the end terminating in a flat tip equal in width to the minor scale graduation. (5.2.3.1.7.2)				
94. There is an obvious break of at least 10° (175. mrad) of arc between the two ends of the scale, except on multirevolution instruments such as clocks. (5.2.3.2.3.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SCALE INDICATORS
HF Considerations	Direction
Abbreviation	Scale

Detailed Design Considerations	YES	NO	N/A	Comment
95. For circular scales, alignment of pointer or fixed reference line is in the 12 o'clock position for right-left directional information and in the 9 o'clock position for up-down information. (5.2.3.2.3.5)				
96. For circular scales, alignment of pointer or fixed reference line is in the 12 o'clock position for right-left directional information and in the 9 o'clock position for up-down information. (5.2.3.3.3)				
97. For indicating a stable value, groups of indicators are arranged either in rows so all pointers line up horizontally or in columns so all pointers line up vertically. (5.2.3.2.4.5)				
98. If positive and negative values are displayed around a zero for all moving pointer displays but circular, magnitude of positive values increases with up or to the right movement of the pointer or magnitude of negative values increases with pointer movement down or to the left. (5.2.3.2.4.2)				
99. On fixed-pointer or moving scale indicators, numbers progress in magnitude in clockwise direction around the faces of circular dials. (5.2.3.3.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SCALE INDICATORS
HF Considerations	Direction (Cont.)
Abbreviation	Scale

Detailed Design Considerations	YES	NO	N/A	Comment
100. On vertical or horizontal straight moving scales, numbers increase from bottom to top or from left to right. (5.2.3.3.1)				
101. The magnitude of positive values increases with a clockwise movement of a circular meter pointer; magnitude of negative values increases with a counterclockwise movement. (5.2.3.2.3.2)				
102. The magnitude of scale reading increases with clockwise movement of the pointer. (5.2.3.2.3.1)				
103. The magnitude of the scale reading increases with movement of the pointer up or to the right. (5.2.3.2.4.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SCALE INDICATORS
HF Considerations	Visibility & Identification
Abbreviation	Scale

Detailed Design Considerations	YES	NO	N/A	Comment
104. Luminance contrast of at least 3.0 is provided between the scale face and the markings and pointer. (5.2.3.1.8)				
105. Pointer tail is the same color as the dial face, unless the tail is used as an indicator or the pointer is used for horizontal alignment. (5.2.3.1.7.4)				
106. Pointers are located to the right of vertical scales and at the bottom of horizontal scales. (5.2.3.2.4.3)				
107. The display pointer extends to, but does not obscure, the index mark width. (5.2.3.1.7.1)				
108. The display pointer is mounted as close as possible to the dial face to eliminate parallax and shadows. (5.2.3.1.7.3)				
109. The tip to the center of the dial part of a pointer is the same color as the marks. (5.2.3.1.7.4)				
110. There is a high degree of contrast between the scale face and markings. (5.2.3.1.8)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CATHODE RAY TUBE DISPLAYS**
HF Considerations	**Functionality, Location & Arrangement, Size & Shape**
Abbreviation	**CRT**

Detailed Design Considerations	YES	NO	N / A	Comment
111. Control is provided to vary the CRT luminance from 10% of minimum ambient luminance to full CRT luminance. (5.2.4.3)				
112. Control is provided to vary the luminous symbol/dark background or dark symbol/luminous background contrast ratio. (5.2.4.3)				
113. Audio signals are not of an intensity or quality to create a disturbance. (5.3.4.2.1)				
114. A 16 in (400 mm) viewing distance is provided for CRTs. (5.2.4.2)				
115. When periods of scope observation are short, or when dim signals must be detected, minimum CRT viewing distance is 10 in (250 mm). (5.2.4.2)				
116. The target signal on a CRT does not subtend less than 20 minutes (6 mrad) of visual angle or less than 10 lines or resolution elements. (5.2.4.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CATHODE RAY TUBE DISPLAYS**
HF Considerations	**Visibility & Identification**
Abbreviation	**CRT**

Detailed Design Considerations	YES	NO	N/A	Comment
117. If faint signal detection is required and ambient illumination is above 0.25 ft-c (2.7 lux), the CRT is hooded, shielded, or recessed. (5.2.4.4)				
118. The ambient illuminance does not contribute more than 25% of screen brightness through diffuse reflection and CRT phosphor excitation. (5.2.4.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER DISPLAY FORMATS**
HF Considerations	**Functionality, Location & Arrangement**
Abbreviation	**Format**

Detailed Design Considerations	YES	NO	N/A	Comment
119. Essential data, text, and formats are under computer, not user, control. (5.15.3.1.1)				
120. Only data essential to the user's needs is displayed. (5.15.3.1.2)				
121. Data fields to be compared on a character-by-character basis are positioned one above the other. (5.15.3.1.8)				
122. When data fields have naturally occurring order (e.g., chronological), such order is reflected in the format organization of the fields. (5.15.3.1.4)				
123. When five or more alphanumeric characters without natural organization are displayed: a) The characters are grouped in blocks of three to five characters within each group. b) Separated by a minimum of one blank space or other separating character such as hyphen or slash. (5.15.3.1.7)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER DISPLAY FORMATS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Format**

Detailed Design Considerations	YES	NO	N/A	Comment
124. Data entry formats match the source document formats. (5.15.3.1.1)				
125. Data presented to the user is in a readily usable and readable form. (5.15.3.1.3)				
126. Display formats are consistent within a system. (5.15.3.1.1)				
127. Each display is labeled with a title or label that is unique within the system. (5.15.3.1.9)				
128. Each individual data group or message contains a descriptive title, phrase, word, or similar device to designate the content of the group or message. (5.15.3.1.10)				
129. Each page of a multiple page display is labeled to identify the currently displayed page and the total number of pages, e.g., Page 2 of 5. (5.15.3.1.12)				
130. Every display frame has a unique identification. (5.15.3.1.13)				
131. Every field or column heading in a display is labeled. (5.15.3.1.9)				
132. Items continued on the next page (scrolled) are numbered relative to the last item on the previous page. (5.15.3.1.11)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMPUTER DISPLAY FORMATS
HF Considerations	Visibility & Identification (Cont.)
Abbreviation	Format

Detailed Design Considerations	YES	NO	N/A	Comment
133. Recurring data fields within a system have: a) Consistent names. b) Consistent relative position within displays. (5.15.3.1.6)				
134. Separation of groups of information is accomplished by blanks, spacing, lines, color coding, or other means. (5.15.3.1.5)				
135. The frame identification is an alphanumeric code or an abbreviation which is prominently displayed in a consistent location. (5.15.3.1.13)				
136. The frame identification is short enough (3-7 characters) and/or meaningful enough to be learned and remembered easily. (5.15,3.1.13)				
137. When appropriate for users, the same format is used for input and output. (5.15.3.1.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER DISPLAY CONTENT**
HF Considerations	**Functionality, Visibility & Identification**
Abbreviation	**Content**

Detailed Design Considerations	YES	NO	N/A	Comment
138. Definitions of all abbreviations, mnemonics, and codes are provided at the user's request. (5.15.3.2.3)				
139. Information is displayed in plain concise text. (5.15.3.2.3)				
140. The content of displays within a system is presented in a consistent, standardized manner. (5.15.3.2.1)				
141. A minimum of one character space is left blank vertically above and below critical information with a minimum of two character spaces left blank horizontally before and after. (5.15.3.2.2)				
142. Abbreviations and acronyms conform to MIL-STD-12, MIL- STD-411, or MIL-STD-783. (5.15.3.2.3)				
143. Abbreviations do not contain punctuation. (5.15.3.2.3)				
144. Information density is held to a minimum in displays used for critical task sequences. (5.15.3.2.2)				
145. Words have only one consistent abbreviation. (5.15.3.2.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER DISPLAY CODING**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Coding**

Detailed Design Considerations	YES	NO	N/A	Comment
146. Brightness intensity coding is employed only to differentiate between an item of information and adjacent information. (5.15.3.3.3)				
147. Coding is employed to: a) Differentiate between items of information. b) Call the user's attention to changes in the state of the system. (5.15.3.3.1)				
148. Consistent, meaningful codes are used. (5.15.3.3.1)				
149. Information is not coded solely by color if the data must be accessed from monochromatic as well as color terminals or printed in hardcopy versions. (5.15.3.3.7)				
150. Symbols are analogs of the event or system element they represent or are in general use and well known to the users. (5.15.3.3.6)				
151. Where size difference between symbols is employed, the major dimensions of the larger are at least 150 percent of the major dimension of the smaller with a maximum of three size levels permitted. (5.15.3.3.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER DISPLAY CODING**
HF Considerations	**Visibility & Identification**
Abbreviation	**Coding**

Detailed Design Considerations	YES	NO	N/A	Comment
152. Coding does not reduce legibility or increase transmission time. (5.15.3.3.1)				
153. Each brightness level is separated from the nearest by at least a 2:1 ratio. (5.15.3.3.3)				
154. Flash coding is employed to call the user's attention to mission critical events only. (5.15.3.3.2)				
155. No more than two flash rates are used. (5.15.3.3.2)				
156. No more than three levels of brightness are used. (5.15.3.3.3)				
157. The colors selected do not conflict with the color association specified in TABLE II in MIL-STD-1472D. (5.15.3.3.7)				
158. Where one rate is used, the rate is between 3 and 5 flashes per second. (5.15.3.3.2)				
159. Where two rates are used in flash coding, the second rate is less than 2 per second. (5.15.3.3.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	DYNAMIC COMPUTER DISPLAYS
HF Considerations	Functionality, Visibility & Identification
Abbreviation	Dyn

Detailed Design Considerations	YES	NO	N/A	Comment
160. A display freeze mode is provided. (5.15.3.4.3)				
161. For frozen display frames, an option is provided to allow resumption at the point of stoppage or at the current real-time point. (5.15.3.4.3)				
162. The rate of update is controllable by the user. (5.15.3.4.2)				
163. An appropriate label is provided to remind the operator when the display is in the freeze mode. (5.15.3.4.4)				
164. Changing alphanumeric values which the operator must reliably read are not updated more often than once per second. (5.15.3.4.1)				
165. Changing values which the viewer uses to identify rate of change or to read gross values are not updated faster than 5 times per second nor slower than 2 per second, when the display is to be considered as real time. (5.15.3.4.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TABULAR DATA COMPUTER DISPLAYS**
HF Considerations	**Functionality, Location & Arrangement**
Abbreviation	**Tab**

Detailed Design Considerations	YES	NO	N/A	Comment
166. Tabular data displays are used to present row-column data. (5.15.3.5.1)				
167. Alphanumeric data is left justified. (5.15.3.5.3)				
168. Location of recurring data is similar among all tabular data displayed and common throughout the system. (5.15.3.5.2)				
169. Tabular data is displayed in a left-to-right, top-to-bottom array. (5.15.3.5.3)				
170. Tabular displays do not extend over more than one page horizontally. (5.15.3.5.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TABULAR DATA COMPUTER DISPLAYS
HF Considerations	Visibility & Identification
Abbreviation	Tab

Detailed Design Considerations	YES	NO	N/A	Comment
171. Conventional punctuation schemes are used if in common usage. Where none exist a space is used after every third or fourth digit. (5.15.3.5.7)				
172. Each item in a list starts on a new line. (5.15.3.5.6.1)				
173. Items in lists are arranged in a recognizable order, such as chronological, alphabetical, sequential, functional, or order of importance. (5.15.3.5.6)				
174. Leading zeros are not used in numerical data except where needed for clarity. (5.15.3.5.7)				
175. Long numeric fields are punctuated with spaces, commas, or slashes. (5.15.3.5.7)				
176. Numeric data is right justified with decimal points, if any, aligned vertically. (5.15.3.5.10)				
177. Strings of alphanumerics are grouped into sets of three to five characters or grouped at natural breaks. (5.15.3.5.8)				
178. When a code consists of both letters and digits, common character types are grouped by common character type for ease of location. (5.15.3.5.8)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TABULAR DATA COMPUTER DISPLAYS**
HF Considerations	**Visibility & Identification (Cont.)**
Abbreviation	**Tab**

Detailed Design Considerations	YES	NO	N/A	Comment
179. When tabular data are divided into classifications: a) The classification titles are displayed. b) Subclassifications are identified. (5.15.3.5.4)				
180. When tabular data extend over more than one page vertically, the columns are titled identically on each page. (5.15.3.5.4)				
181. When trend lines are to be compared, multiple lines are drawn on a single graph. (5.15.3.6.5)				
182. Where lists extend over more than one display page, the last line of one page is the first line of the succeeding page. (5.15.3.5.6.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER TEXT DISPLAYS**
HF Considerations	**Functionality, Visibility & Identification**
Abbreviation	**Text**

Detailed Design Considerations	YES	NO	N/A	Comment
183. Display mode rather than line mode is used for text editing. (5.15.3.7.2)				
184. Text is displayed in normal upper/ lower case front. (5.15.3.7.5)				
185. Textual data formats conform to the practices established for the particular type of textual data displayed (e.g., the format for display of specifications conforms to MIL-STD-490). (5.15.3.7.2)				
186. Paragraphs are numbered.				
187. Program lines reflect a numbering scheme for ease in editing and error correction. (5.15.3.7.4.2)				
188. Text paragraphs are separated by at least one blank line. (5.15.3.5.14)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LARGE SCREEN DISPLAYS
HF Considerations	Functionality
Abbreviation	Large

Detailed Design Considerations	YES	NO	N/A	Comment
189. A separate remote display is provided for operators who wish to make changes and receive information not of interest to the group. (5.2.5.5)				
190. Information presented on large screen group display systems is meaningful to trained observers without requiring reference to display control settings. (5.2.5.6)				
191. Large-screen displays are avoided when space and environmental conditions do not allow all critical operators to have visual access to the display in terms of viewing distance, angle, and lack of intervening objects, personnel, or ambient lighting. (5.2.5.2)				
192. Large-screen displays are used when one or more of the following conditions are true: a) A team of operators are sharing the same information. b) Team members must move about and still refer to information. c) Where it is not possible to provide each individual with commonly used information. d) To prevent disturbances resulting from looking over the shoulder(s) of individual operator(s) to see their individual displays. (5.2.5.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LARGE SCREEN DISPLAYS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Large**

Detailed Design Considerations	YES	NO	N/A	Comment
193. Projection display rates for group viewing conform to the limits of TABLE IV in MIL-STD-1472D. (5.2.6.6.2/3).				
194. Rear projection for large screen optical projection displays is used where physical obstructions to front projection prevent proper visibility or when work areas require high ambient illumination. (5.2.6.6.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LARGE SCREEN DISPLAYS**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Large**

Detailed Design Considerations	YES	NO	N/A	Comment
195. Large-screen displays are not closer to any observer than 1/2 the display width or height, whichever is greater. (5.2.5.3)				
196. Projector/screen arrangements which result in distortion of projected data are avoided. (5.2.6.6.5)				
197. Stroke width is 1/6 to 1/8 of numeral or letter height, but is narrower for light markings on a dark background. (5.2.6.6.4.1)				
198. Stroke width is the same for all letters and numerals of equal height. (5.2.6.6.4.1)				
199. The height of letters and numerals is not less than 15 minutes (4.5 mrad) of visual angle and in no instance is less than 10 minutes (3 mrad). (5.2.6.6.4.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LARGE SCREEN DISPLAYS
HF Considerations	Visibility & Identification
Abbreviation	Large

Detailed Design Considerations	YES	NO	N/A	Comment
200. A simple style of numerals and letters is used. (5.2.6.6.4.1)				
201. Capital letters are used, rather than lower case, except for extended copy or lengthy messages. (5.2.6.6.4.1)				
202. Colored markings on contrasting colored backgrounds of comparable brightness are avoided. (5.2.6.6.4.3.2)				
203. Contrast for optically projected displays is light on dark background or vice-versa, except where superposition is used. (5.2.6.6.4.3.2)				
204. For additive superposition (at the screen), contrast is light on opaque background. (5.2.6.6.4.3.2)				
205. For color photographs or black and-white photographs with grays, the minimum luminance ratio is 100:1. (5.2.6.6.4.3.1)				
206. For projections limited in shadows and detail, the minimum luminance ratio is 25:1. (5.2.6.6.4.3.1)				
207. For subtractive superposition (at the source), contrast is dark on transparent background. (5.2.6.6.4.3.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LARGE SCREEN DISPLAYS**
HF Considerations	**Visibility & Identification (Cont.)**
Abbreviation	**Large**

Detailed Design Considerations	YES	NO	N/A	Comment
208. Large-screen displays are located so that the view of the display to critical observers is not obscured routinely by normal traffic patterns. (5.2.5.4)				
209. The luminance ratio for optically projected displays under optimal ambient lighting is 500:1. (5.2.6.6.4.3.1)				
210. The minimum luminance ratio for viewing charts, printed text, and other linework via slides or opaque projectors is 5:1. (5.2.6.6.4.3.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COUNTERS**
HF Considerations	**Functionality, Size & Shape, Direction & Force**
Abbreviation	**Counter**

Detailed Design Considerations	YES	NO	N/A	Comment
211. Counters are used for presenting quantitative data when continuous trend information is not required. (5.2.6.2.1)				
212. Counters and flags are mounted close to the panel surface. (5.2.6.2.2)				
213. Horizontal separation between numerals is between one-quarter and one-half the numeral width. (5.2.6.2.3)				
214. Movement relationships: a) Numbers change by snap action in preference to continuous movement. b) Numbers follow each other not faster than 2 per second when the observer is expected to read the numbers consecutively. c) The rotation of the counter reset knob is clockwise to increase the counter indication or to reset the counter. d) Counters used to indicate the sequencing of equipment is reset automatically upon completion of the sequence and provision is made for manual resetting. (5.2.6.2.4)				
215. Where pushbuttons are used to manually reset mechanical counters, actuating force required does not exceed 60 oz (16.7 N). (5.2.6.2.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COUNTERS
HF Considerations	Visibility & Identification
Abbreviation	Counter

Detailed Design Considerations	YES	NO	N/A	Comment
216. Commas are not used. (5.2.6.2.3)				
217. Counters are horizontally positioned.				
218. Counters are self-illuminated when used in areas in which ambient illumination will provide display luminance below 1 ft-L (3.5 cd/sq m). (5.2.6.2.5)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PRINTERS**
HF Considerations	**Functionality**
Abbreviation	**Print**

Detailed Design Considerations	YES	NO	N/A	Comment
219. A take-up device for printed material is provided. (5.2.6.3.5)				
220. The user can obtain a paper copy of the exact contents of computer displays in systems where: a) Mass storage is restricted. b) Mass stored data can be lost by power interruption. c) Record keeping is required. (5.15.10.2)				
221. Information is not coded solely by color if the data must be accessed from monochromatic as well as color terminals or printed in hardcopy versions. (5.15.3.3.7)				
222. Material in printer is easily changed and indicates remaining supply of printing materials. (5.2.6.4.8)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PRINTERS
HF Considerations	Visibilility & Identification
Abbreviation	Print

Detailed Design Considerations	YES	NO	N/A	Comment
223. If ambient illumination is inadequate, printed matter is illuminated by the printer. (5.2.6.3.4)				
224. Printed matter is readily visible. (5.2.6.4.2)				
225. Printed matter provides a minimum of 3.0 luminance contrast. (5.2.6.3.3)				
226. Printed output is free from character and line misregistrations, character tilt, and character smear. (5.2.6.3.7)				
227. Printed tape is printed so that it is directly readable as it is received without requiring the cutting and pasting of tape sections. (5.2.6.3.8)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PLOTTERS AND RECORDERS
HF Considerations	Functionality, Visibility & Identification
Abbreviation	Plot Rec

Detailed Design Considerations	YES	NO	N/A	Comment
228. Plotters and recorders are used when a continuous visual record of graphic data is necessary. (5.2.6.4.1)				
229. Material in printer is easily changed and indicates remaining supply of printing materials. (5.2.6.4.8)				
230. Plotters and recorders provide positive feedback concerning the need for consumable replenishment. (5.2.6.4.8)				
231. A minimum of 1.0 luminance contrast is provided between the plotted function and the background on which it is drawn. (5.2.6.4.3)				
232. Plotters and recorders prevent pen assembly, arm, and other hardware elements from obscuring critical graphics while recording. (5.2.6.4.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PLOTTERS AND RECORDERS
HF Considerations	Operating Procedures
Abbreviation	Plot Rec

Detailed Design Considerations	YES	NO	N/A	Comment
233. Graphic overlays do not obscure or distort the data. (5.2.6.4.5)				
234. Job aids (graphic overlays) are provided when a plotter operator is required to interpret graphic data. (5.2.6.4.5)				
235. Operational procedures, adjustments, and consumable replenishment for plotters, recorders are accomplished without requiring disassembly, special equipment, or tools. (5.2.6.4.8)				
236. Plotters and recorders are designed to allow operators to mark the paper while it is still in the plotter/recorder. (5.2.6.4.7)				
237. Plotters and recorders conform to the criteria regarding controls, displays, and operational components for machine operation and minor on-site maintenance. (5.2.6.4.8)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FLAGS**
HF Considerations	**Functionality, Visibility & Identification**
Abbreviation	**Flag**

Detailed Design Considerations	YES	NO	N/A	Comment
238. Flags are used to display qualitative, non-emergency conditions. (5.2.6.5.1)				
239. Indicator display malfunction is not indicated by positioning flags so as to obscure part of the operator's view of the malfunctioning display. (5.2.6.5.5)				
240. Flags are readily apparent under all levels of illumination. (5.2.6.5.5)				
241. When flag legends are used, lettering appears upright when the flag assumes the "no go" position. (5.2.6.5.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LEDS, DOT MATRIX & SEGMENTED DISPLAYS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**LED**

Detailed Design Considerations	YES	NO	N/A	Comment
242. Dot matrix and segmented displays are used for interactive computer systems, instruments, avionics, navigation, and communications equipment where alphanumeric, vector-graphic, symbolic, or real time information is required. (5.2.6.8.2)				
243. Dot matrix and segmented display alphanumeric and symbolic characters do not subtend less than 16 minutes (4.7 mrad) of visual angle. (5.2.6.8.4)				
244. Dot matrix displays are a minimum of 5 x 7 dots, with 7 x 9 dots preferred. (5.2.6.8.3)				
245. For applications requiring the presentation of alphanumeric, vector-graphic, symbolic or real-time information, dot matrix, 14-segment and 16-segment displays are used. (5.2.6.8.2)				
246. If the system requires symbol rotation, minimum specifications are 8 x 11 dots, with 15 x 21 dots preferred. (5.2.6.8.3)				
247. Seven segment displays are used only when presenting exclusively numeric information. (5.2.6.8.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LEDS, DOT MATRIX & SEGMENTED DISPLAYS**
HF Considerations	**Visibility & Identification**
Abbreviation	**LED**

Detailed Design Considerations	YES	NO	N/A	Comment
248. Blue emitters are not used. (5.2.6.8.7)				
249. Dimming is compatible with that of incandescent displays. (5.2.6.7.3)				
250. Dot matrix, segmented, and electroluminescent displays use upper case alphanumeric characters. (5.2.6.8.5)				
251. Emitter colors for monochromatic displays use the following colors in order of preference: green (555 nm), yellow (575 nm), orange (585 nm), and red (660 nm). (5.2.6.8.7)				
252. LEDs are red only and not near red warning lights. (5.2.6.7.4)				
253. Optimum viewing angles for dot matrix and segmented displays are perpendicular to the display and not presented at an angle greater than 35° (0.61 rad) off axis. (5.2.6.8.6)				
254. Red LEDs/segmented displays are not grouped with or located adjacent to red warning lights. (5.2.6.8.10)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ELECTROLUMINESCENT DISPLAYS**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Electro**

Detailed Design Considerations	YES	NO	N/A	Comment
255. Electroluminescent displays are used in conditions requiring the use of integrally lighted displays. (5.2.6.9.1)				
256. Electroluminescent displays are used when display reliability is critical. (5.2.6.9.1)				
257. Supplemental viewing system is provided for remote handling situations. (5.10.4.4)				
258. Alphanumeric characters for flight displays using dot matrix, segmented, or electroluminescent displays do not subtend less than 24 minutes (7 mrad) of visual angle. (5.2.6.9.2)				
259. Electroluminescent display alphanumeric and symbolic characters do not subtend less than 15 minutes (4.4 mrad) of visual angle. (5.2.6.9.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER AUDIO DISPLAYS**
HF Considerations	**Functionality**
Abbreviation	**Audio**

Detailed Design Considerations	YES	NO	N/A	Comment
260. Audio signals used in conjunction with visual displays are: a) Supplementary to the visual signals. b) Used to alert and direct the user's attention to the appropriate visual display. (5.15.3.8.3)				
261. The intensity, duration, and source location of the signal is compatible with the acoustical environment of the intended receiver as well as the requirements of other personnel in the signal area. (5.3.3.2.1)				
262. Signals are intermittent. (5.15.3.8.4)				
263. Signals are automatically terminated by operator response action or by manual control. (5.15.3.8.4)				
264. Frequency of audio signals conforms to 5.3.3.1.1 of MIL-STD-1472D. (5.15.3.8.5)				
265. Audio design criteria follow 5.3.1, 5.3.2.1, and 5.3.2.3 of MIL-STD-1472D. (5.15.3.8.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**INTERACTIVE COMPUTER DISPLAYS**
HF Considerations	**Functionality, Visibility & Identification**
Abbreviation	**Interact**

Detailed Design Considerations	YES	NO	N/A	Comment
266. An acknowledgement message is employed only in those cases where the more conventional mechanism is not appropriate or where feedback response time must exceed one second. (5.15.4.1.13)				
267. Except for broadcast communication systems, the transmitter of each message in inter-user communications is identified. (5.15.4.1.16)				
268. When numeric data is displayed or required for control input, such data is in the decimal, rather than binary, octal, hexa-decimal, or other number system. (5.15.4.1.10)				
269. Information necessary to select or enter a specific control action is available to the user when selection of that control action is appropriate. (5.15.4.1.5)				
270. The presence and location of control input data entered by the user is clearly indicated. (5.15.4.1.15)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**MENU SELECTION COMPUTER DISPLAYS**
HF Considerations	**Functionality, Visibility & Identification**
Abbreviation	**Menu**

Detailed Design Considerations	YES	NO	N/A	Comment
271. If several levels of hierarchical menus are provided, a direct function call capability is provided. (5.15.4.2.8)				
272. Menus are presented in a consistent format throughout the system and are readily available at all times. (5.15.4.2.4)				
273. The system only presents menu selections for actions which are currently available. (5.15.4.2.3)				
274. Menu selections are listed in a logical order or, if no logical order exists, in the order of frequency of use. (5.15.4.2.5)				
275. When the number of selections can fit on one page in no more than two columns, a simple menu is used. (5.15.4.2.6)				
276. If menu selections must be made by keyed codes, the options are coded by the first several letters of their displayed labels. (5.15.4.2.11)				
277. Section codes and associated descriptors are presented on single lines. (5.15.4.2.7)				
278. When selections are indicated by coded entry, the code associated with each option is included on the display in some consistent manner. (5.15.4.2.10)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FORM FILLING COMPUTER DISPLAYS**
HF Considerations	**Functionality**
Abbreviation	**Form**

Detailed Design Considerations	YES	NO	N/A	Comment
279. A displayed cursor is positioned by the system at the first data entry field when the form is displayed. (5.15.4.3.6)				
280. Protected areas of the display areas are: a) Designated. b) Made inaccessible to the user via the cursor. (5.15.4.3.12)				
281. When a consistent dimensional unit is used in a given entry field, the dimensional unit is provided by the computer. (5.15.4.3.10)				
282. When required data entries have not been input: a) The omission is indicated to the user. b) Either immediate or delayed input of the missing items is allowed. (5.15.4.3.11)				
283. When the dimensional unit varies for a given field, it is provided, or selected, by the user. (5.15.4.3.10)				
284. Displayed forms are arranged such that related items are grouped together. (5.15.4.3.2)				
285. A standard input form is used. (5.15.4.3.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	FORM FILLING COMPUTER DISPLAYS
HF Considerations	Functionality (Cont.)
Abbreviation	Form

Detailed Design Considerations	YES	NO	N/A	Comment
286. Field labels are distinctively presented such that they can be distinguished from data entry. (5.15.4.3.5)				
287. Fields or groups of fields are separated by lines or other delineation cues. (5.15.4.3.4)				
288. Labels for data entry fields incorporate additional cueing of data format where the entry is made up of multiple inputs, e.g., DATE (M/D/Y): _____/_____/_____. (5.15.4.3.5)				
289. Required fields are distinguished from optional fields. (5.15.4.3.4)				
290. The format and content of displayed forms is perceptually related to that of paper forms if paper forms are used to guide data entry. (5.15.4.3.3)				
291. The maximum acceptable length for variable length fields is indicated. (5.15.4.3.7)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER FEEDBACK DISPLAYS**
HF Considerations	**Functionality**
Abbreviation	**Feedback**

Detailed Design Considerations	YES	NO	N/A	Comment
292. Confirmation of user input occurs without removing the data display. (5.15.5.4)				
293. Feedback is provided to the user to provide status information. (5.15.5.1)				
294. Feedback is self explanatory. (5.15.5.7)				
295. If the system rejects user input, feedback is provided to indicate the reason for rejection and the required corrective action. (5.15.5.7)				
296. The information displayed to the user is limited to that which is necessary to perform specific actions or to make decisions. (5.15.4.6.2)				
297. When a control process or sequence is completed or aborted by the system, positive indication is presented to the user concerning the outcome of the process and the requirements for subsequent user action. (5.15.5.3)				
298. When multiple modes of operation exist, a means is provided to remind the user of the current mode. (5.15.5.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER FEEDBACK DISPLAYS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Feedback**

Detailed Design Considerations	YES	NO	N / A	Comment
299. When system functioning requires the user to stand-by, periodic feedback is provided to indicate normal system operation. (5.15.5.2)				
300. When a displayed message or datum is selected as an option or input to the system, the subject item is highlighted to indicate acknowledgment by the system. (5.15.5.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMPUTER PROMPTING DISPLAYS**
HF Considerations	**Functionality**
Abbreviation	**Prompt**

Detailed Design Considerations	YES	NO	N/A	Comment
301. A dictionary of abbreviations and codes is available on-line. (5.15.6.5)				
302. Currently defined default values are displayed automatically in their appropriate data fields with the initiation of a data entry transaction. (5.15.7.1)				
303. On-line documentation, off-line documentation, and help instructions use consistent terminology. (5.15.6.6)				
304. Prompts and help instructions are used to explain commands, error messages, system capabilities, display formats, procedures, and sequences and to provide data. (5.15.6.1)				
305. Prompts and help instructions for system-controlled dialogue are explicit. (5.15.6.3)				
306. Prompts are clear and understandable. (5.15.6.4)				
307. Prompts do not require reference to coding schemes or conventions which may be unfamiliar to occasional users. (5.15.6.4)				
308. When operating in special modes, the system displays the mode designation and file(s) being processed. (5.15.6.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMPUTER PROMPTING DISPLAYS
HF Considerations	Location & Arrangement
Abbreviation	Prompt

Detailed Design Considerations	YES	NO	N/A	Comment
309. Prompting messages are displayed in a standardized area of the display. (5.15.6.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMPUTER ERROR CORRECTION DISPLAYS
HF Considerations	Functionality
Abbreviation	Error

Detailed Design Considerations	YES	NO	N/A	Comment
310. Error messages are constructive and neutral in tone. (5.15.8.5)				
311. The error messages reflect the user's view. (5.15.8.5)				
312. Computer-corrected commands, values, and spellings are displayed and highlighted for user confirmation. (5.15.8.9)				
313. To prompt for corrections of an error in stacked commands, the system displays the stacked sequence with the error highlighted. (5.15.8.10)				
314. Where control input errors are detected by the system, error messages are available and error recovery procedures are provided. (5.15.4.1.14)				
315. All error corrections by the user are acknowledged by the system, either by indicating a correct entry has been made or by another error message. (5.15.8.8)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

8. SPECIAL DISPLAYS

Contents	Abbreviation	Page
SPECIAL DISPLAYS - Functionality, Location & Arrangement	Function	B-217
SPECIAL DISPLAYS - Size & Shape	Size	B-218
HEAD-UP DISPLAYS	HUD	B-219

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SPECIAL DISPLAYS
HF Considerations	Functionality, Location & Arrangement
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Displays such as cathode ray tube displays, head-up displays, collimated displays and other displays requiring refreshed information are updated in a synchronous manner. (5.2.1.3.10)				
2. For critical functions, indicators are located within 15° (265 mrad) of the operator's normal line of sight. See FIGURE 2 in MIL-STD-1472D. (5.2.2.1.7)				
3. Groups are located and arranged to share material, information, and equipment; to simplify supervision; and to simplify coordination. (5.14.2.2.2)				
4. Instruments are located so that, with glare shields and bezels in place, they can be easily read by appropriate crew members. (5.14.1.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SPECIAL DISPLAYS
HF Considerations	Size & Shape
Abbreviation	Size

Detailed Design Considerations	YES	NO	N / A	Comment
5. Alphanumeric and symbolic characters do not subtend less than 16 min (4.7 mrad) of visual angle. (5.2.6.8.4)				
6. Alphanumeric characters are composed of upper case letters. (5.2.6.9.2)				
7. Flight display alphanumerics do not subtend less than 24 minutes (7 mrad) of visual angle. (5.2.6.9.2)				
8. Flight display characters which must be read under aircraft environmental conditions subtend not less than 24 min (7 mrad) of visual angle. (5.2.6.8.4)				
9. The height of alphanumeric characters and geometric and pictorial symbols do not subtend less than 15 minutes (4.5 mrad) of visual angle. (5.2.6.9.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HEAD-UP DISPLAYS
HF Considerations	Functionality, Location & Arrangement
Abbreviation	HUD

Detailed Design Considerations	YES	NO	N/A	Comment
10. Head-up displays are compatible with the capabilities and limitations of the human visual system. (5.14.1.1.5.1)				
11. Head-up displays are refreshed to the degree of timeliness required by personnel in the normal operating mode. (5.2.1.3.10)				
12. Information presented on head-up displays is limited to critical data which the operator is required to monitor while simultaneously performing some primary visual task. (5.14.1.1.5.1)				
13. Aircraft display locations conform to requirements of MIL-STD-203, MIL-STD-250,MIL-STD-1333. (5.14.2.1)				
14. Aircraft advisory, caution and warning legends and signals conform to requirements of MIL-STD-411. (5.2.1.4.13)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HEAD-UP DISPLAYS**
HF Considerations	**Size & Shape**
Abbreviation	**HUD**

Detailed Design Considerations	YES	NO	N/A	Comment
15. Head-up displays have a minimum exit pupil (the area within a collimated beam in which the entire image formed by an objective lens is capable of being seen) of 2.8 in, (72 mm). (5.14.1.1.5.5)				
16. Head-up displays have a minimum field of view of 20° (350 mrad) in the vertical plane and 28° (490 mrad) in the horizontal plane. (5.14.1.1.5.4)				
17. Head-up display symbol line width is at least 3.4 ± 0.7 minutes (1.0 ± 0.2 mrad). (5.14.1.1.5.6)				
18. Symbols used in head-up displays have a minimum line width of 1.7 minutes (0.5 mrad). (5.14.1.1.5.6)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HEAD-UP DISPLAYS
HF Considerations	Visibility & Identification
Abbreviation	HUD

Detailed Design Considerations	YES	NO	N/A	Comment
19. For most high ambient light applications, symbol brightness is 2,000 - 3,000 Ft-L (6,900 - 10,300 cd/sq m). (5.14.1.1.5.2)				
20. Sufficient contrast is provided to ensure head-up display symbol legibility under all expected viewing conditions. (5.14.1.1.5.3)				
21. Symbol brightness is not less than 1500 Ft-L (5000 cd/sq m) when legibility in direct sunlight or background luminance of 10,000 Ft-L (34,000 cd/ sq m) is required. (5.14.1.1.5.2)				
22. Symbols are bright enough to be legible under all expected ambient lighting conditions. (5.14.1.1.5.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

9. COMMUNICATIONS

Contents	Abbreviation	Page
COMMUNICATIONS - Functionality	Function	B-223
COMMUNICATIONS - Location, Use Conditions	Loc	B-225
COMMUNICATIONS - Safety, Operating Procedures	Safety	B-226
RECEPTION EQUIPMENT	Recep	B-227
TRANSMISSION EQUIPMENT	Trans	B-229
AUDIO SIGNALS	Aud Sig	B-231

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMMUNICATIONS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. A foot-operated "Send Receive" control is provided for situations in which both hands are busy. (5.3.10.3)				
2. Circuits are designed so that the speaker hears his own voice in the headset in phase with his speech. (5.3.11)				
3. Communication equipment worn by an operator (head phones, telephone headsets, etc.) do not cause discomfort. (5.3.9.1)				
4. If communication channels are continuously monitored, each channel is provided with a signal-activated switching device (squelch control) to suppress channel noise during no-signal periods. (5.3.10.2)				
5. Microphone, headphone, and telephone headsets permit hands-free operation under normal working conditions. (5.3.9.2)				
6. The audio signal devices and circuit designs preclude false alarms. (5.3.1.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMMUNICATIONS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
7. The minimum setting of a volume control is limited to an audible level. (5.3.10.1)				
8. There is a positive feedback indicator that equipment is operative. (5.1.1.4)				
9. Whether audio warning signals are designed to be terminated automatically, by manual control, or both, an automatic reset function is provided. (5.3.6.2)				
10. If hand signals are used, crew members have unobstructed view of each other. (5.14.1.1.4)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMMUNICATIONS**
HF Considerations	**Location & Arrangement, Use Conditions**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
11. Communication devices are located within easy reach of operator.				
12. Radios and telephones are located for easy emergency access and time-critical communications.				
13. Reach to communication controls is unobstructed.				
14. Operations are possible wearing arctic mitts, arctic headwear.				
15. Workspace accommodates operators who are wearing earphones or headsets.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMMUNICATIONS
HF Considerations	Safety, Operating Procedures
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
16. Exposed metal parts are grounded. (5.13.7.1.5)				
17. Headsets worn in high ambient noise provide attenuation equal to ear protective device. (5.3.8.4)				
18. Radio antennas are located so as to minimize radio-frequency hazards.				
19. Antennas and waveguides are grounded.				
20. System allows emergency messages top priority and does not interfere with their transmission or reception. (5.3.5.6.2)				
21. Warning signal intensity does not cause discomfort or "ringing" in the ears. (5.3.3.2.3)				
22. Documentation includes standard communication procedures and protocol.				
23. Documentation provides instructions for use and fault detection for communications equipment.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**RECEPTION EQUIPMENT**
HF Considerations	**Functionality**
Abbreviation	**Recep**

Detailed Design Considerations	YES	NO	N/A	Comment
24. Accessible volume or gain controls are provided for each communications channel. (5.3.10.1)				
25. Color coding is used when multiple handsets are visible or available to the operator. (5.3.9.3)				
26. Earphones and headsets are easily adjusted. (5.3.9.1)				
27. Headphones and loudspeakers respond uniformly (±5 dB) over the range 100 to 4,800 Hz. (5.3.8.1)				
28. Volume and gain controls for loudspeakers and headphones have sufficient electrical power to achieve at least 100 dB with two earphones. (5.3.10.1)				
29. When channel differentiation is required for three channels, one channel is left unfiltered, a high pass filter with 1,000 Hz cutoff is provided in the second channel, and a low-pass filter with 2,500 Hz cutoff is provided in the third channel. (5.3.8.2.2)				
30. When channel differentiation is required, apparent lateral separation is enhanced by applying low-pass filtering (frequency cutoff, FC = 1,800 Hz) to signals fed to loudspeakers on one side of the central operator position. (5.3.8.2.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	RECEPTION EQUIPMENT
HF Considerations	Location, Use Conditions, Safety
Abbreviation	Recep

Detailed Design Considerations	YES	NO	N/A	Comment
31. Loudspeakers used in multi-channel monitoring are mounted so that they are greater than 10° (175 mrad) apart radially in the horizontal plane with respect to the central operator's position. (5.3.8.2.1)				
32. Loudspeakers used in multi-channel monitoring are mounted so that they are greater than 45° (0.8 rad) apart radially to the left and the right of the central operator's position. (5.3.8.2.1)				
33. When several headsets are used, the most frequently or urgently needed headset is the most accessible. (5.3.9.3)				
34. Binaural headsets are used when ambient noise exceeds 85 dB(A). (5.3.8.4)				
35. When earphones will be worn in the operational situation, a dichotic presentation is used. (5.3.4.2.3)				
36. Metal parts of headsets do not come in contact with the user's skin. (5.3.9.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TRANSMISSION EQUIPMENT
HF Considerations	Functionality
Abbreviation	Trans

Detailed Design Considerations	YES	NO	N/A	Comment
37. In environments of loud, low frequency noise (100 dB overall), noise-cancelling microphones are used providing at least a 10 dB RMS gain. (5.3.7.3)				
38. Microphone dynamic range, with a selected amplifier, is great enough to admit variations in signal input of at least 50 dB. (5.3.7.2)				
39. Microphones and associated system input devices respond to a speech spectrum of 200 to 6,100 Hz. (5.3.7.1)				
40. When no clipping is used, speech system input devices employ frequency pre-emphasis with a positive slope frequency characteristic no greater than 18 dB per octave from 140 to 1,500 Hz, and no greater than 9 dB per octave over the frequency range 1,500 to 4,800 Hz. (5.3.7.4)				
41. When the talker is in an intense noise field, the microphone is put in a noise shield. (5.3.7.6)				
42. When transmission equipment employs pre-emphasis and peak clipping is not used, reception equipment employs frequency de-emphasis. (5.3.8.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TRANSMISSION EQUIPMENT
HF Considerations	Functionality (Cont.)
Abbreviation	Trans

Detailed Design Considerations	YES	NO	N/A	Comment
43. Where speech signals are to be transmitted over channels showing less than 15 dB peak speech to root-mean-square-noise ratios, peak clipping of 12 to 20 dB is employed at system input and is preceded by frequency pre-emphasis. (5.3.7.5)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	AUDIO SIGNALS
HF Considerations	Functionality
Abbreviation	Aud Sig

Detailed Design Considerations	YES	NO	N/A	Comment
44. A signal-to-noise ratio of at least 20 dB is provided in at least one octave band between 200 and 5,000 Hz at the operating position of the intended receiver. (5.3.4.1)				
45. Audio signals are coded as to maintenance, emergency, health hazard, signals. (5.3.4.3.2)				
46. Audio signals denoting emergencies are notably different from routine signals. (5.3.4.3.5)				
47. Audio warning signal duration is at least 0.5 second, and may continue until the appropriate response is made. (5.3.6.5)				
48. Completion of a corrective action by the operator, or by other means, automatically terminates the signal. (5.3.6.5)				
49. Critical warning signals are repeated with not more than a 3 second pause between messages. (5.3.5.6.1)				
50. Frequencies below 500 Hz are used when signals must bend around obstacles. (5.3.3.1.1)				
51. If absolute signal discrimination is required, the number of signals to be identified does not exceed four. (5.3.4.3.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	AUDIO SIGNALS
HF Considerations	Functionality (Cont.)
Abbreviation	Aud Sig

Detailed Design Considerations	YES	NO	N/A	Comment
52. If the operator is wearing earphones during normal operations, audio warning signals are directed to both earphones and to the work area. (5.3.4.2.4)				
53. The first 0.5 second of an audio signal is discriminable from the first 0.5 second of any other signal. (5.3.6.5)				
54. The following types of signals are not used as warning devices: a) Modulated or interrupted tones. b) Steady signals that resemble hisses, static, or sporadic radio signals. c) Trains of impulses that resemble electrical interference. d) Simple warbles. e) Scrambled speech effects. f) Signals that resemble random noise, periodic pulses, steady or frequency modulated simple tones, or countermeasure devices. g) Signals similar to random noise. (5.3.4.3.6)				
55. Audio warning signal frequency range is between: 200 - 5,000 Hz required 500 - 3,000 Hz preferred. (5.3.3.1.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	AUDIO SIGNALS
HF Considerations	Functionality (Cont.)
Abbreviation	Aud Sig

Detailed Design Considerations	YES	NO	N/A	Comment
56. The length of the warning is a minimum of 0.5 second until corrective action is taken. (5.3.4.3.3)				
57. The type of audible signal presented is in accordance with Table V in MIL-STD-1472D. (5.3.1.2)				
58. When reaction time is critical and a two element signal is used, all essential information is transmitted in the first 2.0 seconds of the identifying or action signals. (5.3.2.2.1)				
59. When reaction time is critical and a two element signal is used, an alerting signal of 0.5 second duration is provided. (5.3.2.2.1)				
60. When reaction time is critical, signals are of short duration. (5.3.2.2.2)				
61. Where a single element signal is used, all essential information is transmitted in the first 0.5 second. (5.3.2.2.2)				
62. When different audio signals are used to alert an operator to different conditions, discriminable differences in intensity, pitch, or use of beats and harmonics are provided. (5.3.4.3.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	AUDIO SIGNALS
HF Considerations	Functionality (Cont.)
Abbreviation	Aud Sig

Detailed Design Considerations	YES	NO	N/A	Comment
63. When signals must travel over 985 ft. (300 m), sounds with frequencies below 1,000 Hz are used. (5.3.3.1.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

10. LINES, HOSES & CABLES

Contents	Abbreviation	Page
Functionality	Function	B-236
Location & Arrangement, Size & Shape	Loc	B-237
Direction & Force, Clearance & Separation	Dir	B-238
Visibility & Identification	Vis	B-239
Use Conditions	Use	B-241
Safety	Safety	B-242

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LINES, HOSES & CABLES
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Cables are long enough to allow the functioning unit to be checked conveniently or extension cables are provided. (5.9.13.3)				
2. Guide pins or equivalent devices are provided to aid in alignment of drawer modules designed for "remove and replace" maintenance. (5.9.14.10)				
3. Plugs requiring no more than one turn, or other quick-disconnect plugs, are provided. (5.9.14.1)				
4. Covered space is provided for cable storage.				
5. Hand operation or common tools are used to tighten or loosen.				
6. Manner of connecting and disconnecting lines, hoses, cables is obvious.				
7. Reels and reel carts are provided to handle large, heavy, long lines and cables.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LINES, HOSES & CABLES**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
8. Test cables terminating on control panels do not interfere with controls and displays. (5.9.13.4)				
9. Cables are routed so as to be accessible for maintenance and repair. (5.9.13.5)				
10. Number of inputs to and outputs from each unit are minimized by grouping functions.				
11. Bands, tags, and paints are placed adjacent to valves, regulators, flow checks, cleanouts, etc.; at the junction of branch lines; or where lines pass through walls and doors.				
12. Cable clamps are spaced every 12 in. (30 cm).				
13. Cables are size and shape coded for similar components. (5.9.13.8)				
14. Electrical plugs are size and shape coded. (5.9.14.3)				
15. Line fittings are standardized so that lines that differ in content are not interchangeable.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LINES, HOSES & CABLES
HF Considerations	Direction & Force, Clearance & Separation
Abbreviation	Dir

Detailed Design Considerations	YES	NO	N/A	Comment
16. Adequate space is provided to handle lines, hoses, and cables. (5.9.13.6)				
17. Cables are long enough so that drawer or slide-out racks can be opened without breaking electrical connections. (5.9.13.6)				
18. Clearance between cables and controls is 3 in. (76 mm) minimum.				
19. Tightening requires a clockwise motion; loosening requires a counterclockwise motion.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LINES, HOSES & CABLES**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
20. Lines (pipe, hose, and tube) for liquids, gas, steam, etc., are clearly marked as follows: a) Function (hydraulic, electric, etc.). b) Subfunction, when required (flap up, flap down, etc.). c) Hazard. d) Direction of flow, if applicable. (5.13.3)				
21. Cables are labeled as to which equipment or connector they belong. (5.9.13.8)				
22. Cables are visible and accessible during maintenance. (5.9.13.5)				
23. Multiple conductors are coded every 12 inches (300 mm) along their length. (5.9.13.1)				
24. Identification tags and bands are used on: a) Cold lines or lines exposed to excessive heat (above 350 °F (163 °C)). b) Stainless steel lines 4 in. (101 mm) or longer.				
25. Identification paint is used on 4 in. (101 mm) minimum lines.				
26. Identification tapes encircle lines, hoses and cables.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LINES, HOSES & CABLES
HF Considerations	Visibility & Identification (Cont.)
Abbreviation	Vis

Detailed Design Considerations	YES	NO	N/A	Comment
27. Coding conforms to requirements of MIL-STD-1247 and TABLES 5-2 and 5-3 of MIL-HDBK-759A(MI).				
28. Electrical cables are not routed below lines.				
29. If possible, individual conductors of all cables (either single or multi-conductor) are color-coded through their entire length.				
30. Line, hose, and cable color contrasts with background.				
31. At least one identification tape is visible from any point along the line.				
32. Low overhead pipes are highly visible.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LINES, HOSES & CABLES
HF Considerations	Use Conditions
Abbreviation	Use

Detailed Design Considerations	YES	NO	N/A	Comment
33. Cable, line, and hose connectors are operable by user wearing arctic mittens.				
34. Line and cable attachment parts are reachable by user in bulky clothing. (5.9.1.7)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	LINES, HOSES & CABLES
HF Considerations	Safety
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
35. Cables are not pinched by doors or lids and are not in a position to be walked upon or used as handholds. They are not bent or twisted unnecessarily. (5.9.13.6)				
36. Cables routed through holes are protected by grommets, etc. (5.9.13.7)				
37. Automatic shutoffs are provided on fuel service equipment to prevent overflow or spillage. (5.13.7.3.2)				
38. Pipes and hoses are appropriately guarded in case temperature exceeds 140 °F (60 °C) or if it exceeds 120 °F (49 °C) during handling. (5.13.4.6)				
39. Pipes and hoses are appropriately guarded in case temperature is less than 32 °F (0 °C). (5.13.4.6)				
40. Long conductors and cables internal to the equipment are clamped to the chassis unless contained in wiring ducts or cable retractors. (5.9.13.2)				
41. Dangerous voltage is placarded. (5.13.2.1)				
42. Electrical wiring is routed away from lines carrying oxygen and flammable fluids.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**LINES, HOSES & CABLES**
HF Considerations	**Safety (Cont.)**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
43. High-pressure lines have a retaining chain attached to the line and source.				
44. Irregular, fragile, or awkward extensions are removable for handling.				
45. Conductors are bound into cables and held by lacing or tape.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

11. WORKSPACE

Contents	Abbreviation	Page
WORKSPACE - Functionality	Function	B-245
WORKSPACE - Visibility & Identification	Vis	B-247
WORKSPACE - Use Conditions	Use	B-248
WORKSPACE - Safety	Safety	B-249
CONSOLES	Cons	B-251
ILLUMINATION	Illum	B-254
NOISE & VIBRATION	Noise	B-255
HEATING & VENTILATION	HV	B-257
SEATING	Seating	B-260
WORKSPACE IN VEHICLES	In Veh	B-263

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE
HF Considerations	Functionality, Size & Shape
Abbreviation	Function

Test Title
Test Project No. Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Adequate and suitable storage is provided for manuals, worksheets, etc. (5.7.1.3.4)				
2. Compartment design allows equipment sharing and reliable communication. (5.14.2.2.1)				
3. Design accommodates dimensions of 5th to 95th percentile soldier from FIGURES 23-29 and TABLES XIII-XVIII in MIL-STD-1472D. (5.6.1)				
4. Emergency procedures are detailed. (5.14.3.1.1)				
5. Handles are provided on units which are removed or carried. (5.9.11.5.1)				
6. Instructions are kept simple. (5.14.3.1.1)				
7. Test stands are part of the equipment. (5.9.11.1)				
8. Sufficient space is provided to use test equipment and tools required during checkout. (5.9.4.3)				
9. Traffic flow between areas is efficient. (5.14.2.2.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N / A	Comment
10. Workspace allows ease of weapon handling, aiming, loading, firing, and field stripping. (5.14.1)				
11. Easy access to and from a station is provided.				
12. Equipment is designed and installed with workspace requirements in mind.				
13. User is oriented to the work site.				
14. User space is not encroached on by others.				
15. Workspace provides head, arm, and body clearance at any weapon position.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**WORKSPACE**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
16. Crane controls are easily reached and afford load visibility. (5.12.8.3)				
17. Windows, windshields, and canopies are free from color, distortion, etc. (5.14.1.1.1)				
18. The lines of sight to a display are not obscured by poor arrangement of people or equipment. (5.2.1.4.1)				
19. There is a direct view of work. (5.10.4.2)				
20. Areas requiring special equipment and/or clothing are specifically identified. (5.13.2.4)				
21. Push-out escape windows are marked.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE
HF Considerations	Use Conditions
Abbreviation	Use

Detailed Design Considerations	YES	NO	N/A	Comment
22. Aerospace vehicle workspace clearances are sufficient for personnel wearing light or bulky clothing. (5.14.2.3).				
23. Allowances are made for heavy clothing and protective equipment. (5.7.4)				
24. Workspace accommodates required number of suitably clothed 95th percentile males. (5.7.4)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE
HF Considerations	Safety
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
25. Any structure that can be chopped through in an emergency is clearly marked and axes are provided. (5.14.4.1.3)				
26. Equipment is secured in order to prevent accidental shifting or overturning. (5.14.4.1.4)				
27. Conspicuous placards are adjacent to equipment which is hazardous to the user. (5.13.2.1)				
28. Guards are provided on moving parts. (5.13.7.2.1)				
29. Hazard-alerting devices are provided. (5.13.4.1)				
30. Radiation exposure is below 0.5 milliroentgens per hr. at a distance of two inches from any point on the external surface. (5.13.7.5)				
31. Radiation hazards from all sources are minimized. (5.13.7.5)				
32. Maintenance workspace is free of obstructions which could cause injury. (5.13.4.4)				
33. Manuals and markings include warnings on toxic and thermal hazards of heaters and exhaust gas.				
34. Padding is non-abrasive and non-toxic.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE
HF Considerations	Safety (Cont.)
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
35. Exhausts are directed away from compartments.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	CONSOLES
HF Considerations	Location & Arrangement, Size & Shape
Abbreviation	Cons

Detailed Design Considerations	YES	NO	N/A	Comment
36. Components are located so that physical interference among operators working in the same areas is minimized. (5.14.2.2.1)				
37. Groups are located and arranged to share material, information, and equipment; simplify supervision and coordination. (5.14.2.2.2)				
38. Equipment is located to preclude awkward working positions.				
39. Exposed edges and corners are rounded and have a 0.03 in. (0.75 mm) minimum radius. (5.13.5.4)				
40. For personnel safety, edges and corners are rounded and have a 0.5 in. (13 mm) minimum radius. (5.13.5.4)				
41. Panel dimensions conform to TABLE XX and FIGURES 30-32 in MIL-STD-1472D. (5.7.5.1)				
42. Minimum extended lateral workspace for racks having drawers/ removable equipment is: Under 44 pounds (20 kg) 18 inches (460 mm) one side, 4 inches (100 mm) on the other. Over 44 pounds (20 kg) 18 inches (460 mm) on each side. (5.7.1.3.2)				
43. Right-left viewing angle for a wrap-around console is 190° (3.3 rad) maximum. (5.7.6.1.5)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	CONSOLES
HF Considerations	Clearance & Separation
Abbreviation	Cons

Detailed Design Considerations	YES	NO	N/A	Comment
44. Consoles and work surfaces that require standing or sitting close to the front surfaces has a kick space at least 4 in. (100 mm) in depth and height. (5.7.1.1)				
45. Consoles have at least 4 ft. (1.22 m) of free floor space in front. (5.7.1.3)				
46. The minimum space between rows of cabinets is 8 inches (200 mm) greater than the depth of the deepest drawer or cabinet. (5.7.1.3.3)				
47. Equipment racks requiring maintenance have a minimum distance from the front of the rack to the opposite surface or obstacle of 42 in. (1.070 m). (5.7.1.3.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**CONSOLES**
HF Considerations	**Visibility & Identification, Safety**
Abbreviation	**Cons**

Detailed Design Considerations	YES	NO	N/A	Comment
48. Instrument reflection is avoided. (5.14.1.1.1)				
49. Display reading location is identified.				
50. Handles on cabinets and consoles are recessed whenever practicable, to eliminate projections on the surface. (5.7.1.2)				
51. Handles not recessed can neither injure personnel nor entangle clothing or equipment. (5.7.1.2)				
52. Protective padding is used.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	ILLUMINATION
HF Considerations	Visibility & Identification
Abbreviation	Illum

Detailed Design Considerations	YES	NO	N/A	Comment
53. Adequate illumination is provided in all areas. (5.13.4.5)				
54. Surface reflectance is per FIGURE 3-7 in MIL-HDBK-759A(MI). (5.8.2)				
55. Capability for light dimming is provided. (5.8.2)				
56. Illumination levels comply with TABLE XXI in MIL-STD-1472D. (5.8.2)				
57. Warning placards, stairways, and all hazardous areas are illuminated per TABLE XXI in MIL-STD-1472D. (5.13.4.5)				
58. Provisions for auxiliary power and lighting are provided.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	NOISE & VIBRATION
HF Considerations	Functionality
Abbreviation	Noise

Detailed Design Considerations	YES	NO	N/A	Comment
59. Maximum workspace noise limits: a) Extreme quiet needed: 35 dB(A). b) Telephone use or direct communication at distances up to 15 ft: 55 dB(A) SIL. c) Telephone use or direct communication at distances up to 5 ft: 55 dB(A). d) Small office spaces: 45 dB(A) SIL. e) General Workspaces: 75 dB(A) SIL. f) Shipboard: Conforms to MIL-STD-740-1, HEDGE FIGURE C-4. g) Aircraft: Conforms to MIL-A-8806. (5.8.3.3.1-6)				
60. Auditory alerting and warning signals are loud enough to be heard above environmental noise. (5.3.3.2.1)				
61. The acoustical environment does not degrade system effectiveness. (5.8.3.1)				
62. Sound absorption and attenuation material/layouts are provided. (5.8.3.4.2)				
63. Vibration exposure criteria are per FIGURE 43 in MIL-STD-1472D. (5.8.4.1.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	NOISE & VIBRATION
HF Considerations	Functionality (Cont.)
Abbreviation	Noise

Detailed Design Considerations	YES	NO	N / A	Comment
64. Facilities and equipment control transmission of whole body vibration to levels permitting safe operation and maintenance. (5.8.4.1.1)				
65. Motion sickness protection limits from exposure to vibration are per FIGURE 44 in MIL-STD-1472D. (5.8.4.1.1.4)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HEATING & VENTILATION**
HF Considerations	**Functionality**
Abbreviation	**HV**

Detailed Design Considerations	YES	NO	N/A	Comment
66. Adequate ventilation is provided at a minimum of 30 cu. ft. (0.85 cu.m) per minute per soldier. (5.8.1.2)				
67. Air moves past the operator at: 100 ft. (30 m) per minute max. 65 ft. (20 m) per minute preferred. (5.8.1.2)				
68. Wet bulb globe temperature conforms to the following: Chemical protective clothing 67°F (20°C) max. Intermediate clothing 70°F (21°C) max. Use of body armor 72°F (22°C) max. (5.8.1.8)				
69. If hard physical labor is sustained more than two hours, maximum wet bulb globe temperature is 77°F (25°C). See FIGURE 38 in MIL-STD-1472D. (5.8.1.8)				
70. The effective temperature within enclosures for extended periods is at or below 85°F (29°C). (5.8.1.3)				
71. Ventilation or other protective measures are provided within the limits of FIGURE 39 in MIL-STD-1472D. (5.8.1.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HEATING & VENTILATION
HF Considerations	Use Conditions, Safety
Abbreviation	HV

Detailed Design Considerations	YES	NO	N/A	Comment
72. Air conditioning systems do not discharge cold air directly on personnel. (5.8.1.3)				
73. Arctic clothed soldier is not exposed to temperature greater than: 60°F (16°C) max., 35-45°F (2-7°C) optimum.				
74. Carbon monoxide is below levels that will result in carboxyhemoglobin (COHb) blood levels exceeding 5% (aviation systems), or 10% (all other systems). (5.13.7.4.2)				
75. Equipment is guarded if temperature exceeds 140°F (60°C). (5.13.4.6)				
76. Handled equipment is guarded if temperature exceeds 120°F (49 °C). (5.13.4.6)				
77. Handle or grasp surfaces are not thermally or electrically conductive. (5.9.11.5.7)				
78. Heating and air conditioning specifications: Mobile work areas 50 - 85°F (10 - 29°C) Permanent work areas 65 - 85°F (18 - 29°C) (5.8.1.1/3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HEATING & VENTILATION
HF Considerations	Safety (Cont.)
Abbreviation	HV

Detailed Design Considerations	YES	NO	N/A	Comment
79. Intakes for ventilation systems are located so as to minimize the introduction of contaminated air from exhaust pipes, etc. (5.8.1.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SEATING
HF Considerations	Functionality
Abbreviation	Seating

Detailed Design Considerations	YES	NO	N/A	Comment
80. Armrests do not interfere with work, egress, or emergency procedures. (5.14.2.4.7)				
81. Rotating seats have 8 locking positions minimum, and support 250 lb.(113 kg). (5.14.2.4.3)				
82. Seating is compatible with console. (5.7.3.4.1)				
83. Standing operator has work surfaces provided to support manuals, etc. (5.7.2.1)				
84. The operator does not have to lift self to adjust the seat.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**SEATING**
HF Considerations	**Size & Shape**
Abbreviation	**Seating**

Detailed Design Considerations	YES	NO	N / A	Comment
85. Armrests are at least 2 in. (50 mm) wide and 8 in. (200 mm) long. (5.7.3.4.5)				
86. Back and seat of chair have 1 in. (25 mm) minimum of padding. (5.7.3.4.4)				
87. Back-rest angle is less than 110° (1.9 rad) from horizontal. (5.7.3.4.3)				
88. Lateral work space is 30 in. (760 mm) wide x 16 in. (406 mm) deep. (5.7.3.1/3)				
89. Writing space is 24 in. (610 mm) wide x 16 in. (406 mm) deep. (5.7.3.1/3)				
90. Seating providing only lumbar support possesses a back rest angle of 100 - 115° (1.7 - 2.0 rad) for alert positions. (5.7.3.4.3)				
91. Seat backrest reclines 103 to 115° (1.8 - 2.0 rad). (5.7.3.4.3)				
92. Seat backrest supports the torso so that the operator's eyes are within 3 in. (75 mm) of the "eye-line." (5.7.3.4.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	SEATING
HF Considerations	Clearance & Separation
Abbreviation	Seating

Detailed Design Considerations	YES	NO	N/A	Comment
93. Knee and foot room beneath work surfaces exceeds the following dimensions: Height 25 in. (640 mm) Width 20 in. (510 mm) Depth 18 in. (460 mm). (5.7.3.5)				
94. Vertical seat adjustibility is 15 to 21 in. (380 to 530 mm). (5.7.3.4.2)				
95. Vertical seat adjustments are in 1.0 in. (25 mm) increments maximum. (5.7.3.4.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**WORKSPACE IN VEHICLES**
HF Considerations	**Functionality**
Abbreviation	**In Veh**

Detailed Design Considerations	YES	NO	N/A	Comment
96. Cars have seat belts. (5.12.2.7)				
97. The seated operator has free pedal access and use of foot pedals. (5.14.2.4.5)				
98. Fresh air is provided Minimum 20 cu. ft. (0.43 cu. m) per minute per person, Over 90°F (32°C) 150-200 cu. ft. (4.25-5.6 cu.m) per minute per person. (5.12.6.2)				
99. A 95th percentile loader with proper clothing can sit or stand clear of recoil while holding round. (9.1.8.7)				
100. Easy access to and from a station is provided.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**WORKSPACE IN VEHICLES**
HF Considerations	**Size & Shape**
Abbreviation	**In Veh**

Detailed Design Considerations	YES	NO	N/A	Comment
101. A loader can comfortably sit in the closed-hatch mode or stand in the open-hatch mode.				
102. Armrests that are integral with operator's seats are at least 2 in. (50 mm) wide and 6 in. (200 mm) long. (5.14.2.4.7)				
103. Backrest angle is a maximum of 50° (875 mrad) for the rest position. (5.14.2.4.6)				
104. Backrest angle varies between 5 and 15° (85 and 260 mrad) aft of the vertical for the work position. (5.14.2.4.6)				
105. The rest angle does not exceed an included angle between seat and backrest of 136° (2.4 rad). (5.14.2.4.6)				
106. Passenger seats face the rear of the vehicle and include a 16 inch (400 mm) walkway space between the seat pan edge and the back of the adjacent seat. (5.14.2.4.9)				
107. Rotating seats adjust fore and aft at least 4 in. (100 mm) minimum. (5.14.2.4.3)				
108. Sitting surface provides a minimum of 9 in (230 mm) between the sitting surface and the bottom of the work surface. (5.14.2.4.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE IN VEHICLES
HF Considerations	Size & Shape (Cont.)
Abbreviation	In Veh

Detailed Design Considerations	YES	NO	N / A	Comment
109. Armrests that are integral with operator's seats are 7.5 to 10 in (190 to 250 mm) above the seat surface. (5.14.2.4.7)				
110. Ceiling height of trailer vans and transportable enclosures is: Standing 78 in. (198 cm) Seated 74.5 in. (189 cm) (5.12.7.2)				
111. Aircraft seating conforms to requirements of MIL-STD-1333. (5.14.2.1)				
112. Vehicle operator seating conforms to requirements of TABLE XXVII and FIGURES 50-51 in MIL-STD-1472D.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE IN VEHICLES
HF Considerations	Visibility & Identification
Abbreviation	In Veh

Detailed Design Considerations	YES	NO	N/A	Comment
113. Distortion is avoided in windows. (5.12.5.7)				
114. Door posts or wiper motors do not obscure vision.				
115. Loader can see outside while operating in closed-hatch mode.				
116. Mirrors are braced against vibration.				
117. Multireflections from multilayered windows are minimized. (5.14.1.1.2)				
118. Reflection of instruments or console in windows or windshields is avoided.				
119. The forward field of view is: 180° (3.1 rad) min., 220° (3.8 rad) preferred. (5.12.5.2)				
120. Truck operators are provided ground visibility for all distances beyond 10 ft. (3 m) in front of vehicle and upward visibility of 15° (.026 rad) above horizontal. Mirrors may be used to meet this requirement. (5.12.5.3)				
121. Visors reduce external glare. (5.12.5.6)				
122. Vision envelopes for aircraft conform to requirements of MIL-STD-850. (5.14.1.1.4)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	WORKSPACE IN VEHICLES
HF Considerations	Visibility & Identification (Cont.)
Abbreviation	In Veh

Detailed Design Considerations	YES	NO	N/A	Comment
123. Windscreen angle of incidence is 60° (1.05 rad). maximum for undistorted vision. (5.14.1.1.3)				
124. Windshields and windows are shatterproof and do not distort vision. (5.12.5.7)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**WORKSPACE IN VEHICLES**
HF Considerations	**Safety**
Abbreviation	**In Veh**

Detailed Design Considerations	YES	NO	N/A	Comment
125. Emergency doors and exits are constructed so that they: a) Are simple to operate. b) Are readily accessible. c) Are unobstructed. d) Are simple to locate and operate in the dark. e) Are quick opening in three seconds or less. f) Require 10 to 30 lb (44 to 133 N) to open. g) Do not themselves constitute a safety hazard. h) Permit one person egress in 5 seconds or less. (5.13.4.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

12. FASTENERS & CONNECTORS

Contents	Abbreviation	Page
Functionality	Function	B-270
Location & Arrangement, Size & Shape	Loc	B-272
Direction & Force	Dir	B-273
Clearance & Separation	Clear	B-274
Visibility & Identification	Vis	B-275
Use Conditions	Use	B-277
Operating Procedures, Safety	Op	B-278

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	FASTENERS & CONNECTORS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Access-cover fasteners are of the captive type. (5.9.10.3)				
2. Adapters for pin connectors can be hand-tightened. (5.9.14.12)				
3. Aligning pin extends beyond plug's electrical pins to insure alignment before electrical pins engage. (5.9.14.5)				
4. Captive type dust covers are used. (5.9.14.13)				
5. Design of plugs ensures that it is impossible to insert a wrong plug into a receptacle. (5.9.14.2)				
6. Fasteners are standardized to decrease the number of tools required. (5.9.10.5.3)				
7. Hinged doors or covers have captive, quick-opening fasteners. (5.9.10.3)				
8. Only standard tools are used. (5.9.14.12 - 5.9.10.1)				
9. Guide pins or equivalent devices are provided to aid in alignment of drawer modules designed for "remove and replace" maintenance. (5.9.14.10)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FASTENERS & CONNECTORS**
HF Considerations	**Functionality (Cont.)**
Abbreviation	**Function**

Detailed Design Considerations	YES	NO	N/A	Comment
10. Plugs and receptacles have aligning pins or equivalent devices for insertions. (5.9.14.4)				
11. Internal grip head fasteners are used only when a convex smooth surface is critical to mechanical function or for personnel safety. (5.9.10.5.2)				
12. Bolts have a minimum number of turns.				
13. Captive fasteners are used where dropping such items (nuts, bolts, etc.) may cause hazards or where access covers need frequent removal.				
14. Mounting bolts are semi-permanently captive.				
15. Mounting screws have clearance holes.				
16. Plugs and connectors are self-locking.				
17. Self-alignment is provided for fasteners.				
18. The number and type of fasteners used is minimized.				
19. There are not more fasteners or access panels than are required to maintain structural integrity of the unit.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FASTENERS & CONNECTORS**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
20. Plugs and receptacles are arranged so that aligning pins are oriented in the same relative position. (5.9.14.6)				
21. Connectors are placed so that spillage and weather do not cause damage.				
22. Bolts requiring high torque have an external grip head. (5.9.10.5.1)				
23. Non-interchangeable connectors are provided for different uses. (5.9.14.2)				
24. Connectors are physically different when lines carry different fluids. (5.13.7.3.1)				
25. Cotter keys have a snug fit and a large head.				
26. Fastener heads are large enough to be grasped and handled easily.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FASTENERS & CONNECTORS**
HF Considerations	**Direction & Force**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
27. Fasteners and plugs require one turn maximum to tighten or to loosen. (5.9.14.1 - 5.9.10.7)				
28. Fasteners requiring less than 10 ft-lb.(14 N-m) of torque have hex type internal or external grip heads, or combination grip heads. (5.9.10.5.2)				
29. Fasteners requiring more than 10 ft-lb.(14 N-m) of torque possess a hex type external grip head. (5.9.10.5.1)				
30. For quick disconnect, snap action, release or twist, fasteners and plugs require up to one full turn for frequent critical use. (5.9.14.1 - 5.9.10.7)				
31. Tightening requires a clockwise motion; loosening requires a counterclockwise motion.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FASTENERS & CONNECTORS**
HF Considerations	**Clearance & Separation**
Abbreviation	**Clear**

Detailed Design Considerations	YES	NO	N/A	Comment
32. Adequate space is available to grasp connectors firmly. (5.9.14.8)				
33. Connectors are separated by at least 1.0 in. (25 mm)				
34. Where high torque is imposed, space is provided for use of a connector wrench. (5.9.14.8)				
35. Obstructions to access are removable.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	FASTENERS & CONNECTORS
HF Considerations	Visibility & Identification
Abbreviation	Vis

Detailed Design Considerations	YES	NO	N/A	Comment
36. Connecting plugs and receptacles are identified by color, size or shape. See FIGURES 5.5 and 5.6 in MIL-HDBK-759A(MI). (5.9.14.3)				
37. Marking and color-coding of test-points conform to MIL-STD-415. (5.9.15.3)				
38. Plugs and receptacles have stripes, arrows, etc., to show aligning pin positions. (5.9.14.7)				
39. Receptacles are marked as to voltage, phase, and frequency. (5.13.26)				
40. Where torquing is imposed to meet special requirements, instruction labels or placards are provided in close proximity to fasteners. (5.9.10.8)				
41. Easy visual access is provided for starting threads.				
42. Fastener and connector operating parts are easily accessible and visible.				
43. Identification colors are readily discriminable from each other under operational lighting.				
44. Labels and codes are visible when fastener is connected or not connected.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FASTENERS & CONNECTORS**
HF Considerations	**Visibility & Identification (Cont.)**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
45. Non-standard operating directions are clearly marked.				
46. Pins are size and color-coded to avoid mismatch.				
47. The manner of connection is obvious.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	FASTENERS & CONNECTORS
HF Considerations	Use Conditions
Abbreviation	Use

Detailed Design Considerations	YES	NO	N / A	Comment
48. Internal grip head fasteners are not used when exposed to outside elements (e.g., snow, ice, dirt). (5.9.10.5.2)				
49. Connectors are compatible with cables, lines, fasteners and mounting.				
50. Connectors are easily reached by user wearing bulky or restrictive clothing.				
51. Fastener heads are large enough to be grasped and handled with arctic mitts.				
52. Fasteners used outside are operable under all environmental conditions.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	FASTENERS & CONNECTORS
HF Considerations	Operating Procedures, Safety
Abbreviation	Op

Detailed Design Considerations	YES	NO	N/A	Comment
53. Connectors for handling toxic fluids are incompatible with other connectors within access. (5.13.7.3.1)				
54. All "hot" contacts are socket contacts. (5.13.7.1.3)				
55. Plugs and receptacles are such that a plug of one voltage rating cannot be inserted into the receptacle of another voltage rating. (5.13.7.1.2)				
56. Caps, inserts, covers, cases, and shields are provided where necessary.				
57. Removal of a plug or connector does not expose "hot" leads.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

13. HANDLES

Contents	Abbreviation	Page
Functionality	Function	B-280
Location & Arrangement	Loc	B-282
Direction & Force	Dir	B-283
Clearance & Separation	Clear	B-285
Visibility & Identification	Vis	B-286
Use Conditions, Safety	Use	B-287

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HANDLES
HF Considerations	Functionality
Abbreviation	Function

Test Title
Test Project No. Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Non-fixed handles (hinges, fold-outs, etc.) have a stop-position for holding the handle perpendicular to the surface on which it is mounted. (5.9.11.5.3)				
2. Non-fixed handles are capable of being placed into position by one hand. (5.9.11.5.3)				
3. Removable and/or carried units are provided with handles or other suitable means for grasping, handling, and carrying. (5.9.11.5.1)				
4. Surface texture of hand manipulated fuse controls maximizes operator's grip. (5.9.11.5.4)				
5. Handles are provided to remove covers. (5.9.11.5.1)				
6. Handles guard against inadvertent control operation; protect meter face; and are used as support, standing, hanging, or locking devices.				
7. Handles, lugs, and push bars are permanent parts of the equipment case.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HANDLES
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
8. Hoist lugs are used if item weighs over 150 lb. (68 kg).				
9. Hand-shaped handles are used for items carried frequently or for long periods.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HANDLES
HF Considerations	Location & Arrangement
Abbreviation	Loc

Detailed Design Considerations	YES	NO	N/A	Comment
10. Handles and grasp areas are located relative to the center of gravity of the unit. (5.9.11.5.2)				
11. Handles are located so that lifting is at a minimum distance from the body.				
12. Handles are on the front of an item if it is pulled from a rack.				
13. Handles do not interfere with operating or maintaining an item.				
14. Lift points on large items are equidistant from the center of gravity.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HANDLES**
HF Considerations	**Direction & Force**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
15. Weight of item lifted by one soldier conforms to weight limits in Table XXIII in MIL-STD-1472D, conditions A and B. (5.9.11.3.1)				
16. Weight of item lifted by two soldiers conforms to double the weight limits in Table XXIII in MIL-STD-1472D. (5.9.11.3.1)				
17. Where three or more soldiers are lifting simultaneously, not more than 75% of the one-person value is added for each additional lifter. (5.9.11.3.1)				
18. If the frequency of lifting exceeds one lift in 5 minutes or 20 lifts per 8 hours, permissible weight limits in Table XXIII in MIL-STD-1472D are reduced by (8.33 x number of lifts per minute). (5.9.11.3.2)				
19. If the depth of a lifted object exceeds 24 inches (610 mm) the permissible weight in Table XXIII in MIL-STD-1472D is reduced by 33%. (5.9.11.3.3)				
20. If the depth of a lifted object exceeds 36 inches (910 mm), the permissible weight in Table XXIII in MIL-STD-1472D is reduced by 50%. (5.9.11.3.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HANDLES
HF Considerations	Direction & Force (Cont.)
Abbreviation	Dir

Detailed Design Considerations	YES	NO	N/A	Comment
21. If the depth of a lifted object exceeds 48 inches (1.220 m), the permissible weight in Table XXIII in MIL-STD-1472D is reduced by 66%. (5.9.11.3.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HANDLES
HF Considerations	Clearance & Separation
Abbreviation	Clear

Detailed Design Considerations	YES	NO	N/A	Comment
22. Handles have at least 2 in. (50 mm) clearance from obstructions. (5.9.11.5.2)				
23. Handles on cabinets and consoles are recessed wherever practicable. (5.7.1.2)				
24. If handles cannot be recessed, they are designed so that they can neither injure personnel nor entangle clothing or equipment. (5.7.1.2)				
25. Handle clearance and separation conform to the requirements of FIGURES 45 and 48 in MIL-STD-1472D. (5.9.11.5.5)				
26. Hoist lug has 4 in. (101 mm) minimum clearance around lifting eye.				
27. Straps and buckles do not interfere with operation of an item.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HANDLES**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
28. For mechanical power lifts and/or hoists, lift points are provided and labeled. (5.9.11.3.9)				
29. Hand-grasp areas are identified. (5.13.2.7)				
30. Handles are color-coded to distinguish from similarly shaped items.				
31. Handles are visible from the grasping and lifting positions.				
32. Hoist lugs are marked "Lift Here."				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HANDLES**
HF Considerations	**Use Conditions, Safety**
Abbreviation	**Use**

Detailed Design Considerations	YES	NO	N/A	Comment
33. Handles accommodate arctic mittens. (5.9.11.5.1)				
34. Collapsible handles can be erected while wearing arctic mittens. (5.9.11.5.1)				
35. Handles are reachable by 5th percentile personnel wearing bulky or restrictive clothing.				
36. Handgrips have non-slip surface. (5.9.11.5.4)				
37. Insulated handles are used on hot or conductive items. (5.9.11.5.7)				
38. Carried item will ride clear of the legs of personnel.				
39. Attachment screws of handles are recessed.				
40. Edges of handles are rounded.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

14. OPTICS

Contents	Abbreviation	Page
Functionality	Function	B-289
Location & Arrangement	Loc	B-292
Size & Shape	Size	B-293
Direction & Force, Separation	Dir	B-294
Visibility, Use Conditions, Safety	Vis	B-295

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPTICS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Adjusted illumination level of illuminated reticle remains constant under intended use conditions. (5.11.3.12.4)				
2. Built-in collimation is provided for field adjustment. (5.11.3.18.4)				
3. Eyecups are provided to maintain proper eye relief, eliminate stray light, and protect or cushion the eyes and orbital region against impact. (5.11.3.14.1)				
4. Eyepiece focus adjustments over 4 power magnification are: -4 to +2 diopters required, -6 to +2 diopters desired. (5.11.3.9.2)				
5. Eyes do not have to adjust beyond normal functional ability. (5.11.3.2)				
6. Field of view is compatible with intended use and optical/mechanical limitations. (5.11.3.5)				
7. Field of view of illuminated reticle is uniformly illuminated. (5.11.3.12.5.)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPTICS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
8. For instruments 4-power and less, fixed focus eyepieces set between -0.50 and -1.00 diopter are utilized. (5.11.3.9.1)				
9. Illuminated reticle does not use blue light. (5.11.3.12.2)				
10. Illuminated reticle has provision for gradual dimming until light is extinguished. (5.11.3.12.3)				
11. Instrument magnification is sufficient for the required operator task. (5.11.3.4.1)				
12. Instruments over 4-power have eyepiece focus adjustments marked in 0.5 diopter increments. (5.11.3.9.2)				
13. Line reticles are provided as opposed to those with 1, 2, or 3 central spots. (5.11.3.11.3)				
14. Magnification difference between the two eyes is 2% maximum. (5.11.3.13.3)				
15. Optical instruments are oriented to give the operator a comfortable angle of view. (5.11.3.3)				
16. Reticle provides a small cross or circle as opposed to a dot. (5.11.3.11.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPTICS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
17. Weight of handheld binocular device does not exceed: 2.2 lb. (1.0 kg) preferred, 3.3 lb. (1.5 kg) max. (5.11.3.13.6)				
18. Where components require frequent maintenance, provision is made for storage of replacement parts and special tools. (5.11.3.18.6)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPTICS
HF Considerations	Location & Arrangement
Abbreviation	Loc

Detailed Design Considerations	YES	NO	N/A	Comment
19. Components requiring frequent maintenance and frequently used special tools are readily accessible. (5.11.3.18.6)				
20. Purging and charging fittings are accessible for maintenance. (5.11.3.18.5)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPTICS
HF Considerations	Size & Shape
Abbreviation	Size

Detailed Design Considerations	YES	NO	N/A	Comment
21. Entrance pupil is equal to the product of the magnification and the exit pupil diameter. (5.11.3.6)				
22. Exit pupil diameter is: Daylight conditions 0.12 in. (3mm) Twilight/low light conditions 0.28 in. (7 mm). (5.11.3.7.2, 5.11.3.7.3)				
23. Exit pupil diameter is consistent with intended use and size/weight limitations. (5.11.3.7.1)				
24. Eye relief for recoilless systems is at least 0.6 in. (15 mm). (5.11.3.8)				
25. Eye relief for vehicle mounted sights is at least 1.0 in. (25 mm). (5.11.3.8)				
26. Eyepiece and eyecup dimensions conform to FIGURE 49 in MIL-STD-1472D. (5.11.3.14.1)				
27. Reticle line thickness for illuminated reticle subtends visual angle of: 0.5 min. (150 microrad) min., 2.0 min. (600 microrad) preferred. (5.11.3.12.6)				
28. Reticle lines are thin enough not to block targets and thick enough to be easily seen. (5.11.3.11.1)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPTICS
HF Considerations	Direction & Force, Separation
Abbreviation	Dir

Detailed Design Considerations	YES	NO	N/A	Comment
29. Boresight knob locks do not require more than 10 lb. (45 N) resistance to lock and unlock. (5.11.3.18.7.2)				
30. Eyepiece separation for binocular instruments is adjustable from 2.0 in. to 2.9 in. (50 to 73 mm). (5.11.3.13.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**OPTICS**
HF Considerations	**Visibility, Use Conditions, Safety**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
31. Difference between the two eyes in luminous transmittance is 5% maximum. (5.11.3.13.4)				
32. Magnification of rifle or pistol sight is 4 power maximum monocular or 8 power maximum binocular. (5.11.3.4.2)				
33. Eyecups and headrests are compatible with helmets, masks, and other personal equipment. (5.11.3.14.3)				
34. Illuminated reticle is provided for use during twilight or night conditions. (5.11.3.12.1)				
35. Optic components accommodate arctic headwear, handwear. (5.11.3.14.3)				
36. Two eyepieces are used during low light level viewing that exceeds one minute in duration. (5.11.3.13.1)				
37. There is no skin contact with metal parts.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

15. OPERATING ELEMENTS

Contents

Contents	Abbreviation	Page
Functionality	Function	B-297
Location & Arrangement, Size & Shape	Loc	B-299
Direction & Force	Dir	B-300
Clearance & Separation	Clear	B-301
Visibility & Identification	Vis	B-302
Use Conditions	Use	B-303
Safety	Safety	B-305
Operating Procedures	Op	B-306

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPERATING ELEMENTS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Self-alignment devices are provided for remotely handled items. (5.10.1.1)				
2. Gunner environment minimizes obscuration, shock, and vibration to permit resumption of tracking after firing, when applicable. (5.11.2.1)				
3. A single control, joystick, or ball is used for two-dimensional tracking. (5.11.2.3)				
4. Boresight knobs have positive lock. (5.11.3.18.7.1)				
5. Hoist points are provided for mechanical lifting. (5.9.11.3.9)				
6. Controls, vents, etc. are easily and safely accessible during setup and operation.				
7. Tiedown points are accessible before, during, and after transit.				
8. Tiedown and handling points allow free passage of line, cable, and/or hook.				
9. Manual turret traverse travel is 360° and can be pitched or canted.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPERATING ELEMENTS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
10. Loading elements are sized for load.				
11. Weapon is operable under difficult conditions of weather, clothing, temperature, terrain, climate, or illumination.				
12. Power gun control system allows selective use of manual or power control.				
13. Air-dropped items have quick release capability.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPERATING ELEMENTS
HF Considerations	Location and Arrangement, Size and Shape
Abbreviation	Loc

Detailed Design Considerations	YES	NO	N/A	Comment
14. Rifle and machine gun dimensions conform to FIGURE 7-2 in MIL-HDBK-759A(MI).				
15. Tracking crank size is a function of rotation speed (200 rpm max.). (5.11.2.2)				
16. Tracking crank radius for high rpm is 2.2 in. (55 mm); for low rpm it is 4.5 in. (115 mm). (5.11.2.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPERATING ELEMENTS
HF Considerations	Direction & Force
Abbreviation	Dir

Detailed Design Considerations	YES	NO	N/A	Comment
17. Boresight knob lock resistance to lock or unlock is 10 lb. (4.5 kg) max. (5.11.3.18.7.2)				
18. Triggers, safeties, and arming pins need a positive force to operate and are operable by 5th percentile user.				
19. Foot pedals rise from a depressed position backwards and vertically.				
20. Power controller has: Backlash 0, Dead band ± 2° (35 mrad), Operating torque 5 lb. (2.3 kg).				
21. Recoil or stress of field maneuvering does not disturb bipod's extended/retracted setting.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**OPERATING ELEMENTS**
HF Considerations	**Clearance & Separation**
Abbreviation	**Clear**

Detailed Design Considerations	YES	NO	N/A	Comment
22. Units frequently pulled out of installed position are mounted on pullout racks, slides, or hinges. (5.9.12.6)				
23. Full hand and tool clearance is provided at all fastening points.				
24. Moving components have 2 in. (50 mm) hand clearance throughout range.				
25. Trigger guards, safety catches, etc., accommodate gloved hands.				
26. Retracted bipod cannot catch on vegetation.				
27. Lift and attachment points are accessible and are equidistant from center of gravity.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPERATING ELEMENTS
HF Considerations	Visibility & Identification
Abbreviation	Vis

Detailed Design Considerations	YES	NO	N/A	Comment
28. Controls used only for maintenance or adjustment are covered during normal operation, but are accessible and visible when required. (5.4.1.3.6)				
29. Tiedown points are visible for checking.				
30. Blind feed of hooks or cables is avoided.				
31. Tiedown or handling point is emphasized by contrasting color or a label.				
32. Operated elements are visible when accessed, especially if hazards are present.				
33. Elements that are mated are color- or shape-coded.				
34. Settings can be verified in normal firing position without moving body/weapon, manipulating any sight component, or counting of visual/auditory cues.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**OPERATING ELEMENTS**
HF Considerations	**Use Conditions**
Abbreviation	**Use**

Detailed Design Considerations	YES	NO	N/A	Comment
35. Power manipulators are provided with positive stops. (5.10.3.1)				
36. Joysticks used for tracking have hand and wrist support. (5.11.2.4)				
37. Tracking control movement is compatible with expected and conventional control movements. (5.11.2.5)				
38. Operating elements accommodate arctic handwear. (5.4.1.6)				
39. Foot controls are not used for precise adjustments. (5.4.1.8.6.2)				
40. Knobs are used as opposed to screwdriver for frequent adjustment. (5.9.3.1)				
41. Handwheels are knurled or indented.				
42. Weapons controls have distinctive shapes and/or locations.				
43. Sight-mount leveling vial supports are strong enough to prevent bubble displacement.				
44. Parts cannot be assembled backwards.				
45. Weapon settings are immediately obvious with user in normal firing position.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPERATING ELEMENTS
HF Considerations	Use Conditions (Cont.)
Abbreviation	Use

Detailed Design Considerations	YES	NO	N/A	Comment
46. Weapon controls are sturdy enough so that normal field handling cannot damage them.				
47. Jack and hoist points are labeled.				
48. Rate selectors, safeties, etc. are clearly identified as to their position.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	OPERATING ELEMENTS
HF Considerations	Safety
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
49. Internal controls are not located near high voltage, rotating machinery, or other hazards. (5.9.3.6)				
50. Use of pullouts does not shift center of gravity of item to the extent that the entire rack console falls. (5.9.12.6)				
51. Rollouts are provided with limit stops. (5.9.12.7)				
52. Safety is operable without removing hand from weapon.				
53. Any part of weapon that contacts user's skin has thermal insulation.				
54. Safety catches have a distinctive shape and location.				
55. Weapon ejects expended cases forward and to the right.				
56. Projections, edges, and corners around tiedown or lift points are rounded, padded or eliminated.				
57. Electrical, thermal or mechanical hazards near location where user's hand must access are shielded.				
58. Safety catches have positive action and standard operation.				
59. Mechanical operating parts are guarded.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**OPERATING ELEMENTS**
HF Considerations	**Operating Procedures**
Abbreviation	**Op**

Detailed Design Considerations	YES	NO	N/A	Comment
60. Center of gravity and weight of equipment is marked, where applicable. (5.13.2.2)				
61. Weight capacity is indicated on all lifting equipment. (5.13.2.3)				
62. Diagrammed instructions accompany item to provide for adequate tiedown.				
63. Magazine loading is diagrammed if a particular pattern is required.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

16. PACKAGING

Contents	Abbreviation	Page
Functionality	Function	B-308
Location & Arrangement, Size & Shape	Loc	B-309
Direction & Force	Dir	B-310
Clearance & Separation	Clear	B-312
Visibility & Identification, Use Conditions	Vis	B-313
Safety, Operating Procedures	Safety	B-314

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PACKAGING
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Guides, tracks, and stops are used to facilitate handling. (5.9.7.4)				
2. Special opening tools are avoided. (5.9.10.1)				
3. Stowage is available for individual weapons, small-arms ammunition rations, helmets, etc.				
4. Stowage is available for rations.				
5. Tools for opening are built-in or attached to containers.				
6. Tools and devices that are carried, fold or collapse so that they require minimum carrying space.				
7. Small packages are sized for packets and are relatively flat.				
8. Catches and fasteners lock and unlock easily.				
9. Tools, tabs, etc., are large enough for full hand or finger grasp and force application.				
10. Tight-fitting stowage is avoided.				
11. Sealed cans have integral opener device, strip, or tab.				
12. Missiles are easily stowed in racks.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PACKAGING
HF Considerations	Location and Arrangement, Size & Shape
Abbreviation	Loc

Detailed Design Considerations	YES	NO	N/A	Comment
13. Accessibility of stowed equipment reflects its function and use.				
14. Stowage boxes are part of the vehicle, rather than attachments to it.				
15. Cases are sufficiently larger than the units they cover to minimize the possibility of damaging wires or other components when cases are put on or taken off. (5.9.7.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PACKAGING
HF Considerations	Direction & Force
Abbreviation	Dir

Detailed Design Considerations	YES	NO	N/A	Comment
16. Weight of item lifted by one soldier conforms to weight limits in Table XXIII in MIL-STD-1472D, conditions A and B. (5.9.11.3.1)				
17. Weight of item lifted by two soldiers conforms to double the weight limits in Table XXIII in MIL-STD-1472D.(5.9.11.3.1)				
18. Where three or more soldiers are lifting simultaneously, not more than 75% of the one-person value is added for each additional lifter. (5.9.11.3.1)				
19. If the frequency of lifting exceeds one lift in 5 minutes or 20 lifts per 8 hours, permissible weight limits in Table XXIII in MIL-STD-1472D are reduced by (8.33 x number of lifts per minute). (5.9.11.3.2)				
20. If the depth of a lifted object exceeds 24 inches (610 mm) the permissible weight in Table XXIII in MIL-STD-1472D is reduced by 33%. (5.9.11.3.3)				
21. If the depth of a lifted object exceeds 36 inches (910 mm), the permissible weight in Table XXIII in MIL-STD-1472D is reduced by 50%. (5.9.11.3.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PACKAGING**
HF Considerations	**Direction & Force (Cont.)**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
22. If the depth of a lifted object exceeds 48 inches (1.220 m), the permissible weight in Table XXIII in MIL-STD-1472D is reduced by 66%. (5.9.11.3.3)				
23. Missile rack latches are set for quick release and have a 12 lb. (5.4 kg) force maximum.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PACKAGING
HF Considerations	Clearance & Separation
Abbreviation	Clear

Detailed Design Considerations	YES	NO	N/A	Comment
24. Bulkheads, brackets, or other units do not interfere with opening or removal of covers on units within which work is done.(5.9.8.3)				
25. Containers allow for full hand and finger clearance when using opening tool.				
26. Gloved hand clearance is provided.				
27. Vertically mounted missiles exceeding 40 lb. (18 kg) have floor retainer with enough clearance for 95th percentile hand.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PACKAGING**
HF Considerations	**Visibility & Identification, Use Conditions**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
28. Identification of package contents is clearly visible.				
29. Cases lift from units rather than units lift from cases. (5.9.7.2)				
30. It is obvious when a cover is in place but not secured. (5.9.8.1)				
31. Tabs and grasp points for opening are clearly identifiable. (5.13.2.7)				
32. For cross-country operations, items are secured in stowage boxes or restrained by straps or brackets.				
33. The materiel remaining is easily determined.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	PACKAGING
HF Considerations	Safety, Operating Procedures
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
34. Flammable items are stowed away from engines, generators and exhaust pipes.				
35. Edges and corners on covers and cases are rounded or otherwise finished to prevent personnel injury.				
36. Glass containers are avoided for field use.				
37. Labels warn of hazards and dangers within case.				
38. Plug-in components are used where feasible. Incorrect installation of a plug-in unit is prevented by virtue of its size, shape, etc.				
39. Orientation of a unit within its case is obvious or labeled. (5.9.7.1)				
40. Instructions for opening a cover are permanently displayed if opening is not obvious. (5.9.8.2)				
41. Labels/markings tell how to open and remove position covers and cases.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

17. ACCESSES, COVERS & CAPS

Contents	Abbreviation	Page
Functionality	Function	B-316
Location & Arrangement, Size & Shape	Loc	B-318
Direction & Force, Clearance & Separation	Dir	B-319
Visibility & Identification	Vis	B-320
Use Conditions	Use	B-322
Safety	Safety	B-323

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	ACCESSES, COVERS & CAPS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Access covers are equipped with grasp areas for opening. (5.9.9.5.1.1)				
2. An access is provided when frequent maintenance would require removing a case or cover or dismantling a component. (5.9.9.1)				
3. Captive fasteners are used when periodic removal is required. (5.9.10.3)				
4. Covers which are not completely removable are self-supporting in the open position. (5.9.9.2)				
5. Replaceable caps are of the captive type. (5.9.14.13)				
6. Sliding, rotating, or hinged units open fully and remain in place without hand support. (5.9.4.4)				
7. The number of screws used to hold accesses closed is minimized. (5.9.10.4)				
8. Sliding doors and caps lock positively.				
9. Cover fasteners self-lock for closing with an audible snap.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	ACCESSES, COVERS & CAPS
HF Considerations	Functionality
Abbreviation	Function

Detailed Design Considerations	YES	NO	N / A	Comment
10. Small covers hinge at bottom and open down.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ACCESSES, COVERS & CAPS**
HF Considerations	**Location & Arrangement, Size & Shape**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
11. Replaceable items are not placed in a manner which makes them difficult to remove. (5.9.4.1)				
12. Bulkheads and brackets do not interfere with opening or removing covers. (5.9.8.3)				
13. Rubber stripping or sealing material is located so user will not damage it when the cover is removed.				
14. Access opening size and shape conform to the requirements of FIGURE 45 in MIL-STD-1472D. (5.9.9.5.1.2)				
15. Caps are large enough to be handled with gloves. (5.9.1.7)				
16. Opening size allows adequate visual access. (5.9.9.5.1)				
17. Openings are large enough to permit required operations. (5.9.9.5.1)				
18. Container opening is large enough to allow full entry and passage of measuring utensils.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ACCESSES, COVERS & CAPS**
HF Considerations	**Direction & Force, Clearance & Separation**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
19. One soldier can lift cover. (5.9.11.3.1.1)				
20. Caps tighten clockwise and loosen counterclockwise.				
21. Latch cover requires positive force to open.				
22. Access is large enough to insert arm, hand, tools, and/or test equipment. (5.9.9.5.1.2)				
23. Covers through which mounting screws pass for attachment have holes large enough to permit screws to pass without perfect alignment. (5.9.6)				
24. Structural members of units do not prevent removal of components. (5.9.4.1)				
25. Open covers do not interfere with controls or displays.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ACCESSES, COVERS & CAPS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
26. Cover opening method is obvious or instructions are displayed on outside of cover. (5.9.8.2)				
27. Instructions are visible when access cover is open. (5.9.9.3)				
28. It is obvious when a cover is in place but not secured. (5.9.8.1)				
29. Labels and instructions are properly oriented when cover, case, or door is open. (5.9.9.3)				
30. Labels indicate function of units behind enclosure access. (5.9.9.3)				
31. Labels indicate how service equipment is oriented or connected. (5.9.9.3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ACCESSES, COVERS & CAPS**
HF Considerations	**Visibility & Identification (Cont.)**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
32. Where visual access is required, one of the following is provided (most preferable first): a) An opening with no cover except where this might degrade system performance. b) A transparent window if dirt, moisture, or other foreign materials might create a problem. c) A break resistant glass window if physical wear, heat, or contact with solvents would otherwise cause optical deterioration. d) A quick opening metal cover if glass will not meet stress or other requirements. (5.9.9.6)				
33. While operator performs tasks, openings are large enough for internal components to be visible. (5.9.9.5.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	ACCESSES, COVERS & CAPS
HF Considerations	Use Conditions
Abbreviation	Use

Detailed Design Considerations	YES	NO	N/A	Comment
34. Allowance is made for gloved hand in externally located access. (5.9.9.4.1)				
35. Equipment is capable of being removed, replaced, and repaired by personnel wearing personal and special purpose clothing and equipment, including NBC. (5.9.1.7)				
36. Openings provide access to fully clothed and equipped 95th percentile male hand and arm dimensions. (5.9.9.5)				
37. Openings provide appropriate depth of reach for fully clothed and equipped 5th percentile females. (5.9.9.5)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**ACCESSES, COVERS & CAPS**
HF Considerations	**Safety**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
38. Accesses are labeled with warning signs which identify hazards within and precautions needed. (5.9.9.3)				
39. Where a hazardous condition exists behind an access, access is equipped with an interlock that de-energizes the hazardous equipment when opened/removed. (5.9.9.5.1.5)				
40. Accesses over dangerous mechanical or electrical components have an internal light and a warning on door. (5.13.5.3)				
41. Edges and corners on covers and cases are rounded to prevent injury.				
42. Pressurized caps are captive.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

18. MEASURES

Contents	Abbreviation	Page
Functionality	Function	B-325
Location, Clearance, Visibility	Loc	B-327

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	MEASURES
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Display precision and response is consistent with that of system. (5.1.1.3)				
2. Information is directly usable. (5.2.1.3.3)				
3. Scales on measures: a) Are linear. b) Start at 0. c) Use whole numbers. d) Have 2 pointers max. e) Numerals are oriented upright. (5.2.3.1.4/5)				
4. Information is limited to that necessary to take action. (5.2.1.3.1)				
5. Canteen cup is usable as standard or emergency measuring device for field use.				
6. Field items are non-corrosive and are easily cleaned or disposed of.				
7. For group use general formulas for computation are given.				
8. Item container can be used for measuring where possible.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	MEASURES
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
9. Minimum number of measuring devices is used.				
10. Specified measuring amounts are consistent with measuring device.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**MEASURES**
HF Considerations	**Location, Clearance, Visibility**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
11. Display arrangement is consistent from one application to another. (5.2.1.4.10)				
12. Containers allow for full hand and finger clearance when using opening tool.				
13. Display viewing distance is 13 to 25 in. (330 to 635 mm). (5.2.1.4.11/12)				
14. Measuring marks and displays are located so they can be read to the required accuracy. (5.2.1.4.1)				
15. Reflections are minimized. (5.2.1.4.4)				
16. Measurement marks are raised.				
17. Measures are clearly detailed.				
18. Measuring marks on opaque containers are placed inside.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

19. REPLACEABLE UNITS

Contents	Abbreviation	Page
Functionality	Function	B-329
Location & Arrangement	Loc	B-331
Clearance & Separation	Clear	B-332
Visibility & Identification	Vis	B-333
Safety	Safety	B-334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**REPLACEABLE UNITS**
HF Considerations	**Functionality**
Abbreviation	**Function**

Test Title	
Test Project No.	**Date**

Detailed Design Considerations	YES	NO	N/A	Comment
1. Blind screwdriver adjustments have mechanical guides. (5.9.3.2)				
2. Common hand tools are provided for field units. (5.9.12.2)				
3. Faulty equipment is easily detected and quickly removed/repaired using standard parts or modules. (5.9.1.6)				
4. Grasp areas are provided on carried units. (5.9.11.5.1)				
5. Guide pins, rollout racks, interlocks, drawers, hinges, or quick disconnects aid removal and replacement. (5.9.12.4/6/8)				
6. Item does not have to be disassembled to lubricate. (5.9.5.1)				
7. Item failure is indicated or alarmed. (5.9.17.1.2)				
8. Lamps are replaceable with power on. (5.2.2.1.16)				
9. Remote handling devices are compatible and have quick disconnects, captive fasteners, and feedback. (5.10.1.1/2/3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	REPLACEABLE UNITS
HF Considerations	Functionality (Cont.)
Abbreviation	Function

Detailed Design Considerations	YES	NO	N/A	Comment
10. Similarly shaped items with different functions are not interchangeable. (5.9.2.2)				
11. Similarly shaped items with different functions have standard orientation. (5.9.2.2)				
12. Units that are pulled out of item are mounted on rollout racks, slides, or hinges. (5.9.12.6)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**REPLACEABLE UNITS**
HF Considerations	**Location & Arrangement**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
13. All tire valves are accessible. (5.12.9.2.1)				
14. Fuses are easily accessible. (5.9.17.2.2)				
15. Parts are mounted on one plane, not stacked. (5.9.2.1)				
16. Replaceable units are readily accessible. (5.9.12.9/10)				
17. Replaceable units remain "open" without support and are well laid out. (5.9.12.9/10)				
18. Fill points and drains are reachable by 5th percentile personnel wearing restrictive or bulky clothing. (5.9.1.8)				
19. Vehicle drain valves, fuel/oil filters, distributors, fuel injectors, fan belts, etc. are accessible for inspection/replacement. (5.12.9.1.1/2/3)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**REPLACEABLE UNITS**
HF Considerations	**Clearance & Separation**
Abbreviation	**Clear**

Detailed Design Considerations	YES	NO	N/A	Comment
20. Check points, test points, connectors, and labels are accessible during maintenance. (5.9.4.3)				
21. Enough clearance is provided to replace parts without contacting hazards. (5.9.4.3)				
22. Large parts do not prevent access to other parts. (5.9.4.2)				
23. Simple indicator lights have clearance for easy bulb replacement. (5.2.2.3.2)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**REPLACEABLE UNITS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
24. Battery terminals are marked "+"/"-". (5.12.9.1.4)				
25. Components are visible from maintenance position. (5.9.9.6)				
26. Fuses are labeled/rated. (5.9.17.2.3)				
27. Grasp areas are identified. (5.13.2.7)				
28. Labels are provided for hoist, jack, and lift points; center of gravity; "no-step"; and weight of item. (5.9.11.3.9)				
29. Lubrication points are labeled as to type and frequency. (5.9.5.2)				
30. Parts, components, circuits and assemblies are meaningfully labeled. (5.5.6.1.1)				
31. Reference scales are readily visible. (5.9.3.3)				
32. Replaceable items are coded/keyed. (5.9.12.5)				
33. Similarly shaped items with different functions are easily identified. (5.9.2.2)				
34. Maintenance points contrast with background.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	REPLACEABLE UNITS
HF Considerations	Safety
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
35. Delicate parts are protected. (5.9.2.3)				
36. Fuel service equipment has automatic shutoff device. (5.13.7.3.2)				
37. Positive and negative battery terminals are different sizes. (5.12.9.1.4)				
38. Hazards are conspicuously placarded. (5.13.2.1)				
39. Internal controls located near rotating parts, high voltages, or other hazards are shielded. (5.9.3.6)				
40. Sensitive adjustments are guarded and hand support is provided. (5.9.3.5)				
41. Stops are provided for rollout racks and the center of gravity does not shift to the extent that the console topples. (5.9.12.6/7)				
42. Units can be accessed without danger from heat, moving parts, electricity, chemicals, and/or radiation. (5.13.5.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

20. TEST ELEMENTS & TOOLS

Contents	Abbreviation	Page
Functionality	Function	B-336
Location & Arrangement, Size & Shape, Clearance	Loc	B-337
Visibility & Identification	Vis	B-338
Use Conditions	Use	B-339
Safety, Operating Procedures	Safety	B-341

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TEST ELEMENTS & TOOLS
HF Considerations	Functionality
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Lamp test circuits are incorporated. (5.2.2.1.14)				
2. Calibration and adjustment controls with limited motion have mechanical stops to prevent damage. (5.9.3.4)				
3. Indication of equipment power failure is provided. (5.9.17.1.1)				
4. Display is provided to show equipment that is out-of-tolerance or has failed. (5.9.17.1.2)				
5. Positive indication of an open fuse is provided. (5.9.17.2.1)				
6. Electrical potentials over 300V are stepped down for test points. (5.13.7.1.7)				
7. Test points and built-in meters are used to isolate failed unit or module.				
8. Tools are provided with rings or eyes compatible with quick release snaps or hooks on tool belts.				
9. External test points are of the jack terminal design; internal test points are of the stand-off terminal design.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TEST ELEMENTS & TOOLS**
HF Considerations	**Location & Arrangement, Size & Shape, Clearance**
Abbreviation	**Loc**

Detailed Design Considerations	YES	NO	N/A	Comment
10. Test points for adjustment are close to the controls or displays used. (5.9.15.1)				
11. Test equipment either fits the hand or has handle or hand support.				
12. For reaching test points limiting body dimensions are based on 5th percentile user. (5.6.1)				
13. Large parts are not mounted to deny access to smaller ones. (5.9.4.2)				
14. Sufficient space is provided for test equipment or tool use. (5.9.4.3)				
15. Access to unit maintained by one technician does not require removal of one maintained by another. (5.9.4.7)				
16. Cables terminating on control/display panels do not interfere with controls/displays. (5.9.13.4)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**TEST ELEMENTS & TOOLS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
17. Mechanical guides are provided when a screwdriver adjustment must be made without visual access. (5.9.3.2)				
18. Test equipment adjustments, check points, cables, connectors, and/or labels are visible during maintenance. (5.9.4.3)				
19. Contacts, terminals, etc. over 500V are clearly labeled. (5.13.7.1.4)				
20. Test equipment has panel lighting.				
21. Test points are permanently labeled and color-coded.				
22. A simple check shows when equipment is out of calibration.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TEST ELEMENTS & TOOLS
HF Considerations	Use Conditions
Abbreviation	Use

Detailed Design Considerations	YES	NO	N/A	Comment
23. Lamp replacement is possible with power on and from panel front. (5.2.2.1.15/16)				
24. Special tools required for adjustment are with equipment. (5.9.1.2)				
25. Knobs are preferred to screwdrivers for frequent adjustment. (5.9.3.1)				
26. Reference scale is provided for control adjustment. (5.9.3.3)				
27. Sensitive adjustment points have a handrest or armrest nearby if vibration is present during adjustment. (5.9.3.5)				
28. Sensitive adjustment points are guarded against accidental disturbance. (5.9.3.5)				
29. Test points are accessible. (5.9.4.3)				
30. Special tool use is minimized. (5.9.12.2)				
31. Items frequently removed for test are mounted on rollout racks, slides, or hinges. (5.9.12.6)				
32. Braces hold hinged assemblies in working position. (5.9.12.9)				
33. Cables are long enough to check unit in place. (5.9.13.3)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TEST ELEMENTS & TOOLS
HF Considerations	Use Conditions (Cont.)
Abbreviation	Use

Detailed Design Considerations	YES	NO	N/A	Comment
34. Sufficient test points are provided to prevent removing subassemblies for testing. (5.9.15.2)				
35. Adequate storage is provided in portable test equipment case or lid to contain leads, probes, spares, manuals, or tools. (5.9.16.1)				
36. Quick-release removal is provided for optics. (5.11.3.18.3)				
37. Test points reflect the sequence for sequential testing.				
38. Stands or casters are provided for equipment exceeding 30 lb. (13.6 kg); wheels or hoists are provided for equipment exceeding 90 lb. (40.8 kg).				
39. Test equipment is not overly complex or difficult to use.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	TEST ELEMENTS & TOOLS
HF Considerations	Safety, Operating Procedures
Abbreviation	Safety

Detailed Design Considerations	YES	NO	N/A	Comment
40. Internal controls located near hazards are shielded and labeled. (5.9.3.6)				
41. Rollout racks do not shift the center of gravity to the extent that the console topples. (5.9.12.6)				
42. Tools and/or test leads used near high voltages are insulated. (5.13.7.1.1)				
43. Contacts and terminals are shielded with suitable protective measures to prevent accidental contact. (5.13.7.1.4)				
44. Electrical hand-held tools have 3-wire power with ground or are double insulated. (5.13.7.1.6)				
45. Exposed surfaces of electrical hand-held tools are nonconducting or grounded. (5.13.7.1.6)				
46. Operating instructions for portable test equipment are affixed to unit, lid, or compartment. (5.9.16.2)				
47. Calibration reminder is included with test instructions. (5.9.16.2)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

21. CLOTHING & PERSONAL EQUIPMENT

Contents	Abbreviation	Page
GENERAL CLOTHING & PERSONAL EQUIPMENT - Size & Shape	Size	B-343
GENERAL CLOTHING & PERSONAL EQUIPMENT - Direction & Force, Operating Procedures	Dir	B-345
BODYWEAR	Body W	B-346
HEADWEAR	Head W	B-347
HANDWEAR	Hand W	B-349
FOOTWEAR	Foot W	B-350
PERSONAL EQUIPMENT	Pers	B-351
COMBAT HARDWARE	Combat H	B-352

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**GENERAL CLOTHING & PERSONAL EQUIPMENT**
HF Considerations	**Size & Shape**
Abbreviation	**Size**

Test Title	
Test Project No.	**Date**

Detailed Design Considerations	YES	NO	N/A	Comment
1. Clothing, headwear, handwear, footwear, sleeping gear, and equipment is sized for personnel within the 5th to 95th percentile per FIGURES 23 to 28 in MIL-STD-1472D. (5.6.3.5)				
2. Essential and critical clothing, etc. is sized for personnel within the 1st to 99th percentile per FIGURES 23 to 28 in MIL-STD-1472D. (5.6.3.5)				
3. The size and shape of the article of clothing, handwear, sleeping gear, combat hardware, and load carrying devices allows for use by 90% of the user population under the following conditions: a) Tasks to be performed by the wearer. b) The position of the body during the performance of tasks. c) Mobility/flexibility requirements. d) Critical dimensions imposed by obstacles, projections, etc. e) Critical dimensions imposed by protective clothing, equipment, package, lines, padding, etc. (5.6.1)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	GENERAL CLOTHING & PERSONAL EQUIPMENT
HF Considerations	Size & Shape (Cont.)
Abbreviation	Size

Detailed Design Considerations	YES	NO	N/A	Comment
4. Ponchos are fitted only for length, but must be large enough to cover a fully equipped man.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**GENERAL CLOTHING & PERSONAL EQUIPMENT**
HF Considerations	**Direction & Force, Operating Procedures**
Abbreviation	**Dir**

Detailed Design Considerations	YES	NO	N/A	Comment
5. Individual portions of equipment do not weigh more than 35 lb. (16 kg). (5.11.1.1.1)				
6. The total load carried by an individual, including clothing, weapons and equipment for close combat operations does not exceed 30% of body weight. (5.11.1.2.2)				
7. The total load carried by an individual, including clothing, weapons and equipment does not exceed 45% of body weight. (5.11.1.2.2)				
8. For 5th percentile personnel, total load for close combat operations does not exceed 36 lb (16.3 kg). (5.11.1.2.2)				
9. For 5th percentile personnel, total load for marching does not exceed 54 lb (24.5 kg). (5.11.1.2.2)				
10. Special use instructions are permanently attached. (5.5.4.5)				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	BODYWEAR
HF Considerations	Functionality, Use Conditions
Abbreviation	Body W

Detailed Design Considerations	YES	NO	N/A	Comment
11. Ponchos and large protective garments cover packs, weapons. (5.6.1)				
12. Protective clothing fits snugly at openings. (5.6.1)				
13. Fasteners open and close silently.				
14. If snagging or catching will jeopardize wearer, then velcro, snaps, or other quick-release fasteners are used.				
15. Items are of a dull finish and are non-reflecting.				
16. Clothing worn with full combat gear does not degrade performance in any combat task. (5.6.1)				
17. Protective clothing is adaptable to various camouflage requirements. (5.6.1)				
18. Protective clothing used in cold weather remains supple and does not stiffen.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HEADWEAR**
HF Considerations	**Functionality, Size & Shape**
Abbreviation	**Head W**

Detailed Design Considerations	YES	NO	N/A	Comment
19. Headgear allows adequate vision, eating, or drinking when in use. (5.6.1)				
20. Headgear allows use of binoculars or telephones or aiming/firing of weapons without removal and loosening. (5.6.1)				
21. Inside of face plates is fog resistant or is easily opened and cleaned.				
22. Adjustments accommodate the full range of head sizes. (5.6.3.4)				
23. Combat headgear fits securely to prevent tilting or knocking askew during strenuous action.				
24. Protective headgear is large enough to fit over helmet or thin enough to fit under helmet, whichever is the case.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	HEADWEAR
HF Considerations	Safety
Abbreviation	Head W

Detailed Design Considerations	YES	NO	N / A	Comment
25. Headgear is compatible with hearing protection.				
26. Faceplates and eyepieces are shatterproof.				
27. Headgear which involves electrical equipment is non-conductive.				
28. Safety helmets are shatterproof.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**HANDWEAR**
HF Considerations	**Functionality, Size & Shape, Use Conditions**
Abbreviation	**Hand W**

Detailed Design Considerations	YES	NO	N/A	Comment
29. Handwear is flexible and supple for performance of combat tasks. (5.6.1)				
30. In the event handwear is not flexible, etc., alternative protection is provided. (5.6.1)				
31. Waterproofed items have ventilation capability. (5.6.1)				
32. Wrist buckles are adjustable with mitten or glove on. (5.6.4)				
33. Gloves, mittens, etc., are large enough so that fingers are not cramped and flexibility of hand is not impaired. (5.6.3.5)				
34. Cold weather handwear fits snugly at wrist.				
35. Anti-contact gloves provide protection and allow manipulation. (5.6.1)				
36. Arctic mitten liners allow detailed work when required without exposing hand or wrist. (5.6.1)				
37. Mitten for weapon use allows single finger use but not arctic exposure of finger. (5.6.1)				
38. Outside of handwear, shells blend with standard camouflage.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**FOOTWEAR**
HF Considerations	**Use Conditions, Safety**
Abbreviation	**Foot W**

Detailed Design Considerations	YES	NO	N/A	Comment
39. Shoes and boots are compatible with foot controls. (5.6.1)				
40. Footwear size allows for expansion due to heat or load carrying. 5.6.1)				
41. Combat footwear design allows user to climb and perform tasks with minimum of slipping, etc. (5.6.1)				
42. Boots are compatible with skis and snowshoes. (5.6.1)				
43. Soles of boots and shoes are slip-resistant. (5.6.1)				
44. Shoes and boots used around heavy equipment have rigid "safety" toe.				
45. Electrically heated socks cannot shock wearer, especially when wet.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**PERSONAL EQUIPMENT**
HF Considerations	**Functionality, Use Conditions**
Abbreviation	**Pers**

Detailed Design Considerations	YES	NO	N/A	Comment
46. Air mattresses are provided with easy-to-use patch kit.				
47. Bag liners are provided for ease of cleaning.				
48. Bags are easily turned inside out for airing and cleaning.				
49. Bags have self-contained ties and wraps.				
50. Snapped bags have quick release capability.				
51. Zippered bags have both internal and external zipper tags.				
52. Sleeping bags are designed to eliminate any possibility of accidental suffocation.				
53. Sleeping gear is not excessively bulky when rolled or packed.				
54. Zippers and fasteners operate quietly.				
55. Inside and outside of bags, liners, and covers are dark, dull colors.				
56. Sleeping bags used in snow have white exterior.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMBAT HARDWARE**
HF Considerations	**Functionality**
Abbreviation	**Combat H**

Detailed Design Considerations	YES	NO	N/A	Comment
57. Adjustments can be accomplished while item is worn. (5.6.3.5)				
58. Backpacks do not: a) Produce unbalanced loads or shoulder strain. b) Interfere with walking, climbing, shoulder movement, or body temperature regulation. (5.11.1.2.4)				
59. In the case of two-soldier carrying, stretcher-type handles and shoulder supports are provided. (5.11.1.1.4)				
60. Individual items weigh as little as possible. (5.11.1.2.1)				
61. Maximum use is made of standard load-carrying devices. (5.11.1.1.5)				
62. Carrying cases are weather proof.				
63. Gas mask and goggles are usable with helmet.				
64. Material of load-carrying devices is mildew, rot, and rust proofed.				
65. Metal components are rustproof and corrosion-resistant.				
66. Pack-carried items fold or collapse to take up minimum space.				
67. Replacement of expendable components is done without tools.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMBAT HARDWARE
HF Considerations	Location & Arrangement, Size & Shape
Abbreviation	Combat H

Detailed Design Considerations	YES	NO	N/A	Comment
68. Backpacking aids are designed to distribute the load over as many muscle groups as possible. (5.11.1.2.4)				
69. Backpacking aids place the load's center of gravity as close to the carrier's spine as possible. (5.11.1.2.4)				
70. Load carriers have balanced loadings. (5.11.1.2.4)				
71. A single-size device can accommodate smallest user in tropic clothing to the largest user in cold weather clothing. (5.6.1)				
72. Arctic clothing fits 5th-95th percentile personnel. (5.6.4)				
73. Equipment handles for mittened, gloved or bare hand use conforms to the size requirements of FIGURE 48 in MIL-STD-1472D. (5.9.11.5.5)				
74. Gas masks, goggles, and life preservers are adjustable on personnel and fit snugly. (5.6.3.4)				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMBAT HARDWARE**
HF Considerations	**Direction & Force**
Abbreviation	**Combat H**

Detailed Design Considerations	YES	NO	N/A	Comment
75. Individual portions of equipment may weigh up to 35 lb. (15 kg) if load is balanced and well distributed or if it is not necessary to maintain pace of infantry. (5.11.1.1.1)				
76. Load-carrying minimizes application of pressure/compression to the chest and armpits to transmit weight to the ground through bone. (5.11.1.2.4)				
77. Marching load is 54 lb. (24.5 kg) maximum. (5.11.1.2.2)				
78. One-person backpacked loads over 44 lb. (20 kg) are provided with lifting aids for assistance from second soldier. (5.11.1.2.3)				
79. Rifleman's fighting load is 40 lb. (18 kg); other than fighting, 45 lb. (20 kg).				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**COMBAT HARDWARE**
HF Considerations	**Visibility, Use Conditions**
Abbreviation	**Combat H**

Detailed Design Considerations	YES	NO	N/A	Comment
80. Eye and face coverings afford maximum vision and hearing to wearer.				
81. Survival items are brightly colored.				
82. Combat hardware items of sufficient size and weight to interfere with balance have proper placement and type of attachment.				
83. For rough terrain and climbing, heavy load-carrying items are anchored at or near the bottom.				
84. Loose straps, chains, and other noise-producing elements are covered and anchored to reduce noise.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	COMBAT HARDWARE
HF Considerations	Safety
Abbreviation	Combat H

Detailed Design Considerations	YES	NO	N/A	Comment
85. Heavy load items have quick release capability for doffing in an emergency. (5.11.1)				
86. Load permits freedom of movement and has no sharp edges or projections. (5.11.1.1.3)				
87. Loads have minimum projections to prevent personnel injury or entanglement in undergrowth. (5.11.1.2.5)				
88. Sharp edges are adequately covered during portage. (5.11.1.2.5)				
89. The carrying and wearing of emergency items does not interfere with required combat task performance. (5.11.1.1.3)				
90. Emergency items are accessible at all times.				
91. Faceplates and optics are shatterproof.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

22. STRUCTURAL COMPONENTS

Contents	Abbreviation	Page
Functionality, Size & Shape	Function	B-358
Clearance & Separation	Clear	B-359
Visibility & Identification	Vis	B-360
Safety	Safety	B-361

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	STRUCTURAL COMPONENTS
HF Considerations	Functionality, Size & Shape
Abbreviation	Function

Test Title	
Test Project No.	Date

Detailed Design Considerations	YES	NO	N/A	Comment
1. Connection, lifting, and test points are easily reached before and after mating with other components. (5.9.1.3)				
2. For mechanical or power lift devices, hoist and lift points are provided and labeled. (5.9.11.3.9)				
3. Operating, mechanical, and/or electrical components are tested prior to assembly.				
4. Components are sized and shaped to be handled by arctic mitts. (5.9.1.7)				
5. Component shape is such that its connection method is obvious.				
6. Component size and shape are determined by environment, (e.g., jungle, slope, swamp, etc.).				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STRUCTURAL COMPONENTS**
HF Considerations	**Clearance & Separation**
Abbreviation	**Clear**

Detailed Design Considerations	YES	NO	N / A	Comment
7. Clearance is such that components can be removed/replaced quickly and easily.				
8. Components are well-spaced both during and after erection so that the hand and tools can be easily inserted and efficiently utilized.				
9. Components requiring replacement, adjustment, and calibration are accessible during erection.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STRUCTURAL COMPONENTS**
HF Considerations	**Visibility & Identification**
Abbreviation	**Vis**

Detailed Design Considerations	YES	NO	N/A	Comment
10. Blind attachments are avoided whenever possible. (5.4.1.7)				
11. Connection/test points are labeled. (5.9.15.3)				
12. Each assembly, component, and part is labeled or identified. (5.5.6.1.1)				
13. Sequence of assembly is clearly defined and accompanied by illustrations/diagrams. (5.5.1.1)				
14. Minimum assembly visibility requirements are: Coarse 30 ft-c. (325 lux). Medium 50 ft-c. (540 lux). Fine 75 ft-c. (810 lux). Precise 200 ft-c. (2,155 lux).				
15. Preservatives, paint, or grease applied to components cannot hide cracks or breaks in structural members.				

YES = Adequate **NO = Inadequate** **N/A = Not Applicable**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

DESIGN CHECKLIST

Components	**STRUCTURAL COMPONENTS**
HF Considerations	**Safety**
Abbreviation	**Safety**

Detailed Design Considerations	YES	NO	N/A	Comment
16. Exposed edges and corners are rounded 0.03 in. (0.75 mm). (5.13.5.4)				
17. Exposed edges and corners that may present a safety hazard are rounded 0.5 in. (13 mm). (5.13.5.4)				
18. Non-sparking tools are used in explosive atmosphere. (5.13.7.1.7)				
19. Sensitive and delicate components are protected against dust, rain, or mud during assembly and erection. (5.9.2.3)				
20. Sharp edges are covered/sheathed for safe handling.				
21. If heights are involved, hooks and eyes are provided for attaching safety belts/lines.				
22. Structural members used for climbing conform to criteria for steps, ladders, and platforms.				

YES = Adequate NO = Inadequate N/A = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

APPENDIX C

HEDGE FIGURES

Figure		Page
C-1.	Preferred Letter Format	C-2
C-2.	Preferred Numerical Format	C-3
C-3.	Other Acceptable Fonts	C-4
C-4.	Airborne Noise Levels for Ship Compartments	C-6
C-5.	Minimuum Access Dimensions for Construction and Industrial Machinery	C-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

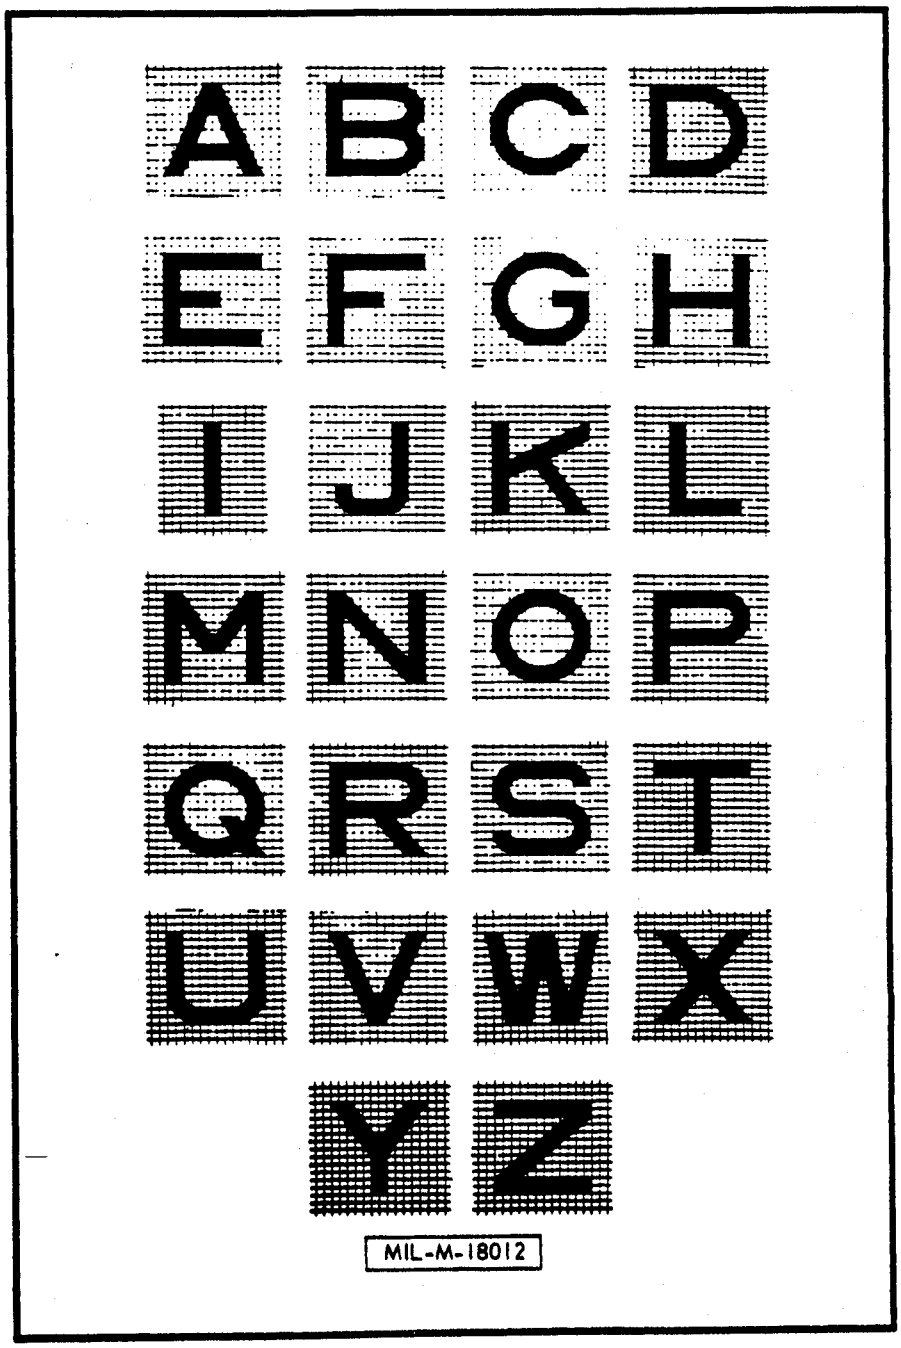


Figure C-1. Preferred Letter Format

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

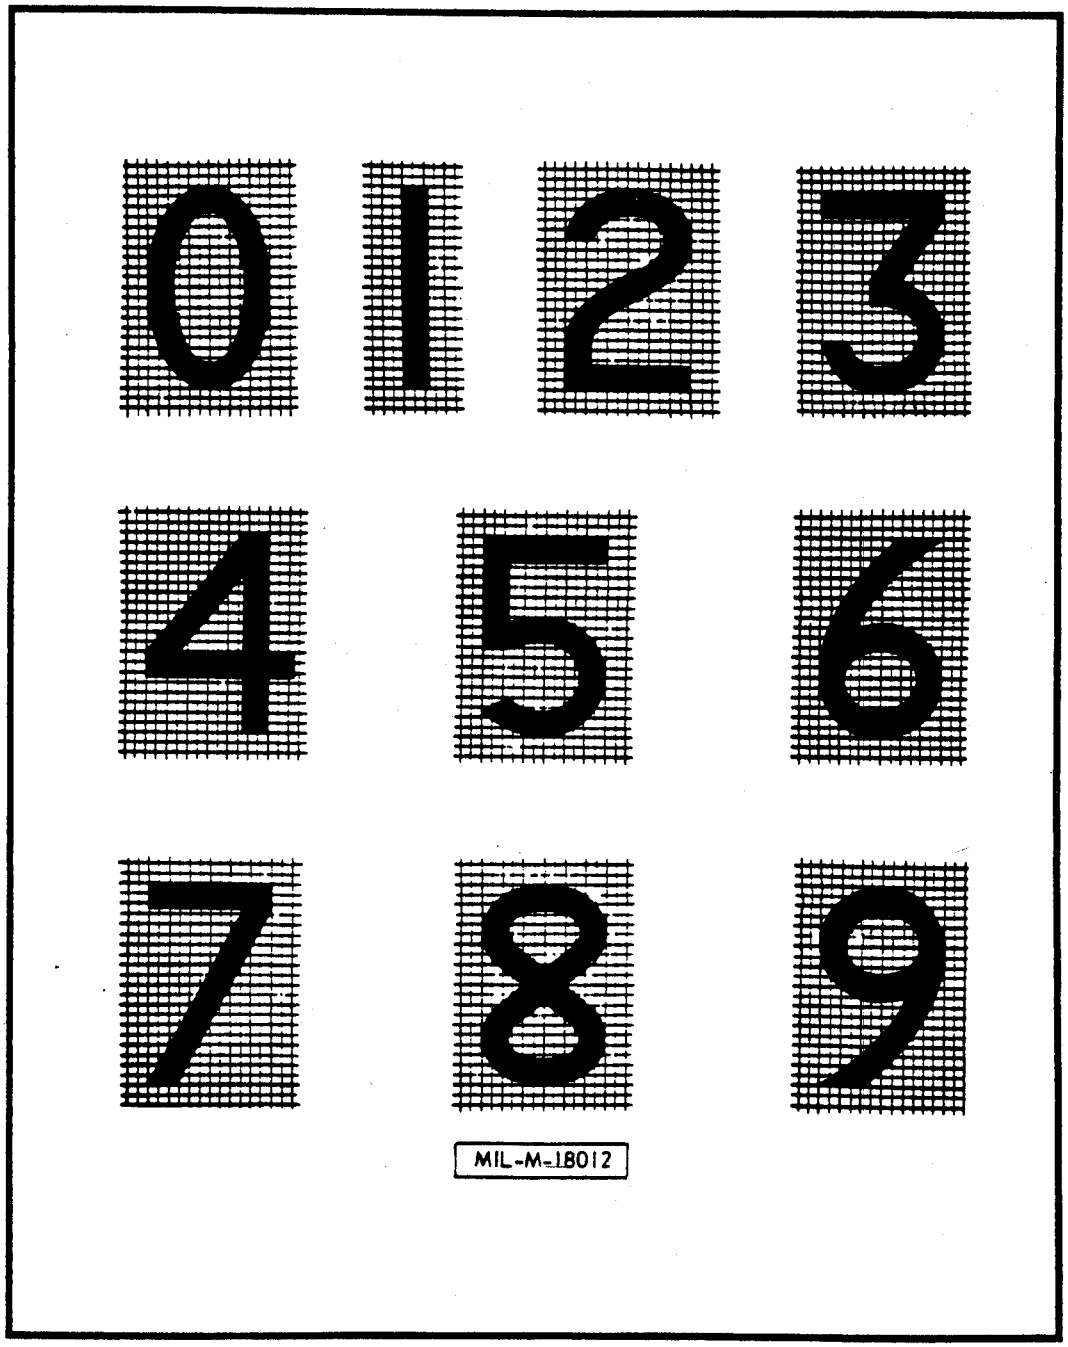


Figure C-2. Preferred Numerical Format

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

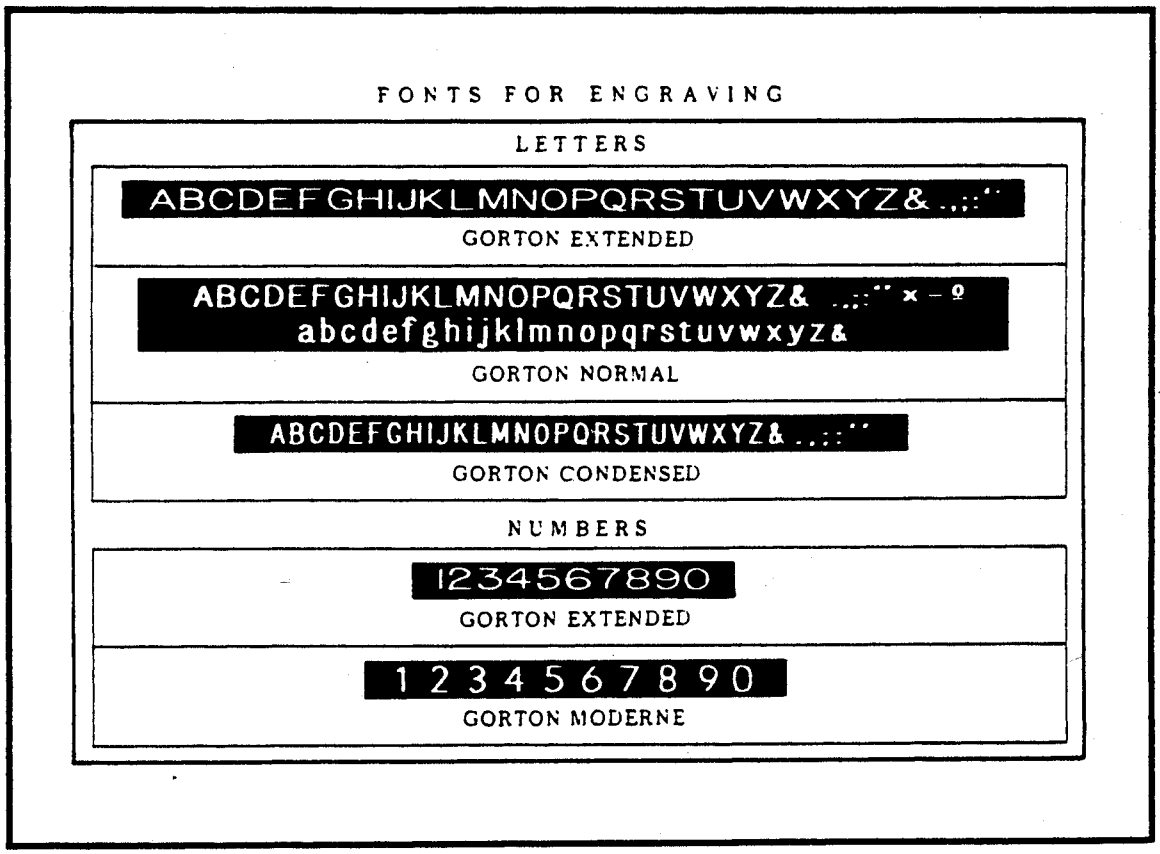


Figure C-3. Other Acceptable Fonts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

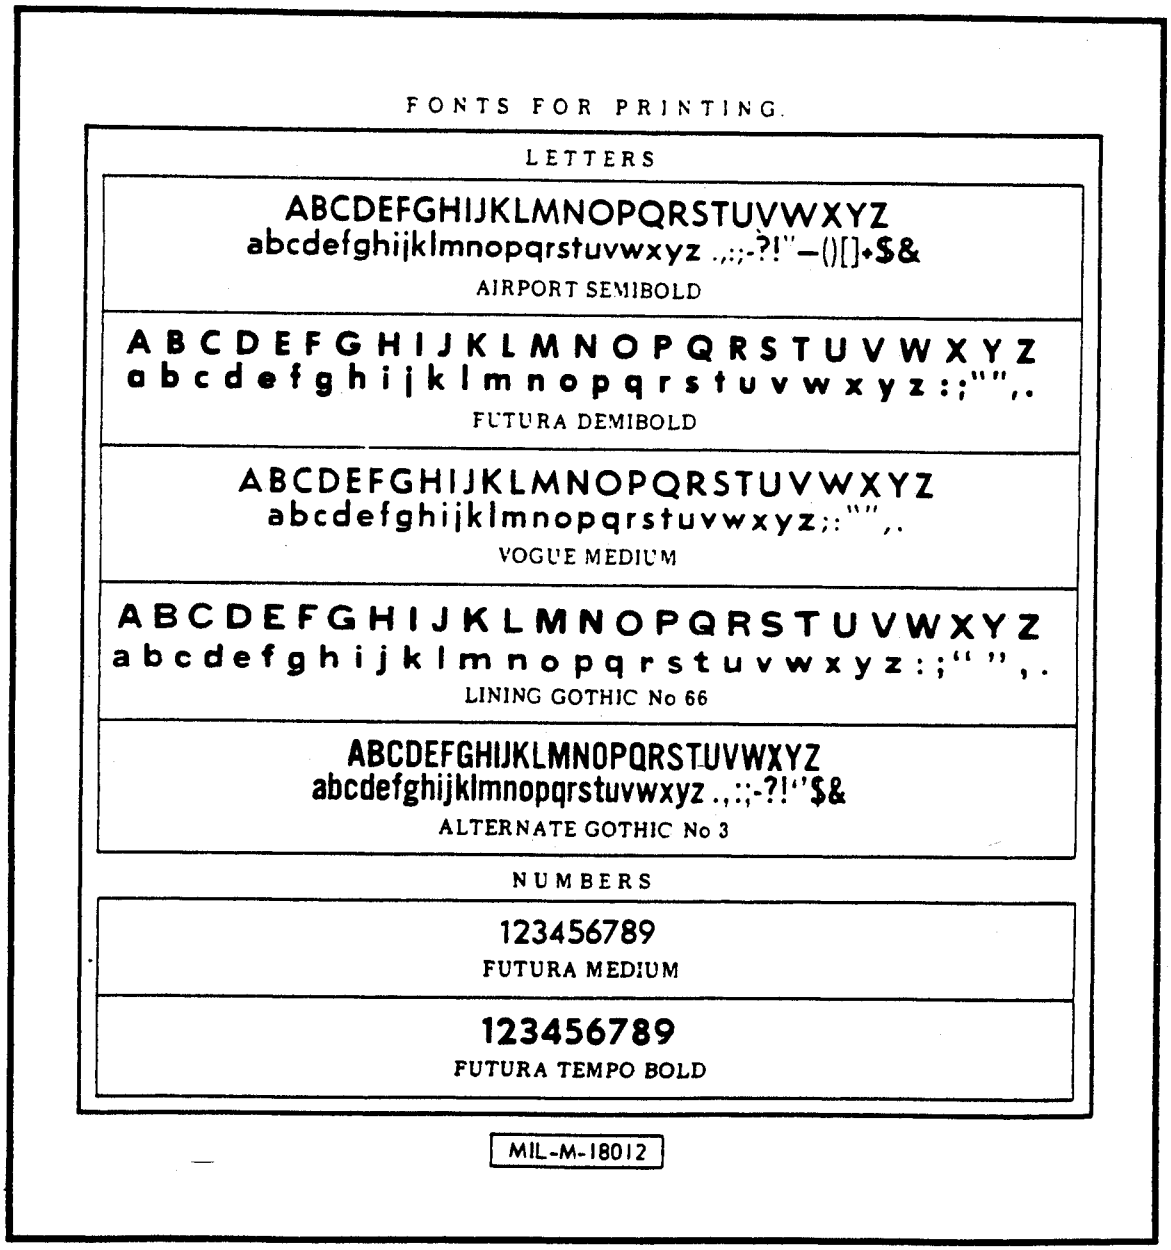


Figure C-3. Other Acceptable Fonts (Cont.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

Airborne Noise Category	Center frequencies of standard octave bands (c.p.s.)									SIL value
	32	63	124	250	500	1000	2000	4000	8000	
A	115	110	105	100	SIL value requirement			85	85	64
B	90	84	79	76	73	71	70	69	68	--
C	85	78	72	68	65	62	60	58	57	--
D	115	110	105	100	90	85	85	85	85	--
E	115	110	105	100	SIL value requirement			85	85	72
F	115	110	105	100	SIL value requirement			85	85	65

Airborne Noise Categories

Category A: Spaces, other than Category E spaces, where intelligible speech communication is necessary.

Category B: Spaces where comfort of personnel in their quarters is normally considered to be an important factor.

Category C: Spaces where it is essential to maintain especially quiet conditions.

Category D: Spaces or areas where a higher noise level is expected and where deafness avoidance is a greater consideration than intelligible speech communication.

Category E: High noise level areas where intelligible speech communication is necessary.

Category F: Topside operating stations on weather decks where intelligible speech communication is necessary.

Speech Interference Level (SIL)

Measure of the effect of airborne background noise on intelligible speech communication. Numerically, it is the arithmetical average of the sound pressure level, in decibels, in the octave bands with center frequencies of 500, 1000, and 2000 c.p.s.

BUSHIPS-SPEC-1-10

Figure C-4. Airborne Noise Levels for Ship Compartments (in Decibels)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.

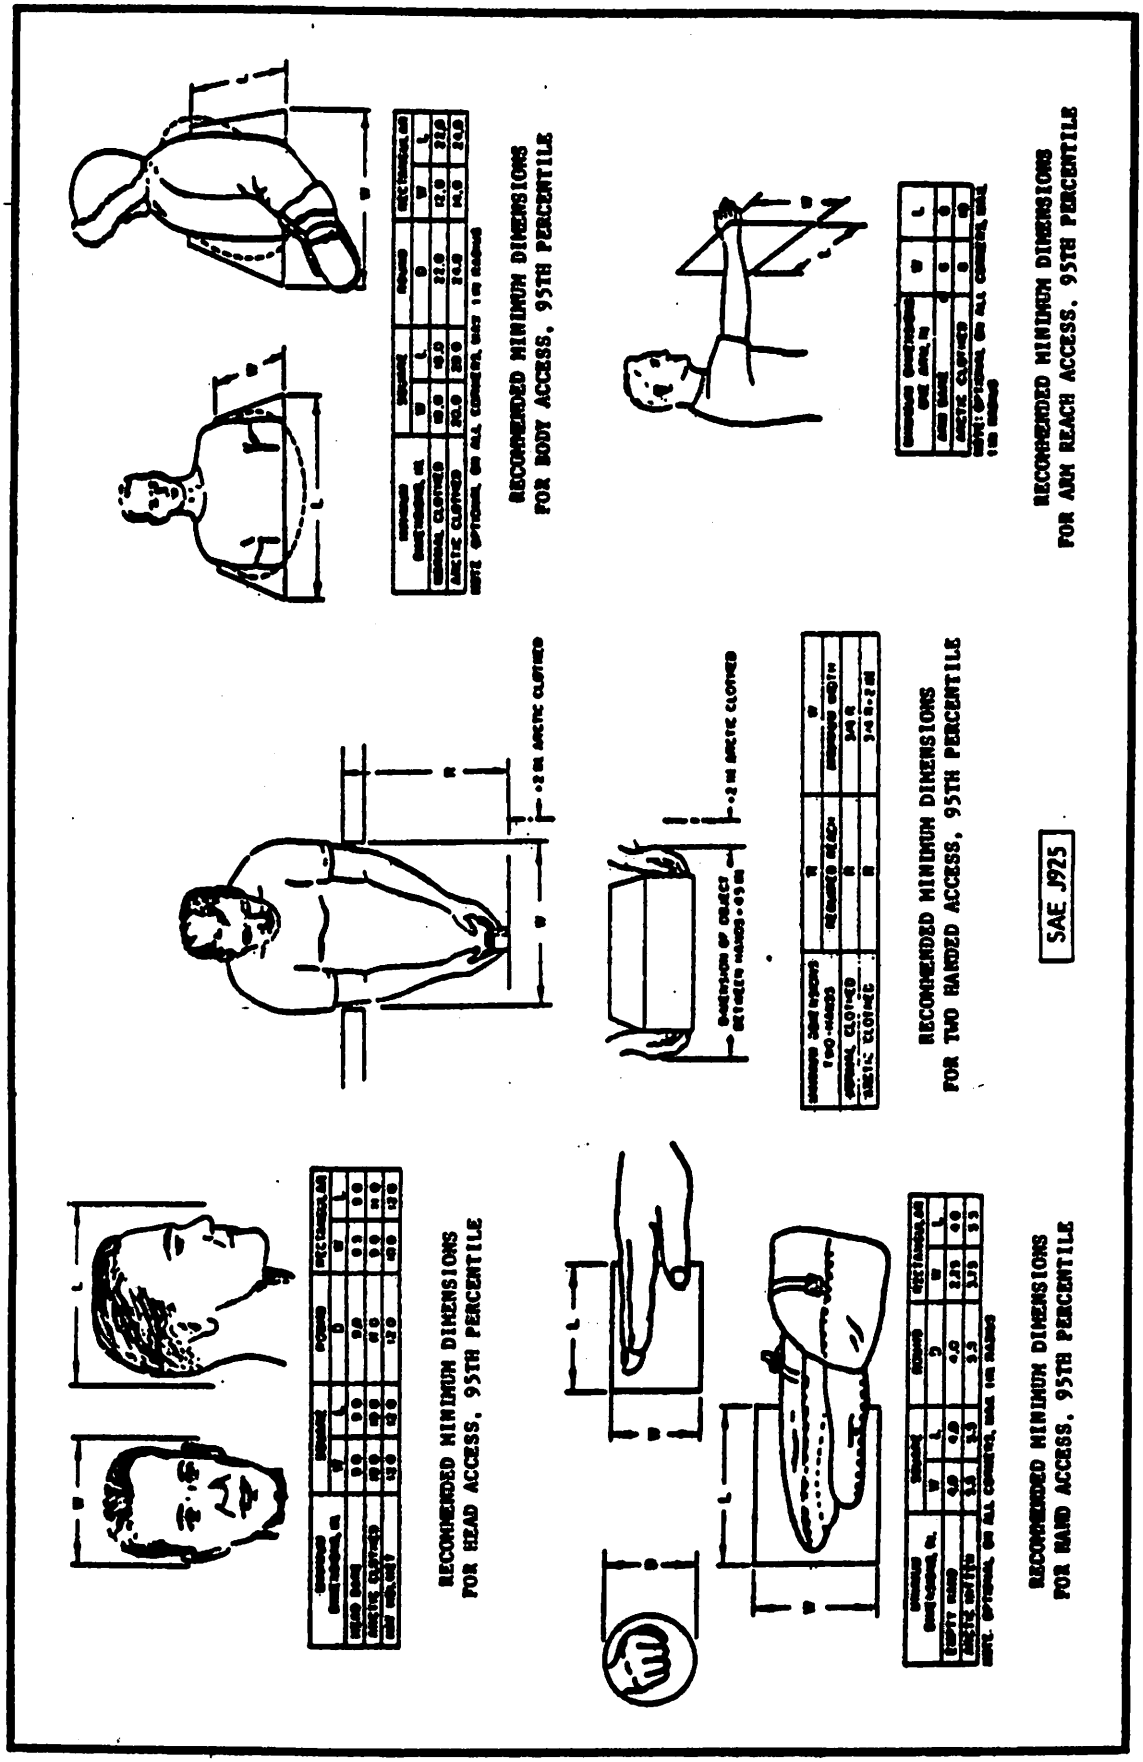


Figure C-5. Minimum Access Dimensions for Construction and Industrial Machinery

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:47Z
Check the source to verify that this is the current version before use.