NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/414A(IH)
27 November 2023
SUPERSEDING
MIL-DTL-3943/414(IH)
23 January 2019

DETAIL SPECIFICATION SHEET

MEDAL, INVESTOR IN PEOPLE LEADERSHIP AWARD, ASSISTANT SECRETARY FOR PREPAREDNESS AND RESPONSE, DEPARTMENT OF HEALTH AND HUMAN SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

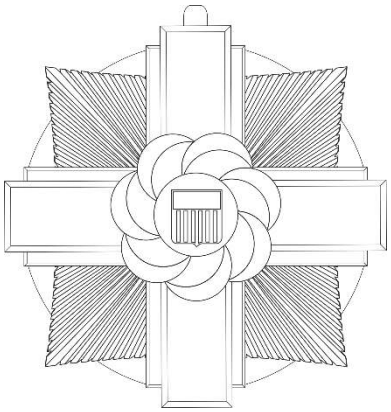


OBVERSE AND ASSEMBLED



REVERSE

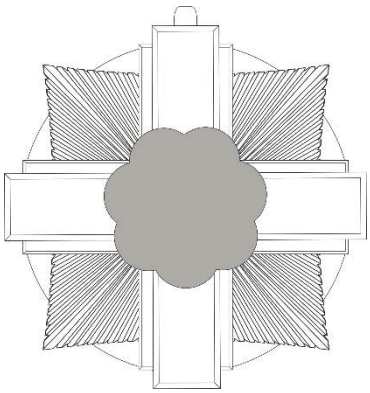

BASE

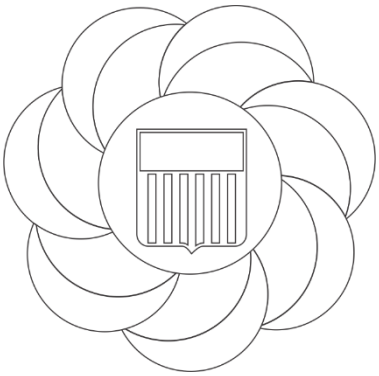

DEVICE

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:29Z
Check the source to verify that this is the current version before use.

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: (-1 and -2) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: (-1 and -2) Silver Plated, Oxidized, Buffed Relieved, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 15.

DIMENSIONS:
HEIGHT:
BASE:
-1: 1-11/16 inches (REF)
-2: 13/16 inch (REF)
DEVICE:
-1: 3/4 inch (REF)
-2: 5/16 inch (REF)
THICKNESS:
BASE:
-1: 0.170 inch ± 0.010 inch
-2: 0.110 inch ± 0.010 inch
DEVICE:
-1: 0.088 inch ± 0.010 inch
-2: 0.077 inch ± 0.010 inch

DECORATION SET: The decoration set packaged in a presentation case and shall consist of a regular size medal, a miniature size medal, a lapel button, a service ribbon and shall be arranged in accordance with MIL-DTL-14633 in a Type XV case with a Class 1 or 3 pad. The following text shall be inscribed on the top of the presentation case using three lines: (Line 1) Investor in People (Line 2) Leadership Award.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR AN NUMBERS	**LOCATION**
Blue #18	Recessed Lines Shaped Like Eagle

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.
2. The specification slash sheet for the ribbon is MIL-DTL-11589/705
3. The specification slash sheet for the lapel button is MIL-DTL-11484/425
4. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:29Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:29Z
Check the source to verify that this is the current version before use.