NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/424
04 April 2022

DETAIL SPECIFICATION SHEET


MEDAL, ATOMIC VETERAN'S SERVICE, OFFICE OF THE SECRETARY OF DEFENSE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.



OBVERSE

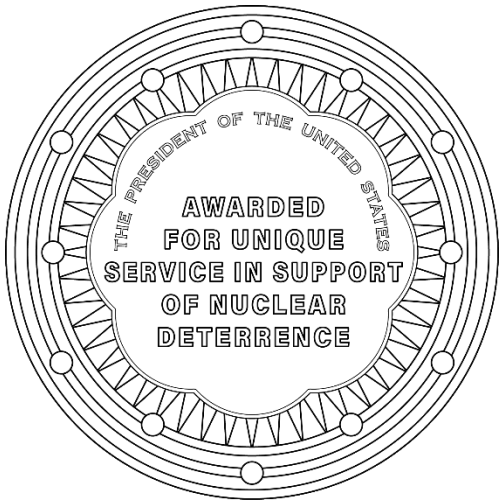

REVERSE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
OBVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Finish Chip 8. **(ONLY RIM, LETTERS AND ATOMIC SYMBOL WILL BE POLISHED)**
REVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Finish Chip 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:31Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER: 1-3/4 inches (REF)
THICKNESS: 0.166 inch ± .010 inch

CASE: Medallions shall be packaged in a commercially procured square case measuring 2-5/8 inches X 2-5/8 inches and 1-1/4 inches high. The outside surface of the case will be covered in Royal Blue Velour matching Pantone Matching System (PMS) Reflex Blue with a nickel plated metal hinge. The interior of the lid shall have a white satin liner. The pad will be a white flock styrene insert vacuum formed to hold the 1-3/4 medallion. The case must be made in the United States of America.

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2022-080)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:31Z
Check the source to verify that this is the current version before use.