
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR FRAME,
TYPE IV, SINGLE SPAN, OFFSET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-28754

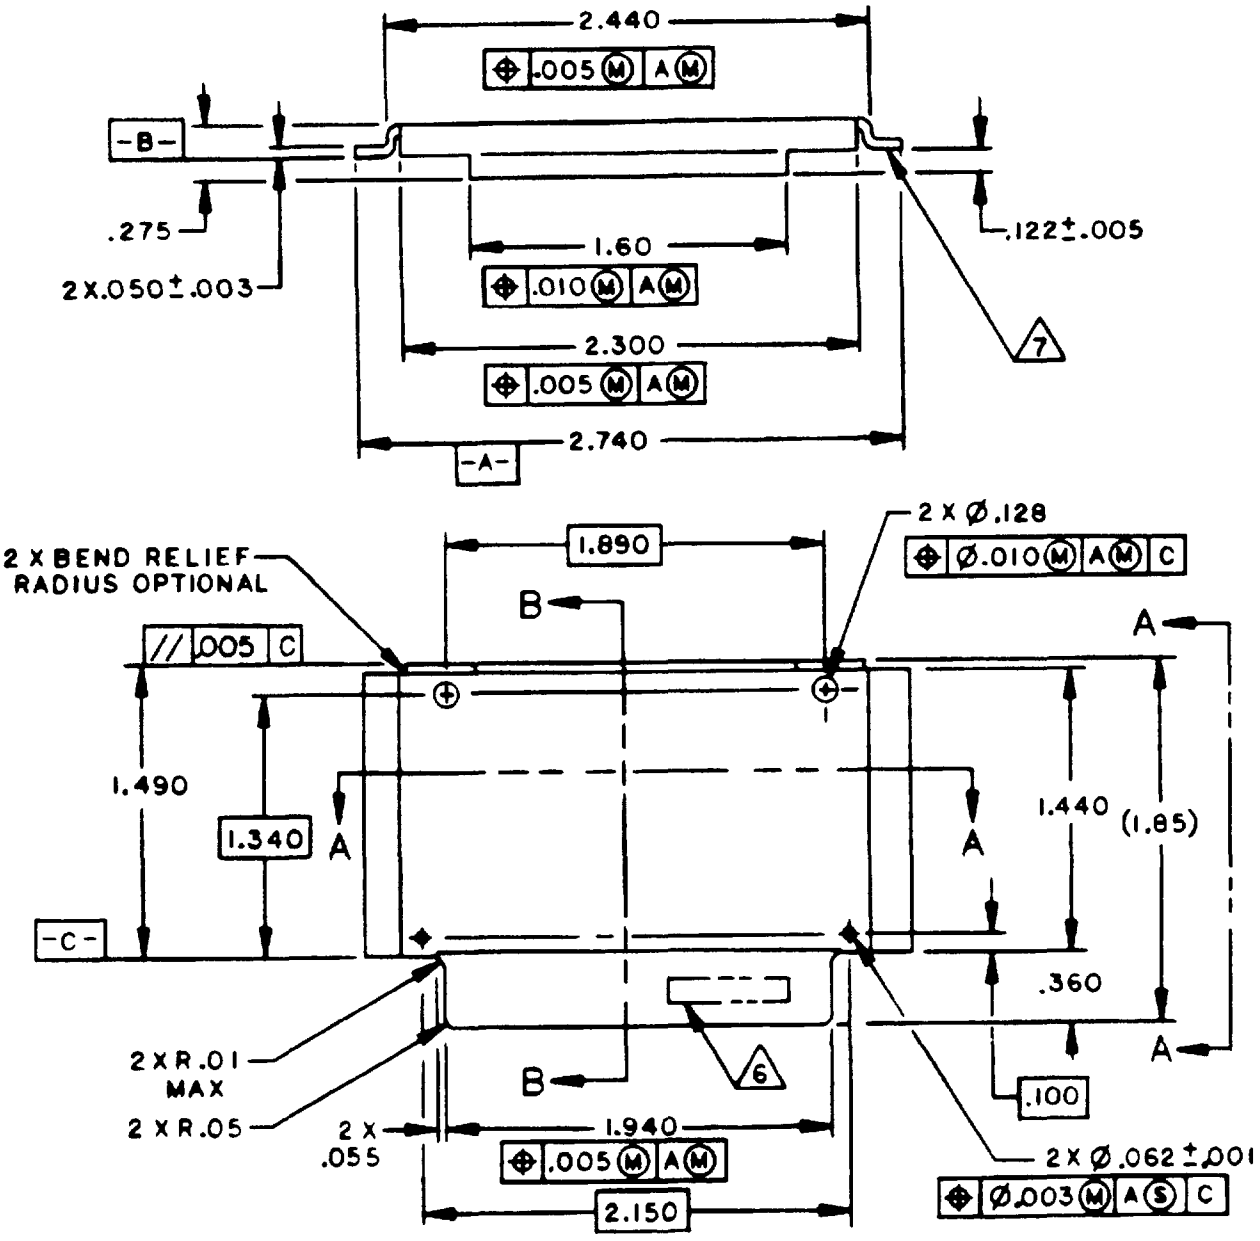


CONFIGURATION 1


FIGURE 1 Dimensions and configurations

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

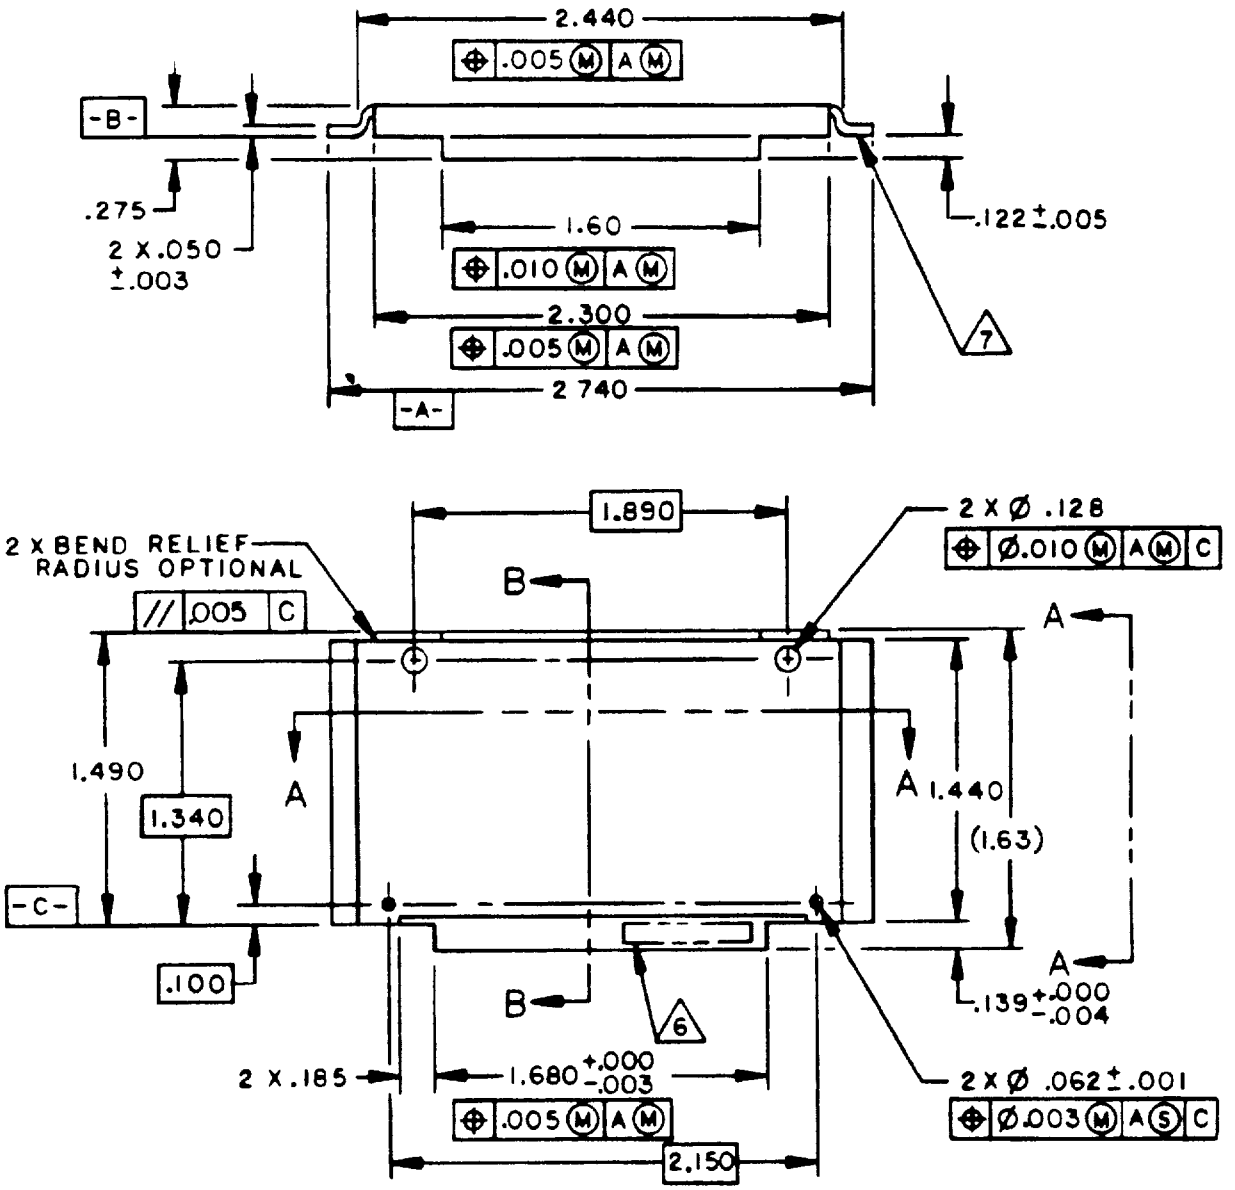

CONFIGURATION 2

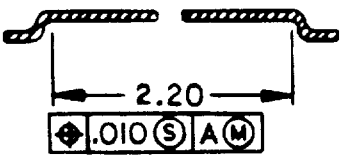


MINIMUM SUBSTRATE SURFACE

SECTION A-A


CONFIGURATION 1 AND 2

FIGURE 1 Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

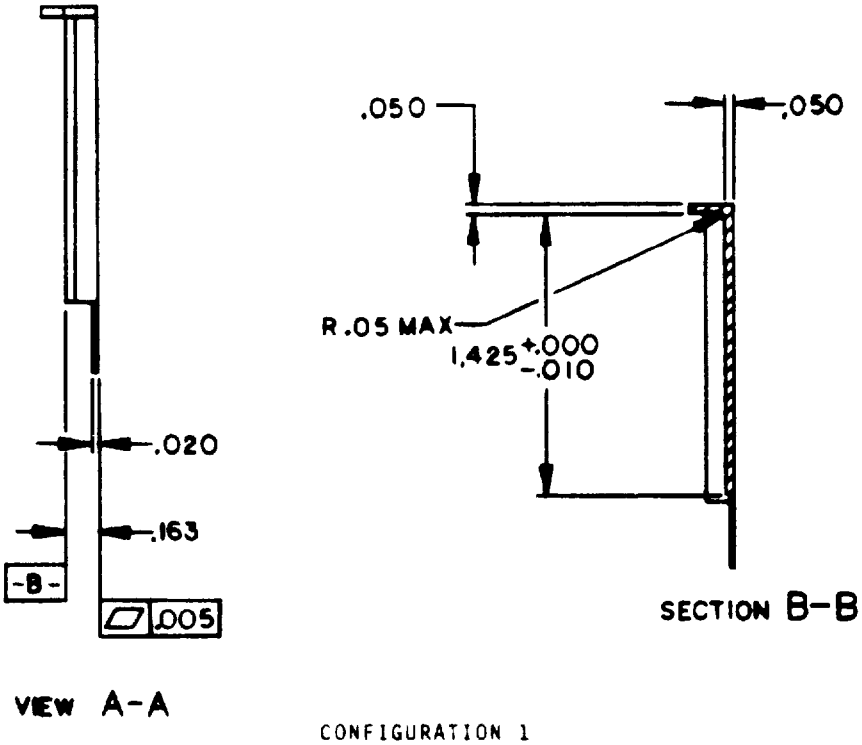

CONFIGURATION 1

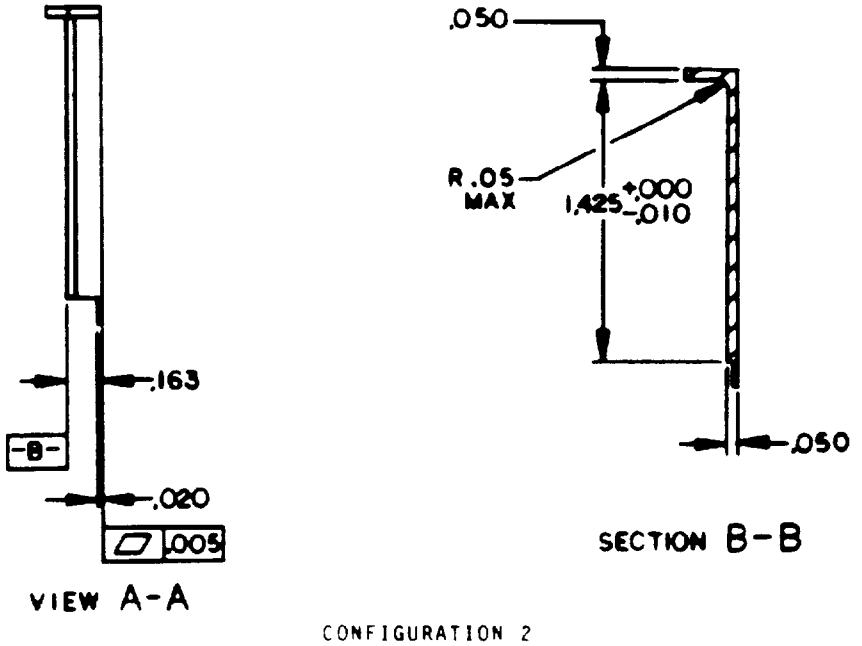

CONFIGURATION 2

FIGURE 1 Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
001	03	055	1 40	185	4 70	1 600	40 64	2.200	55 88
003	08	062	1.58	275	6 99	1 630	41 40	2 300	58.42
004	10	100	2.54	360	9 15	1 680	42.67	2 440	61.98
005	13	122	3 10	1 340	34 04	1 850	46 99	2 740	69 60
010	25	128	3 25	1 425	36 20	1 890	48 01		
020	51	139	3 53	1 440	36 58	1 940	49 28		
050	1 27	163	4 14	1 490	37 85	2 150	54.61		

NOTES

1 Dimensions are in inches.

2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm

3 Unless otherwise specified, tolerances are ± 005 (.13 mm) inch for three place decimals, ± 01 (3 mm) inch for two place decimals and ±2° for angles

4 Unless otherwise specified, all corner radii shall be 02 (.51 mm) inch rad max

5 Dimensional limits apply after plating

6 Frame shall be marked in approximate location shown with part number, manufacturer's number and date code with contrasting ink in characters 06 (1 5 mm) inch high

7 This surface and the 122 dimension shall be flush to 005 maximum step

FIGURE 1 Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See Figure 1 and Table I

Materials For M28754/71-01 and -02, aluminum alloy 6101, ASTM-B-317, T6 extrusion

For M28754/71-03 and -04, copper C11000, HO3 temper, per ASTM B152-81

For M28754/71-05 and -06, copper-invar-copper (20-60-20 by thickness)

Finish For M28754/71-01 and -02, anodic coating, MIL-A-8625, Type II, Class 2, black

For M28754/71-03, -04, -05 and -06, electroless nickel per MIL-C-26074, 5 percent phosphorous minimum, Class 1, Grade A, .0015 ± .0005 inch thick, MIL-C 5541, Class 1A, yellow Within 4 hours after plating oven bake 275 ± 25°F, 1 hour, for hydrogen relief and adhesion

Examination One frame from each plating lot shall be exposed to salt fog per MIL-STD-810, Method 509, Procedure 1, 48 hours, and one frame shall be exposed to oven bake at 375 ± 10°F, 60-90 minutes Examine each frame, using 6 to 10 power magnification, for loose or blistered coating Examination results shall be delivered with each order The examined frames shall be retained by the supplier for a period of 6 months

Stress relief For M28754/71-03, -04, -05 and -06, frames shall receive the following bake cycle prior to plating and after all fabrication steps, 375 ± 10°F for 90 ± 10 minutes

Military part number M28754/71- (Dash Number from Table I)

TABLE I

DASH NUMBER	MATERIAL	FINISH	CONFIGURATION
01	Aluminum Alloy	Anodize	1
02	Aluminum Alloy	Anodize	2
03	Copper	Nickel	1
04	Copper	Nickel	2
05	Copper-Invar	Nickel	1
06	Copper-Invar	Nickel	2

Qualification information The frame shall meet the following qualification tests of MIL-C-28754, Table IV, Type IV Subgroup I, Method Paragraph 4.7.1, Subgroup II, Method Paragraph 4.7.11, 4.7.1, Subgroup III, Method Paragraph 4.7.13 and 4.7.1, Subgroup IV, Method Paragraph 4.7.12, 4.7.18, 4.7.19, 4.7.20 and 4.7.1

Number of units to be inspected Twelve (12) units of each dash number to be qualified shall be inspected

Supersession data Supersedes Naval Electronic Systems Command Drawing Number 0102-716-1, -2, -3, -4, -5, -6, -7 and -8, Code Identification Number 28687

Custodians
Navy - EC

Preparing Activity
Navy - EC

(Project 5935-N252-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.