
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR FRAME, TYPE IV SINGLE SPAN, T-DIP

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-28754

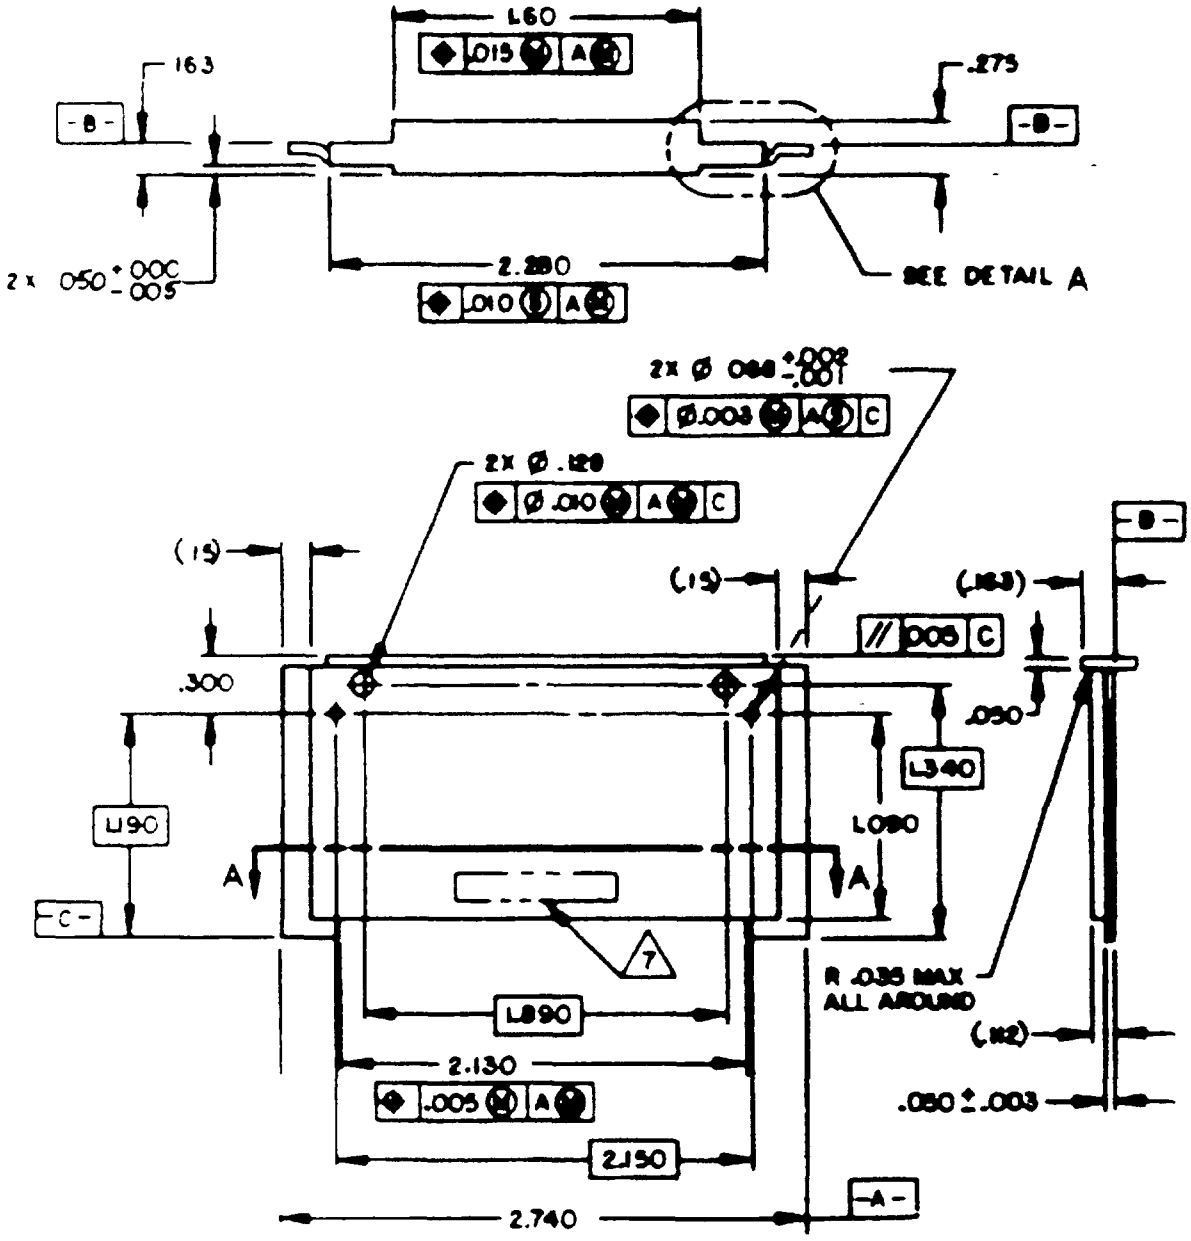


CONFIGURATION 1


FIGURE 1 Dimensions and configurations

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

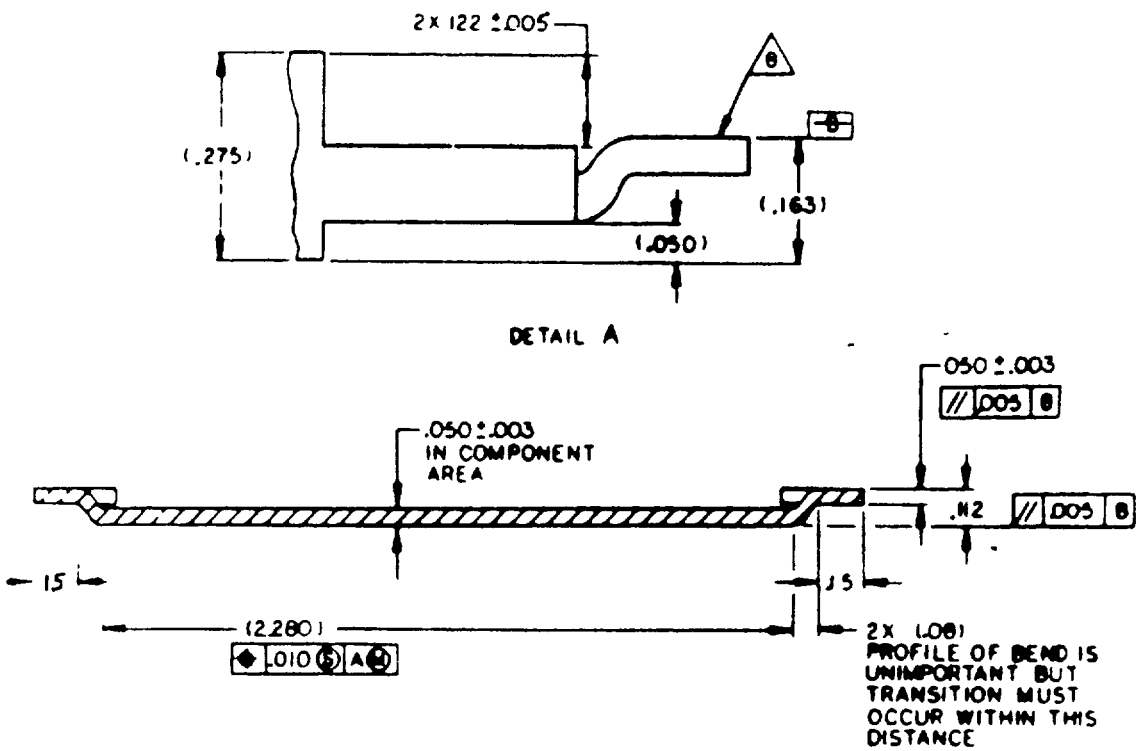


CONFIGURATION 1

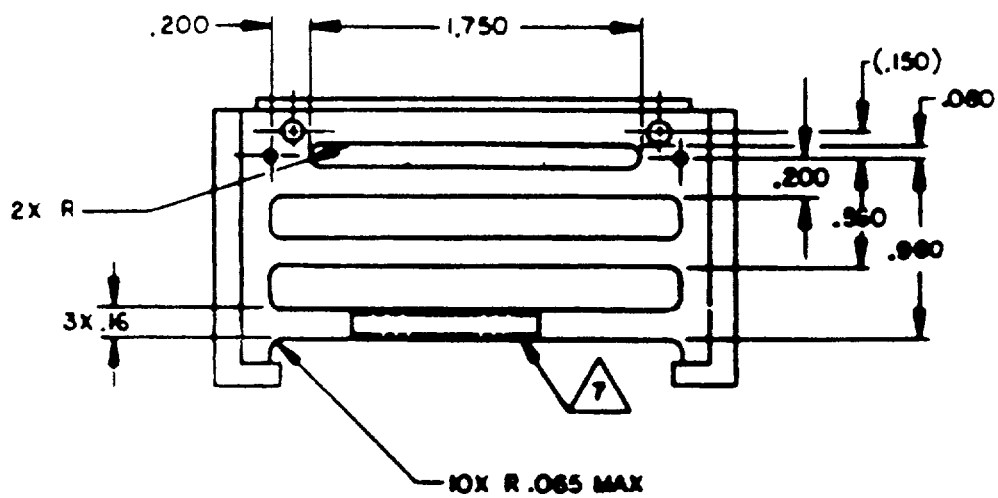


CONFIGURATION 2

FIGURE 1 Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

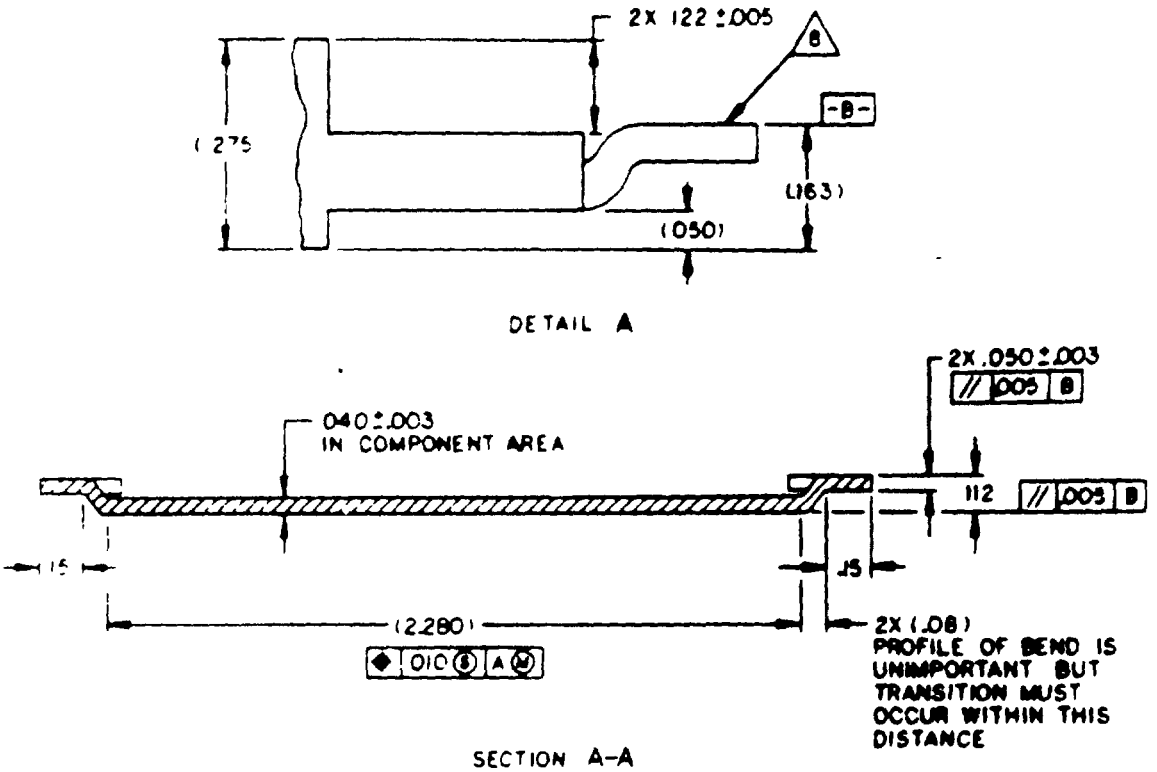

CONFIGURATION 3

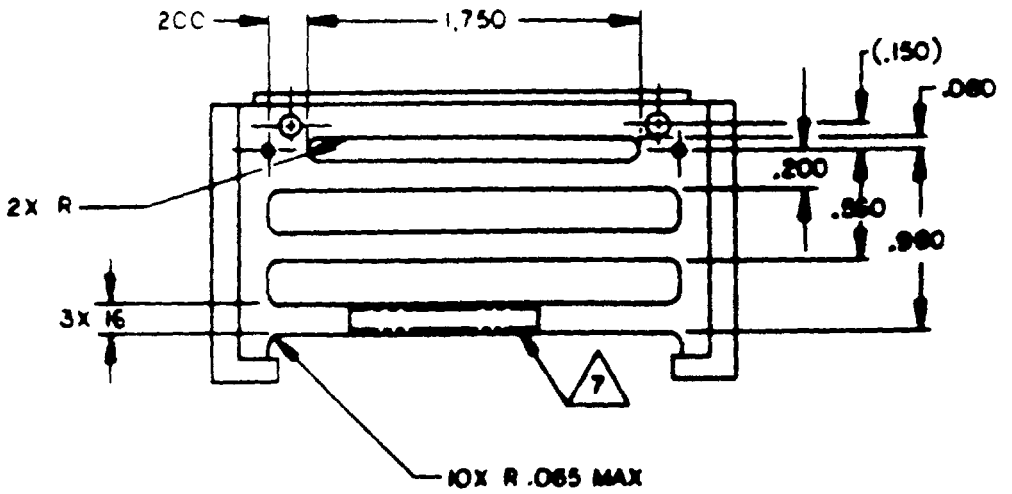

CONFIGURATION 4

FIGURE Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
001	03	040	1 02	128	3 25	560	14 22	1 890	48 01
002	05	050	1 27	150	3 81	960	24 39	2 130	54 10
003	08	065	1 65	160	4 06	1 090	27.69	2 150	54 61
005	13	068	1 73	163	4 14	1 190	30 27	2 280	57 91
010	25	080	2 03	200	5 08	1 340	34 04	2 740	69 60
015	38	112	2 85	275	6 99	1.600	40 64		
035	89	122	3 10	300	7 62	1 750	44 45		

NOTES:

1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3. Unless otherwise specified, tolerances are ±.005 (13 mm) inch for three place decimals, ± 01 (3 mm) inch for two place decimals and ±2° for angles
4. Unless otherwise specified, all corner radii shall be 02 (51 mm) inch rad max
5. Configuration 1 (Part Number -01) defines basic module frame Subsequent configurations (part dash numbers) are made from Configuration 1 and define module frames for specific applications
6. Dimensional limits apply after plating
7. Frame shall be marked in approximate location shown with part number, manufacturer's number and date code with contrasting ink in characters 06 (1 5 mm) inch high
8. This surface and the 122 dimension shall be flush to 005 maximum step

FIGURE 1 Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See Figure 1 and Table I

Materials For M28754/72-01, -02, -03, -06, -07 and -08, aluminum alloy 6101, ASTM-B 317, T6 extrusion

For M28754/72-04, -05, -09 and -10, copper C11000, H01 temper, per ASTM B152-81

Finish For M28754/72-01, -02, -06 and -07, anodic coating, MIL-A-8625, Type II, Class 2, black

For M28754/72-05 and -10, electroless nickel per MIL-C-26074, 5 percent phosphorous minimum, Class 1, Grade A, .0015 ± .0005 inch thick, MIL-C-5541, Class 1A, yellow Within 4 hours after plating oven bake 275 ± 25°F, 1 hour , for hydrogen relief and adhesion

Examination One frame from each plating lot shall be exposed to salt fog per MIL-STD-810, Method 509, Procedure I, 48 hours, and one frame shall be exposed to oven bake at 375 ± 10°F, 60-90 minutes Examine each frame, using 6 to 10 power magnification, for loose or blistered coating Examination results shall be delivered with each order The examined frames shall be retained by the supplier for a period of 6 months

Stress relief For M28754/72-04, -05, -09 and -10, frames shall receive the following bake cycle prior to plating and after all fabrication steps, 375 ± 10°F for 90 ± 10 minutes

Military part number M28754/72- (Dash Number from Table I)

TABLE I

DASH NUMBER	MATERIAL	FINISH	CONFIGURATION
01	Aluminum Alloy	Anodize	1
02	Aluminum Alloy	Anodize	2
03	Aluminum Alloy	None	1
04	Copper	None	1
05	Copper	Nickel	2
06	Aluminum Alloy	Anodize	3
07	Aluminum Alloy	Anodize	4
08	Aluminum Alloy	None	3
09	Copper	None	3
10	Copper	Nickel	4

Qualification information The frame shall meet the following qualification tests of MIL-C-28754 Table IV, Type IV. Subgroup I, Method Paragraph 4.7.1, Subgroup II, Method Paragraph 4.7.11 and 4.7.1; Subgroup III, Method Paragraph 4.7.13 and 4.7.1, Subgroup IV, Method Paragraph 4.7.12, 4.7.18, 4.7.19, 4.7.20 and 4.7.1

Number of units to be inspected Twelve (12) units of Dash 2 will extend qualification to Dash 1 and 3, twelve (12) units of Dash 5 will extend qualification to Dash 4 Twelve (12) units of Dash 7 will extend qualification to Dash 6 and Dash 8, twelve (12) units of Dash 10 will extend qualification to Dash 9 Evidence that Dash 1, 3, 4, 6, 8 and 9 are manufactured must be provided with the qualification units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

Supersession data Supersedes Naval Electronic Systems Command Drawing Number 0102-720-1, -2, -3, -4, -5 and -6, Code Identification Number 28687

Custodians
Navy - EC

Preparing Activity:
Navy - EC

(Project: 5935-N252-19)

☆ U.S. GOVERNMENT PRINTING OFFICE 1988 — 548-628/22406

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.