
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY,
TYPE IV, 40 PIN, SINGLE SPAN, OFFSET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-28754.

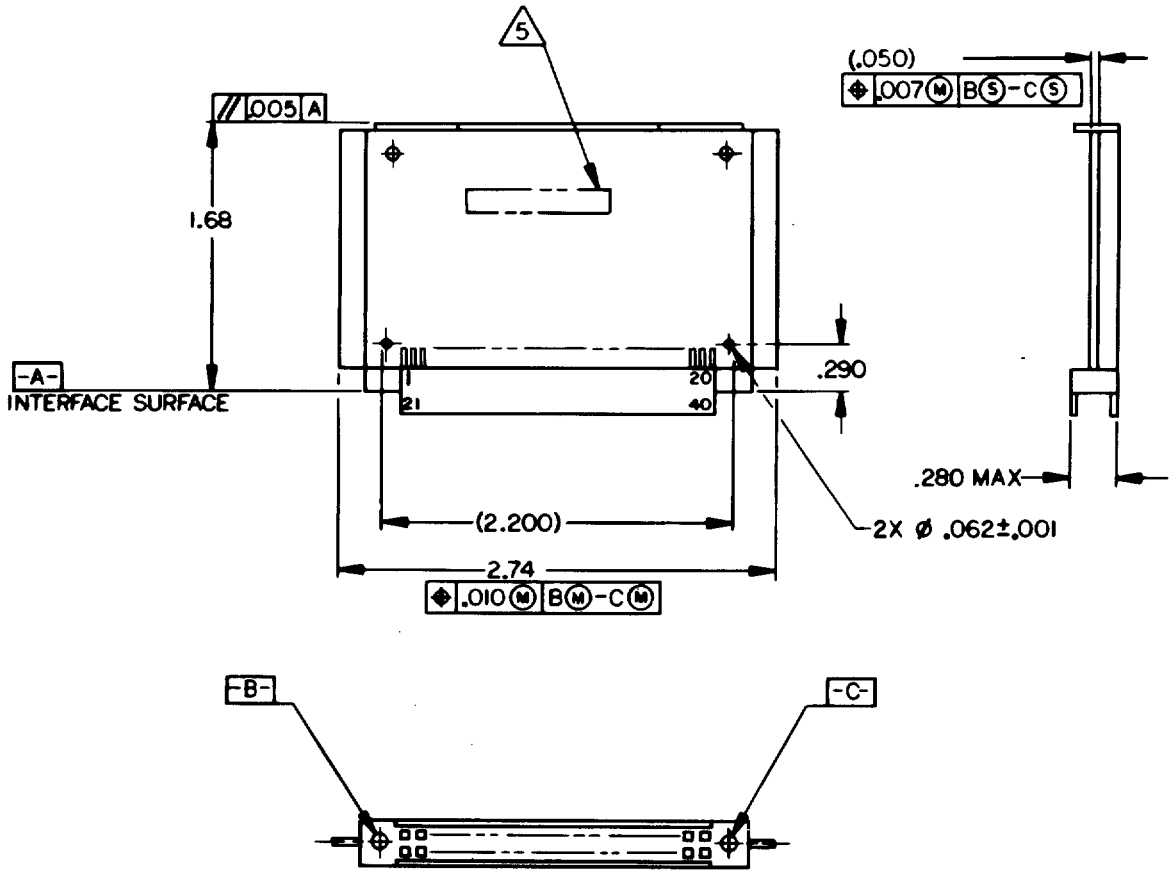

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.050	1.27	1.680	42.67
.005	.13	.062	1.58	2.200	55.88
.007	.18	.280	7.11	2.740	69.60
.010	.25	.290	7.37		

FIGURE 1. Dimensions and configurations

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) inch for three place decimals, ±.01 (.3 mm) inch for two place decimals, and ±2° for angles.
4. The carrier strips supplied as part of connector MIL-C-28754/63- or MIL-C-28754/64-(applicable dash number) shall remain attached.
5. Assembly shall be marked, in approximate location shown, in accordance with MIL-C-28754 using contrasting ink and characters .12 (3.05 mm) inch high.

FIGURE 1. Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See Figure 1 and Table I.

Separating force: The frame shall remain attached to the connector when subjected to a separating load of 15 pounds (66.6 N) applied for 30 seconds at a temperature of 257°F (125°C).

Military part number: M28754/77- (Dash Number from Table I)

TABLE I
DASH NUMBER, CONNECTOR AND FRAME

DASH NUMBER	CONNECTOR	FRAME
01	MIL-C-28754/10-04	MIL-C-28754/71-01
02	MIL-C-28754/63-01	MIL-C-28754/71-01
03	MIL-C-28754/63-03	MIL-C-28754/71-01
04	MIL-C-28754/64-01	MIL-C-28754/71-02
05	MIL-C-28754/64-03	MIL-C-28754/71-02
06	MIL-C-28754/63-02	MIL-C-28754/71-01
07	MIL-C-28754/63-04	MIL-C-28754/71-01
08	MIL-C-28754/64-02	MIL-C-28754/71-02
09	MIL-C-28754/64-04	MIL-C-28754/71-02
10	MIL-C-28754/10-04	MIL-C-28754/71-03
11	MIL-C-28754/63-01	MIL-C-28754/71-03
12	MIL-C-28754/63-03	MIL-C-28754/71-03
13	MIL-C-28754/64-01	MIL-C-28754/71-04
14	MIL-C-28754/64-03	MIL-C-28754/71-04
15	MIL-C-28754/63-02	MIL-C-28754/71-03
16	MIL-C-28754/63-04	MIL-C-28754/71-03
17	MIL-C-28754/64-02	MIL-C-28754/71-04
18	MIL-C-28754/64-04	MIL-C-28754/71-04
19	MIL-C-28754/10-04	MIL-C-28754/71-05
20	MIL-C-28754/63-01	MIL-C-28754/71-05
21	MIL-C-28754/63-03	MIL-C-28754/71-05
22	MIL-C-28754/64-01	MIL-C-28754/71-06
23	MIL-C-28754/64-03	MIL-C-28754/71-06
24	MIL-C-28754/63-02	MIL-C-28754/71-05
25	MIL-C-28754/63-04	MIL-C-28754/71-05
26	MIL-C-28754/64-02	MIL-C-28754/71-06
27	MIL-C-28754/64-04	MIL-C-28754/71-06

Qualification information: The connector assembly shall meet the qualification tests of MIL-C-28754, Table IV, Type IV and this slash sheet.

Number of units to be inspected: To qualify any dash number assembly, twelve (12) units shall be inspected. Qualification will be extended to the respective connector.

To qualify other dash numbers with the above connector, four (4) assemblies shall be inspected.

Supersession data: Supersedes Naval Electronic Systems Command Drawing Number 0102-717-1 thru -20, Code Identification Number 28687.

Custodians:
Navy - EC

Preparing Activity:
Navy - EC

(Project: 5935-N252-24)

User Activities:
Navy - AS

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/22492

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.