MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, TYPE III, FEMALE CONTACT AND INSULATOR BUSHING SET, LOW INSERTION FORCE (LIF), REMOVABLE WIRE WRAPPOST TERMINAL

This specification is approved for use within Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

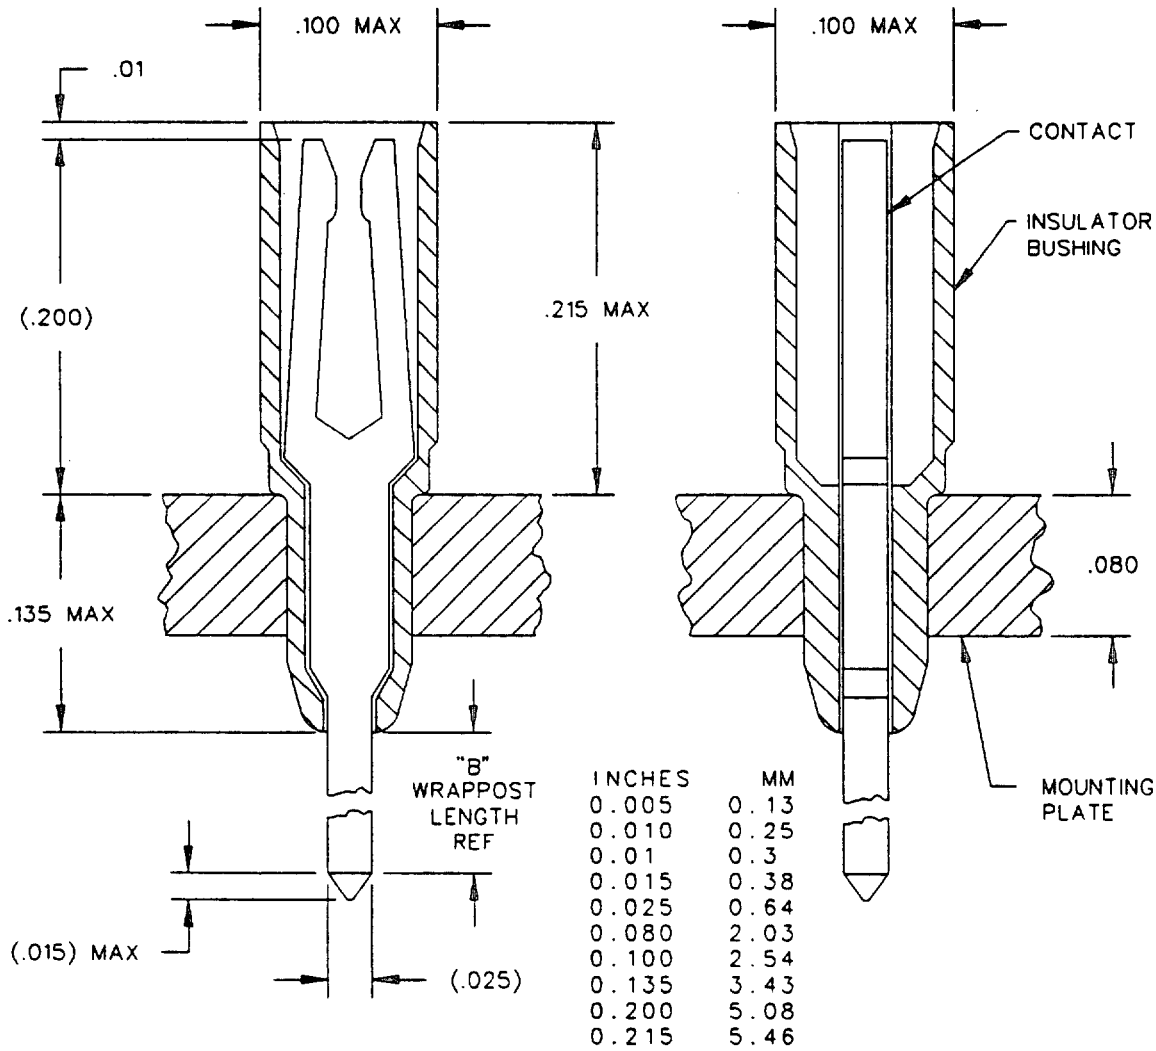

INCHES	MM
0.005	0.13
0.010	0.25
0.01	0.3
0.015	0.38
0.025	0.64
0.080	2.03
0.100	2.54
0.135	3.43
0.200	5.08
0.215	5.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is plus or minus 0.005 on three place decimals, plus or minus 0.01 on two place decimals, and plus or minus 2° on angles.

FIGURE 1. Typical female contact, insulator bushing and mounting plate assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.


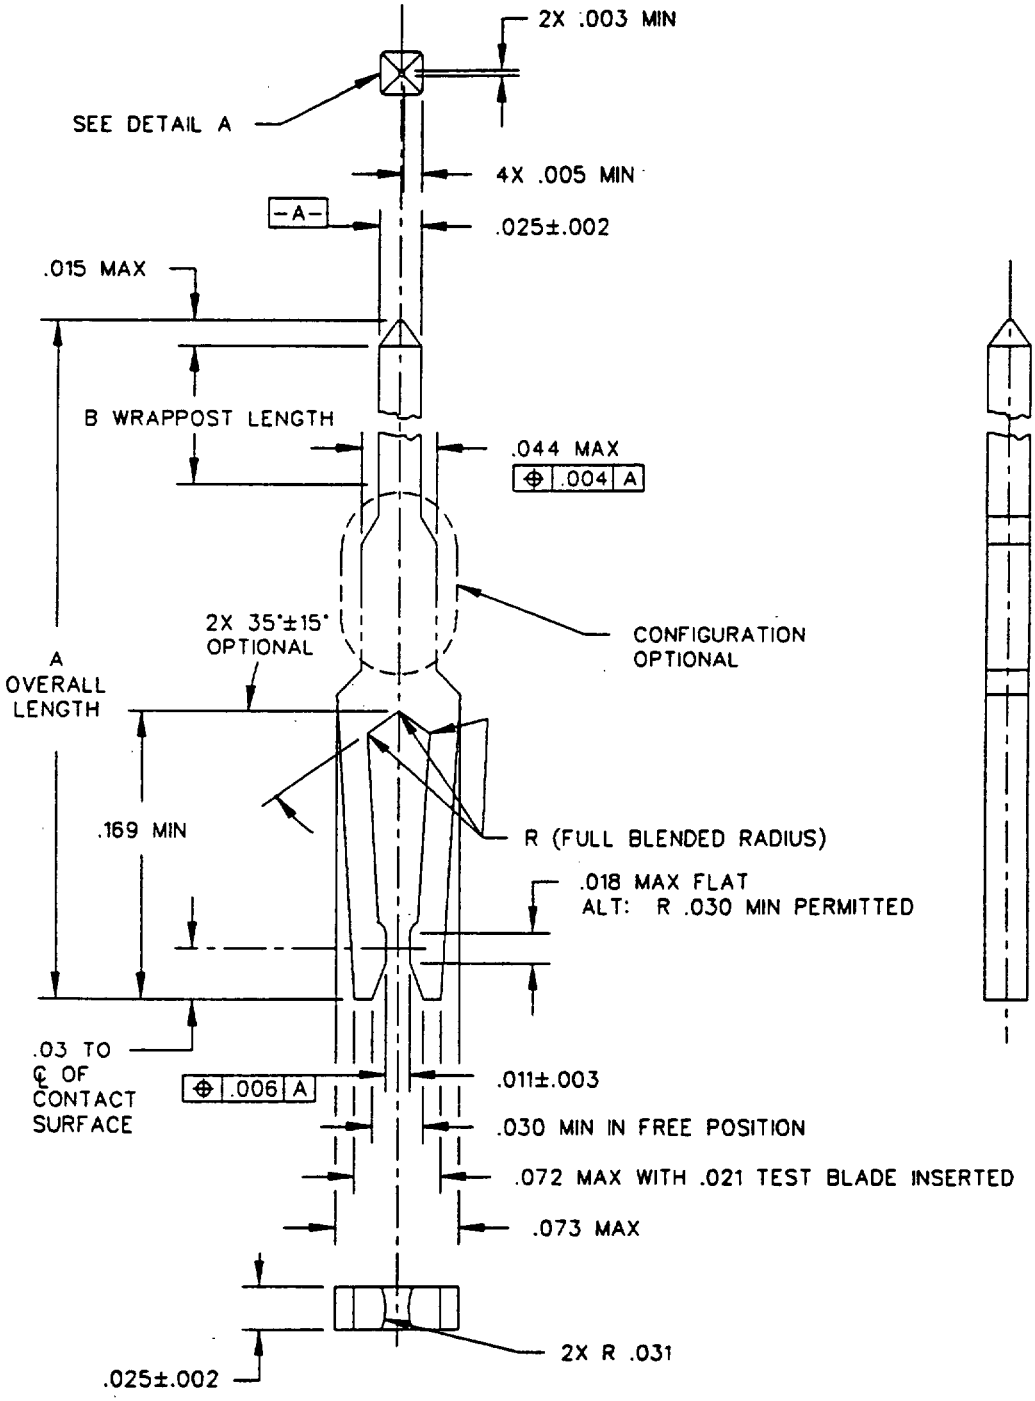


FIGURE 2. Contact, female, wrappost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

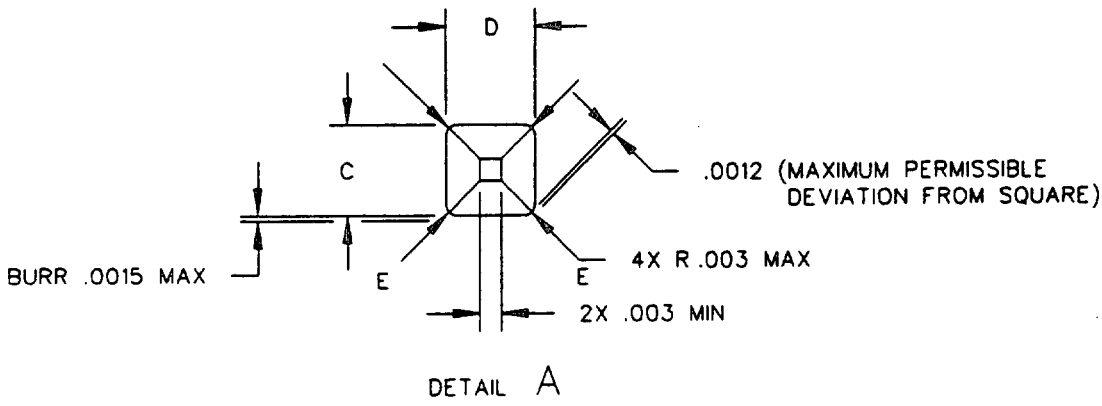

WRAPPOST GEOMETRY

C	D	E	PARALLELISM	STRAIGHTNESS
0.025 (NOM)	0.025 (NOM)	0.0355 (MAX)	0.002	0.005 in./in
0.023 (MIN)	0.023 (MIN)	0.0325 (MIN)		

FIGURE 2. Contact, female, wrappost - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
0.002	0.05	0.01	0.3	0.031	0.79
0.003	0.08	0.015	0.38	0.044	1.12
0.004	0.10	0.018	0.46	0.072	1.83
0.005	0.13	0.021	0.53	0.073	1.85
0.006	0.15	0.025	0.64	0.164	4.17
0.010	0.25	0.030	0.76		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See table I for dimensions A and B.
4. Unless otherwise specified, tolerance is plus or minus 0.005 on three place decimals, plus or minus 0.01 on two place decimals and plus or minus 2° on angles.

FIGURE 2. Contact, female, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

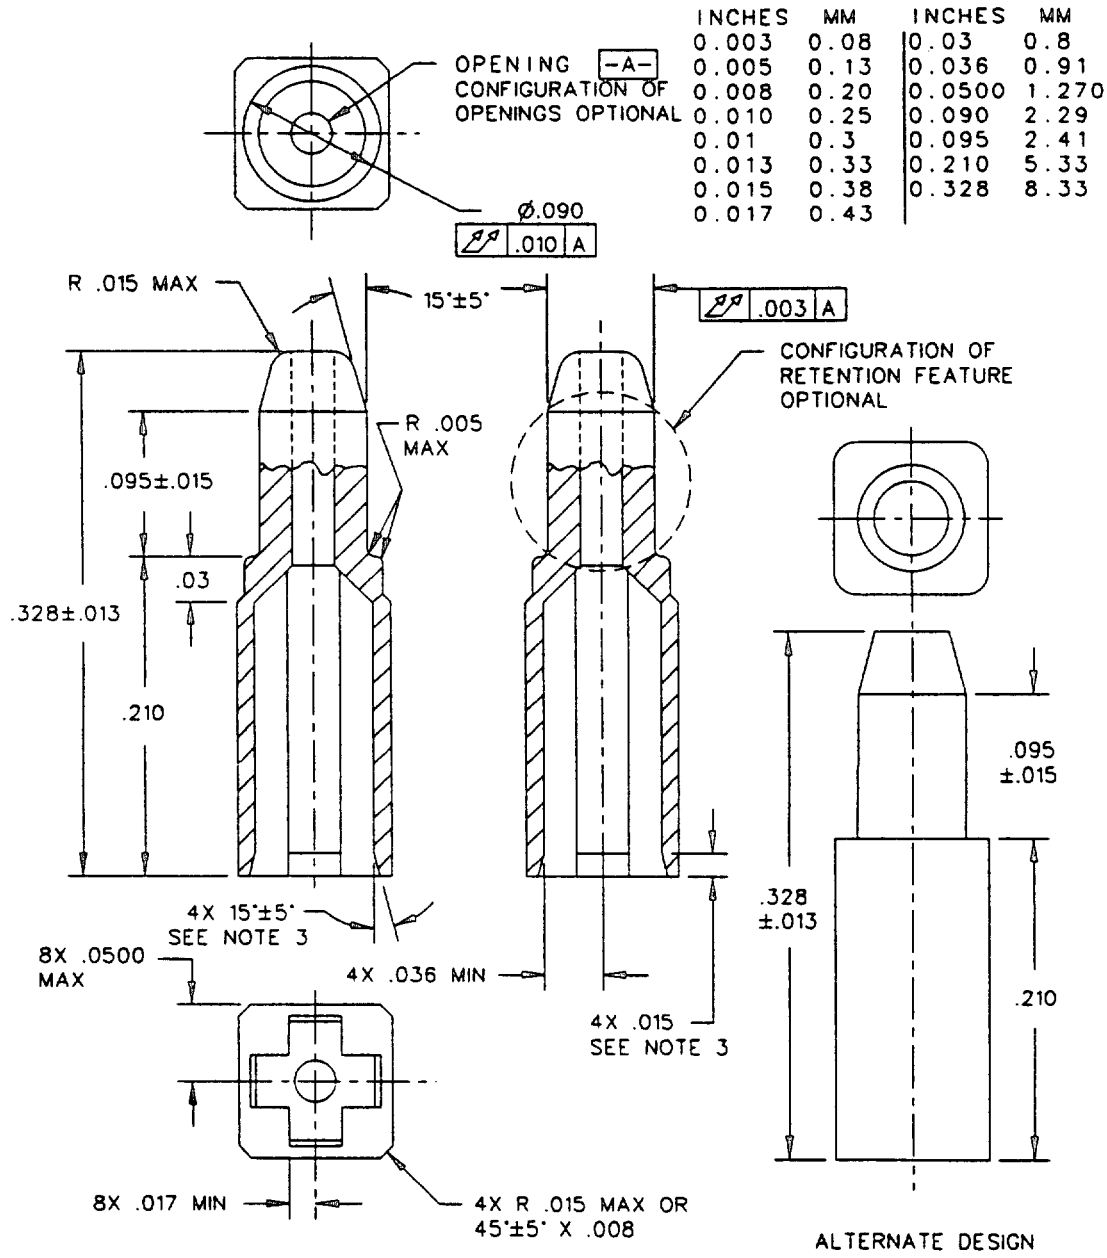


INCHES	MM	INCHES	MM
0.003	0.08	0.03	0.8
0.005	0.13	0.036	0.91
0.008	0.20	0.0500	1.270
0.010	0.25	0.090	2.29
0.01	0.3	0.095	2.41
0.013	0.33	0.210	5.33
0.015	0.38	0.328	8.33
0.017	0.43		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Radius optional on 0.015 plus or minus 0.005 X 15° plus or minus 5° chamfer.
4. Unless otherwise specified, tolerance is plus or minus 0.005 on three place decimals, plus or minus 0.01 on two place decimals, and plus or minus 2° on angles.

FIGURE 3. Bushing, insulator, female.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

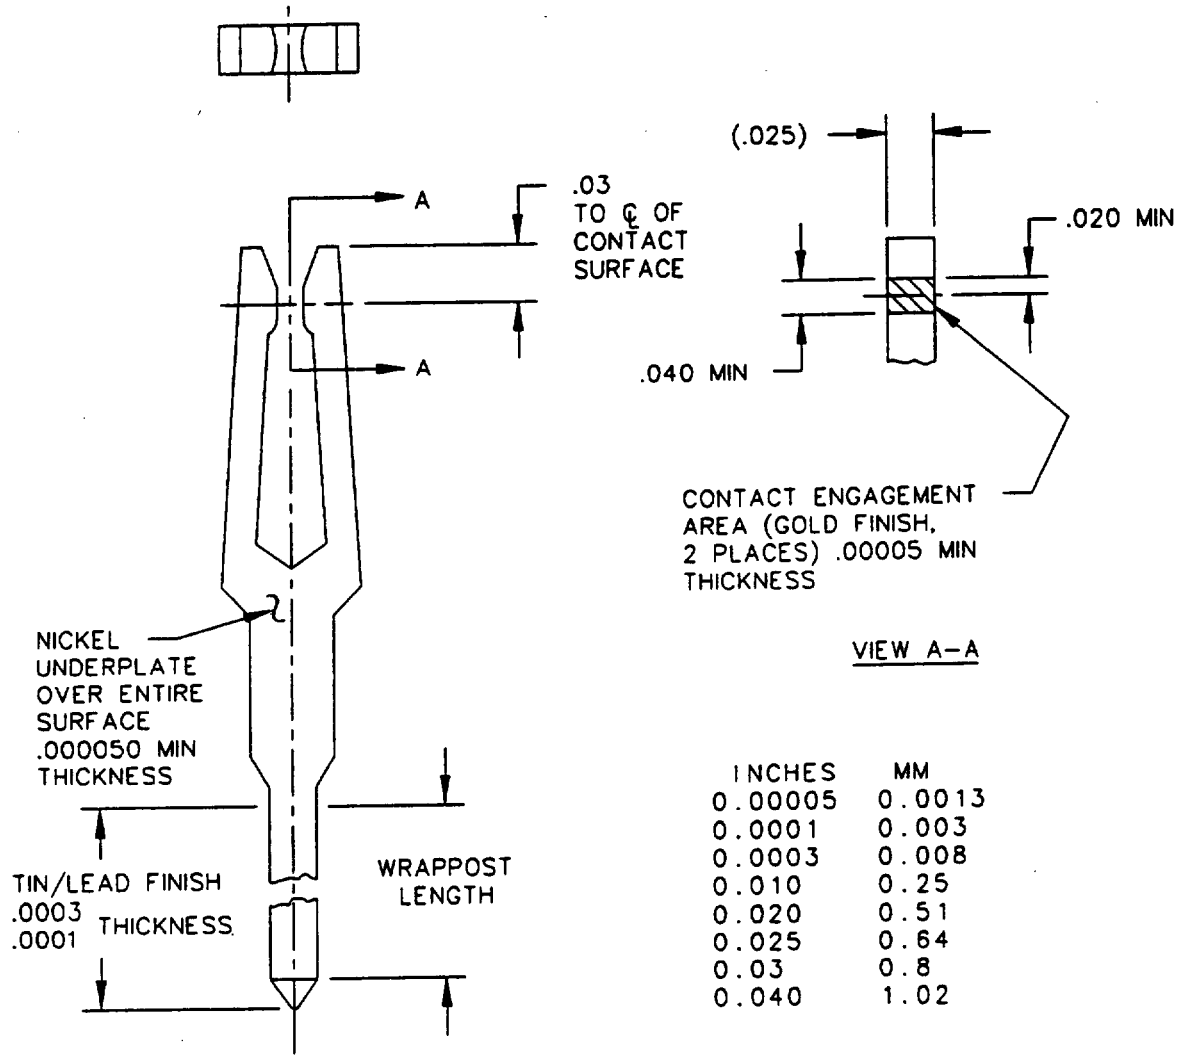

INCHES	MM
0.00005	0.0013
0.0001	0.003
0.0003	0.008
0.010	0.25
0.020	0.51
0.025	0.64
0.03	0.8
0.040	1.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions in this figure are for locating areas of localized finish only.
4. Unless otherwise specified, tolerances are plus or minus 0.005 for three place decimals, plus or minus 0.01 for two place decimals, and plus or minus 2° for angles.

FIGURE 4. Localized finish (optional).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figures 1, 2, 3, and 4.

Material:

Contacts: Contacts shall be beryllium copper per QQ-C-533, minimum hardness of 311 Knoop.

Exposed base material: Exposed base material is permitted in non-critical breakoff or plating carrier areas of the connector parts providing all performance requirements are maintained with no degradation of critical areas.

Bushing: Bushing shall be polyamide (nylon) per L-P-410 or ASTM D4066, designation PA111 (see figure 3).

Insulator bushing color: The insulator bushing color shall be the natural color of the base material.

Standard contact plating: Standard contact plating shall be in accordance with MIL-C-28754.

Localized contact finish: Contacts may be supplied with a localized finish. Contacts supplied with localized finish shall meet the requirements of MIL-C-28754 and this slash sheet. Contacts supplied with a localized finish shall conform to figures 2 and 4.

Gold finish: Gold shall be in accordance with MIL-G-45204, type II, grade C, class 1, and to a thickness of 50 microinches minimum. Area of gold finish shall be as specified on figure 4.

Nickel finish: Nickel finish shall be in accordance with QQ-N-290, class 1, and to a thickness of 50 microinches minimum over the entire contact surface (see figure 4).

Tin-lead finish: Tin-lead finish shall be in accordance with MIL-P-81728 and shall have a tin-composition of 50 to 95 percent. Tin-lead plating thickness shall be 0.0001 to 0.0003 inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

Performance:

Low level (dry circuit): Voltage drop shall not exceed 20 millivolts. Wire size shall be 26 AWG.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Voltage rating: 300 volts, ac (rms) at sea level.

Temperature rating: minus 55 to plus 125°C.

Durability: Voltage drop shall not exceed 20 millivolts after durability cycles.

Military part number M28754/79-(dash number from table I).

TABLE I. Dash numbers and dimensions.

Dash No	Overall length "A" ±0.010	Wrappost length "B" (Ref)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Contacts with localized finish shall have an S following the dash number. For example M28754/79-04S.

Marking: In accordance with MIL-C-28754.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

Shipping: Bulk shipment shall be in unassembled condition. Contact and bushing together make complete set.

Supersession data: This specification includes the requirements of 5516568/01, Code Identification 53711.

QUALIFICATIONS:

See Appendix.

Localized contact finish: The qualification of the contact supplied with the standard finish does not extend qualification to the contact supplied with the localized finish. To be qualified to supply the localized finish in lieu of the standard contact finish, manufacturers shall subject the contact supplied with localized finish to the same qualification procedures as the standard contact finish. Manufacturers that have qualified the localized finish contact will be designated on the Qualified Products List (QPL).

Custodians:
NAVY - SH

User activities:
NAVY - AS

Agent:
NWSC, Crane

Preparing activity:
NAVY - SH

(PROJECT 5935-N336-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/79	Connectors, Electrical, Modular, Connector Type III, Female Contact and Insulator Bushing Set, Low Insertion Force (LIF), Removable Wire Wrappost Terminal

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20114:522
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.