INCH-POUND

MIL-C-28754/79A
23 March 94
SUPERSEDING
MIL-C-28754/79(NAVY)
21 April 1989

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE III, FEMALE CONTACT AND INSULATOR BUSHING SET, LOW INSERTION FORCE (LIF), REMOVABLE WIRE WRAPPOST TERMINAL

* This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 20260410-20T14:52Z
Check the source to verify that this is the current version before use.

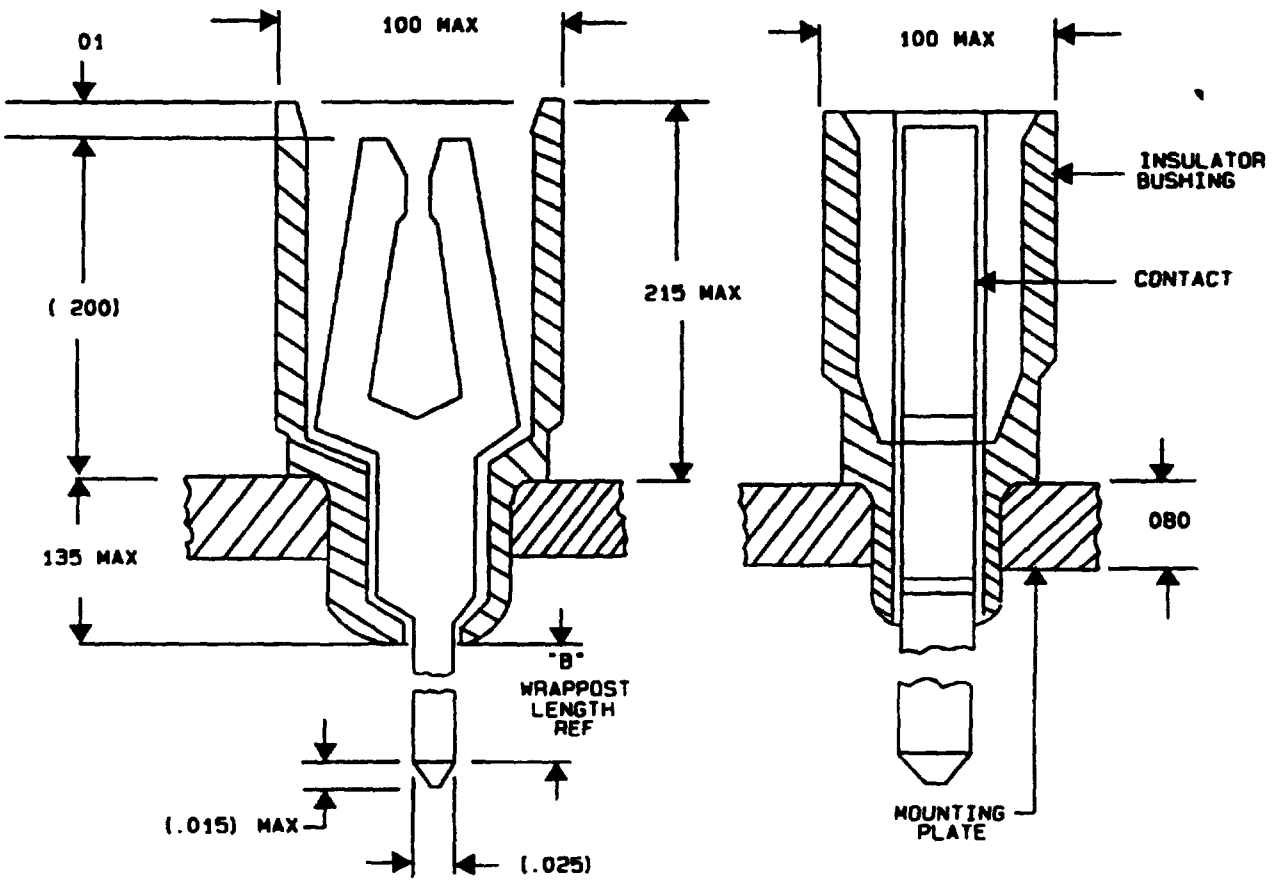


FIGURE 1. Typical female contact, insulator bushing and mounting plate assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

Inches	MM
0.005	0.13
0.010	0.25
0.01	0.3
0.015	0.38
0.025	0.64
0.080	2.03
0.100	2.54
0.135	3.43
0.200	5.08
0.215	5.46

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are plus or minus .005 inch (.13 mm) on three place decimals, plus or minus .01 inch (.3 mm) on two place decimals and plus or minus 2° on angles.

FIGURE 1. Typical female contact, insulator bushing and mounting plate assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.


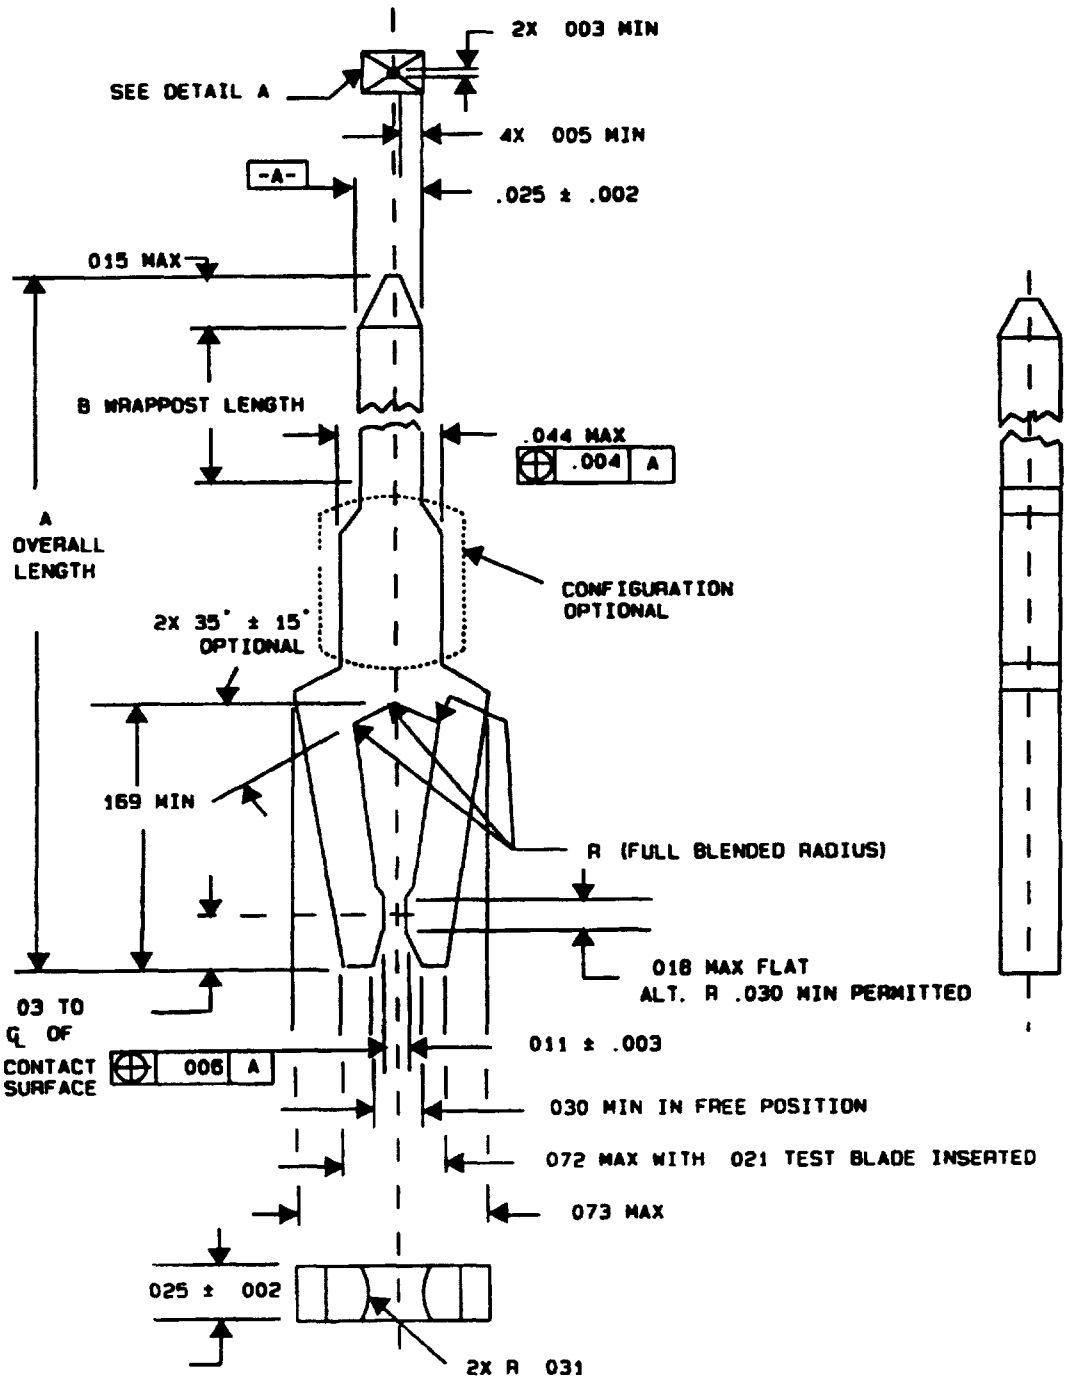


FIGURE 2. Contact, female, wrappost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

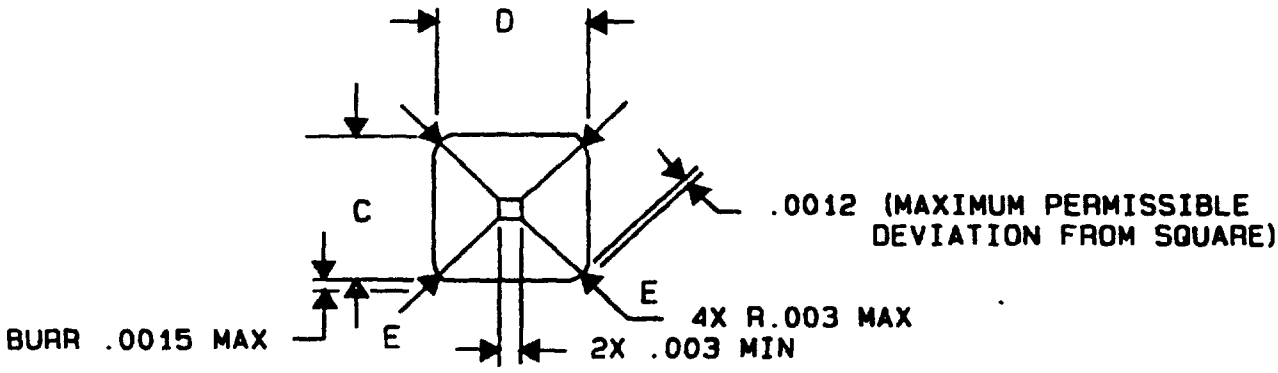

DETAIL A

*

Wrappost Geometry				
C	D	E	Parallelism	Straightness
.025 (Nom) .022 (Min)	.025 (Nom) .022 (Min)	.0355 (Max) .0325 (Min)	.002	.005 in/in

Inches	MM	Inches	MM	Inches	MM
.002	.05	.01	.3	.031	.79
.003	.08	.015	.38	.044	1.12
.004	.10	.018	.46	.072	1.83
.005	.13	.021	.53	.073	1.85
.006	.15	.025	.64	.164	4.17
0.010	.25	.030	.76		

* FIGURE 2. Contact, female, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

3. See table I for dimensions A and B.

4. Unless otherwise specified, tolerances are plus or minus .005 inch (.13 mm) on three place decimals, plus or minus .01 inch (.3 mm) on two place decimals and plus or minus 2° on angles.

FIGURE 2. Contact, female, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

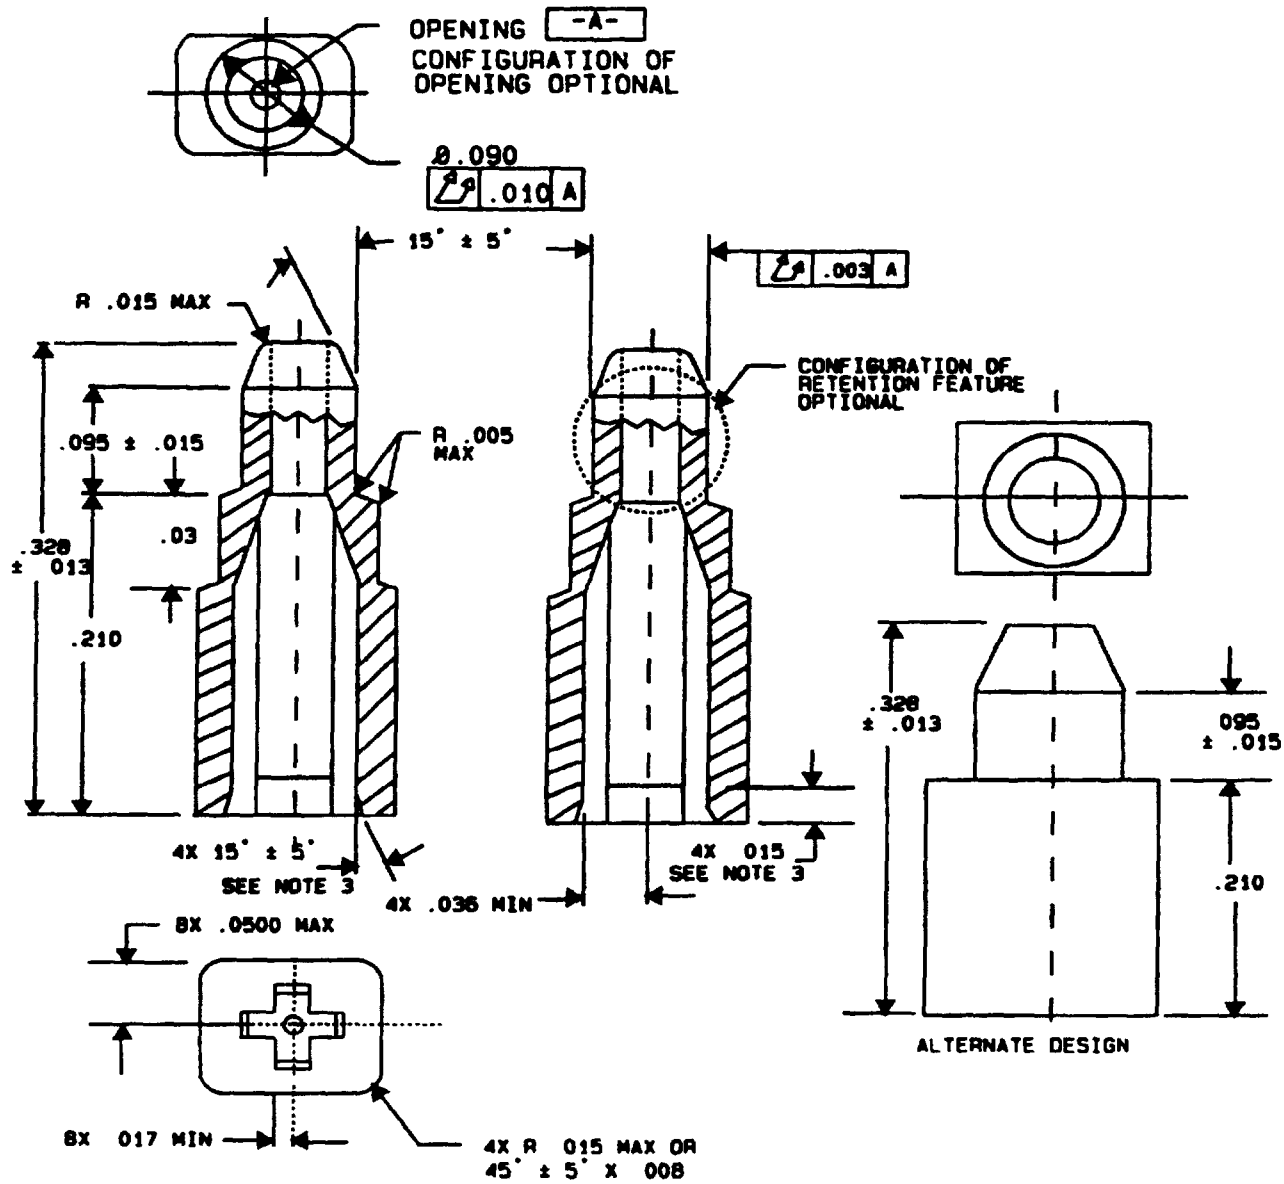


FIGURE 3. Bushing, insulator, female.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T14:52Z
Check the source to verify that this is the current version before use.


Inches	MM	Inches	MM
.003	.08	.03	.8
.005	.13	.036	.91
.008	.20	.0500	1.270
.010	.25	.090	2.29
.01	.3	.095	2.41
.013	.33	.210	5.33
.015	.38	.328	8.33
.017	.43		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Radius optional on .015 plus or minus .005 x 15° plus or minus 5° chamfer.
4. Unless otherwise specified, tolerances are plus or minus .005 inch (.13 mm) on three place decimals, plus or minus .01 inch (.3 mm) on two place decimals and plus or minus 2° on angles.

FIGURE 3. Bushing, insulator, female - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-20T14:52Z
Check the source to verify that this is the current version before use.

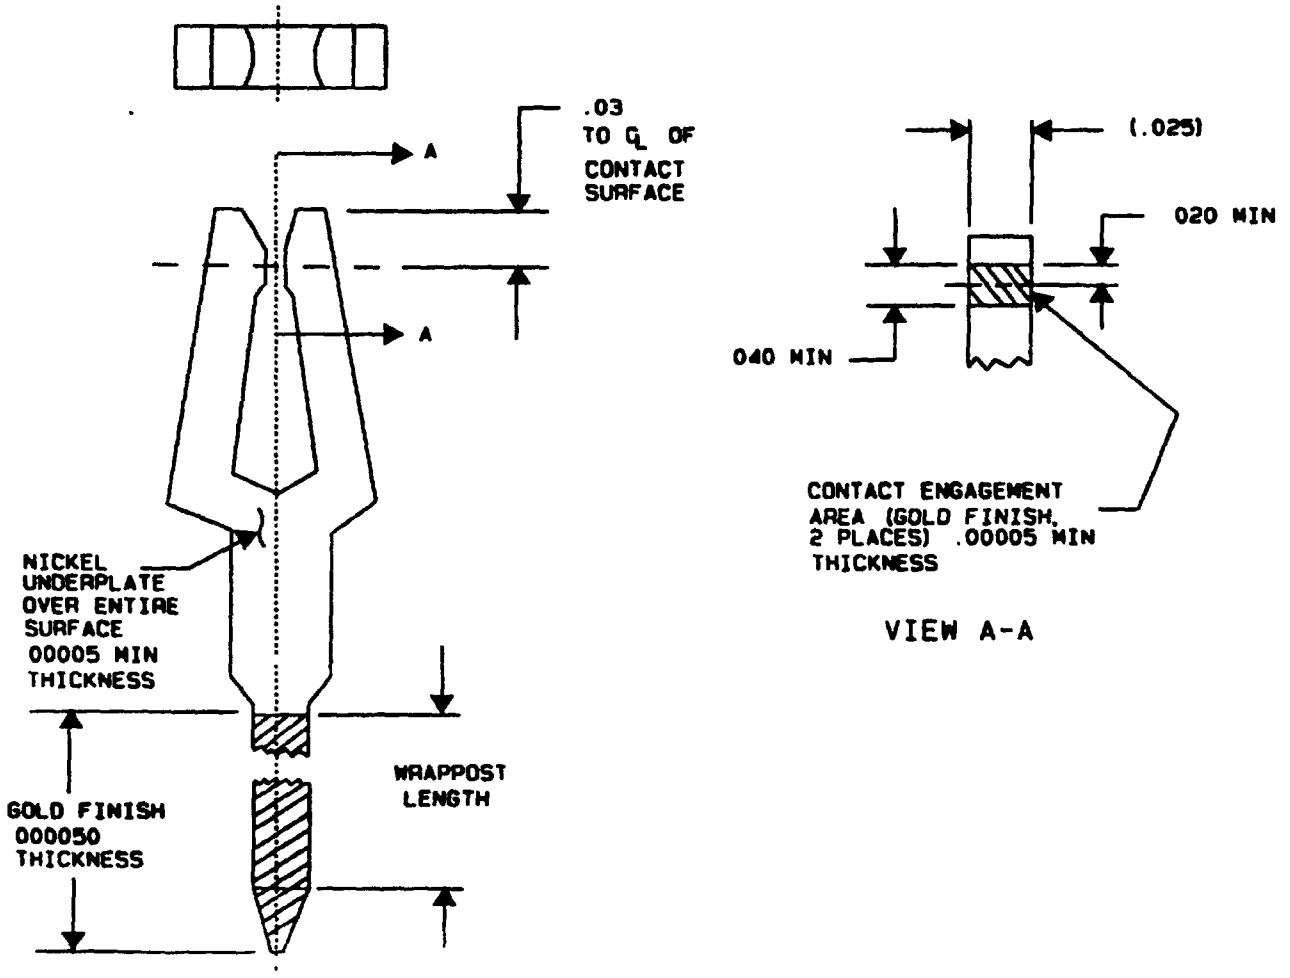

* FIGURE 4. Localized finish (optional).

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T14:52Z
Check the source to verify that this is the currentversion before use.

Inches	MM
.00005	.0013
.0001	.003
.0003	.008
.010	.25
.020	.51
.025	.64
.03	.8
.040	1.02

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensions on this figure are for locating areas of localized finish only.
4. Unless otherwise specified, tolerances are plus or minus .005 inch (.13 mm) on three place decimals, plus or minus .01 inch (.3 mm) on two place decimals and plus or minus 2° on angles.

* FIGURE 4. Localized finish (optional) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figures 1, 2, 3 and 4.

Material:

*Contacts: Contacts shall be beryllium copper in accordance with ASTM B194, alloy UNS No. C17200, minimum hardness of 310HK.

Exposed base material: Exposed base material is permitted in noncritical breakoff or plating carrier areas of the connector parts providing all performance requirements are maintained with no degradation of critical areas.

*Bushing: Bushing shall be polyamide (nylon) per L-P-410 or ASTM D4066, group I (see figure 3).

Insulator bushing color: The insulator bushing color shall be the natural color of the base material.

Standard contact plating: Standard contact plating shall be in accordance with MIL-C-28754.

*Localized contact finish: Contacts may be supplied with a localized finish. Contacts supplied with a localized finish shall meet the requirements of MIL-C-28754 and this slash sheet. Contacts supplied with a localized finish shall conform to figures 2 and 4.

Gold finish: Gold shall be in accordance with MIL-G-45204, type II, grade C, class 1, and to a thickness of 50 micro-inches minimum. Area of gold finish shall be as specified on figure 4.

Nickel finish: Nickel finish shall be in accordance with QQ-N-290, class 1, and to a thickness of 50 microinches minimum over the entire contact surface (see figure 4).

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:52Z
Check the source to verify that this is the current version before use.

Performance:

Low level (dry circuit): Voltage drop shall not exceed 20 millivolts. Wire size shall be 26 AWG.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Voltage rating: 300 volts, ac (rms) at sea level.

Temperature rating: -55°C to +125°C.

Durability: Voltage drop shall not exceed 20 millivolts after durability cycling.

Military part number M28754/79- (dash number from table I).

* TABLE I. Dash numbers and dimensions.

Dash No	Overall length "A" ± 0.010	Wrappost length "B" (Ref)
01	.513	.175
02	.588	.250
03	.688	.350
04	.838	.500
05	.963	.625
06	1.088	.750

Marking: In accordance with MIL-C-28754.

Shipping: Bulk shipment shall be in unassembled condition. Contact and bushing together make complete set.

Supersession data: This specification sheet includes the requirements of drawing 5516568/01, code identification 53711.

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:52Z
Check the source to verify that this is the current version before use.

QUALIFICATIONS: See appendix.

Localized contact finish: The qualification of the contact supplied with the standard finish does not extend qualification to the contact supplied with the localized finish. To be qualified to supply the localized finish in lieu of the standard contact finish, manufacturers shall subject the contact supplied with localized finish to the same qualification procedures as the standard contact finish. Manufacturers that have qualified the localized finish contact will be designated on the Qualified Products List (QPL).

*Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

*Custodians:
Army - CR
Navy - NW
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Preparing activity:
Navy - NW

(Project 5935-3923-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-28754/79A	1994 March 23

3. DOCUMENT TITLE: Connectors, Electrical, Modular, Type III, Female Contact and Insulator Bushing Set, Low Insertion Force (LIF), Removable Wire Wrappost Terminal

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed.)

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a NAME	b TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Technical Point of Contact (TPOC): Mr. Joseph P. Toy (Code 603A) PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS	TPOC: 812-854-5993	88-482-5993
c ADDRESS (Include Zip Code) Commander ATTN: Joseph P. Toy, Code 603A, Bldg. 2917 NAVSURFWARCENDIV, 300 Highway 361 Crane, IN 47522-5001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete — 198/21

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:52Z
Check the source to verify that this is the current version before use.