MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE III, FEMALE CONTACT AND GROUNDING BUSHING SET, LOW INSERTION FORCE (LIF), REMOVABLE WIRE WRAPPOST TERMINAL


This specification is approved for use within Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

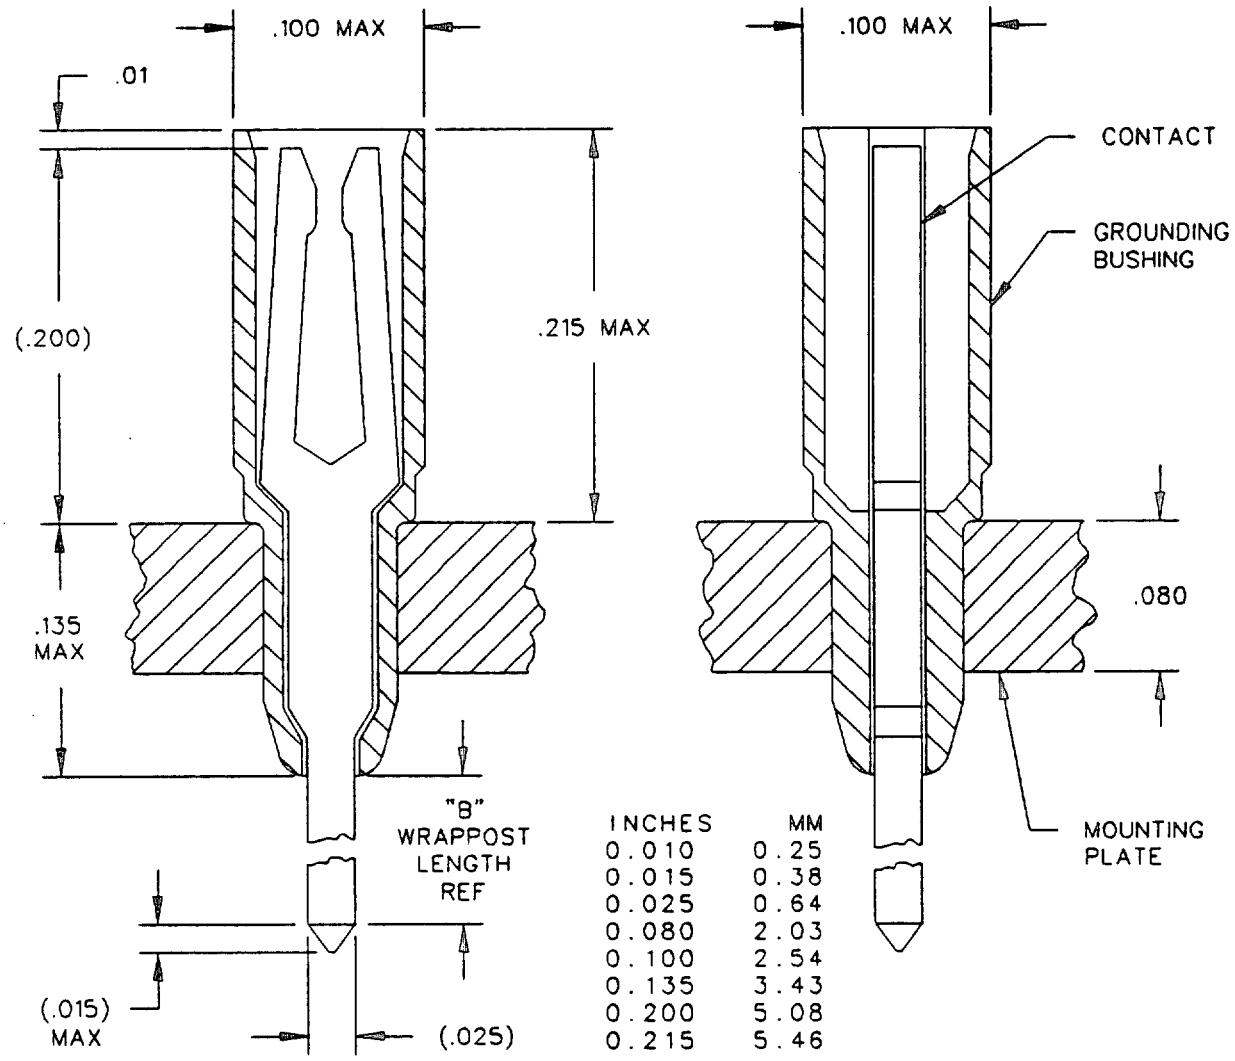

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is plus or minus 0.005 on three place decimals, plus or minus 0.01 on two place decimals, and plus or minus 2° on angles.

FIGURE 1. Typical female contact, grounding bushing, and mounting plate assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.


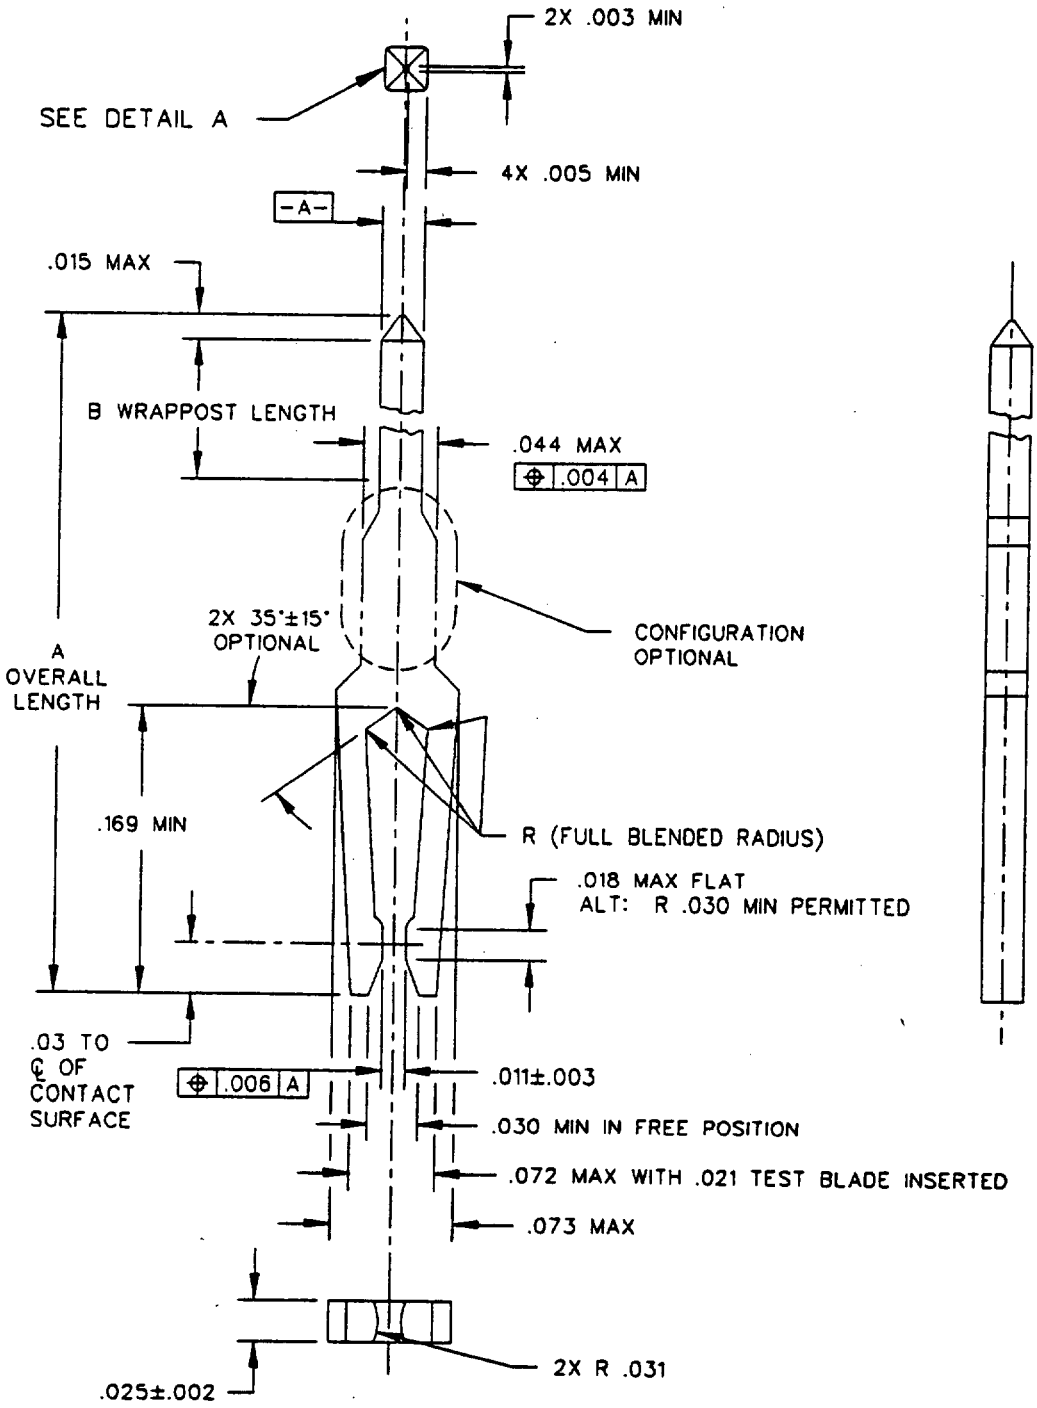


FIGURE 2. Contact, female, wrappost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

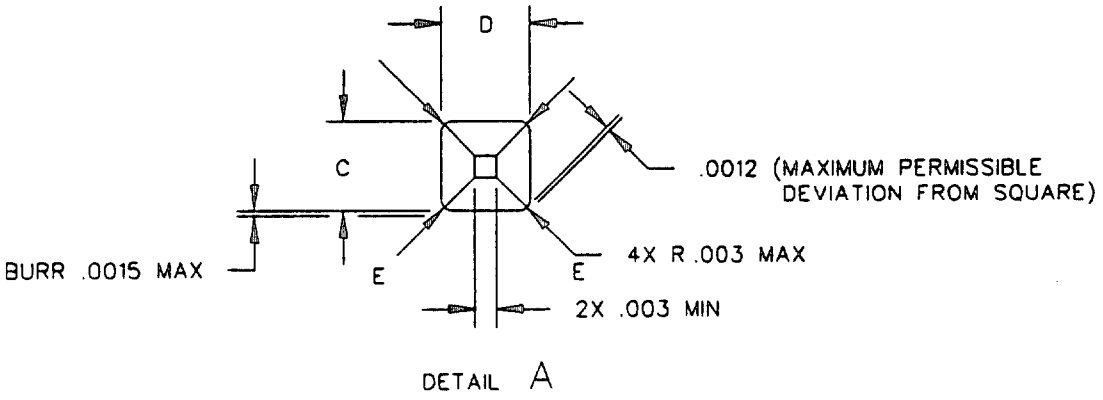

WRAPPOST GEOMETRY

C	D	E	PARALLELISM	STRAIGHTNESS
0.025 (NOM)	0.025 (NOM)	0.0355 (MAX)	0.002	0.005 in./in
0.023 (MIN)	0.023 (MIN)	0.0325 (MIN)		

FIGURE 2. Contact, female, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.


INCHES	MM	INCHES	MM
0.002	0.05	0.021	0.53
0.003	0.08	0.025	0.64
0.004	0.10	0.030	0.76
0.005	0.13	0.031	0.79
0.006	0.15	0.044	1.12
0.010	0.25	0.072	1.83
0.015	0.38	0.073	1.85
0.018	0.46	0.164	4.17

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See table I for dimensions A and B.
4. Unless otherwise specified, tolerances are plus or minus 0.005 for three place decimals, plus or minus 0.01 for two place decimals and plus or minus 2° for angles.

FIGURE 2. Contact, female, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

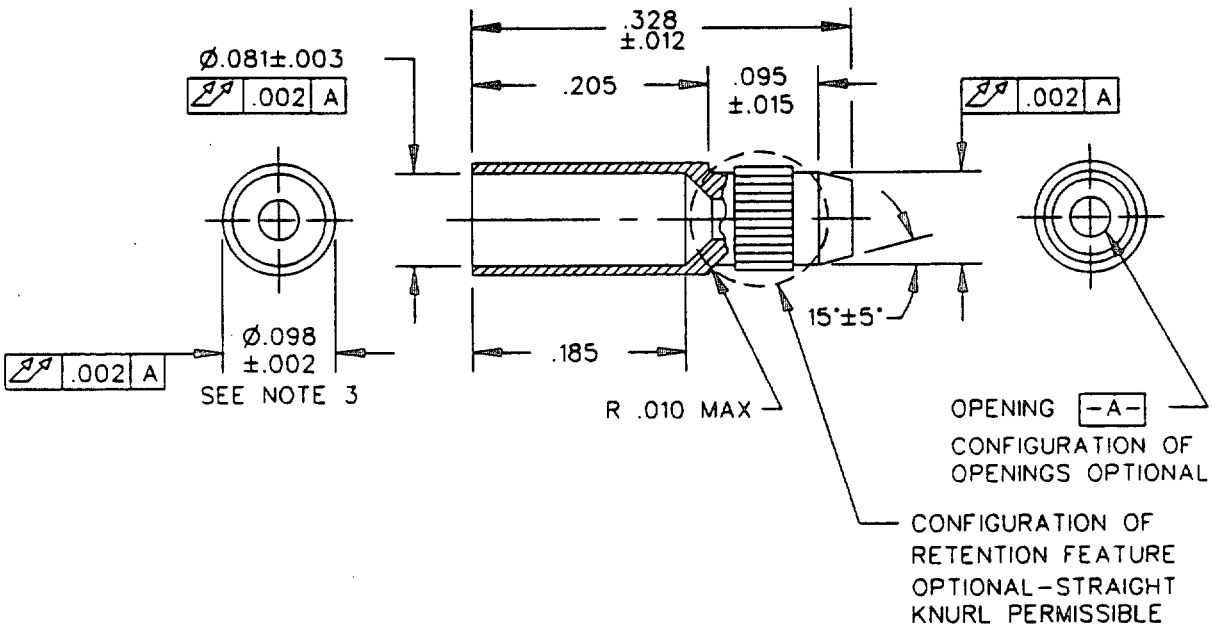


INCHES	MM	INCHES	MM
0.002	0.05	0.095	2.41
0.003	0.08	0.096	2.44
0.010	0.25	0.098	2.49
0.012	0.30	0.185	4.70
0.015	0.38	0.205	5.21
0.081	2.06	0.328	8.33

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. 0.096 plus or minus 0.003 square permissible.
4. Unless otherwise specified, tolerance is plus or minus 0.005 on three place decimals, plus or minus 0.01 on two place decimals, and plus or minus 2° on angles.

FIGURE 3. Grounding bushing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

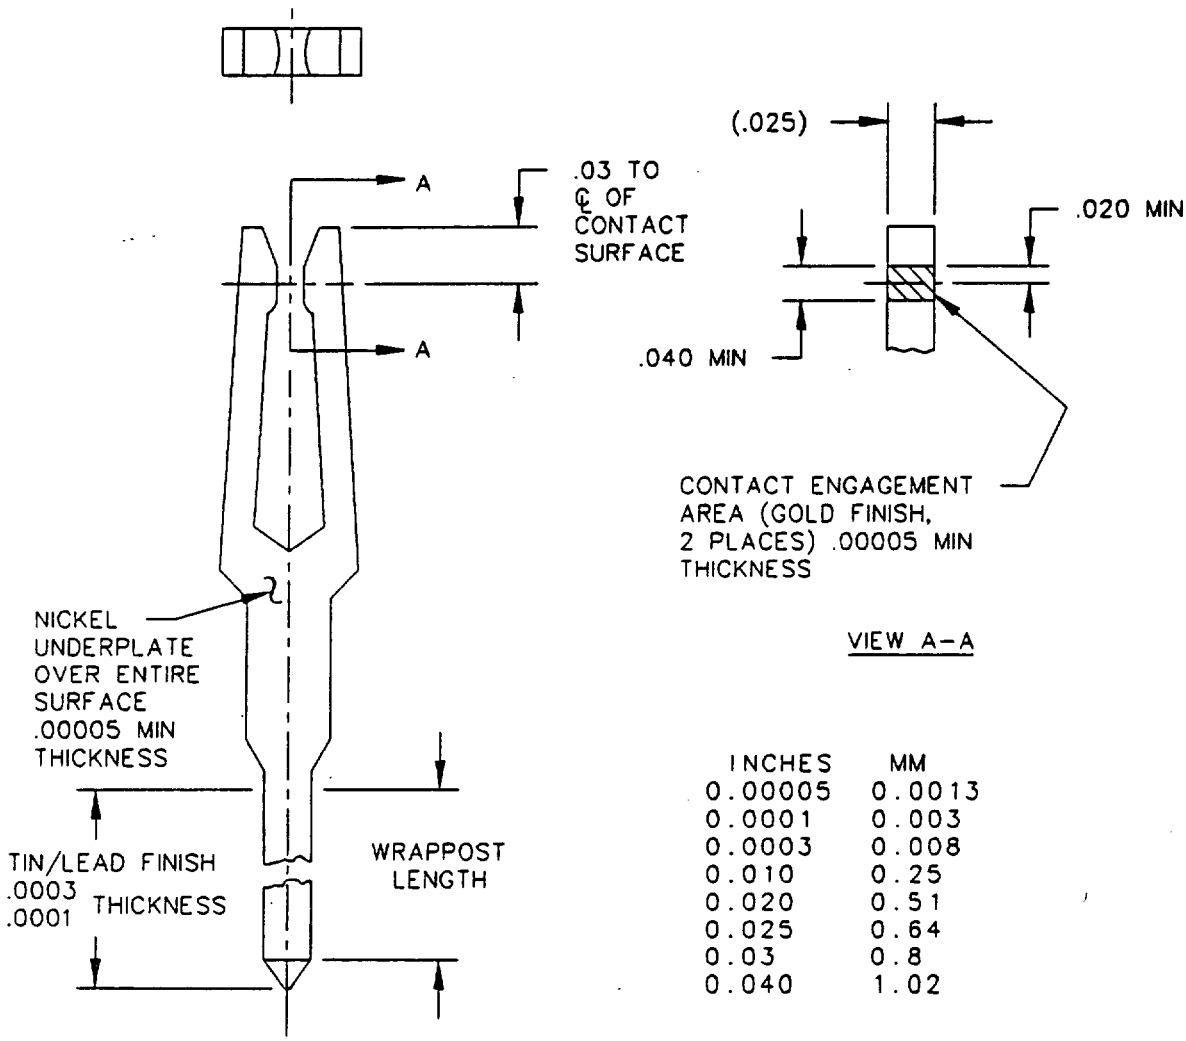

INCHES	MM
0.00005	0.0013
0.0001	0.003
0.0003	0.008
0.010	0.25
0.020	0.51
0.025	0.64
0.03	0.8
0.040	1.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are plus or minus 0.005 for three place decimals, plus or minus 0.01 for two place decimals, and plus or minus 2° for angles.
4. Dimensions in this figure are for locating areas of localized finish only.

FIGURE 4. Localized finish (optional).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figures 1, 2, 3, and 4.

Material:

Contacts: Contacts shall be beryllium copper per QQ-C-533, minimum hardness of 311 Knoop.

Exposed base material: Exposed base material is permitted in noncritical breakoff or plating carrier areas of the connector parts providing all performance requirements are maintained with no degradation of critical areas.

Bushing: Bushing shall be aluminum alloy per QQ-A-225/1, QQ-A-225/6, or QQ-A-225/8 (see figure 3).

Grounding bushing color: The grounding bushing color shall be the natural color of the base material or as modified by a supplementary protective finish.

Standard contact plating: Standard contact plating shall be in accordance with MIL-C-28754.

Localized contact finish: Contacts may be supplied with a localized finish. Contacts supplied with localized finish shall meet the requirements of MIL-C-28754 and this slash sheet. Contacts supplied with a localized finish shall conform to figures 2 and 4.

Gold finish: Gold shall be in accordance with MIL-G-45204, type II, grade C, class 1, and to a thickness of 50 microinches minimum. Area of gold finish shall be as specified on figure 4.

Nickel finish: Nickel finish shall be in accordance with QQ-N-290, class 1, and to a thickness of 50 microinches minimum over the entire contact surface (see figure 4).

Tin-lead finish: Tin-lead finish shall be in accordance with MIL-P-81728 and shall have a tin-composition of 50 to 95 percent. Tin-lead plating thickness shall be 0.0001 to 0.0003 inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

Performance:

Low level (dry circuit): Voltage drop shall not exceed 20 millivolts. Wire size shall be 26 AWG.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Mounting plate to contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Voltage rating: 300 volts, ac (rms) at sea level.

Temperature rating: minus 55 to plus 125°C.

Durability: Voltage drop shall not exceed 20 millivolts after durability cycling.

Military part number M28754/80-(dash number from table I).

Table I. Dash numbers and dimensions.

Dash no.	Overall length "A" ±0.010	Wrappost length "B" (Ref)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Contacts with localized finish shall have an S following the dash number. For example M28754/80-04S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

Marking: In accordance with MIL-C-28754.

Shipping: Bulk shipment shall be in unassembled condition.

Supersession data: This specification includes the requirements of drawing 5516568/11 thru 13, Code Identification 53711.

QUALIFICATIONS:

See appendix.

Localized contact finish: The qualification of the contact supplied with the standard finish does not extend qualification to the contact supplied with the localized finish. To be qualified to supply the localized finish in lieu of the standard contact finish, manufacturers shall subject the contact supplied with localized finish to the same qualification procedures as the standard contact finish. Manufacturers that have qualified the localized finish contact will be designated on the Qualified Products List (QPL).

Custodians:
NAVY - SH

User activities:
NAVY - AS

Agent:
NWSC, Crane

Preparing activity:
NAVY - SH

(PROJECT 5935-N336-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/80	Connectors, Electrical, Modular, Connector, Type III, Female Contact and Grounding Bushing Set, Low Insertion Force (LIF), Removable Wire Wrappost Terminal

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.