MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, LOW INSERTION FORCE (LIF), REMOVABLE WIRE WRAPPOST TERMINAL


This specification is approved for use within Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of the following specification listed in that issue of the Department of Defense Index of Specifications (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

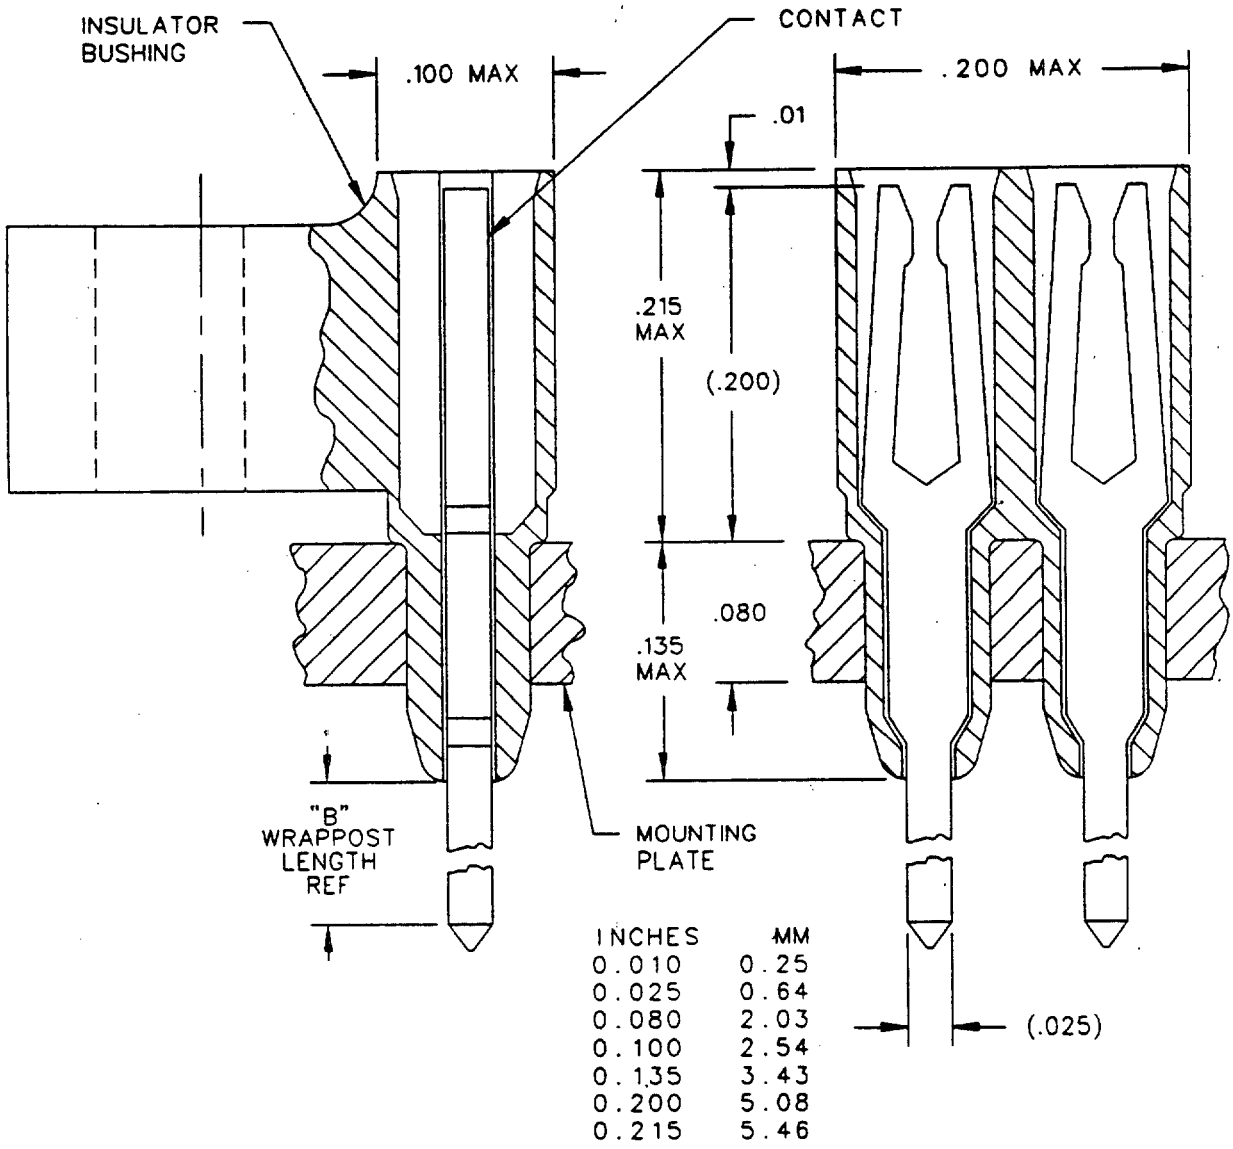

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are plus or minus 0.005 for three place decimals, plus or minus 0.01 for two place decimals, and plus or minus 2° for angles.

FIGURE 1. Typical female contact, polarizing bushing and mounting plate assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.


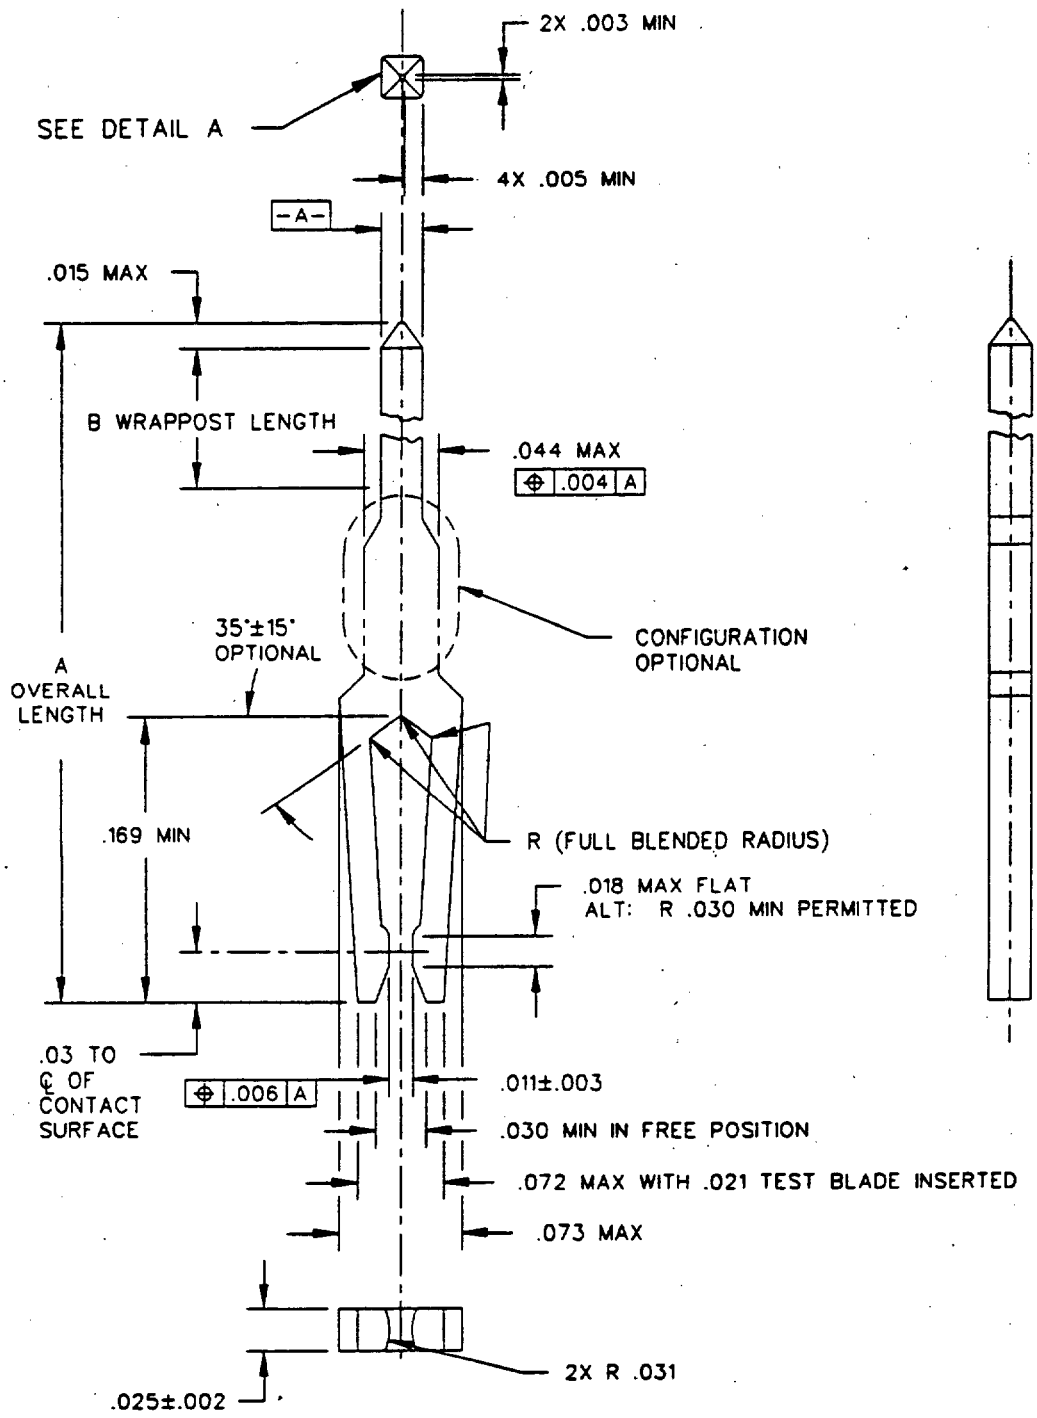


FIGURE 2. Contact, female, wrappost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

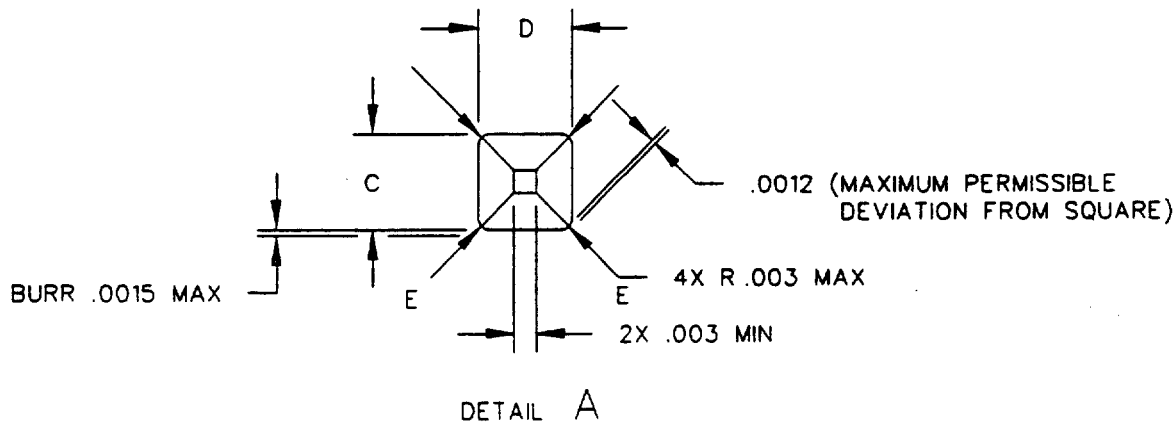

WRAPPOST GEOMETRY

C	D	E	PARALLELISM	STRAIGHTNESS
0.025 (NOM)	0.025 (NOM)	0.0355 (MAX)	0.002	0.005 in./in
0.023 (MIN)	0.023 (MIN)	0.0325 (MIN)		

Figure 2. Contact, female, wrappost - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
0.002	0.05	0.021	0.53
0.003	0.08	0.025	0.64
0.004	0.10	0.030	0.76
0.005	0.13	0.031	0.79
0.006	0.15	0.044	1.12
0.010	0.25	0.072	1.83
0.015	0.38	0.073	1.85
0.018	0.46	0.164	4.17

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See table I for dimensions A and B.
4. Unless otherwise specified, tolerances are plus or minus 0.005 for three place decimals, plus or minus 0.01 for two place decimals and plus or minus 2° for angles.

Figure 2. Contact, female, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

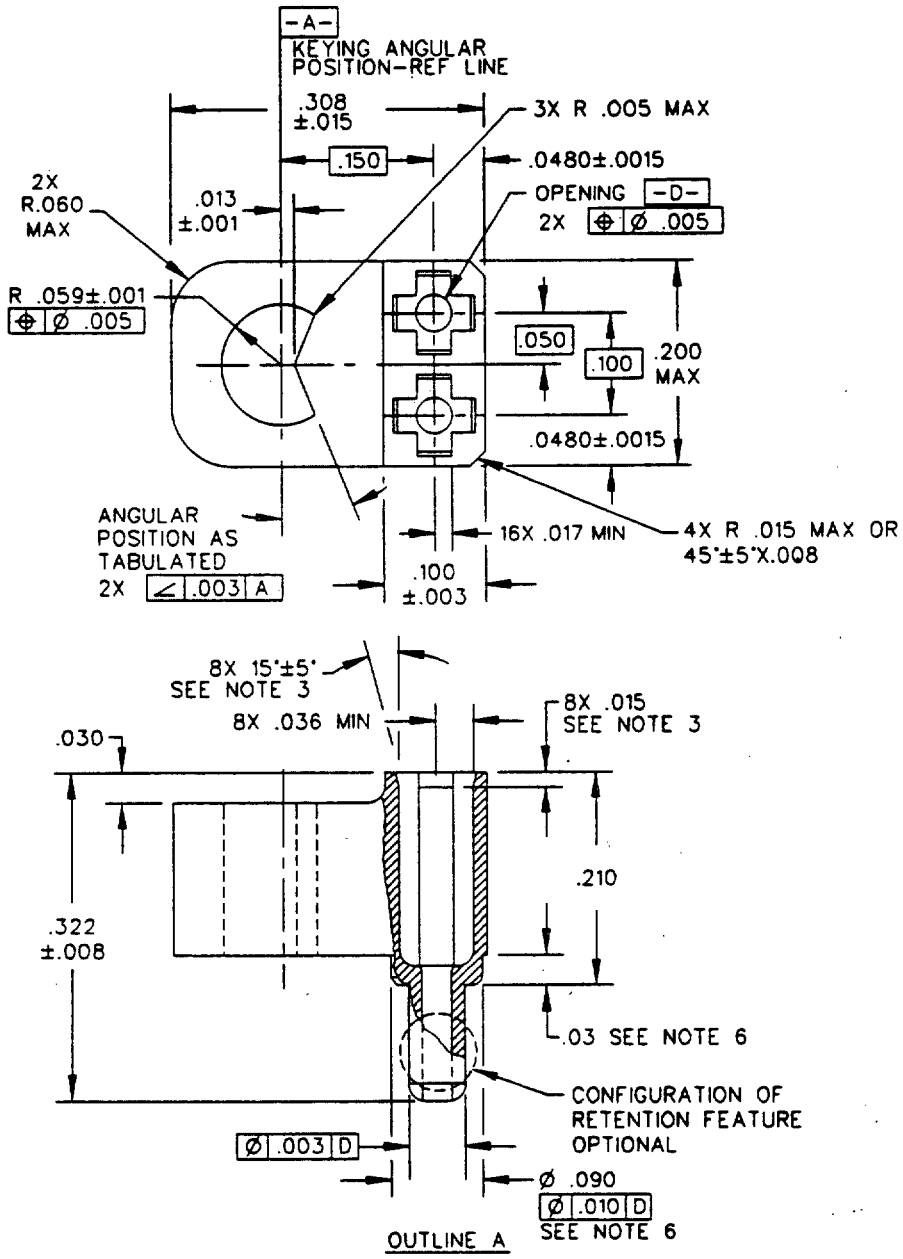


OUTLINE A

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.03	0.010	0.25	0.036	0.91	0.090	2.29	0.308	7.82
0.0015	0.038	0.013	0.33	0.0480	1.219	0.100	2.54	0.322	8.18
0.003	0.08	0.015	0.38	0.050	1.27	0.150	3.81		
0.005	0.13	0.017	0.43	0.059	1.50	0.200	5.08		
0.008	0.20	0.030	0.76	0.060	1.52	0.210	5.33		

FIGURE 3(a). Bushing, polarizing, female.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

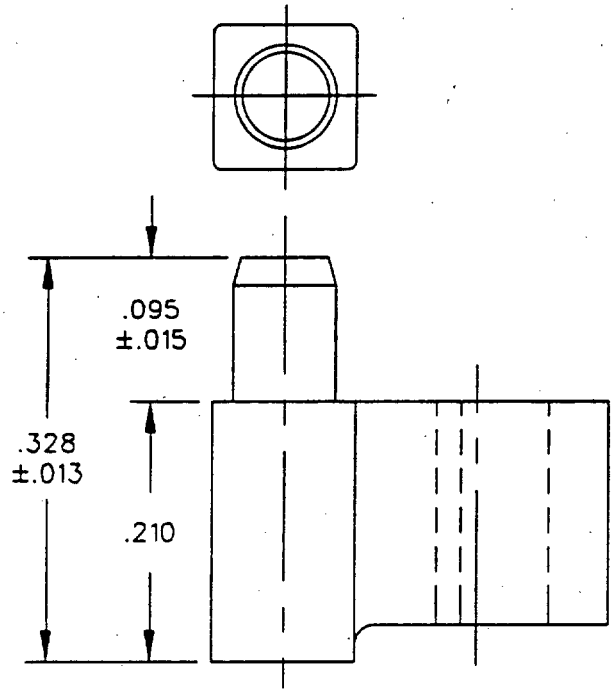

INCHES	MM
0.013	0.330
0.015	0.381
0.095	2.41
0.210	5.334
0.328	8.33

FIGURE 3(a). Bushing, polarizing, female – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

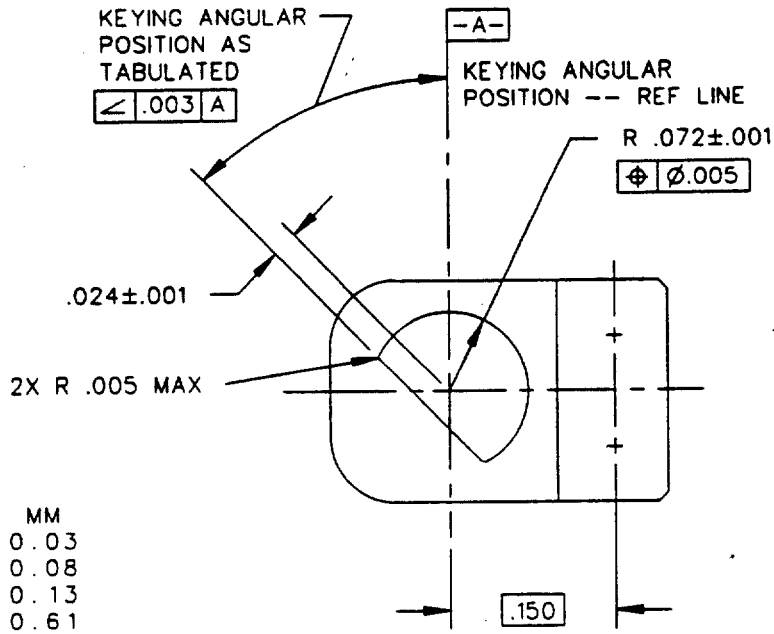


INCHES	MM
0.001	0.03
0.003	0.08
0.005	0.13
0.024	0.61
0.072	1.83
0.150	3.81

OUTLINE B

OTHERWISE SAME AS OUTLINE A

FIGURE 3(b). Bushing, polarizing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

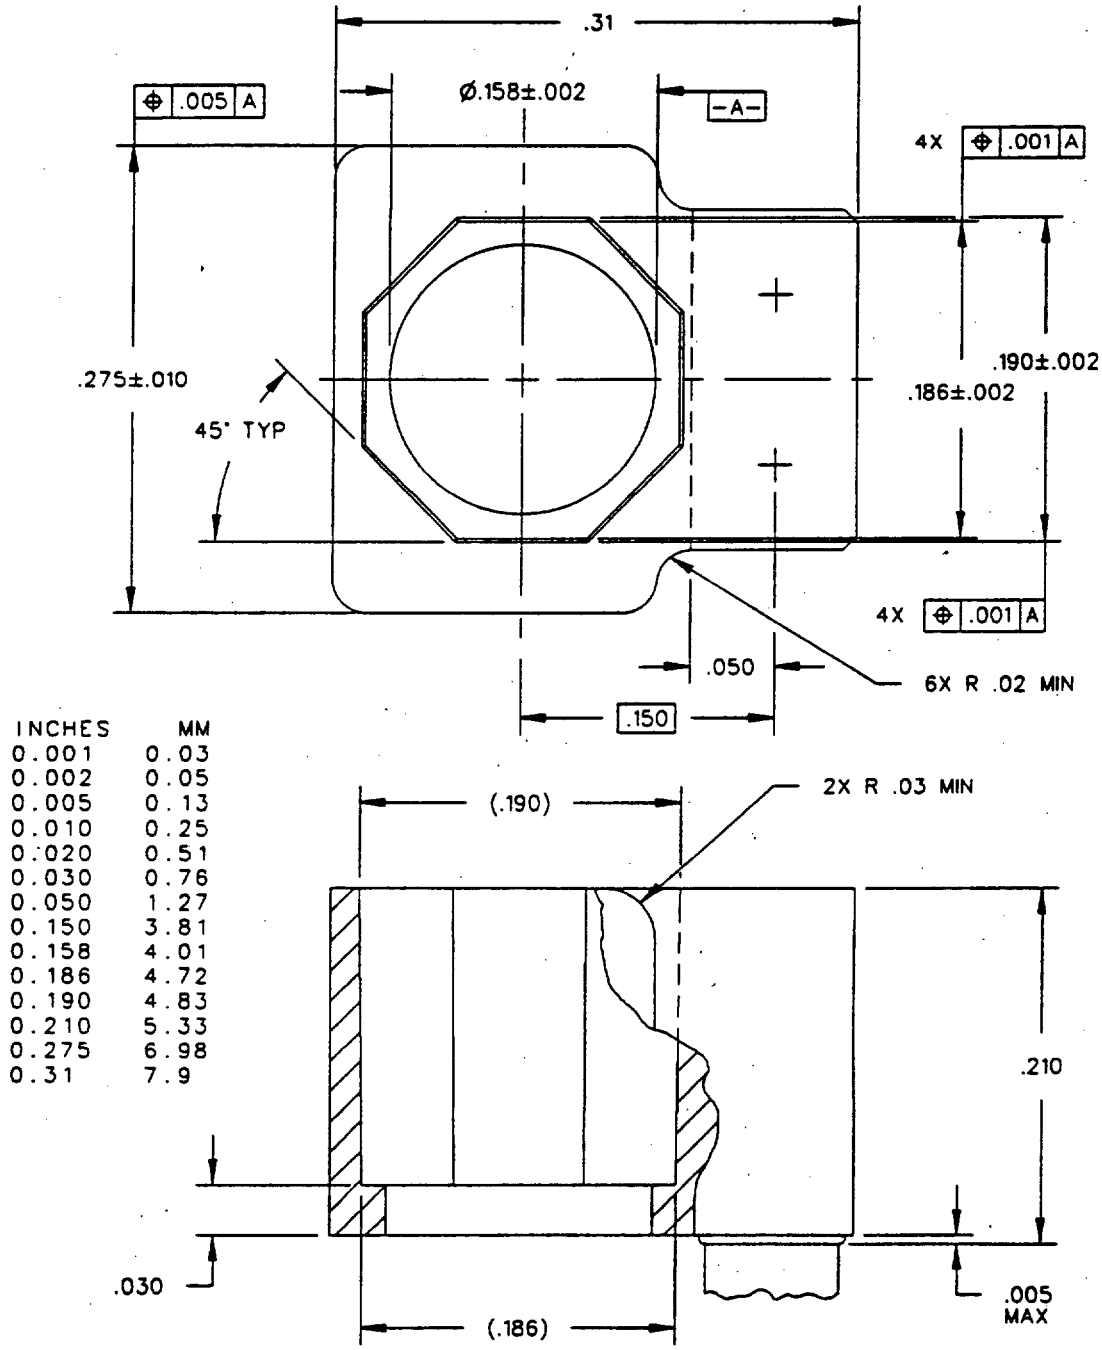

INCHES	MM
0.001	0.03
0.002	0.05
0.005	0.13
0.010	0.25
0.020	0.51
0.030	0.76
0.050	1.27
0.150	3.81
0.158	4.01
0.186	4.72
0.190	4.83
0.210	5.33
0.275	6.98
0.31	7.9

OUTLINE C
OTHERWISE SAME AS OUTLINE A

FIGURE 3(c). Bushing, polarizing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Radius optional on 0.015 plus or minus 0.005 X 15° plus or minus 5° chamfer.
4. Dimensions include draft.
5. Inside corners R 0.005 maximum unless other specified.
6. The 0.03 X 0.090 feature is optional.
7. Unless otherwise specified, tolerances are plus or minus 0.005 for three place decimals, plus or minus 0.01 for two place decimals and plus or minus 2° for angles.

FIGURE 3. Bushing, polarizing, female - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.




Polarizing style	Outline letter	Keying position as viewed at bushing's top surface
a	A	0° 
b	A	45° 
c	A	90° 
d	A	135° 
e	A	180° 
f	A	225° 
g	A	270° 
h	A	315° 
i	B	0° 
j	B	45° 
k	B	90° 
l	B	135° 
m	B	180° 
n	B	225° 
p	B	270° 
q	B	315° 
r	Same as 'A' except for thru hole as shown	Ø.093 ±.003 
s	C	

FIGURE (3d). Bushing, polarizing, female (keying hole orientation).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

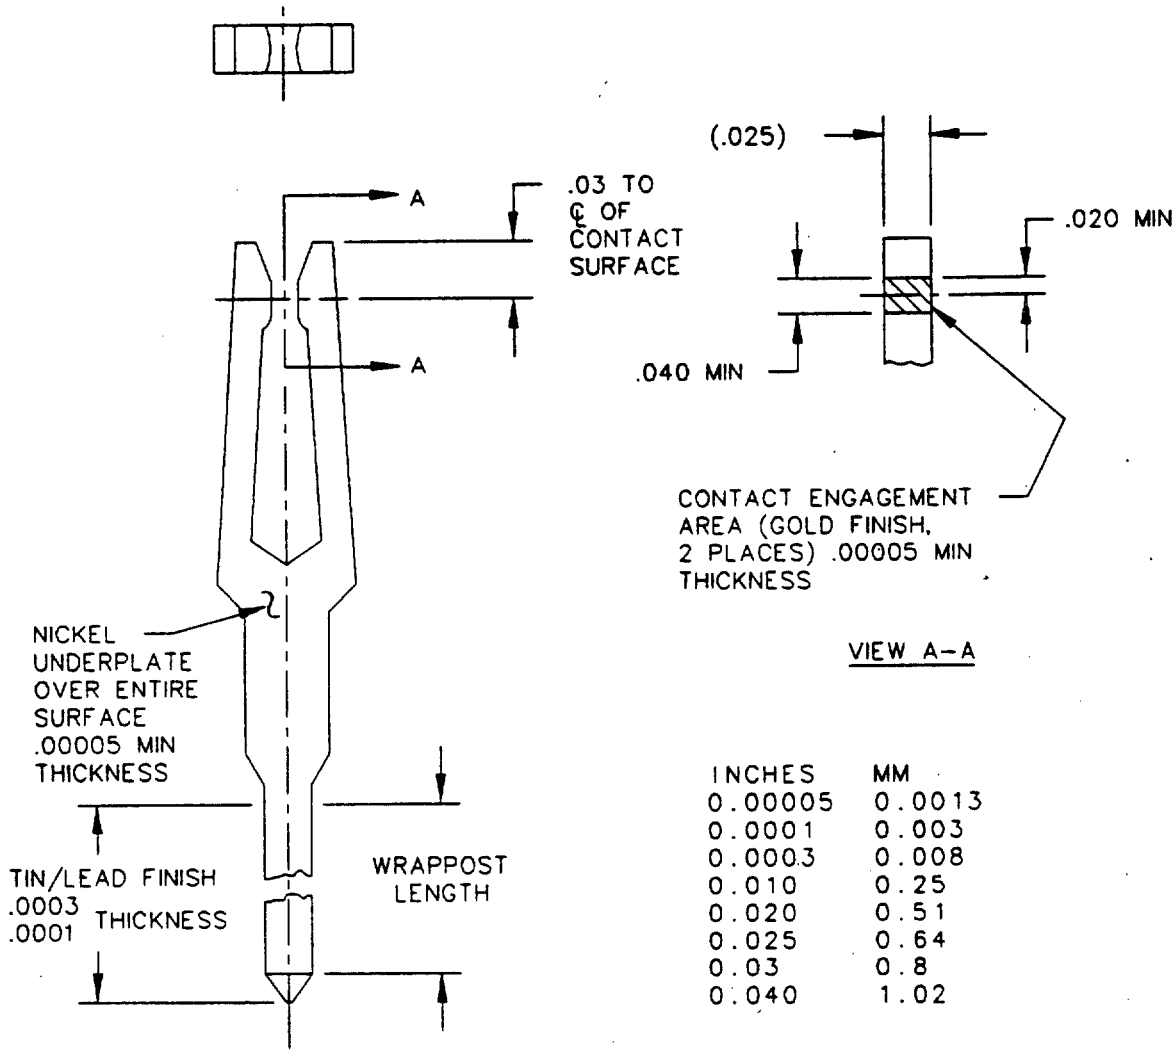

INCHES	MM
0.00005	0.0013
0.0001	0.003
0.0003	0.008
0.010	0.25
0.020	0.51
0.025	0.64
0.03	0.8
0.040	1.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is plus or minus 0.005 on three place decimals, plus or minus 0.01 on two place decimals, and plus or minus 2° on angles.
4. Dimensions on this figure are for locating areas of localized finish only.

FIGURE 4. Localized finish (optional).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figures 1, 2, 3, and 4.

Material:

Contacts: Contacts shall be beryllium copper per QQ-C-533, minimum hardness of 311 Knoop.

Exposed base material: Exposed base material is permitted in noncritical breakoff or plating carrier areas of the connector parts providing all performance requirements are maintained with no degradation of critical areas.

Bushing: Bushing shall be polyamide (nylon) per L-P-410 or ASTM D4066, designation PA111 (see figure 3).

Polarizing bushing color: The polarizing bushing color shall be the natural color of the base material.

Standard contact plating: Standard contact plating shall be in accordance with MIL-C-28754.

Localized contact finish: Contacts may be supplied with a localized finish. Contacts supplied with localized finish shall meet the requirements of MIL-C-28754 and this slash sheet. Contacts supplied with a localized finish shall conform to figures 2 and 4.

Gold finish: Gold shall be in accordance with MIL-G-45204, type II, grade C, class 1, and to a thickness of 50 microinches minimum. Area of gold finish shall be specified on figure 4.

Nickel finish: Nickel finish shall be in accordance with QQ-N-290, class 1, and to a thickness of 50 microinches minimum over the entire contact surface (see figure 4).

Tin-lead finish: Tin-lead finish shall be in accordance with MIL-P-81728 and shall have a tin-composition of 50 to 95 percent. Tin-lead plating thickness shall be 0.0001 to 0.0003 inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

Performance:

Low level (dry circuit): Voltage drop shall not exceed 20 millivolts. Wire size shall be 26 AWG.

Contact resistance: Voltage drop shall not exceed 20 millivolts after durability cycling.

Current rating: 3 amperes.

Voltage rating: 300 volts, ac (rms) at sea level.

Temperature rating: minus 55 to plus 125°C.

Marking: In accordance with MIL-C-28754.

Shipping: Bulk shipping shall be in unassembled condition.

Military part number M28754/81-(dash number from table I).

Contacts with localized finish shall have an S following the dash number. For example M28754/81-04S.

Supersession data: This specification includes the requirements of 5516568/21 thru 22, Code Identification 53711.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and dimensions.

Dash no	Polarizing style (figure 3d)	Overall length "A" ±0.010	Wrappost length "B" (Ref)
01	a	0.513	0.175
02	b	0.513	0.175
03	c	0.513	0.175
04	d	0.513	0.175
05	e	0.513	0.175
06	f	0.513	0.175
07	g	0.513	0.175
08	h	0.513	0.175
09	i	0.513	0.175
10	j	0.513	0.175
11	k	0.513	0.175
12	l	0.513	0.175
13	m	0.513	0.175
14	n	0.513	0.175
15	p	0.513	0.175
16	q	0.513	0.175
17	r	0.513	0.175
18 1/	s	0.513	0.175
19	a	0.588	0.250
20	b	0.588	0.250
21	c	0.588	0.250
22	d	0.588	0.250
23	e	0.588	0.250
24	f	0.588	0.250
25	g	0.588	0.250
26	h	0.588	0.250
27	i	0.588	0.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and dimensions - Continued

Dash no	Polarizing style (figure 3d)	Overall length "A" ±0.010	Wrappost length "B" (Ref)
28	j	0.588	0.250
29	k	0.588	0.250
30	l	0.588	0.250
31	m	0.588	0.250
32	n	0.588	0.250
33	p	0.588	0.250
34	q	0.588	0.250
35	r	0.588	0.250
36 1/	s	0.588	0.250
37	a	0.688	0.350
38	b	0.688	0.350
39	c	0.688	0.350
40	d	0.688	0.350
41	e	0.688	0.350
42	f	0.688	0.350
43	g	0.688	0.350
44	h	0.688	0.350
45	i	0.688	0.350
46	j	0.688	0.350
47	k	0.688	0.350
48	l	0.688	0.350
49	m	0.688	0.350
50	n	0.688	0.350
51	p	0.688	0.350
52	q	0.688	0.350
53	r	0.688	0.350
54 1/	s	0.688	0.350

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and dimensions - Continued

Dash no	Polarizing style (figure 3d)	Overall length "A" ±0.010	Wrappost length "B" (Ref)
55	a	0.838	0.500
56	b	0.838	0.500
57	c	0.838	0.500
58	d	0.838	0.500
59	e	0.838	0.500
60	f	0.838	0.500
61	g	0.838	0.500
62	h	0.838	0.500
63	i	0.838	0.500
64	j	0.838	0.500
65	k	0.838	0.500
66	l	0.838	0.500
67	m	0.838	0.500
68	n	0.838	0.500
69	p	0.838	0.500
70	q	0.838	0.500
71	r	0.838	0.500
72 1/	s	0.838	0.500
73	a	0.963	0.625
74	b	0.963	0.625
75	c	0.963	0.625
76	d	0.963	0.625
77	e	0.963	0.625
78	f	0.963	0.625
79	g	0.963	0.625
80	h	0.963	0.625
81	i	0.963	0.625

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and dimensions - Continued

Dash no	Polarizing style (figure 3d)	Overall length "A" ±0.010	Wrappost length "B" (Ref)
82	j	0.963	0.625
83	k	0.963	0.625
84	l	0.963	0.625
85	m	0.963	0.625
86	n	0.963	0.625
87	p	0.963	0.625
88	q	0.963	0.625
89	r	0.963	0.625
90 1/	s	0.963	0.625
91	a	1.088	0.750
92	b	1.088	0.750
93	c	1.088	0.750
94	d	1.088	0.750
95	e	1.088	0.750
96	f	1.088	0.750
97	g	1.088	0.750
98	h	1.088	0.750
99	i	1.088	0.750
100	j	1.088	0.750
101	k	1.088	0.750
102	l	1.088	0.750
103	m	1.088	0.750
104	n	1.088	0.750
105	p	1.088	0.750
106	q	1.088	0.750
107	r	1.088	0.750
108 1/	s	1.088	0.750

Notes:

1/ Keying pegs for insertion into the octal hole are covered by MIL-C-28754/39.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.

QUALIFICATIONS:

See appendix.

Localized contact finish: The qualification of the contact supplied with the standard finish does not extend qualification to the contact supplied with the localized finish. To be qualified to supply the localized finish in lieu of the standard contact finish, manufacturers shall subject the contact supplied with localized finish to the same qualification procedures as the standard contact finish. Manufacturers that have qualified the localized finish contact will be designated on the Qualified Products List (QPL).

Custodians:
NAVY - SH

User activities:
NAVY - AS

Agent:
NWSC, Crane

Preparing activity:
NAVY - SH

(PROJECT 5935-N336-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:52Z
Check the source to verify that this is the current version before use.